

OMDB/DXB DUBAI INTL

17 MAR 23 **10-1R** Eff 23 Mar



DUBAI, UAE

RADAR MINIMUM ALTITUDES

AL MAKTOUM
Radar
124.025

Apt Elev
62

Alt Set: hPa Trans level: FL150 Trans alt: 13000
1. This chart should only be used for cross-checking of altitudes while under RADAR control.
2. Altitudes corrected for low temperatures.

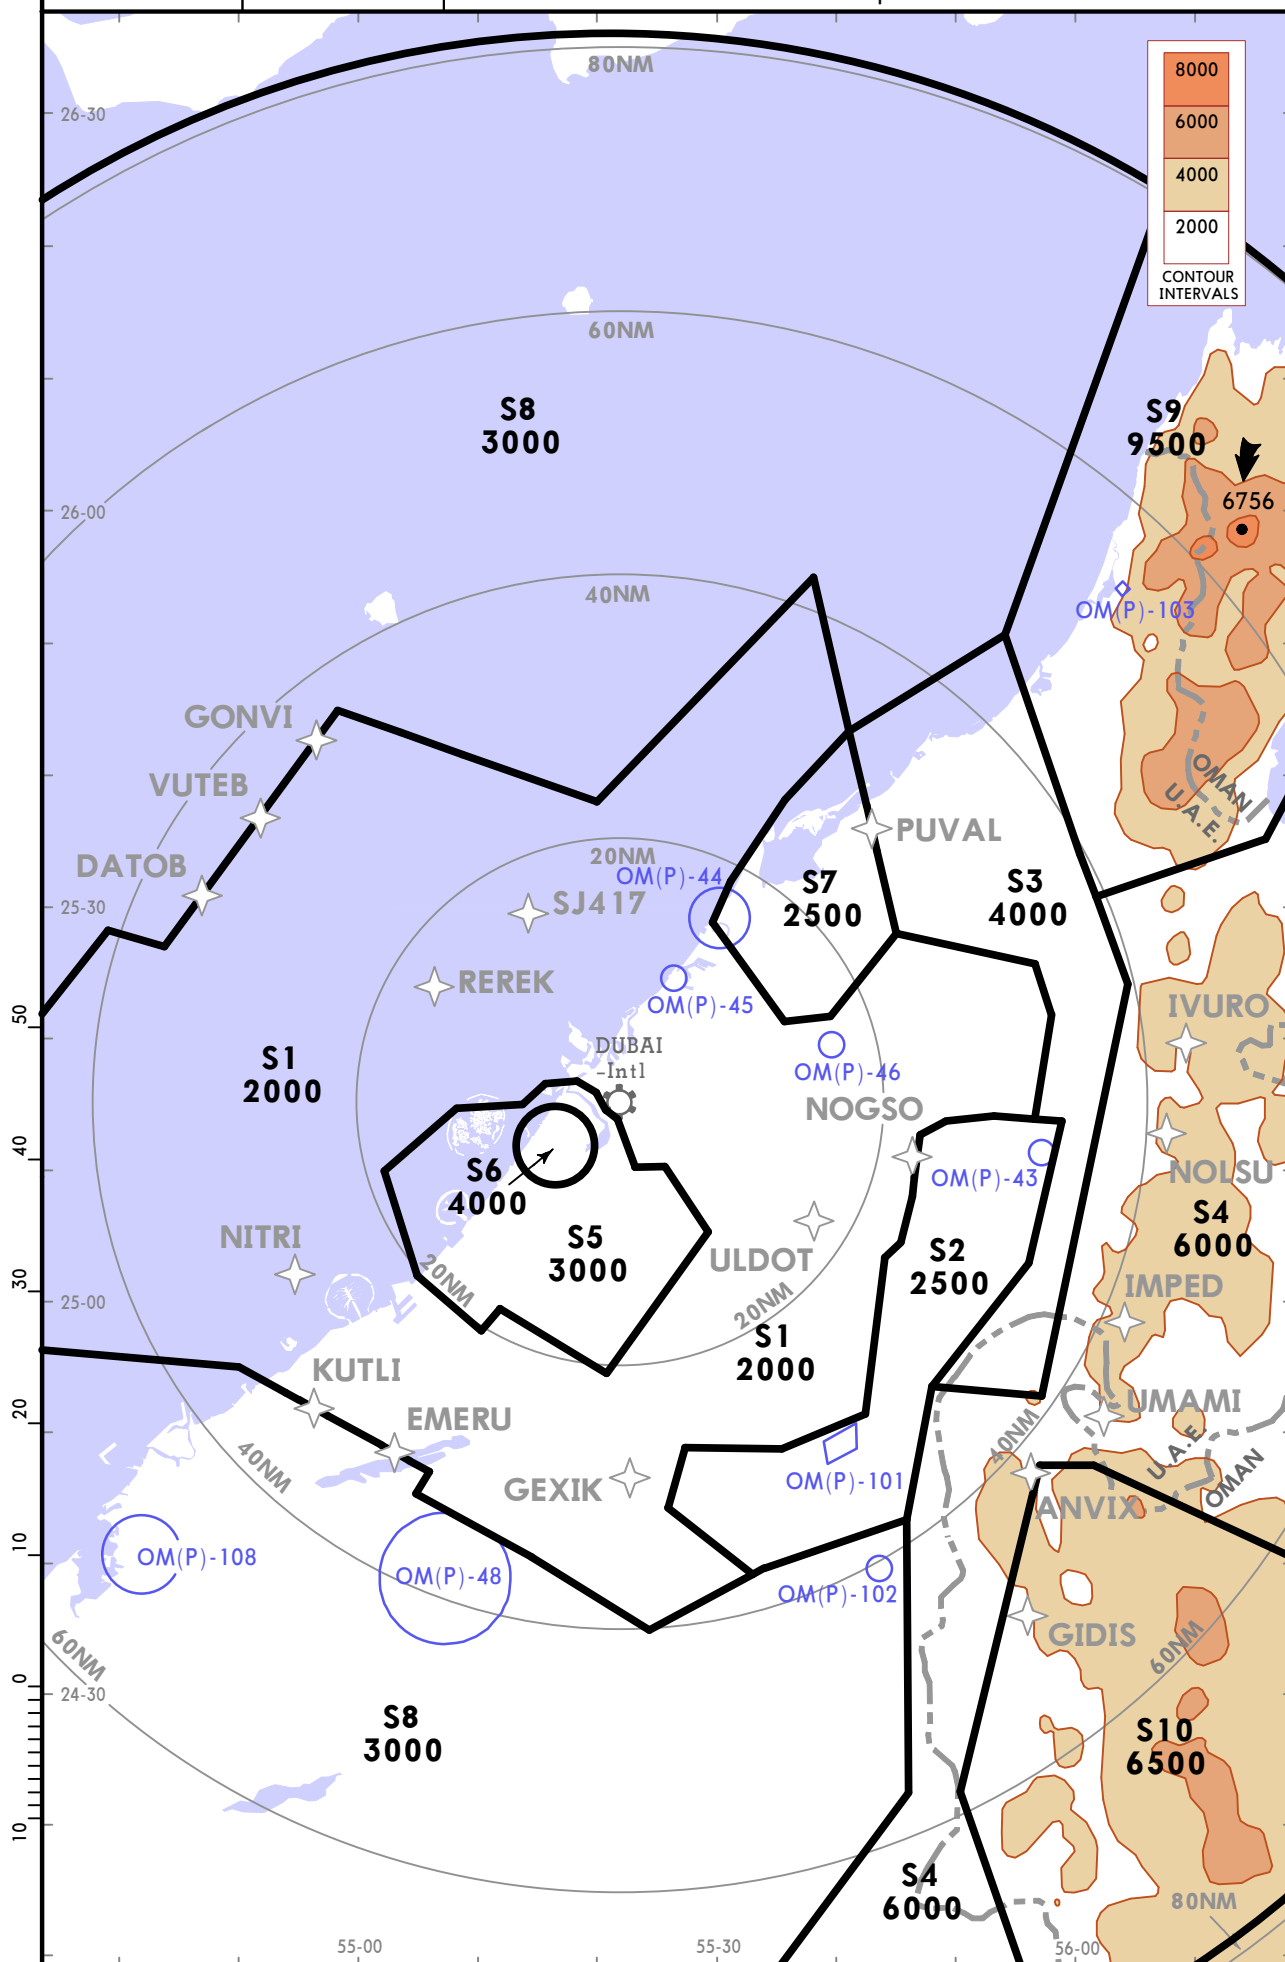

CHANGES: Sectors and altitudes revised.

© JEPPESEN, 2012, 2023. ALL RIGHTS RESERVED.

OMDB/DXB
DUBAI INTL

 **JEPPESEN**
5 JUN 20 **10-2**

DUBAI, UAE
RNAV STAR

RNAV STAR INSTRUCTIONS


Pilots are required to strictly follow ATC advised STAR clearance and ensure correct readback of STAR clearance at all times.


Unless explicitly cancelled or amended by ATC, the pilot must follow the vertical and lateral profile of the STAR and comply with any published speed restrictions.

The use of a STAR designator without a cleared level does not authorise the pilot to descend on the STAR vertical profile.

A level restriction depicted on a STAR chart does not authorise a pilot to descend to meet that restriction. ATC will issue descent clearance to permit compliance with vertical navigation restrictions. Pilots must inform ATC if a level restriction cannot be met. Do not descend below ATC cleared level.

Flight crews are expected to strictly adhere to STAR speed restrictions unless otherwise approved or instructed by ATC.

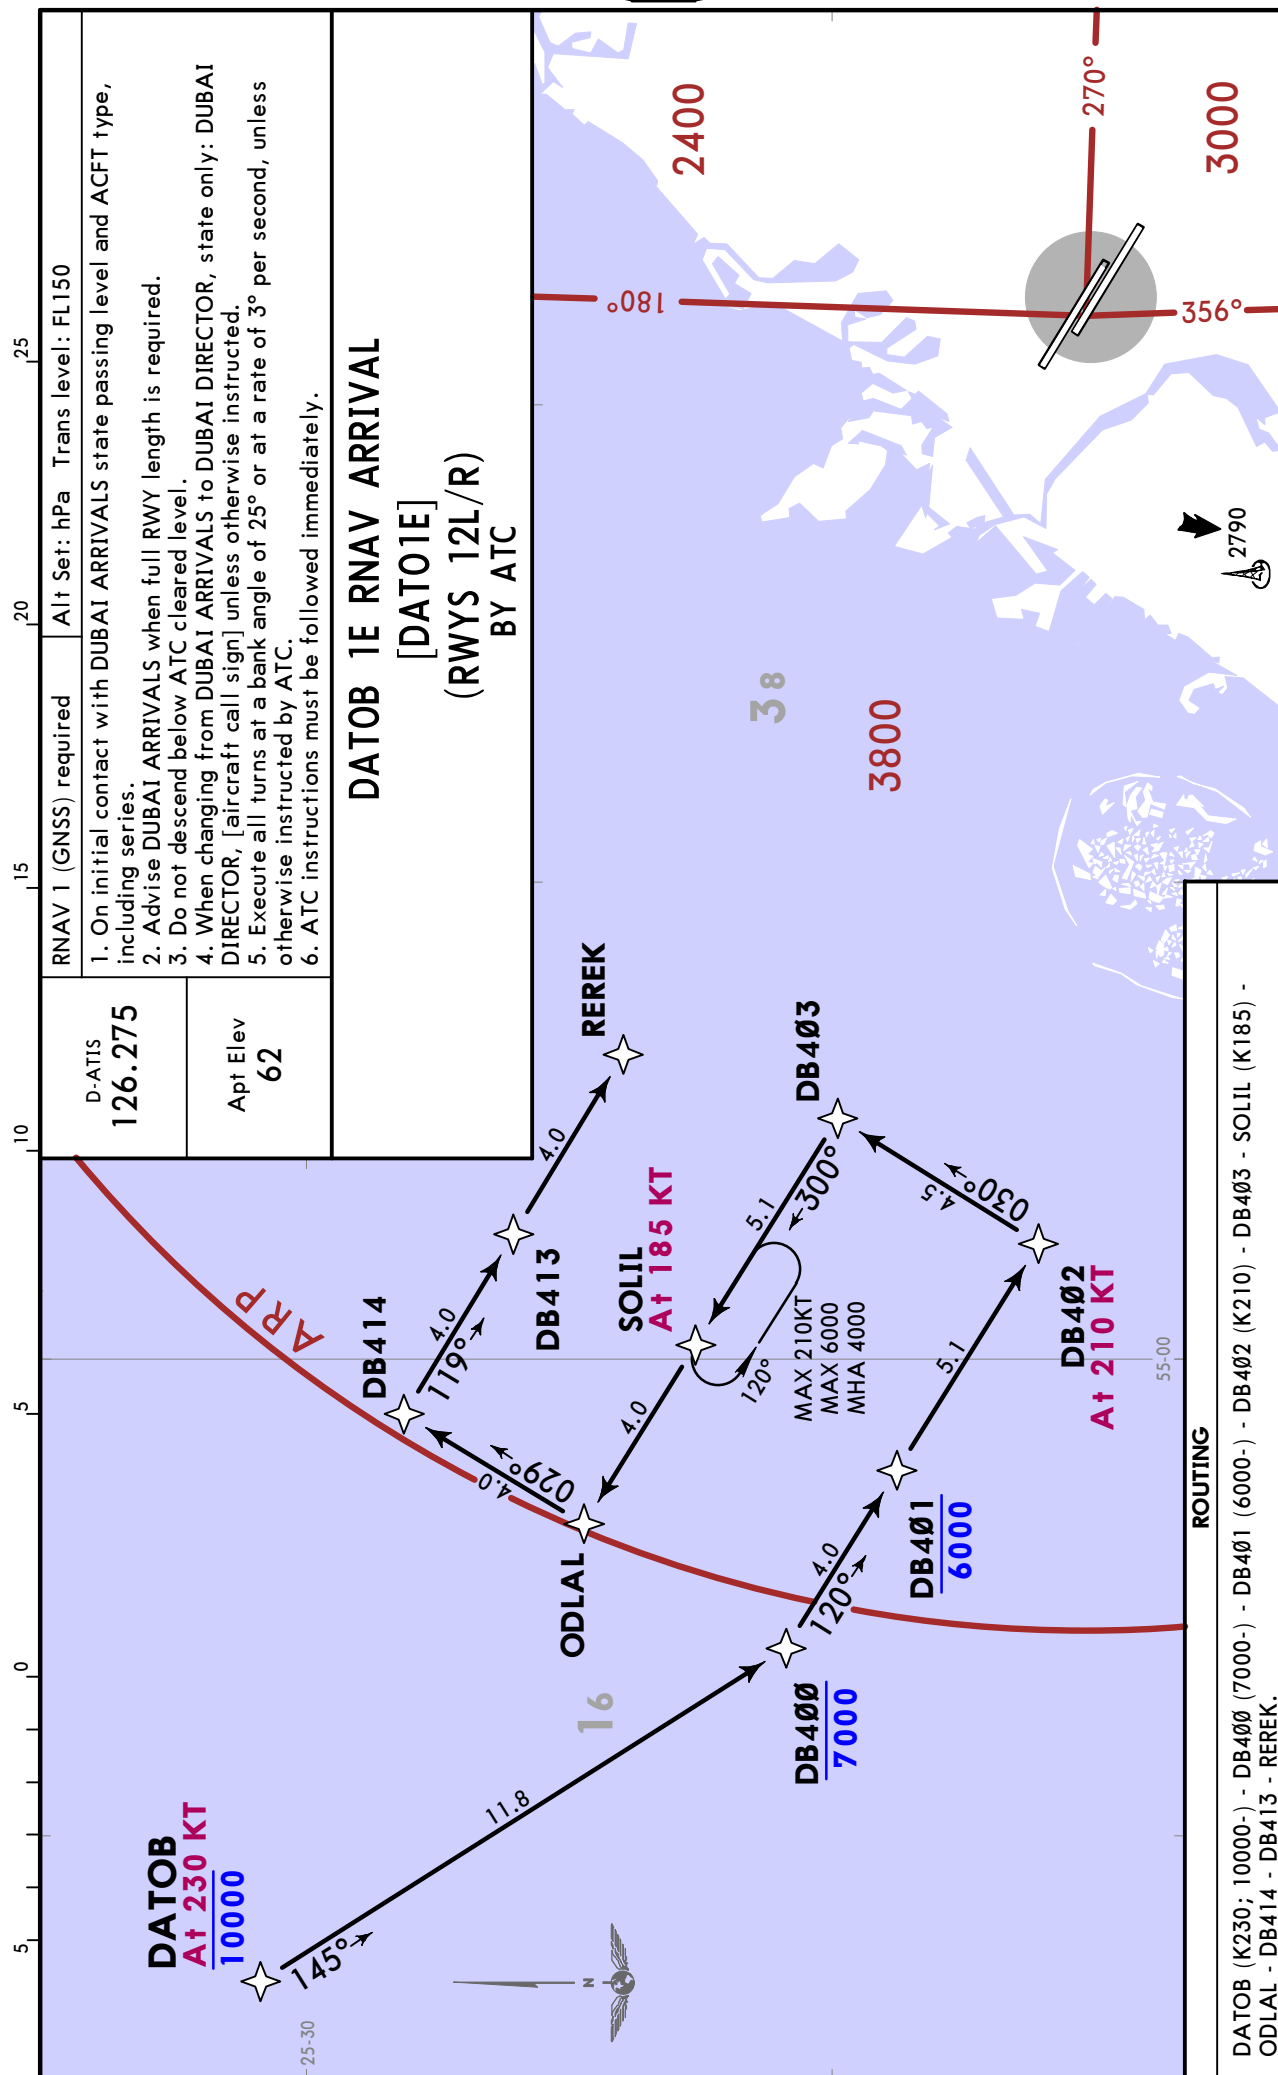


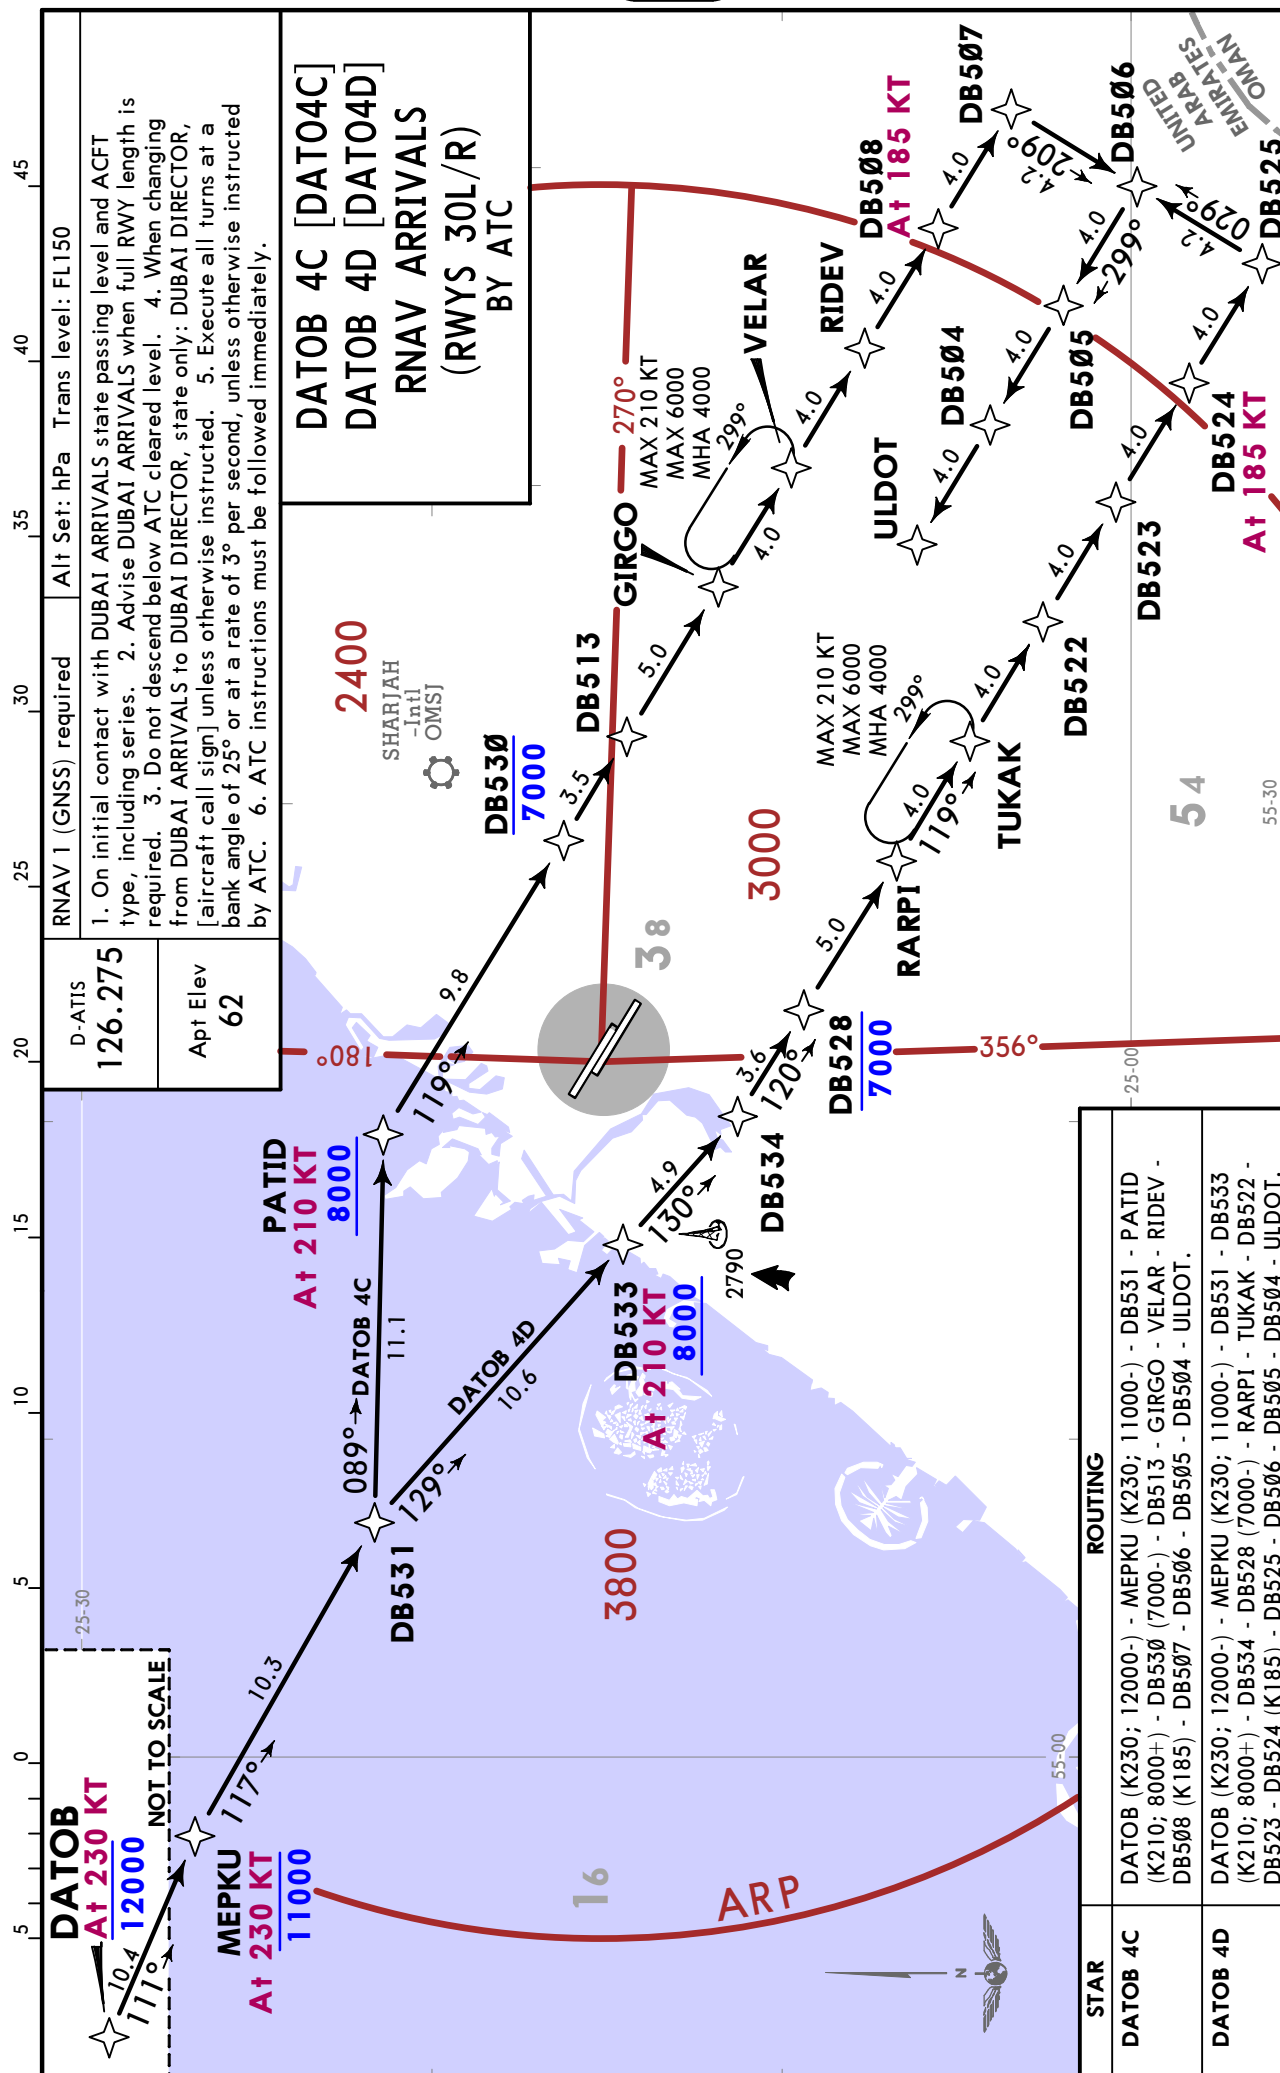


OMDB/DXB
DUBAI INTL


JEPPESSEN
30 MAY 25 10-2B Eff 12 Jun


DUBAI, UAE
RNAV STAR

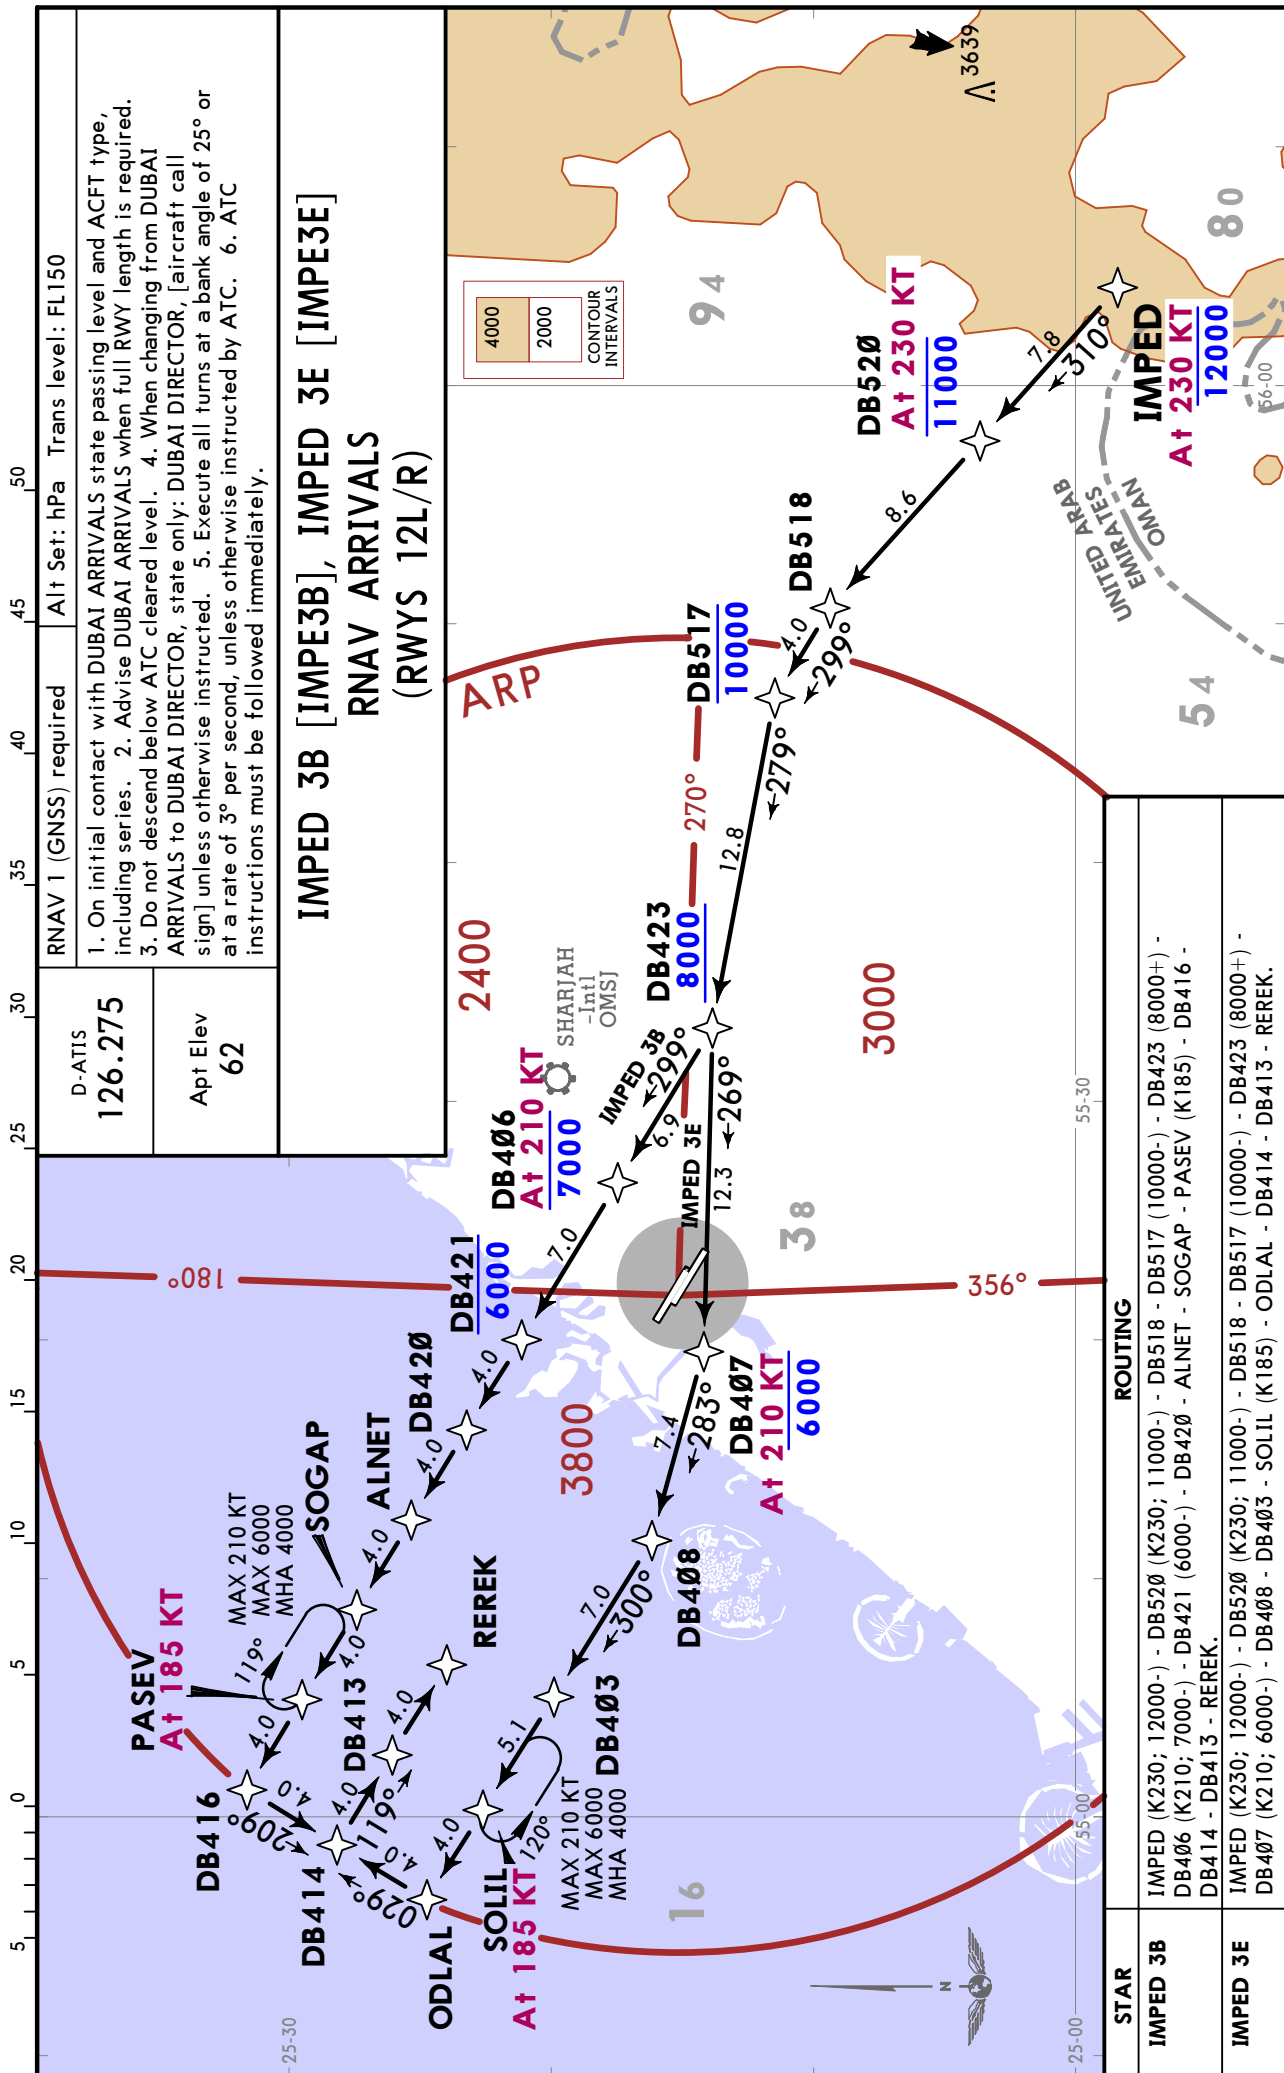




DUBAI, UAE
RNAV STAR

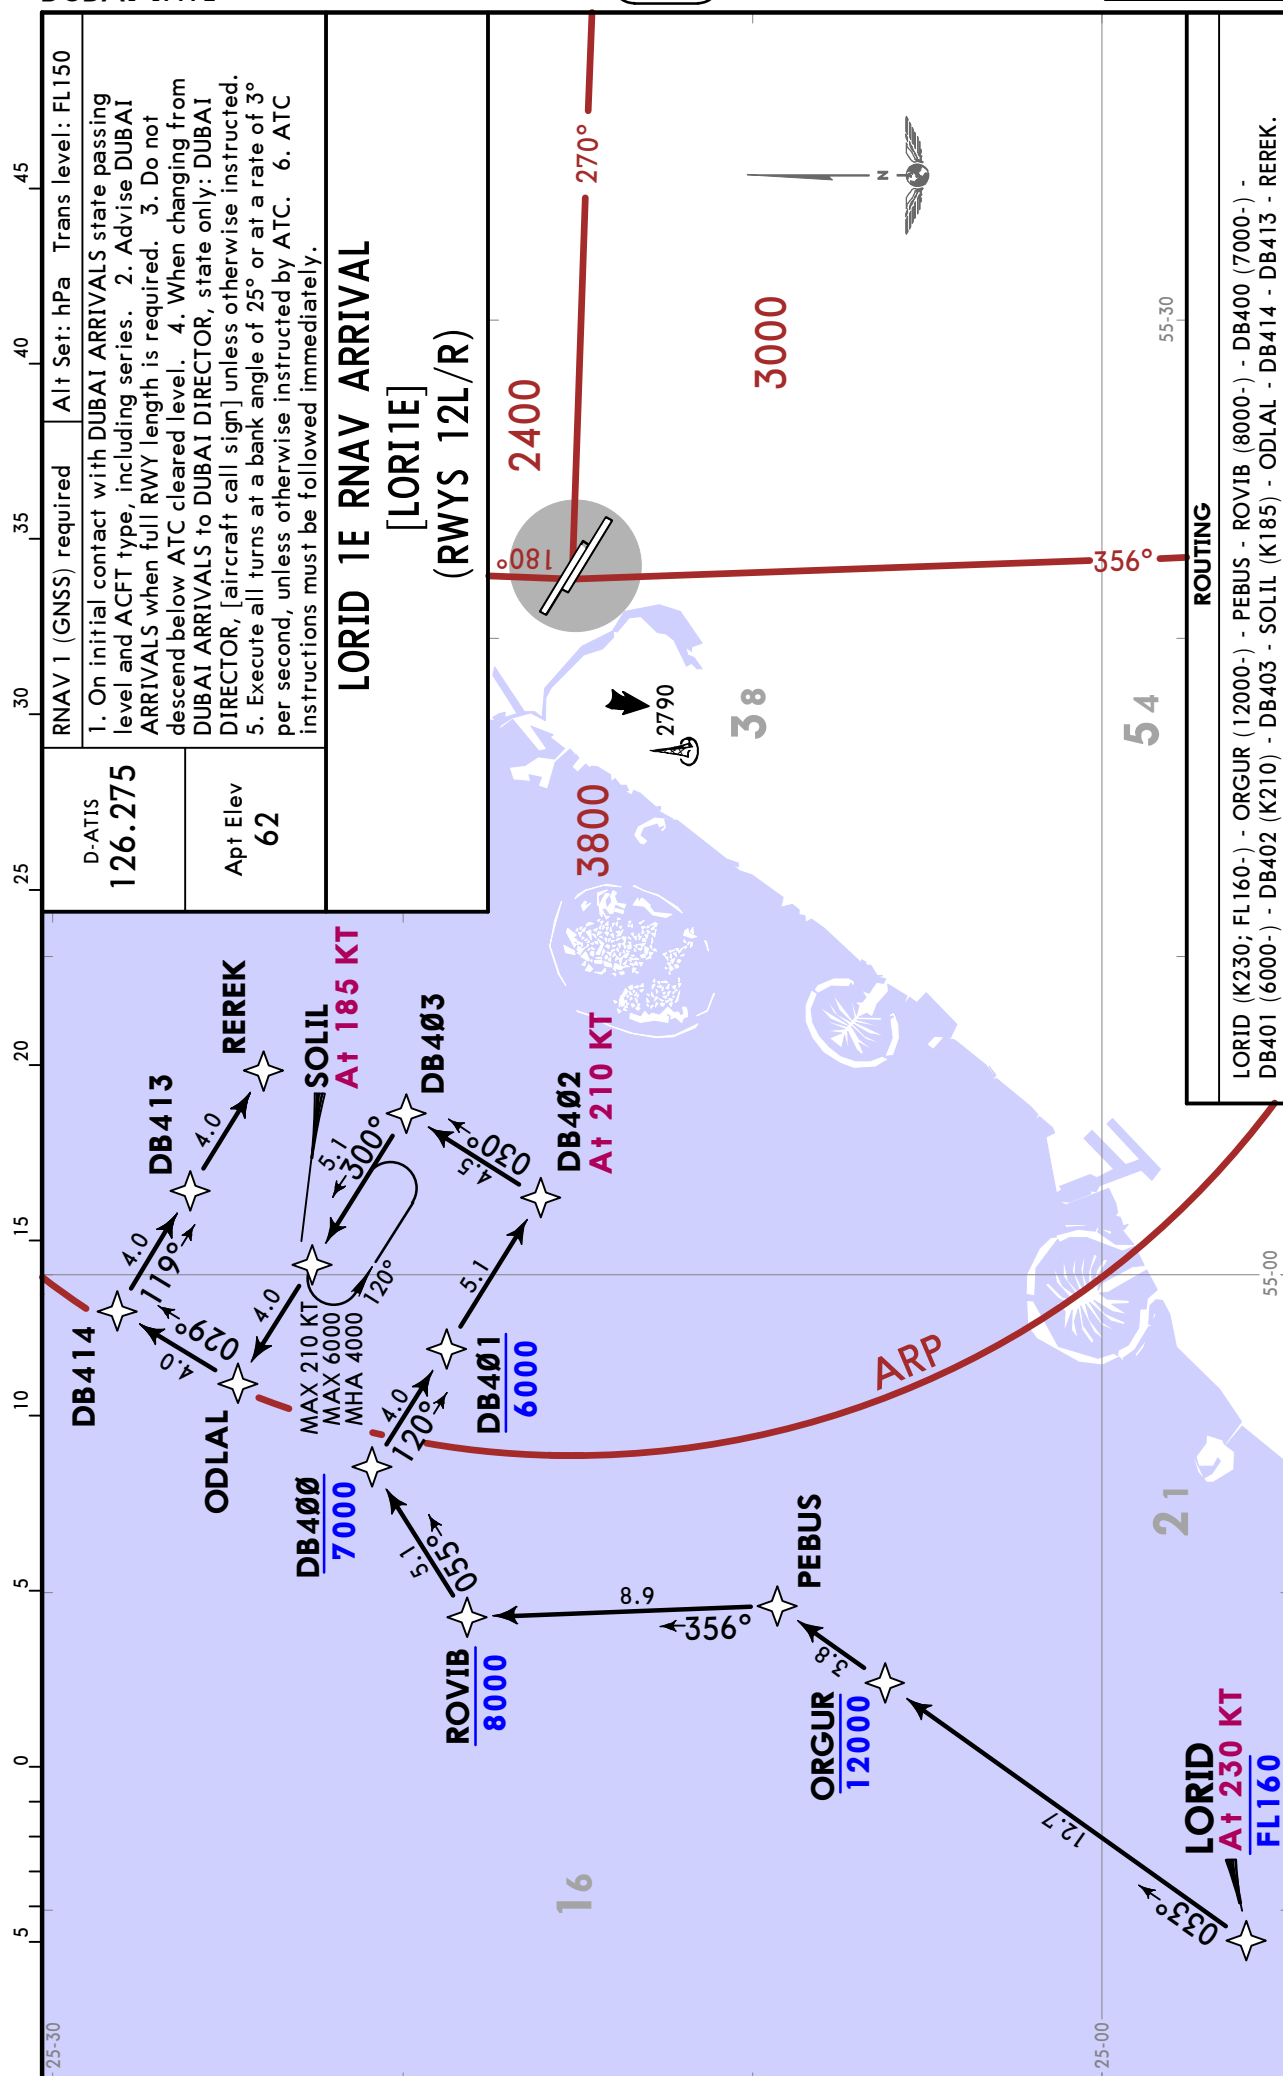

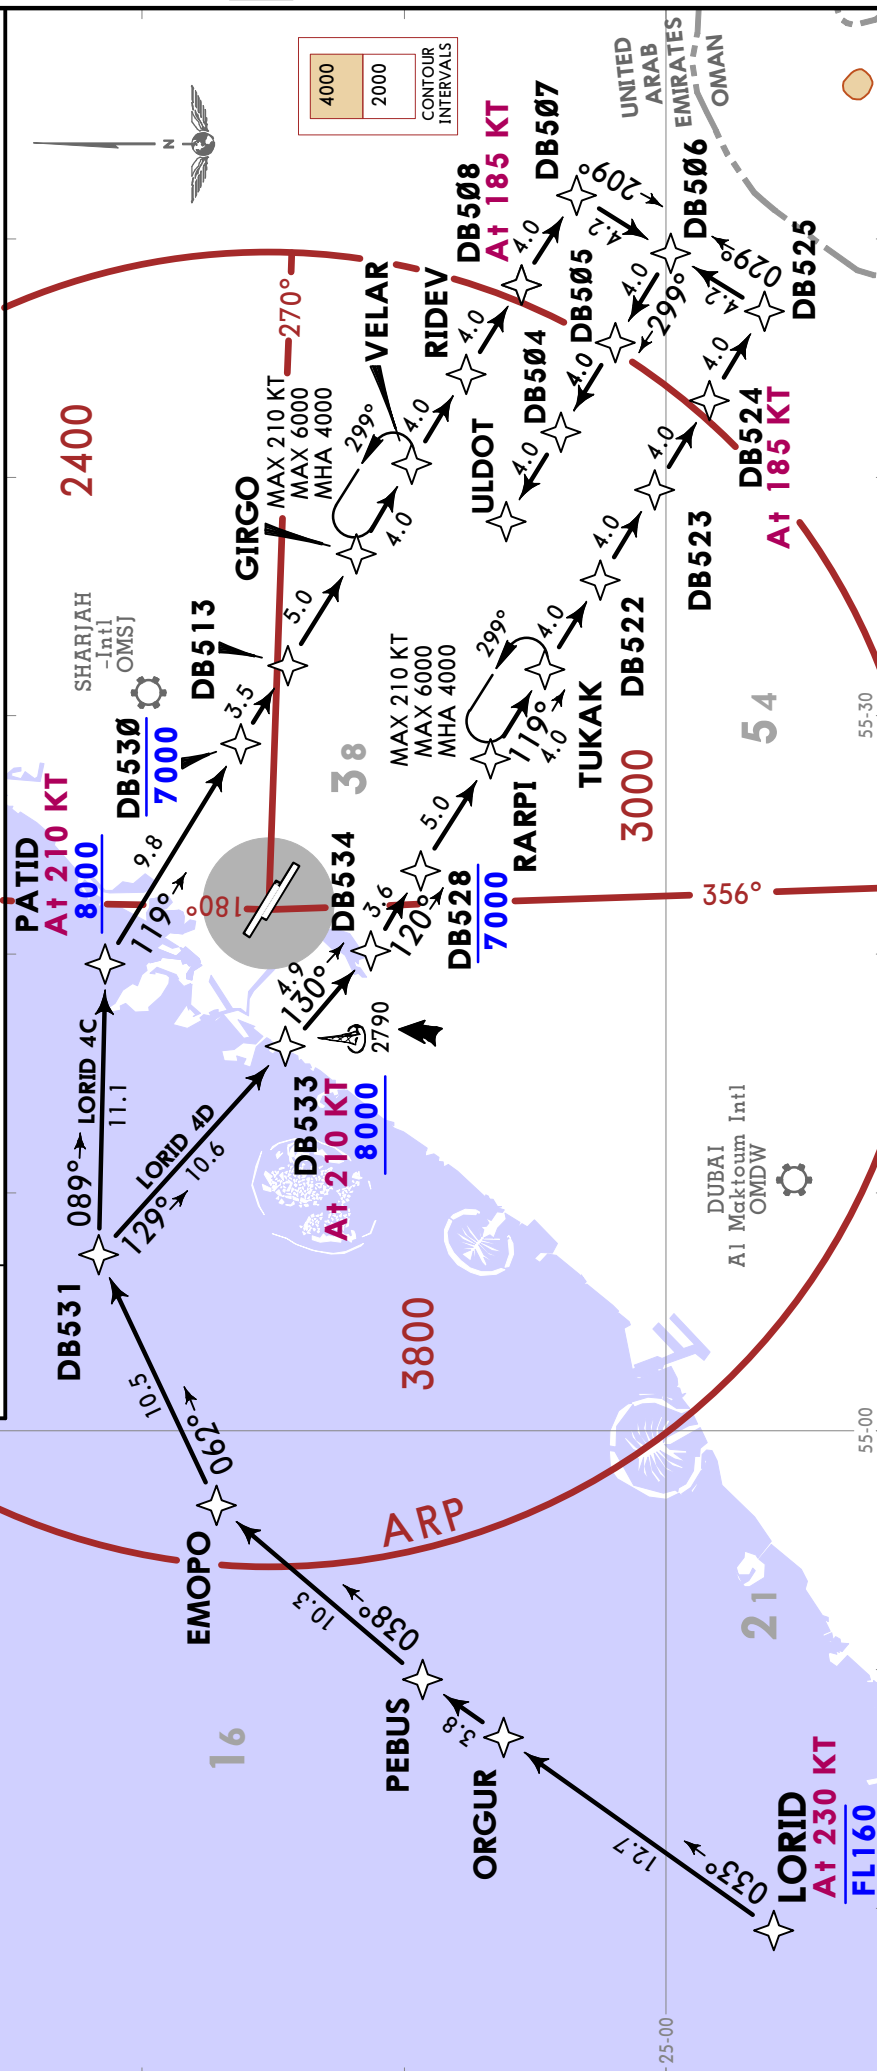

DUBAI, UAE
RNAV STAR

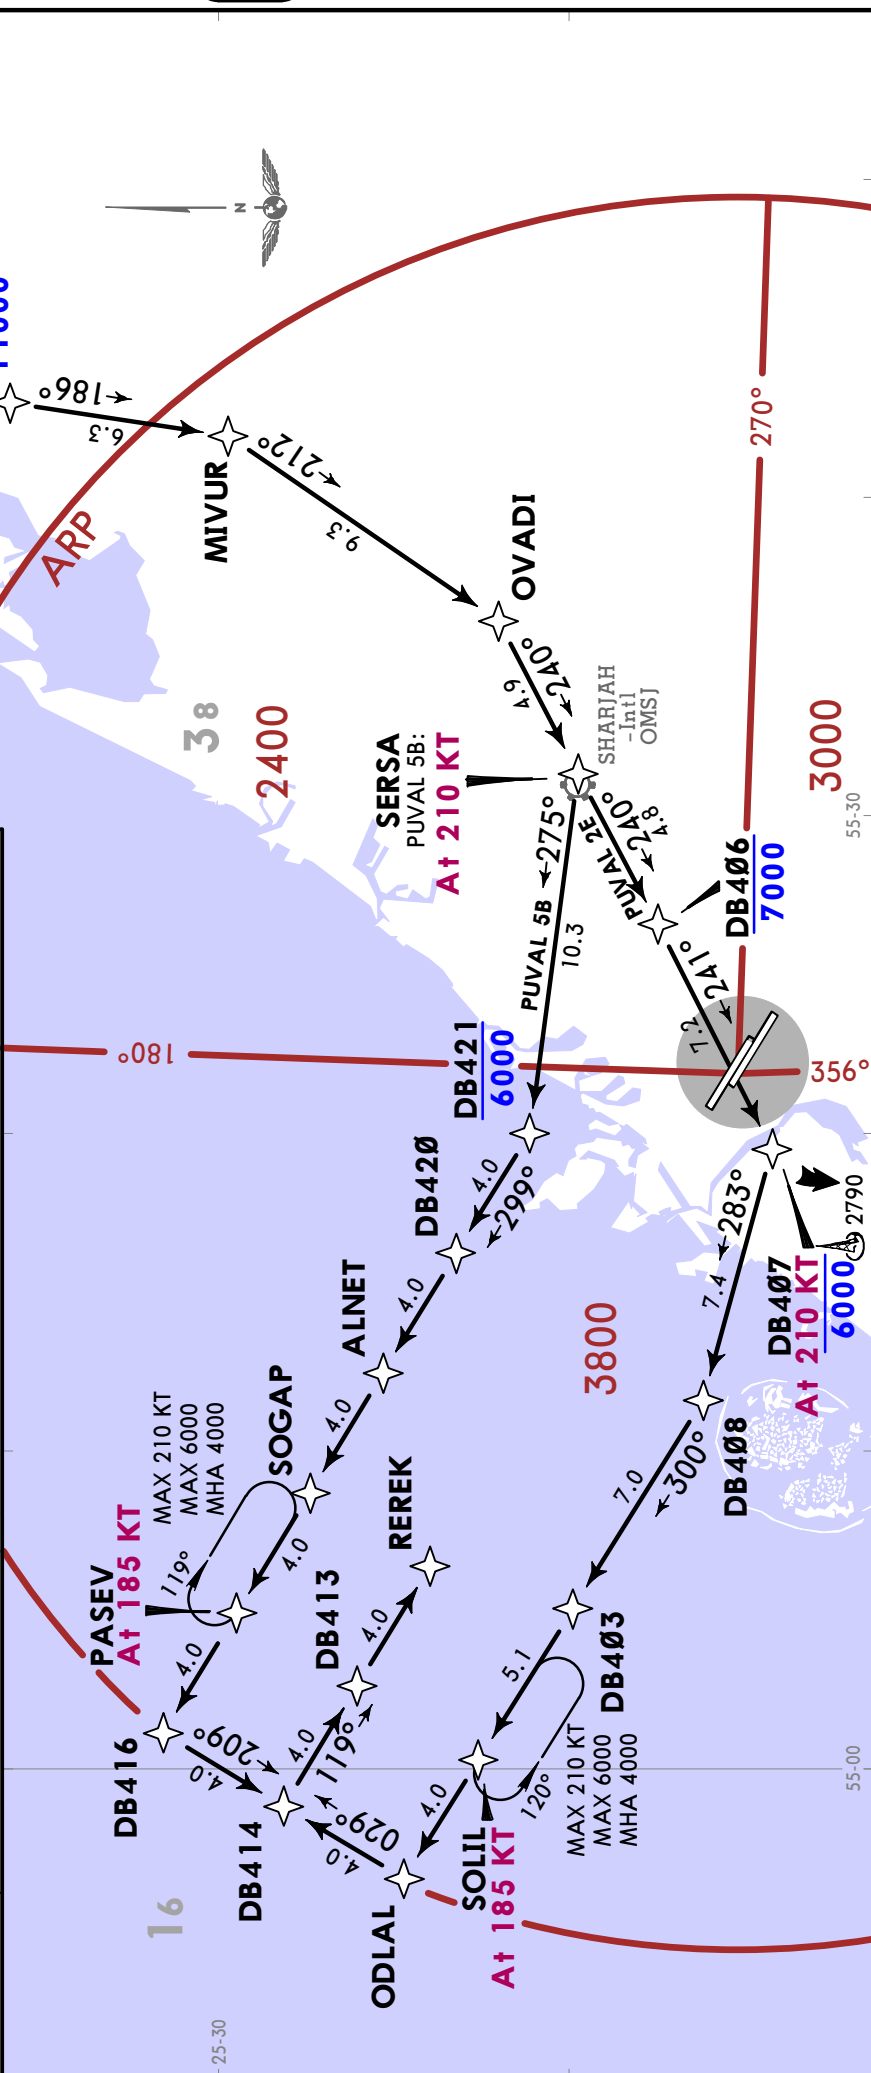

OMDB/DXB
DUBAI INTL

JEPPESSEN
30 MAY 25 10-2G Eff 12 Jun

DUBAI, UAE
RNAV STAR

D-ATIS
126.275


Apt Elev
62

RNAV 1 (GNSS) required

Alt Set: hPa Trans level: FL150

1. On initial contact with DUBAI ARRIVALS state passing level and ACFT type, including series. 2. Advise DUBAI ARRIVALS when full RWY length is required. 3. Do not descend below ATC cleared level. 4. When changing from DUBAI ARRIVALS to DUBAI DIRECTOR, state only: DUBAI DIRECTOR, [aircraft call sign] unless otherwise instructed. 5. Execute all turns at a bank angle of 25° or at a rate of 3° per second, unless otherwise instructed by ATC. 6. ATC instructions must be followed immediately.

PUVAL 5C [PUVA5C], PUVAL 3D [PUVA3D]
RNAV ARRIVALS
(RWYS 30L/R)

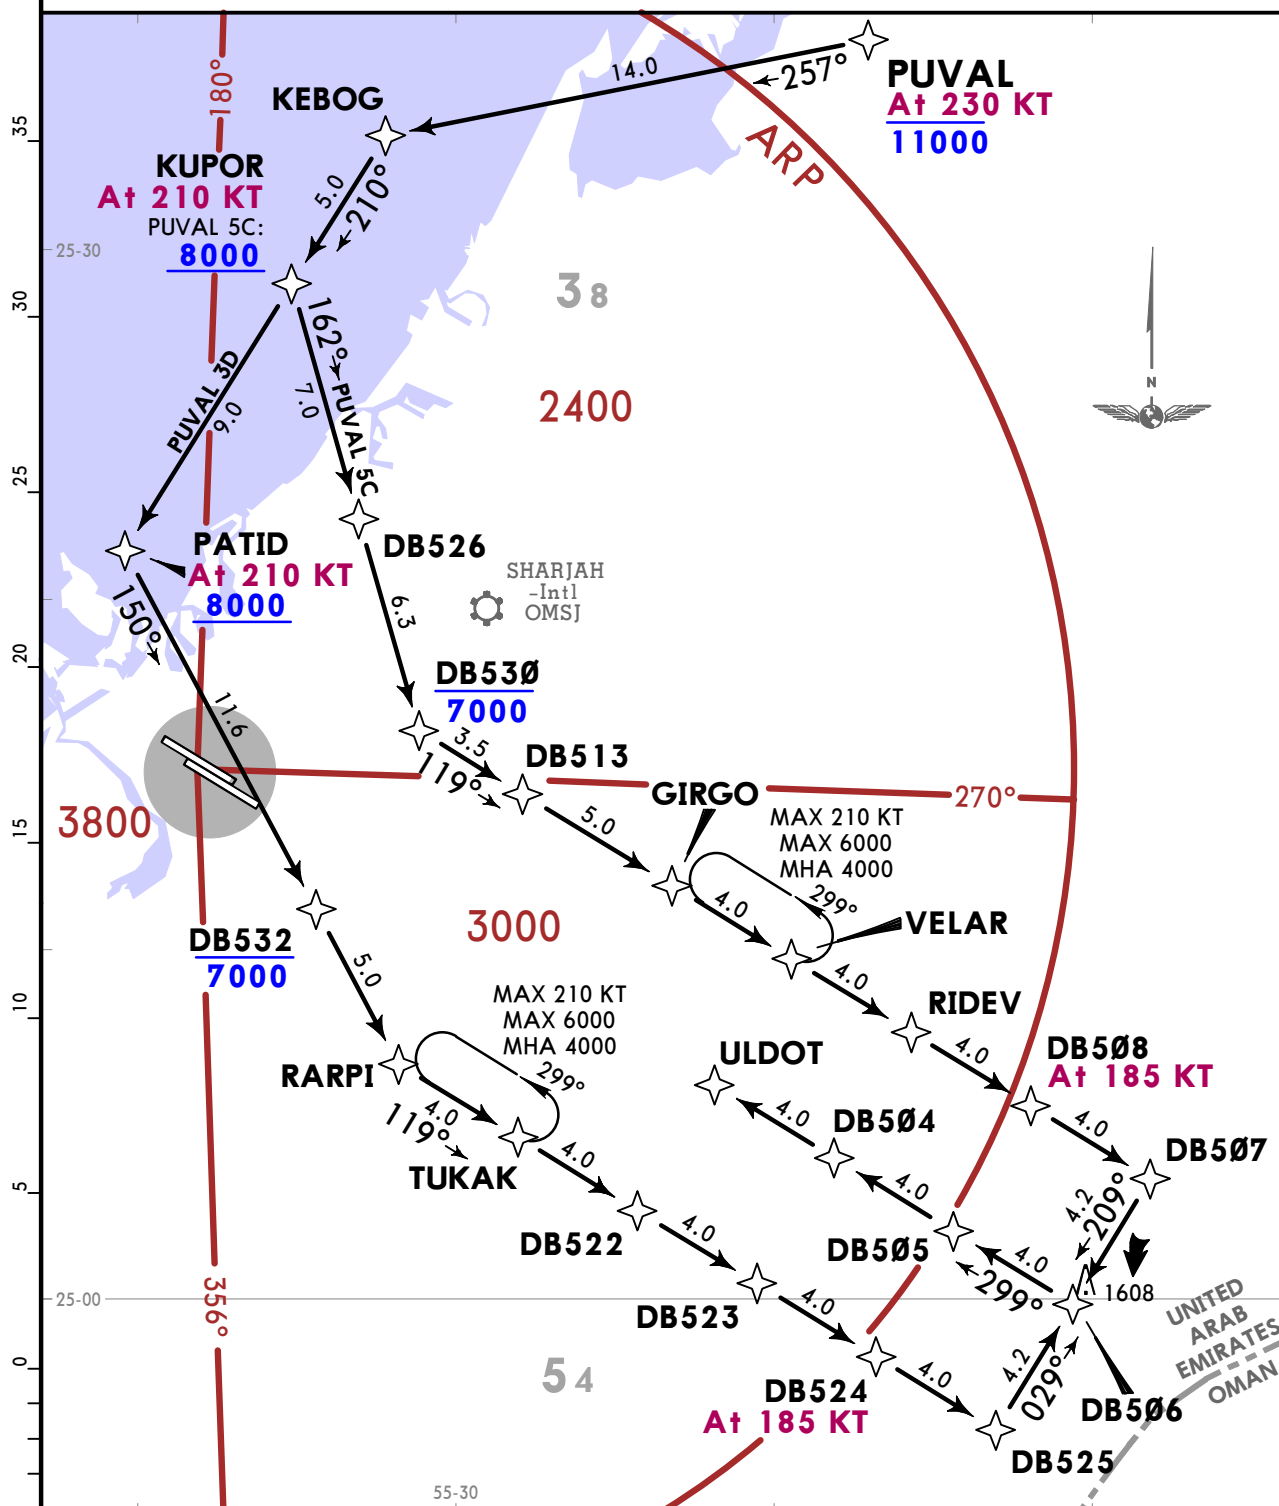

STAR

ROUTING

PUVAL 5C

PUVAL (K230; 11000-) - KEOG - KUPOR (K210; 8000+) - DB526 - DB530 (7000-) - DB513 - GIRGO - VELAR - RIDEV - DB508 (K185) - DB507 - DB506 - DB505 - DB504 - ULDOT.


PUVAL 3D

PUVAL (K230; 11000-) - KEOG - KUPOR (K210) - PATID (K210; 8000+) - DB532 (7000-) - RARPI - TUKAK - DB522 - DB523 - DB524 (K185) - DB525 - DB506 - DB505 - DB504 - ULDOT.

OMDB/DXB
DUBAI INTL

JEPPESSEN
30 MAY 25 10-2H Eff 12 Jun

DUBAI, UAE
RNAV STAR

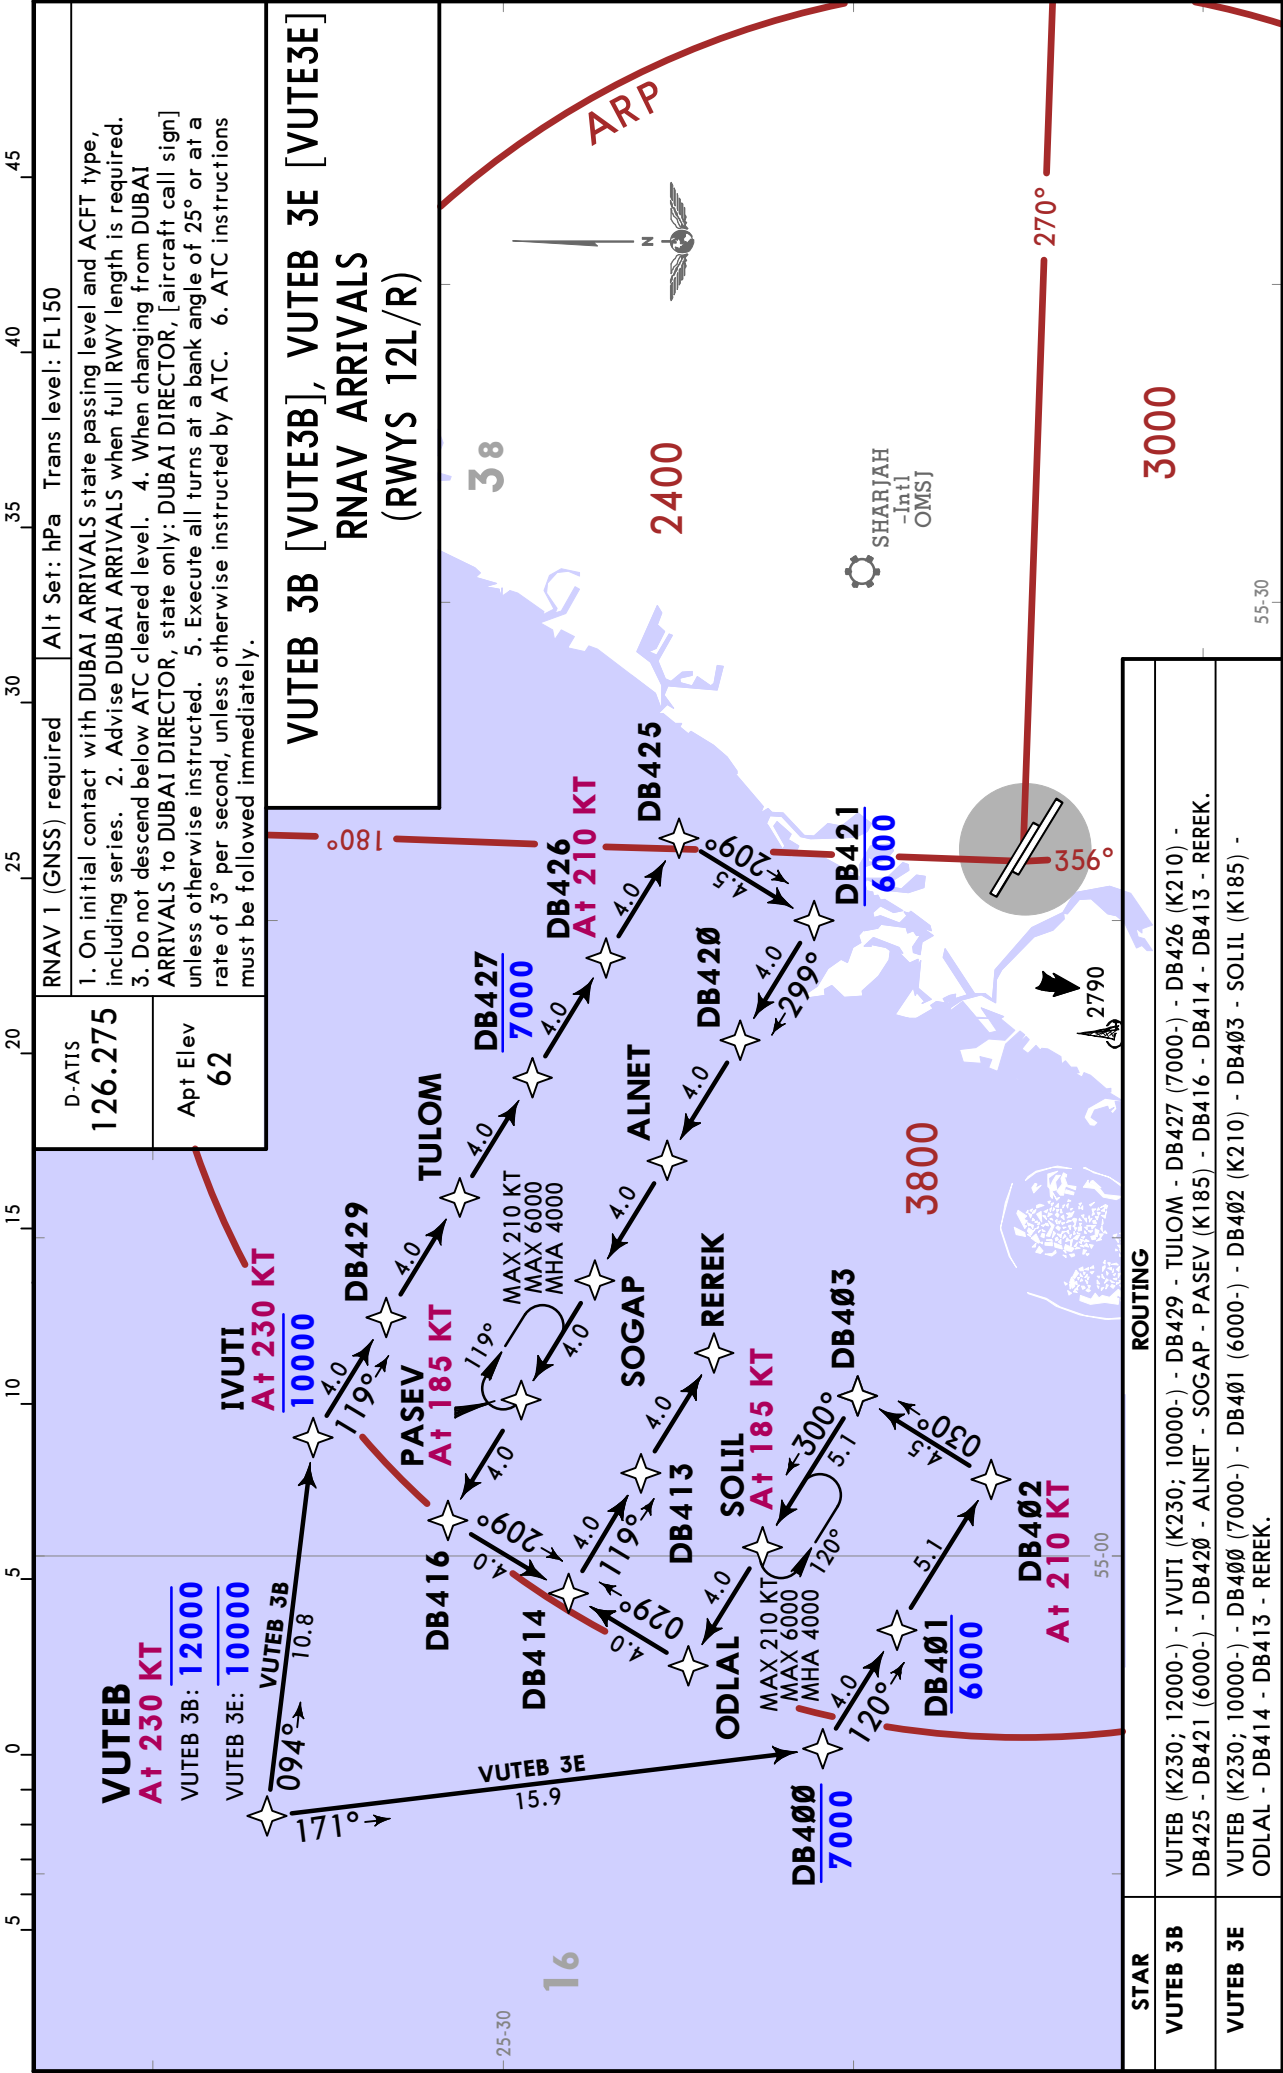

OMDB/DXB
DUBAI INTL

JEPPESSEN
30 MAY 25 10-2J Eff 12 Jun

DUBAI, UAE
RNAV STAR

