

RKSI/ICN
INCHEON INTL

 **JEPPESSEN**
8 JUL 22 **20-1P**

SEOUL/INCHEON, KOREA
AIRPORT BRIEFING

GENERAL

ASSIGNMENT OF STAR OR SID

This information will help pilots during preflight planning to select a STAR or SID. It may be changed if necessary due to ATC purposes, weather, ground conditions or traffic volume.

1. Assignment of Standard Terminal Arrival (STAR)
a. Passenger flight/cargo flight

TIME (UTC)	AIRWAY	RUNWAY	STAR (PRIMARY/SECONDARY)
0000-2400	G-597 (KARBU)	15L/R, 16L/R	KARBU TWO HOTEL RNAV/ KARBU TWO CHARLIE RNAV
		33L/R, 34L/R	KARBU TWO ECHO RNAV/ BIKSI TWO MIKE RNAV *
	G-585 (GUKDO)	15L/R, 16L/R	GUKDO TWO HOTEL RNAV/ GUKDO TWO CHARLIE RNAV
		33L/R, 34L/R	GUKDO TWO ECHO RNAV/ CUN (YECHEON) TWO MIKE RNAV *
	Y-644 (REBIT)	15L/R, 16L/R	REBIT TWO HOTEL RNAV
	Y-644 (COWAY/GONAV)	33L/R, 34L/R	REBIT TWO ALPHA RNAV/ GONAV THREE MIKE RNAV *
	Y-722 (OLMEN)	15L/R, 16L/R	OLMEN TWO HOTEL RNAV/ OLMEN TWO CHARLIE RNAV
		33L/R, 34L/R	OLMEN TWO ECHO RNAV/ MAKSA TWO MIKE RNAV *

* These procedures are operated only 1400-1900 UTC (see 20-1P2 for details).
** Cargo flights will be preferentially assigned to Rwys 15L/R & 33L/R.

2. Assignment of Standard Instrument Departure (SID)
a. Passenger flight /cargo flight

TIME (UTC)	AIRWAY	RUNWAY	SID (PRIMARY/SECONDARY)
0000-2400	G-597 (KARBU)	15L/R	EGOBA TWO CHARLIE RNAV
		16L/R	EGOBA TWO HOTEL RNAV
		33L/R	EGOBA TWO ECHO RNAV/ EGOBA TWO ALPHA RNAV
		34L/R	EGOBA TWO YANKEE RNAV
	G-597 (BINIL)	15L/R	BINIL TWO CHARLIE RNAV
		16L/R	BINIL TWO HOTEL RNAV
	G-597 (NOPIK)	33L/R	NOPIK TWO ALPHA RNAV
		34L/R	NOPIK TWO YANKEE RNAV
	A-582 (OSPOT)	15L/R	OSPOT TWO CHARLIE RNAV
		16L/R	OSPOT TWO HOTEL RNAV
		33L/R	OSPOT TWO ECHO RNAV/ OSPOT TWO ALPHA RNAV
		34L/R	OSPOT TWO YANKEE RNAV
	Y-711 (BOPTA)	15L/R	BOPTA TWO CHARLIE RNAV
		16L/R	BOPTA TWO HOTEL RNAV
		33L/R	BOPTA TWO ALPHA RNAV
		34L/R	BOPTA TWO YANKEE RNAV

RKSI/ICN
INCHEON INTL

8 JUL 22
Eff 13 Jul 1600Z

JEPPesen
20-1P1

SEOUL/INCHEON, KOREA
AIRPORT BRIEFING

GENERAL

ASSIGNMENT OF STAR OR SID (contd)

3. Use of SID/STAR

- a. Pilot shall note that adherence to SID/STAR level restrictions are critical for aircraft separation in SEOUL TMA. For ATC separation, pilots are strongly encouraged to check whether he or she can comply with level restrictions of SID(before airborne)/ STAR(before passing subsequent waypoint) or not.
- b. If unable to comply with any restrictions depicted on SID or STAR, pilot shall notify ATC as early as possible.
- c. To eliminate safety risk due to a mismatch between ATC and pilot expectations, ATC will provide aircraft with explicit indications with regard to what is expected in terms of speed and level at all times using "CANCEL (LEVEL/SPEED) RESTRICTIONS" or "COMPLY WITH (LEVEL/SPEED) RESTRICTIONS" RTF phraseology.

USE OF MODE S TRANSPONDER ON THE GROUND

GENERAL. This system using Mode S transponder improves the accuracy and reliability of the Ground Movement Monitoring System. All operators having aircraft equipped with Mode S transponders shall ensure Mode S transponders are operative when aircraft are on the ground.

DEPARTING AIRCRAFT. Prior to pushback or taxiing from a parking stand (whichever comes first):

- Enter, using either FMS mode or transponder control unit, the Flight Identification as specified in Item 7 of the ICAO Flight Plan, or in the absence of Flight Identification, enter the Aircraft Registration.
- Select XPNDR, or its equivalent, on installed transponder equipment.
- If function is available, select AUTO mode. Do not select OFF or SDBY functions.
- Set Mode A code as assigned by ATC. When lining up select TA/RA.

ARRIVING AIRCRAFT. After landing and until the aircraft is stationary at a parking stand:

- Maintain XPNDR, or its equivalent, on installed transponder equipment.
- Do not select OFF or SDBY functions. Maintain Mode A code assigned by ATC.
- When aircraft is stationary at the parking stand, select OFF or SDBY.

OTHER CASES OF TAXIING AIRCRAFT. Select XPNDR, or its equivalent, on installed transponder equipment. Select AUTO mode if available. Do not select OFF or SDBY functions. Set Mode A code to 2000.

AIRCRAFT NOT EQUIPPED WITH MODE S TRANSPONDER OR TRANSPONDER UNSERVICEABLE.

DEPARTING AIRCRAFT. Maintain Mode A+C transponder in the ON position until lining up.

ARRIVING AIRCRAFT. Maintain Mode A+C transponder in the ON position and Mode A code as assigned by ATC until parking stand.

OTHER CASES OF TAXIING AIRCRAFT. Select Mode A+C transponder in the ON position, or equivalent, on installed transponder. Do not select OFF or SDBY functions. Set Mode A code to 2000. When fully parked on stand, select OFF or SDBY position.

RKSI/ICN
INCHEON INTL

 **JEPPESEN**
14 FEB 25 (20-1P2)

SEOUL/INCHEON, KOREA
Eff 19 Feb 1600Z AIRPORT BRIEFING

ARRIVAL

CDO (Continuous Descent Operation) PROCEDURE FOR INCHEON AD

1. The CDO procedures are in place for all aircraft flying on Y644, Y722, G585 (Y685) and G597 (Y697) inbound to Incheon International Airport to ensure efficient arrival and approach operation as far as possible during specified time.
 - a. Operation time : 1400 - 1900 UTC
 - b. Available RWY: 33 L/R, 34L/R
 - c. Available procedures: BIKSI 2M, CUN 2M, MAKSA 2M, GONAV 3M
2. ATC instructions

Incheon or Daegu ACC will instruct the aircraft to perform CDO when it enters Incheon FIR, as follows:

 - Phraseology

Controller: (Call sign), Cleared CUN (Yecheon) 2M arrival. Descend via STAR to 7000.

*The above instruction (Phraseology) may be changed if necessary.
3. Pilots should report ATC when leaving the altitude of the Top of Descent (TOD).
 - Phraseology

Pilot: Incheon control, (Call sign), Now leaving

*Reference point of descending: ENPIL (IAF) at 7,000'.
4. Pilots may maintain the ECON (Economical) SPEED on the FMS, unless ATC advises otherwise.
5. If the CDO procedure is not possible due to an emergency, weather conditions and traffic, an alternate instruction will be issued by ATC or pilots can request it.

Initial Radio Call Procedures with SEOUL APPROACH

1. When instructed to 'CONTACT', pilot shall Squawk IDENT and report callsign, aircraft type (including series) and ATIS code.
2. When instructed to 'MONITOR or STAND BY FOR', pilot shall Squawk IDENT and keep silent until ATC initiate call.

Inbound cargo aircraft to Incheon Intl Airport are required to advise Seoul Approach that they are cargo operators.

Missed approach procedure when ground navigation aid is unserviceable

1. If able to follow published procedure using the suitable RNAV system with GPS or DME/DME/IRU, follow as published.
2. If unable to follow as published, missed approach procedure is established as follows.
 - a. Rwy 15L/R: Climb to 3000', after passing 720' fly heading 100 then radar vector.
 - b. Rwy 16L/R: Climb to 3000', after passing 500' fly heading 190 then radar vector.
 - c. Rwy 33L/R: Climb to 3000', after passing 500' fly heading 010 then radar vector.
 - d. Rwy 34L/R: Climb to 3000', after passing 500' fly heading 280 then radar vector.
 - e. Report to ATC about heading/altitude when going around.
3. If ATC issue another heading/altitude, follow ATC's instruction when going around.

RKSI/ICN
INCHEON INTL

 **JEPPESSEN**
14 FEB 25 **(20-1P3)**

SEOUL/INCHEON, KOREA
Eff 19 Feb 1600Z **AIRPORT BRIEFING**

ARRIVAL

CAT II / III OPERATIONS

General

Incheon International Airport RWY 15L, RWY 15R, RWY 16L, RWY 16R, RWY 33L, RWY 33R, RWY 34L and RWY 34R have ILS CAT III equipment. Low Visibility Procedures are established for operation in a visibility of less than RVR 550m or a cloud ceiling of less than 200'(60m) or less.

- a. Low visibility operations will be initiated by broadcasting 'ATC LOW VISIBILITY PROCEDURES ARE IN OPERATION' via ATIS and/or appropriate radio frequencies.
- b. Low visibility operations will be terminated by deleting the above mentioned message from ATIS and/or broadcasting 'ATC LOW VISIBILITY OPERATIONS ARE TERMINATED' via appropriate frequencies.

Aircraft operators must obtain approval from Administrator of Seoul Regional Aviation Administration prior to conducting any low visibility operations at Incheon International Airport.

a. Approval for CAT II/III Operations

1. Aircraft operators and pilots who wish to conduct ILS CAT II/III operations at Incheon International Airport shall conform with certain requirements. Details of these requirements are published in Aviation Safety Act, Article 67 and its Enforcement Regulations Article 189, which are available from:

Flight Operations Division

Seoul Regional Aviation Administration

2850 Unseo-dong, Jung-gu, Incheon

400-718, Republic of Korea

Tel : 82-32-740-2154 / 5

Fax : 82-32-740-2159

- b. Foreign operators may obtain the approval from Administrator of Seoul Regional Aviation Administration by providing the following information to Administrator of Seoul Regional Aviation Administration.

1. Aircraft type and register number;
2. The Category II/III minima to which they intend to operate; and
3. A copy of the category II/III certification issued by their own category authority.

Pilots shall be informed when:

- a. Meteorological reports preclude ILS CAT I operations;
- b. Low Visibility Procedures are in operation;
- c. There is any unserviceable in a promulgated facility so that they may amend their minima.

The separation between successive landing aircraft on the same runway will not be less than 10 NM.

When informed of the failure of Surface Movement Radar (SMR), pilots should anticipate that considerable spacing between aircraft may be required.

Pilots who wish to carry out an ILS CAT II/III approach shall inform to Approach Control on initial contact.

RKSI/ICN
INCHEON INTL **JEPPESSEN**
13 OCT 23 **(20-1P4)****SEOUL/INCHEON, KOREA**
AIRPORT BRIEFING

ARRIVAL

Special Procedures and Safeguards**General Special Procedures and Ground Safeguards**

Special procedures and ground safeguards will be applied during CAT II/III operations to protect aircraft from operating in low visibility and to avoid interference with the ILS signals in accordance with the provisions of ICAO Doc. 9365 - Manual of All Weather Operations, and the provisions of the Enforcement Regulations of Aviation Act, Article 210-8.

- a. During low visibility operations, taxiway centerline lights will be used in conjunction with the stop bar lights as follows:
 1. If the stop bar lights are turned on, the centerline lights beyond the stop bar will be turned off.
 2. If the stop bar lights are turned off, the centerline lights beyond the stop bar will be turned on.
- b. Restrictions of application on CAT-II/III holding positions: TWY G or TWY L
 1. When RWY 15L for landing and RWY 15R for departure are in use at the same time, CAT-II/III holding positions on TWY G and L are not applied.
 2. When RWY 33L for departure and RWY 33R for landing are in use at the same time, CAT-II/III holding positions on TWY L and G are not applied.
- c. Arriving Aircraft
 1. Aircraft shall vacate the runway via the designated exit taxiways as follows;
Other exit taxiways will not be lit.
RWY 15L - C2, C1, D1 or G
RWY 15R - B3, B2 or G
RWY 33L - B4, B5 or L
RWY 33R - C4, C5, D6 or L
RWY 16L - N3, N2 or S
RWY 16R - P6, P5, P4, P2 or S
RWY 34R - N4, N5 or N7
RWY 34L - P7, P8, P10, P11 or P13
Refer to RKSI 20-9F and 20-9H
 2. All runway exits have taxiway center-line lead off lights that are color coded (green/yellow) to indicate that portion of the taxiway that is within the ILS sensitive area.
 3. Pilots are required to make a 'runway vacated' call giving due allowance for the size of the aircraft to ensure that the entire aircraft has vacated the ILS critical sensitive areas.
- d. Departing Aircraft
Departing aircraft shall normally enter the runway via the designated taxiways as follows:
 - RWY 15L: A - L or D - L
 - RWY 15R: A - L, D - L, D - K - C - L
 - RWY 33L: A - G, D - G, D - J - C - G
 - RWY 33R: A - G, D - G
 - RWY 16L: M - N7
 - RWY 16R: M - V - P - P13, M - N7 - P - P13,
 - RWY 34R: M - S
 - RWY 34L: M - S, M - T - P - S
 Refer to RKSI 20-9J and 20-9G

Practice Approaches

Pilots may carry out a practice ILS CAT II/III approach at any time with prior approval of ATC, but the full safeguarding ground procedures will not be applied and pilots should anticipate the possibility of ILS signal interference.

Apron Safety Management

- a. All GSE (Ground Service Equipment) vehicle roadways crossing taxiways or taxi lanes are marked in the form of zipper.
- b. Pilots shall pay extra caution to the vehicles while taxiing in apron areas.

RKSI/ICN
INCHEON INTL

 **JEPPESSEN**
13 OCT 23 **20-1P5**

SEOUL/INCHEON, KOREA
AIRPORT BRIEFING

DEPARTURE

INTERSECTION DEPARTURE

The take-off runway available distances for intersection departures are as follows:

RWY	Take-off from intersection with TWY:	Take-Off Runway Available
15R	-	3750m / 12,303 ft
	① B6	3560m / 11680 ft
	① K	3000m / 9843 ft
	B5	2550m / 8366 ft
	B4	2250m / 7382 ft
	C8	2460m / 8071 ft
33L	-	3750m / 12,303 ft
	① B1	3560m / 11680 ft
	① J	3000m / 9843 ft
	B2	2550m / 8366 ft
	B3	2250m / 7382 ft
	C3	2520m / 8268 ft
15L	-	3750m / 12,303ft
	① K	3000m / 9843 ft
	D6	2550m / 8366 ft
33R	-	3750m / 12,303 ft
	① J	3000m / 9843 ft
	D1	2550m / 8366 ft
16L	-	4000m / 13,123 ft
	① N6	3810m / 12,500 ft
	① V	3314m / 10,873 ft
	① U	3009m / 9872ft
	N5	2550m / 8366 ft
	P9	2404m / 7887 ft
	N4	2050m / 6726 ft
	W	1799m / 5902 ft
34R	-	4000m / 13,123 ft
	① N1	3810m / 12,500 ft
	① T	3259m / 10,692 ft
	P3	2786m / 9140 ft
	N2	2550m / 8366 ft
	N3	2049m / 6722 ft
	W	2049m / 6722 ft
16R	-	3750m / 12,303 ft
	① P12	3555m / 11,663 ft
	① V	3314m / 10,873 ft
	① U	3009m / 9872 ft
	P11	2500m / 8202 ft
	P10	2200m / 7218 ft
	P8	1900m / 6234 ft
	P7	1600m / 5249 ft
	W	1875m / 6152 ft
34L	-	3750m / 12,303 ft
	① P1	3555m / 11,663 ft
	① T	3009m / 9872 ft
	P2	2500m / 8202 ft
	P4	2200m / 7218 ft
	P5	1900m / 6234 ft
	P6	1600m / 5249 ft
	W	1875m / 6152 ft

① Entry Point for Intersection departure.

Note:
Intersection departure may be initiated by pilot or ATC and approved by ATC considering traffic and enroute separation. ATC may change departure sequence for the purposes of traffic flow management.

RKSI/ICN
INCHEON INTL

JEPPESSEN
 11 NOV 22 **(20-1P6)**
SEOUL/INCHEON, KOREA
AIRPORT BRIEFING
DEPARTURE
AIRCRAFT PUSHBACK PROCEDURES

Aircraft Stands	Pushback Procedures	Phraseology
Apron 1		
1 and 2	The aircraft shall be pushed back to face north along blue line until its nosewheel is at spot 1.	Pushback approved to point 1.
3	The aircraft shall be pushed back onto taxilane R1 to face north.	Pushback approved to face north.
	The aircraft shall be pushed back to face north along blue line until its nosewheel is at spot 1.	Pushback approved to point 1.
6	The aircraft shall be pushed back onto taxilane R1 to face north.	Pushback approved to face north.
	The aircraft shall be pushed back to face south along taxilane R1 until the specific gate position.	Pushback approved to face south abeam gate (number).
7	The aircraft shall be pushed back onto taxilane R1 to face north.	Pushback approved to face north.
	The aircraft shall be pushed back to face south along taxilane R1 until the specific gate position.	Pushback approved to face south abeam gate (number).
	The aircraft shall be pushed back onto stand 825 on taxilane R5 to face south.	Pushback approved to stand 825.
8	The aircraft shall be pushed back onto taxilane R1 to face south.	Pushback approved to face south.
	The aircraft shall be pushed back to face north along taxilane R1 until the specific gate position.	Pushback approved to face north abeam gate (number).
	The aircraft shall be pushed back onto stand 825 on taxilane R5 to face south.	Pushback approved to stand 825.
9	The aircraft shall be pushed back to face south along blue line until its nosewheel is at R1.	Pushback approved to face south.
	The aircraft shall be pushed back onto taxilane R1 to face north.	Pushback approved to face north.
	The aircraft shall be pushed back onto stand 825 on taxilane R5 to face south.	Pushback approved to stand 825.
10, 11 and 12	The aircraft shall be pushed back onto taxilane R1 to face south.	Pushback approved to face south.
	The aircraft shall be pushed back onto taxilane R1 to face north.	Pushback approved to face north.
14	The aircraft shall be pushed back onto taxilane R1 to face south.	Pushback approved to face south.
	The aircraft shall be pushed back onto taxilane R1 to face north until gate 10 to minimize jet blast effect.	Pushback approved to face north.
	The aircraft shall be pushed back onto spot 53R on A6 to face west.	Pushback approved to spot 53R.
15	The aircraft shall be pushed back to face north along blue line until its nosewheel is at R1.	Pushback approved to face north.
	The aircraft shall be pushed back onto taxilane R1 to face south.	Pushback approved to face south.
	The aircraft shall be pushed back onto spot 53R on A6 to face west.	Pushback approved to spot 53R.
16	The aircraft shall be pushed back onto taxilane R1 to face north.	Pushback approved to face north.
	The aircraft shall be pushed back onto taxilane R1 to face south.	Pushback approved to face south.
	The aircraft shall be pushed back onto spot 53R on A6 to face west.	Pushback approved to spot 53R.
17	The aircraft shall be pushed back onto taxilane R1 to face north.	Pushback approved to face north.
	The aircraft shall be pushed back onto taxilane R7 to face east.	Pushback approved to face east on R7.
	The aircraft shall be pushed back onto spot 53R on A6 to face west.	Pushback approved to spot 53R.

RKSI/ICN
INCHEON INTL

 **JEPPESSEN**
11 NOV 22 **20-1P7**

SEOUL/INCHEON, KOREA
AIRPORT BRIEFING

DEPARTURE

AIRCRAFT PUSHBACK PROCEDURES (CONTD)

Aircraft Stands	Pushback Procedures	Phraseology
Apron 1		
18	The aircraft shall be pushed back onto taxilane R7 to face east.	Pushback approved to face east.
	The aircraft shall be pushed back onto taxilane R7 to face west.	Pushback approved to face west.
	The aircraft shall be pushed back to face north along taxilane R1 until the specific gate position.	Pushback approved to face north on R1 abeam gate (number).
19	The aircraft shall be pushed back onto taxilane R7 to face east.	Pushback approved to face east.
	The aircraft shall be pushed back onto taxilane R7 to face west.	Pushback approved to face west.
	The aircraft shall be pushed back to face north along taxilane R1 until the specific gate position.	Pushback approved to face north on R1 abeam gate (number).
	The aircraft shall be pushed back to face north along taxilane R2 until its nosewheel is at spot 2.	Pushback approved to point 2.
20	The aircraft shall be pushed back onto taxilane R7 to face east.	Pushback approved to face east.
	The aircraft shall be pushed back onto taxilane R7 to face west.	Pushback approved to face west.
	The aircraft shall be pushed back to face north along taxilane R2 until its nosewheel is at spot 2.	Pushback approved to point 2.
21	The aircraft shall be pushed back to face north along blue line until its nosewheel is at R2.	Pushback approved to blue.
	The aircraft shall be pushed back to face north until its body is on taxilane R2.	Pushback approved to face north.
	The aircraft shall be pushed back onto taxilane R7 to face east.	Pushback approved to face east on R7.
	The aircraft shall be pushed back onto taxilane R7 to face west.	Pushback approved to face west on R7.
22	The aircraft shall be pushed back to face north along blue line until its nosewheel is at R2.	Pushback approved to blue.
	The aircraft shall be pushed back to face north and then towed forward until its nosewheel is at spot 2.	Pushback approved to point 2.
23, 24 and 26	The aircraft shall be pushed back to face north and then towed forward until its nosewheel is at spot 2.	Pushback approved to point 2.
	The aircraft shall be pushed back to face south along blue line until its nosewheel is at spot 3.	Pushback approved to point 3.
	The aircraft shall be pushed back to face south along taxilane R2 until the specific gate number.	Pushback approved to face south on R2 [abeam gate (number)].
27	The aircraft shall be pushed back to face north and then towed forward until its nosewheel is at spot 2.	Pushback approved to point 2.
	The aircraft shall be pushed back to face south along blue line until its nosewheel is at spot 3.	Pushback approved to point 3.
	The aircraft shall be pushed back to face north and then towed forward until its nosewheel is at spot 4.	Pushback approved to point 4.
	The aircraft shall be pushed back to face south along taxilane R2 until the specific gate number.	Pushback approved to face south on R2 [abeam gate (number)].
	The aircraft shall be pushed back to face south along taxilane R3 until the specific gate number.	Pushback approved to face south on R3 [abeam gate (number)].

RKSI/ICN
INCHEON INTL

JEPPESSEN
 11 NOV 22 **20-1P8**
SEOUL/INCHEON, KOREA
AIRPORT BRIEFING
DEPARTURE
AIRCRAFT PUSHBACK PROCEDURES (CONTD)

Aircraft Stands	Pushback Procedures	Phraseology
Apron 1		
28, 30 and 31	The aircraft shall be pushed back to face south along blue line until its nosewheel is at spot 3.	Pushback approved to point 3.
	The aircraft shall be pushed back to face north and then towed forward until its nosewheel is at spot 4.	Pushback approved to point 4.
	The aircraft shall be pushed back to face south along taxilane R3 until the specific gate number.	Pushback approved to face south on R3 [abeam gate (number)].
32	The aircraft shall be pushed back to face north along blue line until its nosewheel is at R3.	Pushback approved to blue.
	The aircraft shall be pushed back to face north and then towed forward until its nosewheel is at spot 4.	Pushback approved to point 4.
33	The aircraft shall be pushed back to face north along blue line until its nosewheel is at R3.	Pushback approved to blue.
	The aircraft shall be pushed back to face north until its body is on taxilane R3.	Pushback approved to face north.
	The aircraft shall be pushed back onto taxilane R7 to face east.	Pushback approved to face east on R7.
	The aircraft shall be pushed back onto taxilane R7 to face west.	Pushback approved to face west on R7.
34	The aircraft shall be pushed back onto taxilane R7 to face east.	Pushback approved to face east.
	The aircraft shall be pushed back onto taxilane R7 to face west.	Pushback approved to face west.
	The aircraft shall be pushed back to face north along taxilane R3 until its nosewheel is at spot 4.	Pushback approved to point 4.
35	The aircraft shall be pushed back onto taxilane R7 to face east.	Pushback approved to face east.
	The aircraft shall be pushed back onto taxilane R7 to face west.	Pushback approved to face west.
	The aircraft shall be pushed back to face north along taxilane R3 until its nosewheel is at spot 4.	Pushback approved to point 4.
	The aircraft shall be pushed back to face north along taxilane R4 until the specific gate position.	Pushback approved to face north on R4 abeam gate (number).
36	The aircraft shall be pushed back onto taxilane R7 to face east.	Pushback approved to face east.
	The aircraft shall be pushed back onto taxilane R7 to face west.	Pushback approved to face west.
	The aircraft shall be pushed back to face north along taxilane R4 until the specific gate position.	Pushback approved to face north on R4 abeam gate (number).
37	The aircraft shall be pushed back onto taxilane R4 to face north.	Pushback approved to face north.
	The aircraft shall be pushed back onto taxilane R7 to face west.	Pushback approved to face west on R7.
	The aircraft shall be pushed back onto taxilane R6 to face north.	Pushback approved to face north on R6.
38	The aircraft shall be pushed back onto taxilane R4 to face south.	Pushback approved to face south.
	The aircraft shall be pushed back onto taxilane R4 to face north.	Pushback approved to face north.

RKSI/ICN
INCHEON INTL

JEPPESSEN
 11 NOV 22 **20-1P9**
SEOUL/INCHEON, KOREA
AIRPORT BRIEFING
DEPARTURE
AIRCRAFT PUSHBACK PROCEDURES (CONTD)

Aircraft Stands	Pushback Procedures	Phraseology
Apron 1		
39	The aircraft shall be pushed back onto taxilane R4 to face south.	Pushback approved to face south.
	The aircraft shall be pushed back to face north along blue line until its nosewheel is at R4.	Pushback approved to face north.
40, 41, 42 and 43	The aircraft shall be pushed back onto taxilane R4 to face south.	Pushback approved to face south.
	The aircraft shall be pushed back onto taxilane R4 to face north. Aircraft of Gate 40 shall be pushed back to face north until Gate 43 to minimize jet blast effect.	Pushback approved to face north.
45	The aircraft shall be pushed back to face south along blue line until its nosewheel is at R4.	Pushback approved to face south.
	The aircraft shall be pushed back onto taxilane R4 to face north.	Pushback approved to face north.
	The aircraft shall be pushed back onto taxilane R6 to face south.	Pushback approved to face south on R6.
46	The aircraft shall be pushed back onto taxilane R4 to face south.	Pushback approved to face south.
	The aircraft shall be pushed back onto taxilane R4 to face north.	Pushback approved to face north.
	The aircraft shall be pushed back onto taxilane R6 to face south.	Pushback approved to face south on R6.
47 and 48	The aircraft shall be pushed back onto taxilane R4 to face north.	Pushback approved to face north.
	The aircraft shall be pushed back to face south along taxilane R4 until the specific gate position.	Pushback approved to face south abeam gate (number).
	The aircraft shall be pushed back to face south along taxilane R6.	Pushback approved to face south on R6.
49	The aircraft shall be pushed back to face north along blue line until its nosewheel is at R4.	Pushback approved to face north.
	The aircraft shall be pushed back along blue line until its nosewheel is at spot 5.	Pushback approved to point 5.
50	The aircraft shall be pushed back along blue line until its nosewheel is at spot 5.	Pushback approved to point 5.
103	The aircraft shall be pushed back onto taxilane AS to face east.	Pushback approved to face east.
	The aircraft shall be pushed back onto taxilane R1 to face south.	Pushback approved to face south on R1.
105, 107, 109, 111, 113, 115, 117, 119, 121, 123, 125, 127 and 129	The aircraft shall be pushed back onto taxilane AS to face east.	Pushback approved to face east.
	The aircraft shall be pushed back onto taxilane AS to face west.	Pushback approved to face west.
131	The aircraft shall be pushed back onto taxilane R4 to face south.	Pushback approved to face south.
	The aircraft shall be pushed back onto taxilane AS to face west.	Pushback approved to face west.
132	The aircraft shall be pushed back onto taxilane R4 to face south.	Pushback approved to face south.

RKSI/ICN
INCHEON INTL17 JAN 25
Eff 22 Jan 1600Z **JEPPESSEN**
20-1P10**SEOUL/INCHEON, KOREA**
AIRPORT BRIEFING**DEPARTURE****AIRCRAFT PUSHBACK PROCEDURES (CONTD)**

Aircraft Stands	Pushback Procedures	Phraseology
Apron 2		
101	The aircraft shall be pushed back onto taxilane R1 to face north.	Pushback approved to face north.
102	The aircraft shall be pushed back onto taxilane R1 to face north.	Pushback approved to face north.
	The aircraft shall be pushed back onto taxilane R9 to face east.	Pushback approved to face east.
104, 106, 108, 110, 112, 114, 118, 122, 124, 126 and 128	The aircraft shall be pushed back onto taxilane R9 to face east.	Pushback approved to face east.
	The aircraft shall be pushed back onto taxilane R9 to face west.	Pushback approved to face west.
130	The aircraft shall be pushed back onto taxilane R9 to face west.	Pushback approved to face west.
	The aircraft shall be pushed back onto taxilane R4 to face north.	Pushback approved to face north on R4.
302 thru 304	The aircraft shall be pushed back onto taxilane R10 to face east.	Pushback approved to face east.
	The aircraft shall be pushed back onto taxilane R10 to face west.	Pushback approved to face west.
306 thru 314	The aircraft shall be pushed back onto taxilane R10 to face east.	Pushback approved to face east.
	The aircraft shall be pushed back onto taxilane R10 to face west.	Pushback approved to face west.
301	The aircraft shall be pushed back onto taxilane R10 to face east.	Pushback approved to face east.
302 thru 311 (309A/B, 310A/B, 311A/B)	The aircraft shall be pushed back onto taxilane R10 to face east.	Pushback approved to face east.
	The aircraft shall be pushed back onto taxilane R10 to face west.	Pushback approved to face west.
312	The aircraft shall be pushed back onto taxilane R10 to face west.	Pushback approved to face west.
321	The aircraft shall be pushed back onto taxilane RG to face east.	Pushback approved to face east.
322 thru 331 (329A/B, 330A/B, 331A/B)	The aircraft shall be pushed back onto taxilane RG to face east.	Pushback approved to face east.
	The aircraft shall be pushed back onto taxilane RG to face west.	Pushback approved to face west.
332	The aircraft shall be pushed back onto taxilane RG to face west.	Pushback approved to face west.
341, 341R/L	The aircraft shall be pushed back onto taxilane RG to face east.	Pushback approved to face east.
342 thru 352 (342R/L, 343R/L, 345R, 347R, 352R/L)	The aircraft shall be pushed back onto taxilane RG to face east.	Pushback approved to face east.
	The aircraft shall be pushed back onto taxilane RG to face west.	Pushback approved to face west.
353, 353R/L	The aircraft shall be pushed back onto taxilane RG to face west.	Pushback approved to face west.
Apron 3		
208, 209	The aircraft shall be pushed back onto taxilane RW to face east.	Pushback approved to face east.
	The aircraft shall be pushed back to face east until its nosewheel is at spot 54.	Pushback approved to point 54.
	The aircraft shall be pushed back onto taxilane R24 to face south.	Pushback approved to face south on R24.
210, 211	The aircraft shall be pushed back onto taxilane RW to face east.	Pushback approved to face east.
	The aircraft shall be pushed back onto taxilane RW to face west.	Pushback approved to face west.
	The aircraft shall be pushed back to face east and then towed forward until its nosewheel is at spot 54.	Pushback approved to point 54.

RKSI/ICN
INCHEON INTL

 17 JAN 25
Eff 22 Jan 1600Z

JEPPESSEN
(20-1P11)
SEOUL/INCHEON, KOREA
AIRPORT BRIEFING
DEPARTURE
AIRCRAFT PUSHBACK PROCEDURES (CONTD)

Aircraft Stands	Pushback Procedures	Phraseology
Apron 3		
212, 213	The aircraft shall be pushed back onto taxilane RW to face east.	Pushback approved to face east.
	The aircraft shall be pushed back onto taxilane RW to face west.	Pushback approved to face west.
214, 215	The aircraft shall be pushed back onto taxilane RW to face east.	Pushback approved to face east.
	The aircraft shall be pushed back onto taxilane RW to face west.	Pushback approved to face west.
	The aircraft shall be pushed back to face north until its nosewheel is at spot 53.	Pushback approved to point 53.
214R	The aircraft shall be pushed back to face north until its nosewheel is at spot 53.	Pushback approved to point 53.
	The aircraft shall be pushed back onto taxilane R4 until clear of R17 to face south.	Pushback approved to face south.
	The aircraft shall be pushed back to face south and then towed forward until its nosewheel is at spot 52.	Pushback approved to point 52.
216	The aircraft shall be pushed back onto taxilane R4 to face south.	Pushback approved to face south.
	The aircraft shall be pushed back onto taxilane R4 to face north.	Pushback approved to face north.
	The aircraft shall be pushed back to face south and then towed forward until its nosewheel is at spot 52.	Pushback approved to point 52.
	The aircraft shall be pushed back to face north and then towed forward until its nosewheel is at spot 53.	Pushback approved to point 53.
217, 218	The aircraft shall be pushed back onto taxilane R4 to face south.	Pushback approved to face south.
	The aircraft shall be pushed back onto taxilane R4 to face north.	Pushback approved to face north.
	The aircraft shall be pushed back to face south until its nosewheel is at spot 52.	Pushback approved to point 52.
219 thru 222 (224L)	The aircraft shall be pushed back onto taxilane R4 to face south.	Pushback approved to face south.
	The aircraft shall be pushed back onto taxilane R4 to face north.	Pushback approved to face north.
224 (224R)	The aircraft shall be pushed back onto taxilane R4 to face south.	Pushback approved to face south.
	The aircraft shall be pushed back onto taxilane R4 to face north.	Pushback approved to face north.
	The aircraft shall be pushed back to face north and then towed forward until its nosewheel is at spot 51.	Pushback approved to point 51.
225 thru 236 (231R/L, 232R/L)	The aircraft shall be pushed back onto taxilane R4 to face south.	Pushback approved to face south.
	The aircraft shall be pushed back onto taxilane R4 to face north.	Pushback approved to face north.
236R	The aircraft shall be pushed back onto taxilane R4 to face south.	Pushback approved to face south.
	The aircraft shall be pushed back onto taxilane R12 to face west.	Pushback approved to face west.
237	The aircraft shall be pushed back onto taxilane R4 to face south.	Pushback approved to face south.
	The aircraft shall be pushed back to face north along blue line until its nosewheel is at R12.	Pushback approved to blue
	The aircraft shall be pushed back onto taxilane R12 to face west.	Pushback approved to face west.
238, 239	The aircraft shall be pushed back to face north along blue line until its nosewheel is at R12.	Pushback approved to blue.
	The aircraft shall be pushed back onto taxilane R12 to face east.	Pushback approved to face east.
	The aircraft shall be pushed back onto taxilane R12 to face west.	Pushback approved to face west.

RKSI/ICN

27 SEP 24

INCHEON INTL Eff 2 Oct 1600Z

JEPPESSEN

20-1P11A

SEOUL/INCHEON, KOREA

AIRPORT BRIEFING

DEPARTURE

AIRCRAFT PUSHBACK PROCEDURES (CONTD)

Aircraft Stands	Pushback Procedures	Phraseology
Apron 3		
238, 239	The aircraft shall be pushed back onto taxilane R4 to face south.	Pushback approved to face south.
	The aircraft shall be pushed back to face south until its nosewheel is at spot 31 (or 32).	Pushback approved to point 31 (32).
239R	The aircraft shall be pushed back onto taxilane R12 to face east.	Pushback approved to face east.
	The aircraft shall be pushed back onto taxilane R12 to face west.	Pushback approved to face west.
	The aircraft shall be pushed back to face south until its nosewheel is at spot 31 (or 32).	Pushback approved to point 31 (32).
240	The aircraft shall be pushed back to face north along blue line until its nosewheel is at R12.	Pushback approved to blue.
	The aircraft shall be pushed back to face south until its nosewheel is at spot 31 (or 32).	Pushback approved to point 31 (32).
	The aircraft shall be pushed back onto taxilane R12 to face east.	Pushback approved to face east.
241	The aircraft shall be pushed back to face south until its nosewheel is at spot 32.	Pushback approved to point 32.
	The aircraft shall be pushed back to face south and then towed forward until its nosewheel is at spot 31.	Pushback approved to point 31.
	The aircraft shall be pushed back to face south until its body is on taxilane RC.	Pushback approved to face south.
	The aircraft shall be pushed back onto the stand 816 (or 817) to face west.	Pushback approved to stand 816 (817).
	The aircraft shall be pushed back onto taxilane R12 to face east.	Pushback approved to face east on R12.
242	The aircraft shall be pushed back onto taxilane R12 to face west.	Pushback approved to face west on R12.
	The aircraft shall be pushed back to face south and then towed forward until its nosewheel is at spot 31 (or 32).	Pushback approved to point 31 (32).
	The aircraft shall be pushed back to face west until its nosewheel is at spot 33.	Pushback approved to point 33.
	The aircraft shall be pushed back onto the stand 817 (or 816) to face west.	Pushback approved to stand 817 (816).
243, 245	The aircraft shall be pushed back onto taxilane RC to face north.	Pushback approved to face north.
	The aircraft shall be pushed back onto the stand 817 to face west.	Pushback approved to stand 817.
	The aircraft shall be pushed back to face south and then towed forward until its nosewheel is at spot 32 (or 31).	Pushback approved to point 32 (31).
	The aircraft shall be pushed back to face west until its nosewheel is at spot 33 (or 34).	Pushback approved to point 33 (34).
246	The aircraft shall be pushed back to face south and then towed forward until its nosewheel is at spot 32 (or 31).	Pushback approved to point 32 (31).
	The aircraft shall be pushed back to face west until its nosewheel is at spot 33 (or 34).	Pushback approved to point 33 (34).
	The aircraft shall be pushed back onto taxilane RC to face north.	Pushback approved to face north.
247	The aircraft shall be pushed back onto taxilane RC (or RF) to face west.	Pushback approved to face west (face west on RF).
	The aircraft shall be pushed back to face south and then towed forward until its nosewheel is at spot 32 (or 31).	Pushback approved to point 32 (31).
	The aircraft shall be pushed back to face west until its nosewheel is at spot 33 (or 34).	Pushback approved to point 33 (34).
	The aircraft shall be pushed back onto taxilane RC (or RB) to face north.	Pushback approved to face north (face north on RB).
	The aircraft shall be pushed back to face north and then towed forward until its nosewheel is at spot 39.	Pushback approved to point 39.

RKSI/ICN
INCHEON INTL

 27 SEP 24
Eff 2 Oct 1600Z

JEPPESSEN
(20-1P11B)
SEOUL/INCHEON, KOREA
AIRPORT BRIEFING
DEPARTURE
AIRCRAFT PUSHBACK PROCEDURES (CONTD)

Aircraft Stands	Pushback Procedures	Phraseology
Apron 3		
248, 249	The aircraft shall be pushed back onto taxilane RC (or RF) to face west.	Pushback approved to face west (face west on RF).
	The aircraft shall be pushed back to face west until its nosewheel is at spot 33 (or 34).	Pushback approved to point 33 (34).
	The aircraft shall be pushed back onto taxilane RC (or RB) to face north.	Pushback approved to face north (face north on RB).
	The aircraft shall be pushed back to face north and then towed forward until its nosewheel is at spot 39.	Pushback approved to point 39.
250	The aircraft shall be pushed back onto taxilane RC (or RF) to face east.	Pushback approved to face east (face east on RF).
	The aircraft shall be pushed back onto taxilane RA (or RF) to face west.	Pushback approved to face west (face west on RF).
	The aircraft shall be pushed back to face west and then towed forward until its nosewheel is at spot 34.	Pushback approved to point 34.
	The aircraft shall be pushed back to face east and then towed forward until its nosewheel is at spot 35.	Pushback approved to point 35.
	The aircraft shall be pushed back onto taxilane RB to face north.	Pushback approved to face north.
	The aircraft shall be pushed back to face north and then towed forward until its nosewheel is at spot 39.	Pushback approved to point 39.
251, 252	The aircraft shall be pushed back onto taxilane RA (or RF) to face east.	Pushback approved to face east (face east on RF).
	The aircraft shall be pushed back to face east and then towed forward until its nosewheel is at spot 35 (or 36).	Pushback approved to point 35 (36).
	The aircraft shall be pushed back onto taxilane RA (or RB) to face north.	Pushback approved to face north (face north on RB).
	The aircraft shall be pushed back to face north and then towed forward until its nosewheel is at spot 39.	Pushback approved to point 39.
253	The aircraft shall be pushed back onto taxilane RA (or RF) to face east.	Pushback approved to face east (face east on RF).
	The aircraft shall be pushed back to face east until its nosewheel is at spot 35 (or 36).	Pushback approved to point 35 (36).
	The aircraft shall be pushed back to face south and then towed forward until its nosewheel is at spot 37 (or 38).	Pushback approved to point 37 (38).
	The aircraft shall be pushed back onto taxilane RA (or RB) to face north.	Pushback approved to face north (face north on RB).
	The aircraft shall be pushed back to face north and then towed forward until its nosewheel is at spot 39.	Pushback approved to point 39.
254	The aircraft shall be pushed back to face east until its nosewheel is at spot 35 (or 36).	Pushback approved to point 35 (36).
	The aircraft shall be pushed back to face south and then towed forward until its nosewheel is at spot 37 (or 38).	Pushback approved to point 37 (38).
	The aircraft shall be pushed back onto taxilane RA to face north.	Pushback approved to face north.
255	The aircraft shall be pushed back to face east until its nosewheel is at spot 35 (or 36).	Pushback approved to point 35 (36).
	The aircraft shall be pushed back to face south and then towed forward until its nosewheel is at spot 37 (or 38).	Pushback approved to point 37 (38).
	The aircraft shall be pushed back onto taxilane RA to face north.	Pushback approved to face north.
	The aircraft shall be pushed back onto the stand 815 to face east.	Pushback approved to stand 815.

RKSI/ICN
INCHEON INTL17 JAN 25
Eff 22 Jan 1600ZJEPPESSEN
(20-1P12)SEOUL/INCHEON, KOREA
AIRPORT BRIEFING

DEPARTURE

AIRCRAFT PUSHBACK PROCEDURES (CONTD)

Aircraft Stands	Pushback Procedures	Phraseology
Apron 3		
256	The aircraft shall be pushed back to face east until its nosewheel is at spot 36.	Pushback approved to point 36.
	The aircraft shall be pushed back to face south and then towed forward until its nosewheel is at spot 37 (or 38).	Pushback approved to point 37 (38).
	The aircraft shall be pushed back onto the stand 815 (or 814) to face east.	Pushback approved to stand 815 (814).
	The aircraft shall be pushed back onto taxilane RA to face north.	Pushback approved to face north.
257	The aircraft shall be pushed back to face south until its nosewheel is at spot 37.	Pushback approved to point 37.
	The aircraft shall be pushed back to face south and then towed forward until its nosewheel is at spot 38.	Pushback approved to point 38.
	The aircraft shall be pushed back to face south until its body is on taxilane RA.	Pushback approved to face south.
	The aircraft shall be pushed back onto the stand 814 (or 815) to face east.	Pushback approved to stand 814 (815).
	The aircraft shall be pushed back onto taxilane R12 to face east.	Pushback approved to face east on R12.
258	The aircraft shall be pushed back onto taxilane R12 to face west.	Pushback approved to face west on R12.
	The aircraft shall be pushed back to face north along blue line until its nosewheel is at R12.	Pushback approved to blue.
	The aircraft shall be pushed back to face south until its nosewheel is at spot 38 (or 37).	Pushback approved to point 38 (37).
	The aircraft shall be pushed back onto taxilane R12 to face west.	Pushback approved to face west.
258R	The aircraft shall be pushed back onto taxilane R12 to face east.	Pushback approved to face east.
	The aircraft shall be pushed back onto taxilane R12 to face west.	Pushback approved to face west.
	The aircraft shall be pushed back to face south until its nosewheel is at spot 38 (or 37).	Pushback approved to point 38 (37).
259, 260	The aircraft shall be pushed back to face north along blue line until its nosewheel is at R12.	Pushback approved to blue.
	The aircraft shall be pushed back onto taxilane R12 to face east.	Pushback approved to face east.
	The aircraft shall be pushed back onto taxilane R12 to face west.	Pushback approved to face west.
	The aircraft shall be pushed back to face south until its nosewheel is at spot 38 (or 37).	Pushback approved to point 38 (37).
	The aircraft shall be pushed back onto taxilane R1 to face south.	Pushback approved to face south.
261	The aircraft shall be pushed back to face north along blue line until its nosewheel is at R12.	Pushback approved to blue.
	The aircraft shall be pushed back onto taxilane R12 to face east.	Pushback approved to face east.
	The aircraft shall be pushed back onto taxilane R1 to face south.	Pushback approved to face south.
261R	The aircraft shall be pushed back onto taxilane R1 to face south.	Pushback approved to face south.
	The aircraft shall be pushed back onto taxilane R12 to face east.	Pushback approved to face east.
262 thru 268 (266R/L - 268R/L)	The aircraft shall be pushed back onto taxilane R1 to face south.	Pushback approved to face south.
	The aircraft shall be pushed back onto taxilane R1 to face north.	Pushback approved to face north.
275 (275L)	The aircraft shall be pushed back onto taxilane R1 to face south.	Pushback approved to face south.
	The aircraft shall be pushed back onto taxilane R1 to face north.	Pushback approved to face north.
	The aircraft shall be pushed back to face north and then towed forward until its nosewheel is at spot 58.	Pushback approved to point 58.

RKSI/ICN
INCHEON INTL

 17 JAN 25
Eff 22 Jan 1600Z

JEPPESSEN
(20-1P13)
SEOUL/INCHEON, KOREA
AIRPORT BRIEFING
DEPARTURE
AIRCRAFT PUSHBACK PROCEDURES (CONTD)

Aircraft Stands	Pushback Procedures	Phraseology
Apron 3		
276 thru 279 (275R)	The aircraft shall be pushed back onto taxilane R1 to face south.	Pushback approved to face south.
	The aircraft shall be pushed back onto taxilane R1 to face north.	Pushback approved to face north.
280, 281	The aircraft shall be pushed back onto taxilane R1 to face south.	Pushback approved to face south.
	The aircraft shall be pushed back onto taxilane R1 to face north.	Pushback approved to face north.
	The aircraft shall be pushed back to face south until its nosewheel is at spot 57.	Pushback approved to point 57.
282	The aircraft shall be pushed back onto taxilane R1 to face south.	Pushback approved to face south.
	The aircraft shall be pushed back to face south and then towed forward until its nosewheel is at spot 57.	Pushback approved to point 57.
	The aircraft shall be pushed back onto taxilane R1 to face north.	Pushback approved to face north.
	The aircraft shall be pushed back to face north and then towed forward until its nosewheel is at spot 56.	Pushback approved to point 56.
283	The aircraft shall be pushed back to face south and then towed forward until its nosewheel is at spot 57.	Pushback approved to point 57.
	The aircraft shall be pushed back to face north and then towed forward until its nosewheel is at spot 56.	Pushback approved to point 56.
	The aircraft shall be pushed back onto taxilane R1 to face north.	Pushback approved to face north.
	The aircraft shall be pushed back onto taxilane RE to face east.	Pushback approved to face east.
283R	The aircraft shall be pushed back to face south and then towed forward until its nosewheel is at spot 57.	Pushback approved to point 57.
	The aircraft shall be pushed back to face north until its nosewheel is at spot 56.	Pushback approved to point 56.
	The aircraft shall be pushed back onto taxilane R1 to face north.	Pushback approved to face north.
284, 285	The aircraft shall be pushed back onto taxilane RE to face east.	Pushback approved to face east.
	The aircraft shall be pushed back onto taxilane RE to face west.	Pushback approved to face west.
	The aircraft shall be pushed back to face north until its nosewheel is at spot 56.	Pushback approved to point 56.
286, 287	The aircraft shall be pushed back onto taxilane RE to face east.	Pushback approved to face east.
	The aircraft shall be pushed back onto taxilane RE to face west.	Pushback approved to face west.
288, 289	The aircraft shall be pushed back onto taxilane RE to face east.	Pushback approved to face east.
	The aircraft shall be pushed back onto taxilane RE to face west.	Pushback approved to face west.
	The aircraft shall be pushed back to face west and then towed forward until its nosewheel is at spot 55.	Pushback approved to point 55.
290, 291	The aircraft shall be pushed back onto taxilane RE to face west.	Pushback approved to face west.
	The aircraft shall be pushed back to face west until its nosewheel is at spot 55.	Pushback approved to point 55.
	The aircraft shall be pushed back onto taxilane R23 to face south.	Pushback approved to face south on R23.
361	Pilot shall request start engine then taxi on stand except following aircraft: A320 series, B737 series and A220 series.	—————
	The aircraft shall be pushed back onto taxilane R11 to face east.	Pushback approved to face east.

RKSI/ICN
INCHEON INTL17 JAN 25
Eff 22 Jan 1600Z **JEPPESSEN**
20-1P14**SEOUL/INCHEON, KOREA**
AIRPORT BRIEFING**DEPARTURE****AIRCRAFT PUSHBACK PROCEDURES (CONTD)**

Aircraft Stands	Pushback Procedures	Phraseology
Apron 3		
362 thru 375	The aircraft shall be pushed back onto taxilane R11 to face east.	Pushback approved to face east.
	The aircraft shall be pushed back onto taxilane R11 to face west.	Pushback approved to face west.
376	Pilot shall request start engine then taxi on stand except following aircraft: A320 series, B737 series and A220 series.	_____
	The aircraft shall be pushed back onto taxilane R11 to face west.	Pushback approved to face west.
501 (501L/R)	The aircraft shall be pushed back onto taxilane R1 to face south.	Pushback approved to face south.
	The aircraft shall be pushed back onto taxilane R1 to face north.	Pushback approved to face north.
	The aircraft shall be pushed back to face north and then towed forward until its nosewheel is at spot 58.	Pushback approved to point 58.
502 thru 505	The aircraft shall be pushed back onto taxilane R1 to face south.	Pushback approved to face south.
	The aircraft shall be pushed back onto taxilane R1 to face north.	Pushback approved to face north.
506	The aircraft shall be pushed back onto taxilane R1 to face south.	Pushback approved to face south.
	The aircraft shall be pushed back onto taxilane R1 to face north.	Pushback approved to face north.
	The aircraft shall be pushed back to face north and then towed forward until its nosewheel is at spot 56.	Pushback approved to point 56.
507	The aircraft shall be pushed back onto taxilane R1 to face north.	Pushback approved to face north.
	The aircraft shall be pushed back to face south and then towed forward until its nosewheel is at spot 57.	Pushback approved to point 57.
	The aircraft shall be pushed back onto taxilane RE to face east.	Pushback approved to face east.
511(511L/R)	The aircraft shall be pushed back onto taxilane R4 to face south.	Pushback approved to face south.
	The aircraft shall be pushed back onto taxilane R4 to face north.	Pushback approved to face north.
	The aircraft shall be pushed back to face north and then towed forward until its nosewheel is at spot 51.	Pushback approved to point 51.
512 thru 515	The aircraft shall be pushed back onto taxilane R4 to face south.	Pushback approved to face south.
	The aircraft shall be pushed back onto taxilane R4 to face north.	Pushback approved to face north.
516	The aircraft shall be pushed back onto taxilane R4 to face south.	Pushback approved to face south.
	The aircraft shall be pushed back onto taxilane R4 to face north.	Pushback approved to face north.
	The aircraft shall be pushed back to face north and then towed forward until its nosewheel is at spot 53.	Pushback approved to point 53.
517	The aircraft shall be pushed back onto taxilane R4 to face north.	Pushback approved to face north.
	The aircraft shall be pushed back to face south and then towed forward until its nosewheel is at spot 52.	Pushback approved to point 52.
	The aircraft shall be pushed back onto taxilane RW to face west.	Pushback approved to face west.
Apron 4		
520	The aircraft shall be pushed back onto taxilane R26 to face south.	Pushback approved to face south.

RKSI/ICN
INCHEON INTL

 17 JAN 25
Eff 22 Jan 1600Z

JEPPESSEN
(20-1P15)
SEOUL/INCHEON, KOREA
AIRPORT BRIEFING
DEPARTURE
AIRCRAFT PUSHBACK PROCEDURES (CONTD)

Aircraft Stands	Pushback Procedures	Phraseology
Apron 4		
521 thru 524	The aircraft shall be pushed back to face north and then towed forward until its nosewheel is at spot 41.	Pushback approved to point 41.
	The aircraft shall be pushed back onto taxilane R26 to face south.	Pushback approved to face south.
522R	The aircraft shall be pushed back onto taxilane R26 to face south.	Pushback approved to face south.
525	The aircraft shall be pushed back to face south and then towed forward until its nosewheel is at spot 42.	Pushback approved to point 42.
	The aircraft shall be pushed back onto taxilane R26 to face north.	Pushback approved to face north.
526 thru 528	The aircraft shall be pushed back to face south then towed forward until its nosewheel is at spot 42.	Pushback approved to point 42.
	The aircraft shall be pushed back onto taxilane R26 to face north.	Pushback approved to face north.
528R, 529 thru 530	The aircraft shall be pushed back onto taxilane R26 to face north.	Pushback approved to face north.
531 thru 532	The aircraft shall be pushed back onto taxilane R26 to face south.	Pushback approved to face south.
533	The aircraft shall be pushed back to face north and then towed forward until its nosewheel is at spot 41.	Pushback approved to point 41.
	The aircraft shall be pushed back onto taxilane R26 to face south.	Pushback approved to face south.
534	The aircraft shall be pushed back to face south then towed forward until its nosewheel is at spot 42.	Pushback approved to point 42.
	The aircraft shall be pushed back onto taxilane R26 to face north.	Pushback approved to face north.
535 thru 536	The aircraft shall be pushed back onto taxilane R26 to face north.	Pushback approved to face north.
541 thru 544	The aircraft shall be pushed back onto taxilane R4 to face south.	Pushback approved to face south.
	The aircraft shall be pushed back onto taxilane R4 to face north.	Pushback approved to face north.
545, 547	The aircraft shall be pushed back to face south then towed forward until its nosewheel is at spot 43.	Pushback approved to point 43.
	The aircraft shall be pushed back onto taxilane R4 to face north.	Pushback approved to face north.
546	The aircraft shall be pushed back onto taxilane R4 to face north.	Pushback approved to face north.
551 thru 554	The aircraft shall be pushed back onto taxilane R4 to face south.	Pushback approved to face south.
	The aircraft shall be pushed back onto taxilane R4 to face north.	Pushback approved to face north.
	Pilot shall taxi on stand when assigned for deicing.	_____
557	The aircraft shall be pushed back to face south and then towed forward until its nosewheel is at spot 43.	Pushback approved to point 43.
	The aircraft shall be pushed back onto taxilane R4 to face north.	Pushback approved to face north.
	Pilot shall taxi on stand when assigned for deicing.	_____
558	The aircraft shall be pushed back onto taxilane R4 to face north.	Pushback approved to face north.

RKSI/ICN
INCHEON INTL

27 SEP 24
Eff 2 Oct 1600Z



SEOUL/INCHEON, KOREA
AIRPORT BRIEFING

DEPARTURE

AIRCRAFT PUSHBACK PROCEDURES (CONTD)

Aircraft Stands	Pushback Procedures	Phraseology
Cargo Apron 1		
601 thru 614 621 thru 634	The aircraft shall be pushed back onto taxilane D2 or D3 to face west.	Pushback approved
615 thru 616	The aircraft shall be pushed back to face west and then towed forward until its nosewheel is at spot 12.	Pushback approved to point 12.
635 thru 636	The aircraft shall be pushed back to face west and then towed forward until its nosewheel is at spot 11.	Pushback approved to point 11.
Cargo Apron 2		
641 to 652 (652R/L)	The aircraft shall be pushed back onto taxilane D4 to face west.	Pushback approved
653 to 655	The aircraft shall be pushed back to face west and then towed forward until its nosewheel is at spot 10.	Pushback approved to point 10.
671 to 681	The aircraft shall be pushed back onto taxilane D5 to face west.	Pushback approved
682, 683	The aircraft shall be pushed back to face west and then towed forward until its nosewheel is at spot 9.	Pushback approved to point 9.

RKSI/ICN
INCHEON INTL

27 SEP 24
Eff 2 Oct 1600Z



SEOUL/INCHEON, KOREA
AIRPORT BRIEFING

RUNWAY

1. HIGH INTENSITY RUNWAY OPERATION (HIRO)

HIRO will be in force when runway surface condition is dry and adverse weather condition is not present. When HIRO are in force, ATC will inform via ATIS (Phrase: High Intensity Runway Operation in force. Minimum Runway Occupancy Time required) or RTF.

1.1 LANDING PROCEDURES

- a. During HIRO in force, pilots are strongly requested to use the following preferred rapid exit taxiways or vacate the landing runway within 60 seconds of timeframe. Aircraft unable to comply with these procedures should notify ATC as early as possible.
- b. Pilots are encouraged to apply proper deceleration technique take into account the following distance information of rapid exit taxiway to avoid decelerating to taxi speed on midpoint of landing runway and minimize runway occupancy time.

RUNWAY	Rapid Exit Taxiway	DISTANCE FROM THRESHOLD
15L	<u>C2</u>	7381 ft / 2250m
	C1, <u>D1</u> (to cargo apron 1, 2)	8418 ft / 2566m
15R	<u>B3</u>	7381 ft / 2250m
	B2	8418 ft / 2566m
33L	<u>B4</u>	7381 ft / 2250m
	B5	8418 ft / 2566m
33R	<u>C4</u>	7381 ft / 2250m
	C5, <u>D6</u> (to cargo apron 1, 2)	8418 ft / 2566m
16L	<u>N3</u>	6725 ft / 2050m
	N2	8366 ft / 2550m
34R	<u>N4</u>	6725 ft / 2050m
	N5	8366 ft / 2550m
16R	<u>P6</u>	5249 ft / 1600m
	P5	6233 ft / 1900m
	P4	7218 ft / 2200m
	P2	8202 ft / 2500m
34L	<u>P7</u>	5249 ft / 1600m
	P8	6233 ft / 1900m
	P10	7218 ft / 2200m
	P11	8202 ft / 2500m

Note 1: Preferred rapid exit taxiways are in bold and underlined
Note 2: The design speed of all rapid exit taxiways (RET) is 50 kt.

- c. After landing, aircraft are not to stop on rapid exit taxiway to awaiting instructions from ATC but should continue taxi via the following taxi procedures, unless otherwise instructed by ATC.

RUNWAY	Preferred RET	Standard Taxi Procedures
15L	C2	During HIRO in force, any landing aircraft to Apron 1, 2, 3, 4 should continue taxi to TWY J then hold short of RWY 15R on TWY J. Remain on TWR FREQ. (refer 20-9B)
	D1	During HIRO in force, any landing aircraft to Cargo Apron 1, 2 should continue taxi via TWY D to appropriate Transfer of Control Point (TCP) of parking gate/stand. (refer 20-9B)
15R	B3	During HIRO in force, any landing aircraft to Apron 1, 2, 3, 4 should continue taxi via TWY B to appropriate Transfer of Control Point (TCP) of parking gate/stand. Remain on TWR FREQ. (refer 20-9B)
33L	B4	During HIRO in force, any landing aircraft to Apron 1, 2, 3, 4 should continue taxi via TWY B to appropriate Transfer of Control Point (TCP) of parking gate/stand. (refer 20-9B)
33R	C4	During HIRO in force, any landing aircraft to Apron 1, 2, 3, 4 should continue taxi to TWY K then hold short of RWY 33L on TWY K. Remain on the TWR FREQ. (refer 20-9B)
	D6	During HIRO in force, any landing aircraft to Cargo Apron 1, 2 should continue taxi via TWY D to appropriate Transfer of Control Point (TCP) of parking gate/stand. (refer 20-9B)

RKSI/ICN
INCHEON INTL

 **JEPPESSEN**
3 JAN 25 **(20-1P18)**

SEOUL/INCHEON, KOREA
AIRPORT BRIEFING

RUNWAY

RUNWAY	Preferred RET	Standard Taxi Procedures
16L	N3	During HIRO in force, all landing aircraft should continue taxi via TWY N to appropriate Transfer of Control Point (TCP) of parking gate/stand. (refer 20-9C)
34R	N4	During HIRO in force, all landing aircraft should continue taxi via TWY N to appropriate Transfer of Control Point (TCP) of parking gate/stand. (refer 20-9C)
16R	P6	During HIRO in force, all landing aircraft should continue taxi to TWY T then hold short of RWY 16L on TWY T. Remain on the TWR FREQ. (refer 20-9C)
34L	P7	During HIRO in force, all landing aircraft should continue taxi to TWY U then hold short of RWY 34R on TWY U. Remain on the TWR FREQ. (refer 20-9C)

1.2 DEPARTURE PROCEDURES

- Pilots are strongly encouraged to check the availability of intersection departure before start-up. Declared distance for intersection departure are detailed on chart 20-1P5. For the purpose of performance calculations the standard intersection departure points are:
RWY 15R - B6 / K
RWY 33L - B1 / J
RWY 16L - N6 / V / U
RWY 34R - N1 / T
- Intersection departures may be initiated by ATC to expedite traffic flow. Pilots must advise ATC if they are not able to comply with this request to prevent additional delay or sequence change.

1. HIGH INTENSITY RUNWAY OPERATION (HIRO) (contd)

1.2 DEPARTURE PROCEDURES (contd)

- ATC will consider all aircrafts at the RWY holding point as able to commence line-up and take-off roll immediately on receiving clearance from ATC, unless otherwise instructed. Pilots should note that ATC expects pre-departure cockpit checks to be completed prior to entering the runway and take-off checks that must be made on the runway are kept to the minimum required. Pilots not ready when reaching the RWY holding point shall advise ATC as early as possible before reaching to RWY holding point.
- When line-up or take-off clearance is issued, ATC will expect and has planned on seeing movement within 10 seconds.
- Normally ATC will apply ICAO wake vortex separation minima between successive departures. If more separation than prescribed minima is required, pilot shall notify ATC before entering the RWY.

1.3 DEPARTURE SEQUENCE

- Departures will normally be cleared in the order in which they are ready for take-off (First Come, First Served), however deviations may be made from this principle to facilitate the maximum number of departures with the least average delay considering following factors:
 - Types of aircraft and their relative performance;
 - Routes to be followed after take-off
 - Any specified minimum departure interval between take-off
 - Need to apply wake turbulence separation minima;
 - Aircraft which should be afforded priority; and
 - Aircraft subject to ATFM requirements
- For aircraft subject to ATFM requirements, it is the responsibility of the pilot and the operator to ensure that the aircraft is ready to taxi in time to meet any required departure time, bearing in mind that once a departure sequence is established on the taxiway system, it can be difficult, and sometimes impossible, to change the order.

1.4 Preferential RWY System

The runway 33L/R or 34L/R is recommended to be in use to the extent of 8 kts tailwind. If unable to comply with this procedure, notify ATC of the reason 20 minutes prior to ETD or ETA. Delay may be possible depending on traffic situation.

2. REDUCED RUNWAY SEPARATION MINIMA (RRSM)

Reduced Runway Separation Minima (RRSM) will be applied between a departing aircraft and a succeeding landing aircraft or between two successive landing aircraft.

- RRSM will be applied when the following conditions exist:
 - Visibility of at least 5 km and ceiling not lower than 1000 ft;
 - During daylight hours from 30 minutes local after sunrise to 30 minutes before local sunset;
 - No unfavorable surface wind conditions (including turbulence, wind shear, or significant tailwind (greater than 5 KT), etc);
 - The braking action shall not be adversely affected by runway contaminants;
 - The second aircraft will be able to see the first aircraft clearly and continuously until it is clear of runway

RKSI/ICN
INCHEON INTL

 **JEPPESSEN**
3 JAN 25 **20-1P19**

SEOUL/INCHEON, KOREA
AIRPORT BRIEFING

RUNWAY

2. REDUCED RUNWAY SEPARATION MINIMA (RRSM) (contd)

- b. Landing clearance may be issued to an arriving aircraft while the runway is still occupied provided that there is reasonable assurance that the following separation distance will exist when the arriving aircraft crosses the runway threshold:
 - (1) Landing following Landing
Preceding aircraft has landed and has passed at least 7874ft (2400m) from the threshold of the landing runway, is in motion and will vacate the runway without backtracking;
 - (2) Landing following Departure
Preceding aircraft is/will be airborne and has passed at least 7874ft (2400m) from the threshold of the landing runway
- c. ATC will provide traffic information when issuing the landing clearance. The following ICAO standard phraseology examples will be used:
 - '(Call sign), PRECEDING B747 VACATING RUNWAY/ABOUT TO VACATE/LANDING ROLL, CLEARED TO LAND.'
 - '(Call sign), DEPARTING A321 AHEAD ABOUT TO ROTATE, CLEARED TO LAND.'

3. SPEED RESTRICTIONS

- a. All aircraft shall not exceed 250 kt IAS below 10000 ft in SEOUL TMA, unless otherwise authorized by ATC. If unable to comply with this speed restriction, state minimum speed acceptable to ATC.
- b. ATC will use 'NO ATC SPEED RESTRICTIONS' RTF phraseology to remove MAX 250 kt IAS below 10000 ft.
- c. Speed control under radar vector:
 - c1. When arriving traffic is being sequenced under radar direction, ATC typically will apply the following speed control:
 - (1) Initial approach phase: 210 kt IAS
 - (2) Base leg/Heading to final approach: 180 kt IAS
 - (3) When established on final approach: 180 kt - 160 kt IAS
 - (4) Thereafter to 5 DME: 160 kt IAS
 - c2. These speed restrictions are essential for smooth and safe operations at high traffic loads. If an aircraft does not comply with these speed instructions, the aircraft may have to be excluded from the planned approach sequence.
 - c3. When ATC use 'RESUME NORMAL SPEED' RTF phraseology, it means that the previously issued speed restriction by ATC is cancelled and a pilot can resume an aircraft's preferred speed. Pilot shall note that it does not mean the removal of MAX 250 kt IAS within SEOUL TMA.

4. SCHEDULED PREVENTIVE MAINTENANCE TIME

- a. Rwy:
 - 16R/34L: Every 3 days from the 1st day of the month (1500-1900 UTC)
 - 15R/33L and 15L/33R: Every 3 days from the 2nd day of the month (1500-1900 UTC)
 - 16L/34R: Every 3 days from the 3rd day of the month (1500-1900 UTC)
- b. During the Scheduled Preventive Maintenance Time take-offs and landings are prohibited. Ground maneuvering is allowed under ATC instructions.
- c. A 30 minutes prior request is required to use the closed runway for take-offs and landings.

5. SCHEDULED ILS INSPECTION TIME

- a. Rwy:
 - 16R/34L: Every 3 days from the 1st day of the month (1500-1900 UTC)
 - 15R/33L and 15L/33R: Every 3 days from the 2nd day of the month (1500-1900 UTC)
 - 16L/34R: Every 3 days from the 3rd day of the month (1500-1900 UTC)
- b. ILS is unserviceable during the scheduled inspection time.
- c. A 30 minutes prior request is required to use ILS.

RKSI/ICN

INCHEON INTL

20 DEC 24
Eff 25 Dec 1600Z



JEPPESSEN

20-1P20

SEOUL/INCHEON, KOREA

AIRPORT BRIEFING

INCHEON AIRPORT COLLABORATIVE DECISION MAKING(A-CDM) OPERATION

1. General

- a. A-CDM is a process that allows air traffic controllers, airport operators, aircraft operators (AO), ground handling agents(GHA), pilots and air traffic flow managers to exchange operational information and work together to efficiently manage operations at aerodrome.
- b. Definitions Commonly Used Terms in A-CDM
 - (1) Target Off Block Time(TOBT) - The time that an Aircraft Operator(AO) or Ground Handler(GH) estimates that an aircraft will be ready, all doors closed, boarding bridge removed, push back vehicle available and ready to start up /push back immediately upon reception of clearance from the ATC.
 - (2) Target Start up Approval Time(TSAT) - The time provided by ATC taking into account TOBT, Calculated Take-Off Time(CTOT) and/or the traffic situation that an aircraft can expect start up / push back approval.
- c. The operation of A-CDM at Incheon Airport will be phased due to ATC environmental restrictions. TSAT will not be provided to all departure flights. The flights subject to Pre-Departure Sequencing are limited to ATFM regulated flights during first operational phase.
- d. TSAT will not be provided to the aircraft in de-icing operation.
- e. TOBT and TSAT will be displayed on VDGS in UTC for the improvement of A-CDM operation.

2. A-CDM Procedures

- a. Incheon Airport A-CDM Portal System will automatically calculate system TOBT for each departure flight taking into account the Estimated In-Block Time/ Actual In-Block Time(EIBT/AIBT), Minimum Turnaround Time(MTTT) and Estimated Off Block Time(EOBT).
- b. AO or GHA can manually update the system generated TOBT from 90 minutes prior to EOBT.
- c. If the prediction of departure readiness (new TOBT) differs more than 5 minutes from the previous TOBT, AO or GHA shall update TOBT.
- d. TOBT shall not deviate from EOBT by more than 15 minutes. If TOBT deviates from EOBT by more than 15 minutes, AO has to initiate a delay message. When EOBT is modified, TOBT is automatically modified to the value of EOBT.
- e. TOBT shall be updated through the following channels:
 - (1) A-CDM portal and mobile web; or
 - (2) Flight Information Assistant (FIA) at PBB boarding rooms
- f. TOBT information is available through the following channels:
 - (1) A-CDM portal and mobile web; or
 - (2) Flight Information Assistant (FIA) at PBB boarding rooms; or
 - (3) Visual Docking Guidance System(VDGS); or
 - (4) Radio communication with AO or GHA.
- g. TSAT will be calculated by taking into account factors such as TOBT, CTOT, Estimated Taxi-Out Time(EXOT) and ATC separation standards etc. Thus the accuracy of TOBT is vital to an optimal TSAT.
- h. AO or GHA are strongly encouraged to update TOBT as soon as any expected delay to the aircraft readiness for push-back is made available to avoid unnecessary hold-ups.
- i. TSAT information is available through the following channels:
 - (1) A-CDM portal and mobile web; or
 - (2) Flight Information Assistant (FIA) at PBB boarding rooms; or
 - (3) Visual Docking Guidance System(VDGS); or
 - (4) Radio communication with GHA or AO; or
 - (5) INCHEON APRON (in case VDGS is unserviceable)

3. Non A-CDM Procedures

- a. The non A-CDM procedure is applicable when TOBT and TSAT references used in A-CDM mode of operations become unavailable due to system issues or maintenance.
- b. If unable to refer TOBT through any channels, pilot shall contact INCHEON DELIVERY for ATC clearance via voice RTF or Data-link Departure Clearance Service (DCL) from EOBT -10 minutes.

4. Procedures for start-up and push back

1. Pilot shall ensure aircraft is ready for push-back at TOBT.
2. Pilot shall maintain communication with the AO / GHA as they are responsible for updating the TOBT. Pilot shall notify the AO / GHA to update the TOBT if it is expected to differ by 5 minutes or more.
3. ATC clearance can be requested via voice RTF or Data-link Departure Clearance Service (DCL) from TOBT -10 minutes to +5 minutes.

RKSI/ICN

INCHEON INTL

20 DEC 24

Eff 25 Dec 1600Z



JEPPESSEN

20-1P21

SEOUL/INCHEON, KOREA

AIRPORT BRIEFING

INCHEON AIRPORT COLLABORATIVE DECISION MAKING(A-CDM) OPERATION (CONTD)

4. ATC will update TSAT changes if any, before push-back. Note that TSAT displayed on VDGS may not be final and can be revised due to en-route clearance restrictions, ground congestion or flow management.
5. Pilot with TSAT shall contact INCHEON APRON to request engine start-up and push-back within 5 minutes of TSAT after obtaining ATC clearance. Pilot without TSAT shall contact INCHEON APRON after obtaining ATC clearance when ready for start-up and push-back. The pilot provide the following:
 - (1) Call sign
 - (2) Gate/Stand number
 - (3) TSAT (If applicable)
6. INCHEON APRON may swap push-back sequencing based on TSAT and real-time readiness of aircraft to maximise apron and runway capacity and to reduce the overall delay to traffic as and when required.
7. If a flight is unable to commence push-back by TSAT + 5 minutes due to the aircraft being unready, ATC clearance and TSAT will be cancelled. Pilot must notify the AO / GHA to update the TOBT for a new TSAT before requesting for a new ATC clearance. This also applies to aircraft returning back to blocks after push-back.
8. In case of engine start-up with GPU at gates due to APU malfunction or failure, pilot needs to contact INCHEON APRON earlier than TSAT window(+/-5 minutes) considering the time required for engine start-up and push-back.
9. All aircraft to be taxied within the Apron shall set their engine thrusts to idle. In case of using breakaway thrust, it should be minimized, especially when commencing taxiing from stands 814 thru 817 and starting points 33 thru 36 in Apron 3 for ground safety.
10. Prior to request for push-back clearance, pilots shall ensure the following:
 - Push-back tractor has been connected;
 - Boarding bridge is detached and at stand-by position;
 - Wing walkers are ready and positioned for push-back.
11. Pilots shall not commence push-back unless approved by Incheon Apron.
12. The smaller aircraft (business jets) ingress and egress procedures at designated deicing pads shall follow the instructions of Incheon Apron. Deicing pads are self-maneuvering stands (i.e. taxi out with no push-back). In case of M North zone assigned not for deicing, aircraft shall be pushed back for departure.
13. There are several blue lines in Apron 1 and 3
Locations : Right behind Gates 9, 15, 21, 22, 32, 33, 39, 45, 49 in Apron 1, and 237, 238, 239, 240, 258, 259, 260, 261 in Apron 3.
The aircraft of those gates shall be pushed back along blue line until their nose-wheels are on the specific taxilane.
14. Prior to request for taxi clearance, pilots shall ensure the following:
 - Push-back tractor has been disconnected;
 - Ground personnel, vehicles, equipment, obstacles are clear of ACFT;
 - ACFT is fully ready to taxi.
15. Pilots shall not commence taxi unless approved by Incheon Apron.
16. To avoid delay to other aircraft using 'Apron 1 and 3' area, aircraft should be ready to taxi as soon as the push-back manoeuvre and engine start procedure are completed. The push-back for gate 17, 18, 19, 20, 21, 33, 34, 35, 36 is onto taxilane R7, for gate 236R, 237, 238, 239, 240, 241, 257, 258, 259, 260, 261, 261R is onto taxilane R12, and for gate 208R, 290R is onto taxilane R17 therefore to avoid delays to other traffic it is essential that the aircraft should be ready to taxi as soon as the push-back manoeuvre is completed. If aircraft are unable to comply with these procedures, pilots shall immediately inform Incheon Apron in order that alternative taxi instructions may be issued to other aircraft.
17. When an aircraft have any problem which can't make it taxi right after push back, the pilot should report to Apron control. And then pilot will be instructed to return to gate or to move to other place to avoid blocking taxilanes.
18. Delays may be expected due to other aircraft to pushback or to taxi as distances between aircraft gates/stands vary. If push-back is delayed due to apron traffic conditions, TSAT will remain valid even if it exceeds TSAT + 5 minutes. TOBT needs not to be updated for such situations.
19. The following tables describe the procedures for pushback of aircraft from gates with airbridges and stands. Incheon Apron will issue specific instructions to the pilot if it is necessary to expedite traffic movement. Most gates and stands have several pushback procedures. Pushback instructions shall be issued including direction (only 4 directions are used) or specific position when necessary. Incheon Apron will issue a pushback instruction according to the use of runway or certain traffic condition.
20. When the aircraft push back onto taxilane R2 or R3 with facing south, the pilot shall be taxied with idle power for ground safety.
21. The aircraft that have been approved for push-back by Incheon Apron must set the Mode A code assigned by ATC prior to push-back.
22. The pilots and vehicle operators should look out all directions as they are instructed by the Incheon Apron and also obey emergency stop instruction given by any team member.
23. The aircraft that are moving after stopping at 4E and 5W must move with minimum power.

RKSI/ICN
INCHEON INTL

 **JEPPESSEN**
11 NOV 22 **(20-1P22)**

SEOUL/INCHEON, KOREA
AIRPORT BRIEFING

FOLLOW THE GREENS (FtGs)

1. "Follow the Greens" procedures at Incheon INTL Airport is operated to provide pilots with individual visual guidance (green taxiway centerline lights and red Stop bar lights) while taxiing during day and night operations as well as during periods of low visibility.
2. Aircraft taxiing on maneuvering area (runway and main parallel taxiways) will be guided by dedicated individual green taxiway centerline lights in front of the aircraft.
3. ATC will use the phraseology "Follow the Greens....." when issuing a clearance to pilots to taxi along the directional guidance provided by the green taxiway centerline lights to clearance limit (runway holding point or transfer of control point/TCP or stop bar lights).
4. When instructed to follow the greens by ATC, pilots are reminded of the extreme importance of maintaining a careful lookout and are at all times responsible wing tip clearance.
5. When instructed to follow the greens by ATC, pilots shall not taxi ahead if there is no green lights or red Stop bar lights are ahead.
6. Pilots and drivers shall enter/cross the runway or taxiway only when both the following conditions are met.
The crew have:
 - a. received positive ATC clearance to enter/cross the runway or taxiway, and
 - b. observed that the red Stop bar lights are turned off.
7. When more than one aircraft taxi closely toward the common intersection, it is possible to see more than one directional guidance ahead because the end of proceeding green lights segment is still remaining.
8. When more than one directional guidance are provided ahead or hard to see the guidance due to reflection of sunlight, pilots shall stop and ask ATC for onward clearance before taxiing.
9. When more than one aircraft taxi toward the common intersection, ATC will continue turning on the green lights to give priority to first aircraft. Second aircraft will be instructed "GIVE WAY TO...../FOLLOW....." or provided turning on the red Stop bar lights.
10. When ATC wants to terminate the "Follow the Greens", ATC will revert to directional guidance by taxiway information or mandatory signs/markings. In this case, pilots shall navigate their taxi route with reference to signs/markings on taxiway.
11. Arriving aircraft taxiing into cargo apron 1 and 2 will not be instructed to follow the greens by apron controller because green taxiway centerline lights may not be provided for continuous guidance to each aircraft stand.
12. Aircraft taxiing onto or from deicing pads can be guided by aircraft stand maneuvering guidance lights (yellow lights) along with green taxiway centerline lights. Furthermore, aircraft stand maneuvering guidance lights are not provided in cargo apron 1 and 2.

RKSI/ICN INCHEON INTL

(ALSO SERVES GIMPO INTL)
(ALSO SERVES SEOUL DOMESTIC)

JEPPESSEN

SEOUL/INCHEON, KOREA

14 MAR 25 **(20-1R)** Eff 19 Mar 1600Z

RADAR MINIMUM ALTITUDES


SEOUL Approach (R)
119.1

Apt Elev
See
Graphic

Alt Set: hPa

Trans level: FL140 Trans alt: 14000

1. Chart only to be used for cross-checking of altitudes assigned while under radar control.
2. Levels assigned by ATC include a correction for low temperature effect when necessary.

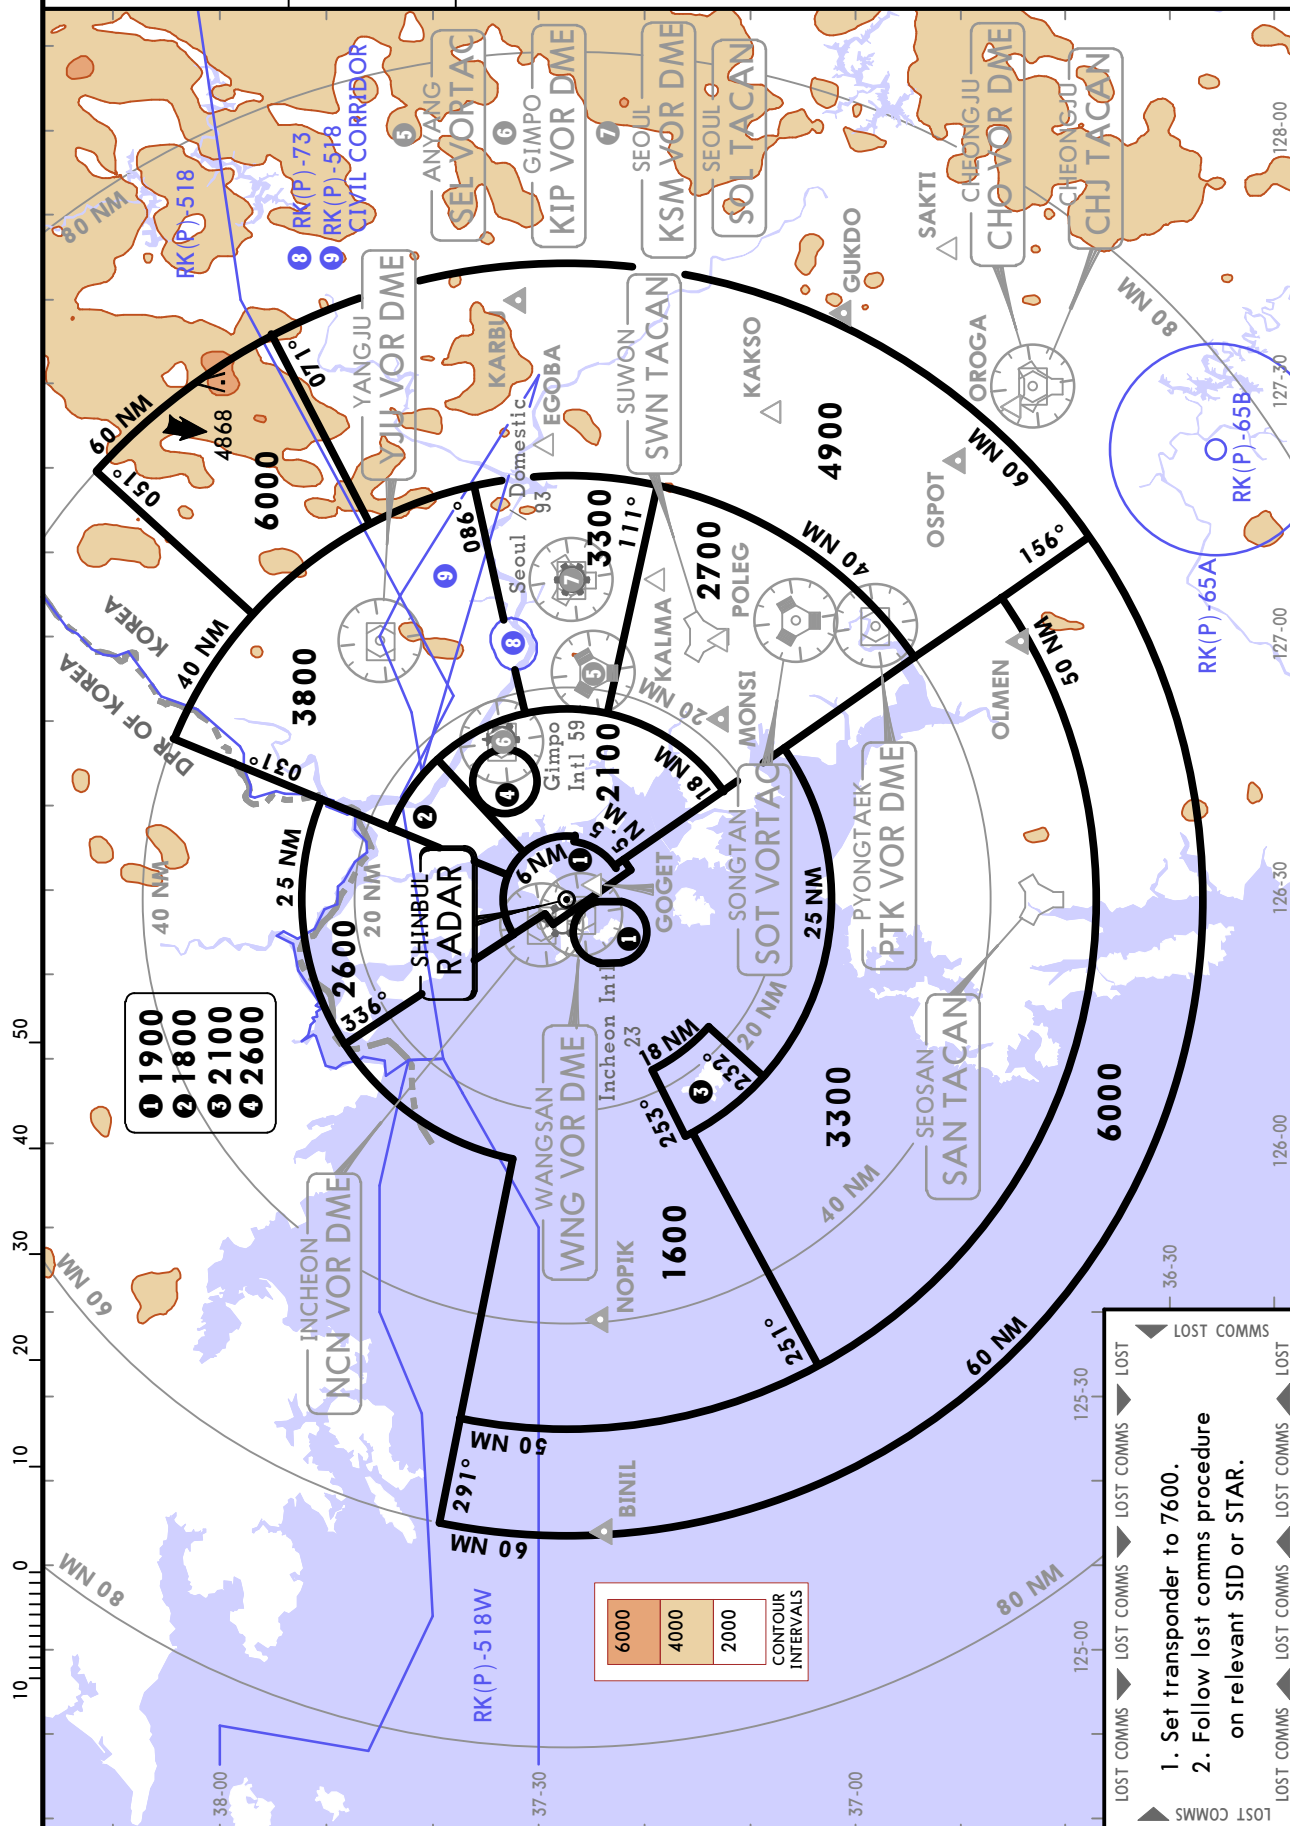

CHANGES: Sectors revised.

© JEPPESSEN, 2010, 2025. ALL RIGHTS RESERVED.