
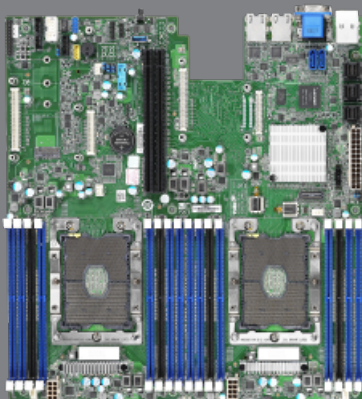


DUAL-SOCKET SERVER DEPLOYMENT

Tempest CX S7106

S7106GM2NR / S7106GM2NR-L2

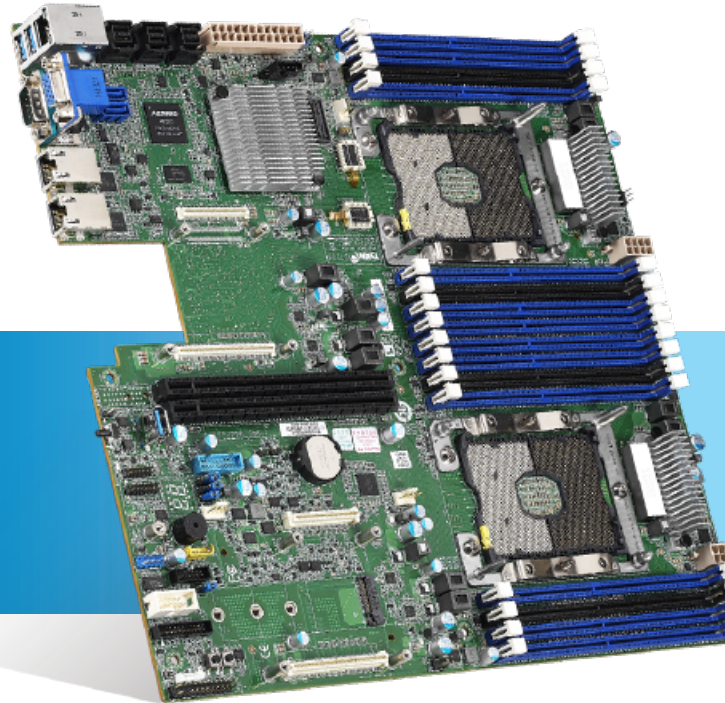

■ Intel® C621/C622 Chipset

Rack-optimized dual-socket server implmentation for CSP deployment

- Dual LGA3647 socket supports (2) Intel® Xeon® Scalable Processor
- Intel® C621 or Intel® C622 (-L2 sku)
- (8+8) DDR4 DIMM slots DDR4 RDIMM/RDIMM 3DS/LRDIMM/LRDIMM 3DS 2666 MHz
- Support up to 512GB RDIMM/ 1,024GB LRDIMM/ 768GB LRDIMM 3DS
*Follow latest Intel® DDR4 Memory POR
- (2) PCI-E Gen3 x24 slots + (2) PCI-E Gen3 x16 OCP 2.0 slots (conn.A+conn.B)
- (2) PCI-E Gen3 x24 slots + (1) PCI-E Gen3 x16 OCP 2.0 slots (conn.A+conn.B) + (1) PCI-E Gen3 x16 OCP 2.0 slots (conn.A+conn.B+conn.C) (-L2 Sku)
- (2) SATA-III + (12) SATA/SAS ports by (3) mini-SAS HD connectors running at 6.0Gb/s w/ RAID 0, 1, 10, 5 support
(1) M.2 connector (2242/2260/2280) by PCI-E interface
- (2) GbE LAN + (1) PHY (via Intel® I210-AT + via Realtek® RTL8211E)
- EATX (12" x 13") form factor



Tempest CX S7106


S7106GM2NR / S7106GM2NR-L2

TYAN

Specifications

Processor	Supported CPU Series		Intel® Xeon® Scalable Processor
	Socket Type / Q'ty		LGA3647/ (2)
	Thermal Design Power (TDP) wattage		Max up to 205W
Chipset	PCH / PCI-E Switch		Intel® C621 Intel® C622 (-L2 SKU)
Memory	Supported DIMM Qty		(8+8) DIMM sockets
	DIMM Type / Speed		DDR4 RDIMM/RDIMM 3DS/LRDIMM/LRDIMM 3DS 2666
	Capacity		Up to 512GB RDIMM/ 1,024GB LRDIMM/ 768GB LRDIMM 3DS *Follow latest Intel DDR4 Memory POR
	Memory channel		6 Channels per CPU
	Memory voltage		1.2V
Expansion Slots	PCI-E		(2) PCI-E Gen3 x24 slots
	Others		(2) PCI-E Gen3 x16 OCP 2.0 slots (conn.A+conn.B)
			(1) PCI-E Gen3 x16 OCP 2.0 slots (conn.A+conn.B) + (1) PCI-E Gen3 x16 OCP 2.0 slots (conn.A+conn.B+conn.C) (-L2 SKU)
LAN	Port Q'ty		(2) GbE ports, (1) PHY dedicated for IPMI
	Controller		Intel® I210-AT
	PHY		Realtek® RTL8211E
Storage	SATA	Connector	(2) Mini-SAS HD (8-ports)
		Controller	Intel® C621 Intel® C622 (-L2 SKU)
		Speed	6.0 Gb/s
		RAID	RAID 0/1/10/5 (Intel RST)
	sSATA	Connector	(2) SATA-III, (1) Mini-SAS HD (4-ports)
		Controller	Intel® C621 Intel® C622 (-L2 SKU)
		Speed	6.0 Gb/s
		RAID	RAID 0/1/10/5 (Intel® RST) only for 4 SATA devices
	M.2 connector		(1) M.2 connector (2242/2260/2280) by PCI-E interface
Graphic	Connector type		D-Sub 15-pin
	Resolution		Up to 1920x1200
	Chipset		Aspeed AST2500
Input /Output	USB		(2) USB3.0 ports (2 via cable), (2) USB3.0 ports (at rear), (2) USB 2.0 ports (via cable), (1) Type-A USB3.0 port
	COM		(1) DB-9 COM Connector
	VGA		(1) D-Sub 15-pin VGA port
	Power		SSI 24-pin + 8-pin + 8-pin power connectors
	RJ-45		(2) GbE ports, (1) Dedicated for IPMI
	Front Panel		(1) 2x12-pin SSI front panel header
	SATA		(2) SATA-III connectors + (3) Mini-SAS HD (4-in-1) connectors
TPM (Optional)	TPM Support		Please refer to our TPM supported list.
System Monitoring	Chipset		Aspeed AST2500
	Voltage		Monitors voltage for CPU, memory, chipset & power supply
	Fan		Total (5) 4-pin headers
	Temperature		Monitors temperature for CPU & system environment
	LED		Over temperature warning indicator / Fan & PSU fail LED indicator
	Others		Watchdog timer support
Server Management	Onboard Chipset		Onboard Aspeed AST2500
	AST2500 IPMI Feature		IPMI 2.0 compliant baseboard management controller (BMC). Supports storage over IP and remote platform-flash, USB 2.0 virtual hub
	AST2500 IKVM Feature		24-bit high quality video compression, 10/100/1000 Mb/s MAC interface

Block Diagram

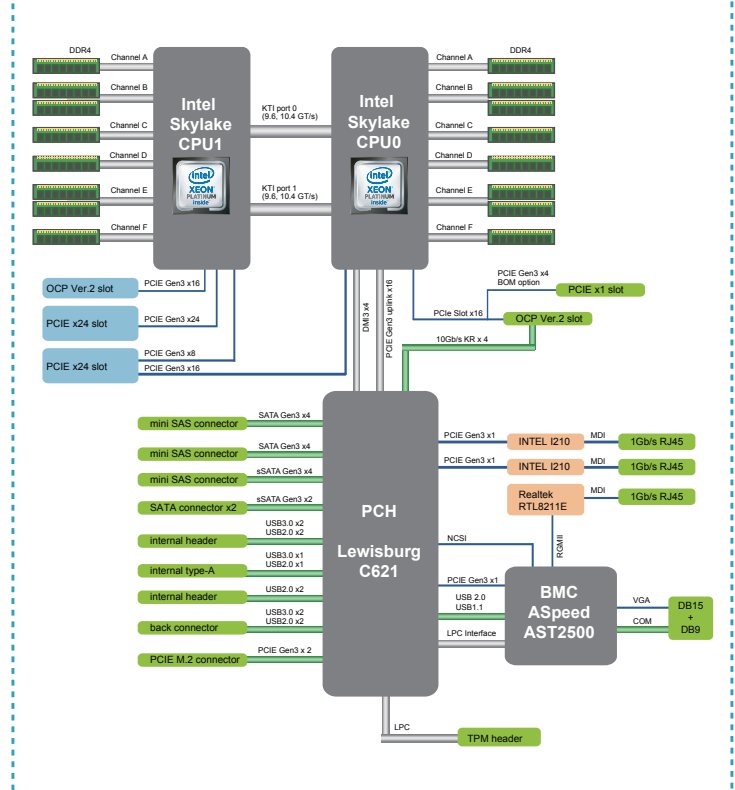

BIOS	Brand / ROM size	AMI / 32MB
	Feature	Hardware Monitor, SMBIOS 3.0/PnP/Wake on LAN, Boot from USB device/PXE via LAN/Storage, User Configurable FAN PWM Duty Cycle, Console Redirection, ACPI sleeping states S4,S5, ACPI 6.1
Form Factor	Form Factor	EATX
Operating System	Board Dimension	12"x13" (305x330mm)
	OS supported list	Please refer to our Intel OS supported list.
Regulation	FCC (DoC)	Class B
	CE (DoC)	Class A
Operating Environment	Operating Temp.	10° C ~ 35° C (50° F ~ 95° F)
	Non-operating Temp.	- 40° C ~ 70° C (-40° F ~ 158° F)
	In/Non-operating Humidity	90%, non-condensing at 35° C Non-operating Relative Humidity: 10% to 95% (non-condensing)
RoHS	RoHS 6/6 Complaint	Yes

(Specifications are subject to change without notice. Items pictured may only be representative.)

MiTAC Computing Technology Corp
TYAN Business Unit

USA
Tel: +1-510-651-8868
Fax: +1-510-651-7688

Taiwan
Tel: +886-3-327-5988
Fax: +886-3-327-6312

China
Shanghai Tel: +86-021-61431188 #1361
China Tel: +86-010-62381108 #2485

Japan
Tel: +81-3-3769-8311
Fax: +81-3-3769-8328

EMEA
Tel: +44 07540328523
Email: robin.daunter@tyan.com