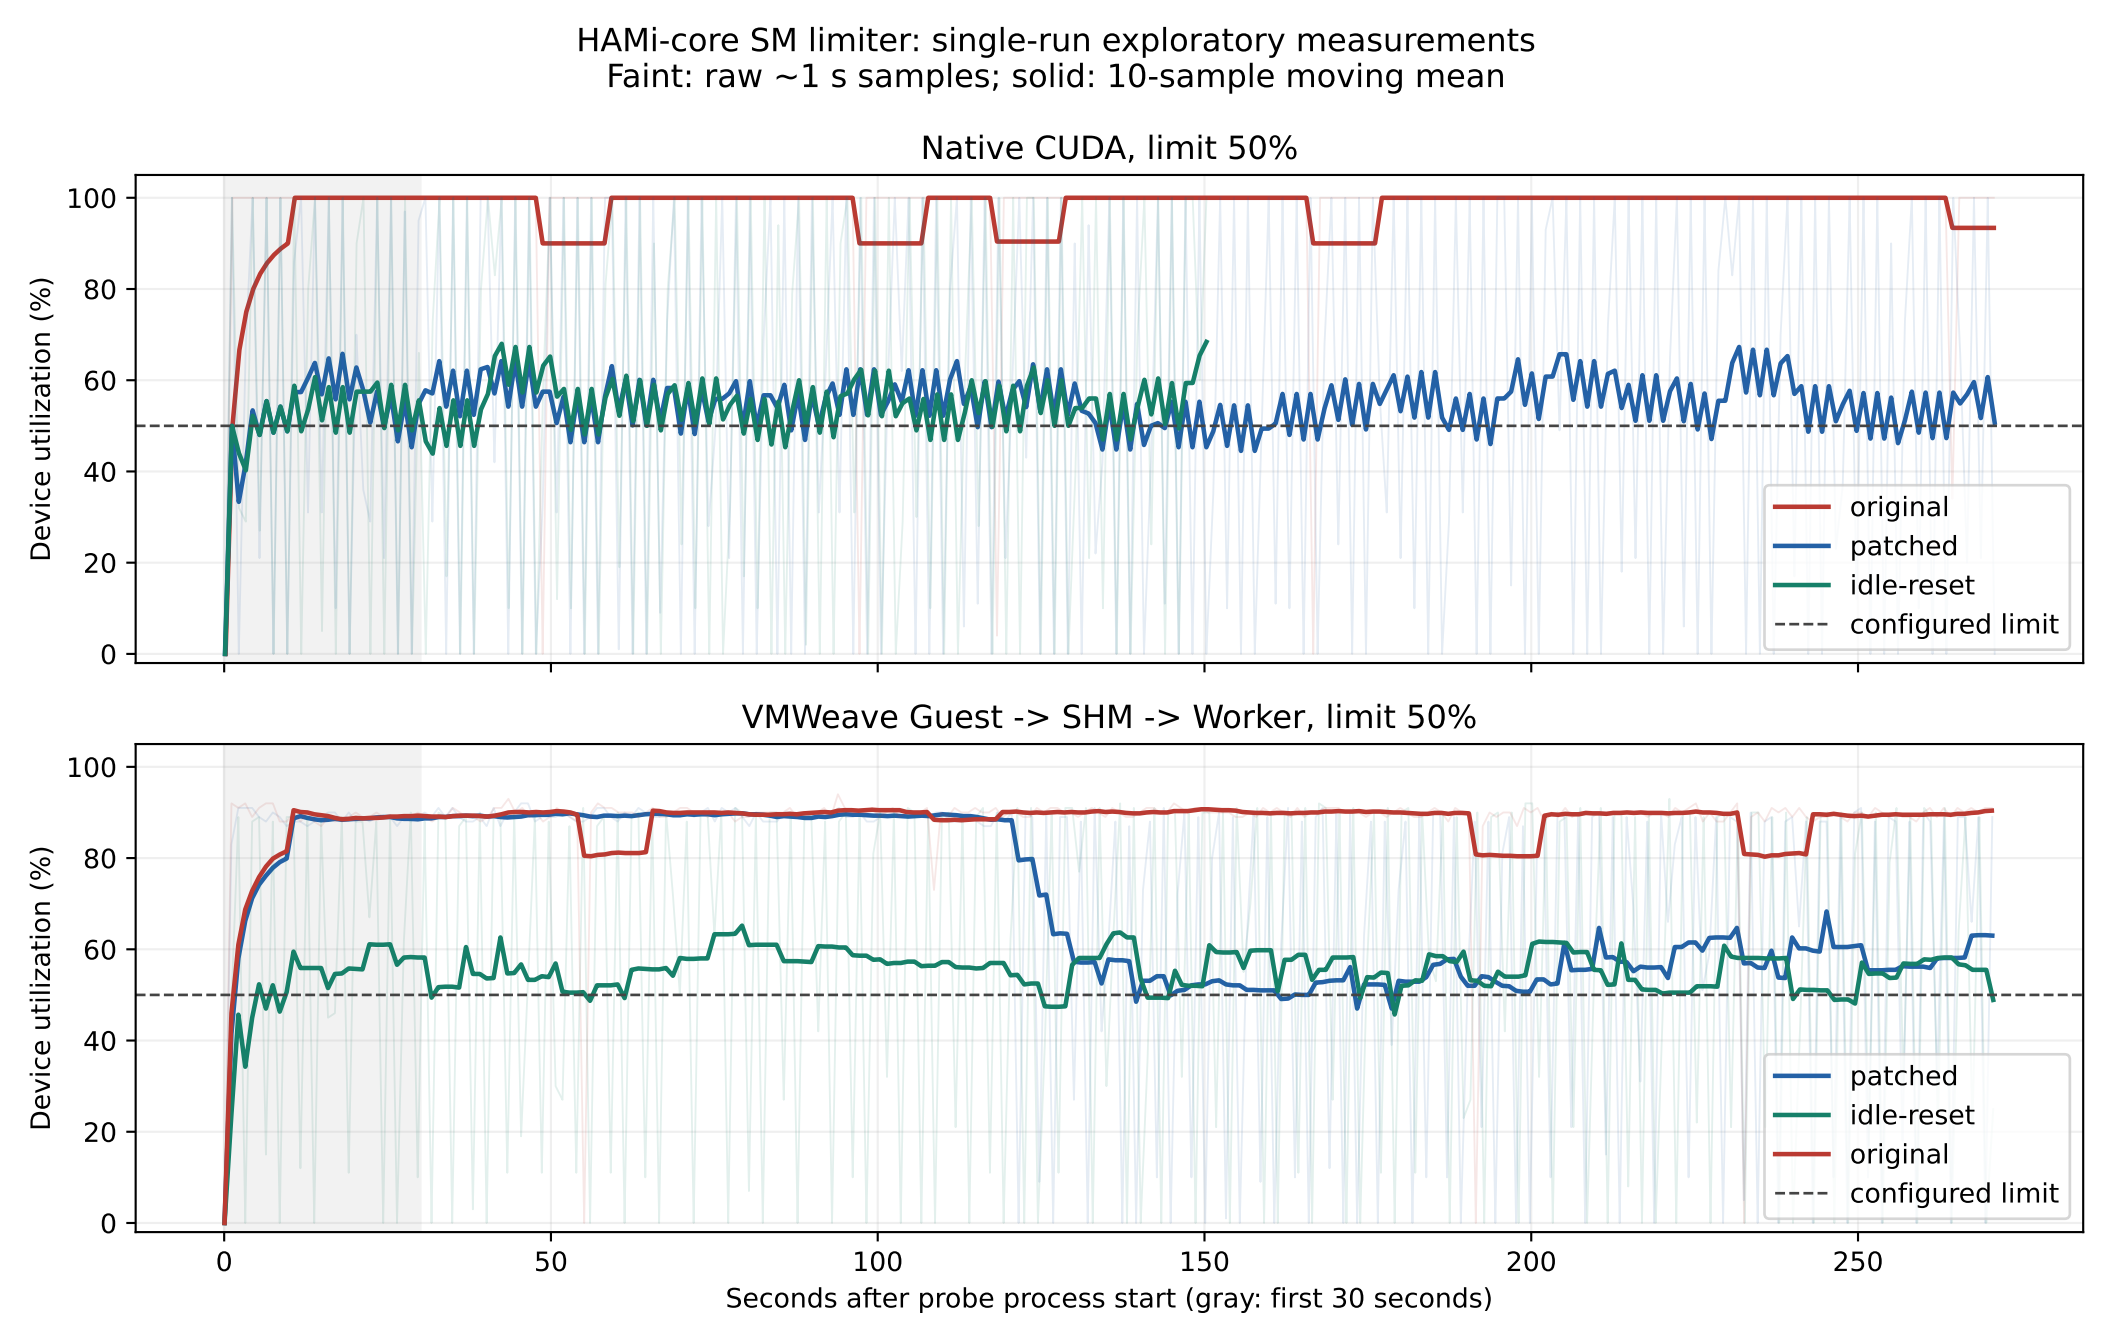
HAMi-core SM limiter: single-run exploratory measurements
Faint: raw ~1 s samples; solid: 10-sample moving mean
Native CUDA, limit 50%
Device utilization (%)
100
80
60
40
20
0
original
patched
idle-reset
configured limit
VMWeave Guest -> SHM -> Worker, limit 50%
Device utilization (%)
100
80
60
40
20
0
patched
idle-reset
original
configured limit
0
50
100
150
200
250
Seconds after probe process start (gray: first 30 seconds)