

### 6 mm Square Thin Type SMD Light Touch Switches

Type: **EVQP0**  
**EVQQ2**




#### ■ Features

- External dimensions : 6.5 mm×6.0 mm, Height 1.8 mm (Excluding the push plate)
- With or without ground terminal, height, operating force
- Overstroke travel

#### ■ Recommended Applications

- Operating switches for other electronic equipment
- Operation switches for PC mouse
- Car audio systems

#### ■ Explanation of Part Numbers

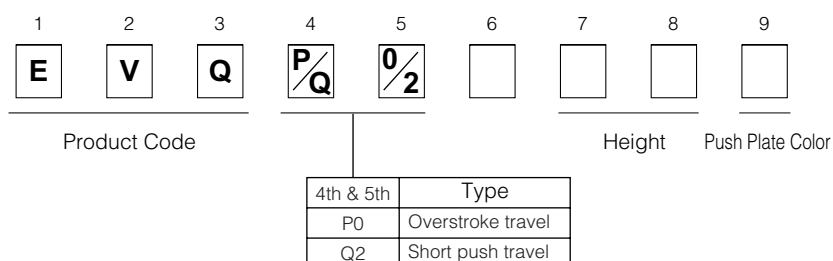

#### ■ Specifications



Travel Type		Short Push Travel	Overstroke Travel
Type		Snap action/Push-on type SPST	
Electrical	Rating	10 $\mu$ A 2 Vdc to 20 mA 15 Vdc (Resistive load)	
	Contact Resistance	100 m $\Omega$ max.	
	Insulation Resistance	100 M $\Omega$ min. (at 100 Vdc)	
	Dielectric Withstanding Voltage	250 Vac for 1 minute	
	Bouncing	10 ms max. (ON, OFF)	
Mechanical	Operating Force	0.5 N, 1.0 N, 1.3 N, 1.6 N, 2.6 N, 3.5 N	0.6 N, 1.0 N
	Travel	0.25 mm (0.2 mm : 0.5N, 1.0N)	0.3 mm
Endurance	Operating Life	0.5 N : 2000000 cycles min. 1.0 N, 1.3 N, 1.6 N : 1000000 cycles min. 2.6 N : 200000 cycles min. 3.5 N : 100000 cycles min.	0.6 N : 2000000 cycles min. 1.0 N : 1000000 cycles min.
Operating Temperature		-40 °C to +85 °C	
Storage Temperature		-40 °C to +85 °C (Bulk) -20 °C to +60 °C (Taping)	
Minimum Quantity/Packing Unit		H=2.0 mm	4000 pcs. Embossed Taping (Reel Pack)
		H=2.5 mm, 3.1 mm	2000 pcs. Embossed Taping (Reel Pack)
Quantity/Carton		H=2.0 mm	20000 pcs.
		H=2.5 mm, 3.1 mm	10000 pcs.

Note: Non washable


Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use.  
Should a safety concern arise regarding this product, please be sure to contact us immediately.

00 Oct. 2012

### ■ Dimensions in mm (not to scale)

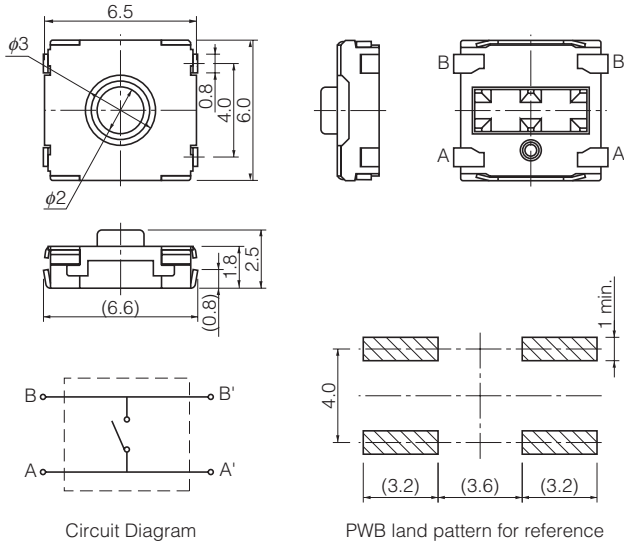
<p>No. 1</p> <p><b>EVQP0</b></p> <p>Overstroke travel : 0.35 mm With J-bent terminals</p> 	 <p>Circuit Diagram</p> <p>PWB land pattern for reference</p>				
Part Numbers	Operating Force	Height	Push Plate Color	Ground Terminal	Operating Life
EVQP0N02B	0.6 N	2.5 mm	Blue	Without	2000000 cycles
EVQP0P02B	0.6 N	2.5 mm	Blue	With	2000000 cycles
EVQP0Q02Q	1.0 N	2.5 mm	Gray	Without	1000000 cycles
EVQP0S02Q	1.0 N	2.5 mm	Gray	With	1000000 cycles

### ■ Dimensions in mm (not to scale)


No. 2					
EVQQ2					
Short push travel : 0.25 mm With J-bent terminals					
					

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use.  
 Should a safety concern arise regarding this product, please be sure to contact us immediately.

### ■ Recommended Reflow Soldering Conditions

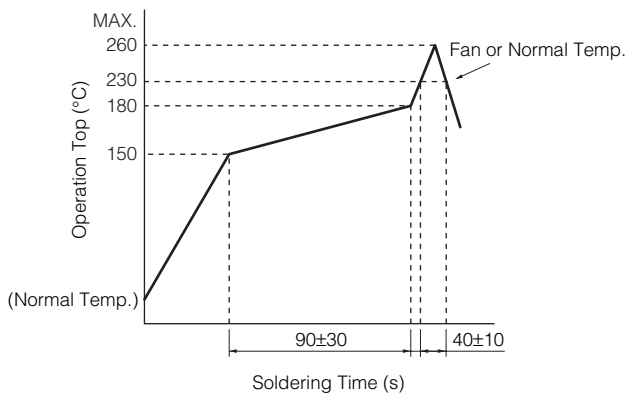


### ● Embossed Carrier Taping

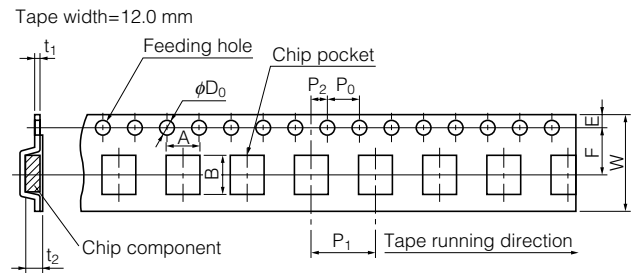

Unit: mm

Part No.	Height	A	B	W	F	E	P1	P2	P0	D0 Dia	t1	t2
EVQQ2	2.0	6.7±0.2	7.4±0.2	12.0±0.3	5.5±0.1	1.75±0.10	8.0±0.1	2.0±0.1	4.0±0.1	1.5 <sup>+0.1</sup> <sub>-0</sub>	0.30±0.05	2.2±0.2
	2.5/3.1											3.2±0.2
EVQP0	2.5											2.8±0.2

### ● Standard Reel Dimensions in mm (not to scale)

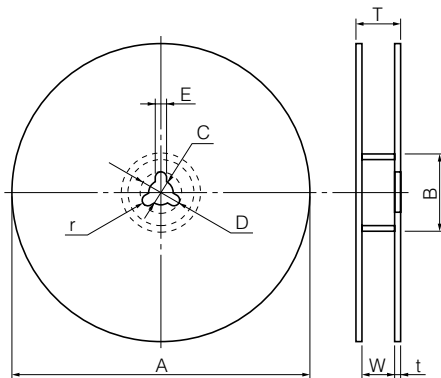


Item	A	B	C	D	E
Rate (mm)	φ380.0±2.0	φ80.0±1.0	φ13.0±0.5	φ21.0±1.0	2.0±0.5


  

Item	W	T	t	r
Rate (mm)	13.5±1.0	17.5±1.0	—	—

### ■ Recommended Shape of Test Pole

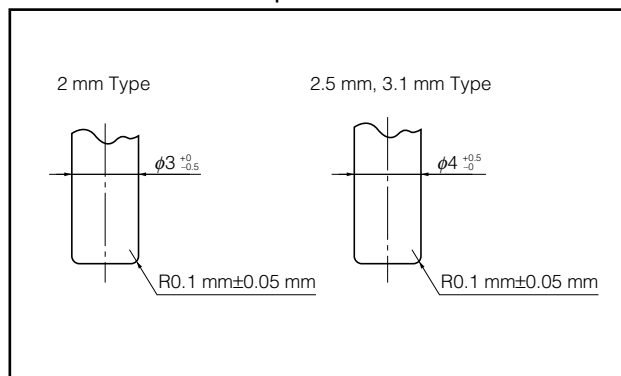

### ■ Recommended Operating Conditions

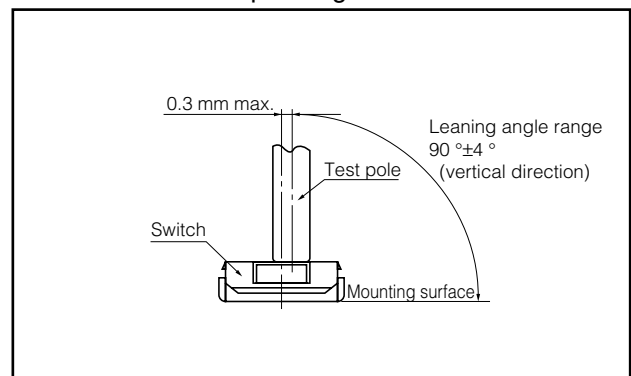

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use.  
Should a safety concern arise regarding this product, please be sure to contact us immediately.

00 Oct. 2012

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Panasonic:

[EVQ-Q2F03W](#) [EVQ-Q2K03W](#) [EVQ-Q2P03W](#) [EVQ-Q2U03W](#) [EVQ-Q2Y03W](#) [EVQ-P0N02B](#) [EVQ-P0P02B](#) [EVQ-P0Q02Q](#) [EVQ-P0S02Q](#) [EVQ-Q2201W](#) [EVQ-Q2202W](#) [EVQ-Q2203W](#) [EVQ-Q2B01W](#) [EVQ-Q2B02W](#) [EVQ-Q2B03W](#) [EVQ-Q2D01W](#) [EVQ-Q2D02W](#) [EVQ-Q2D03W](#) [EVQ-Q2F01W](#) [EVQ-Q2F02W](#) [EVQ-Q2H01W](#) [EVQ-Q2H02W](#) [EVQ-Q2H03W](#) [EVQ-Q2K01W](#) [EVQ-Q2K02W](#) [EVQ-Q2M01W](#) [EVQ-Q2M02W](#) [EVQ-Q2M03W](#) [EVQ-Q2P01W](#) [EVQ-Q2P02W](#) [EVQ-Q2S01W](#) [EVQ-Q2S02W](#) [EVQ-Q2S03W](#) [EVQ-Q2U01W](#) [EVQ-Q2U02W](#) [EVQ-Q2W01W](#) [EVQ-Q2W02W](#) [EVQ-Q2W03W](#) [EVQ-Q2Y01W](#) [EVQ-Q2Y02W](#)