



[illegible]

"Indented Breakaway" example



Area "B" MUST remain attached for delivery to Customer per Note 6.

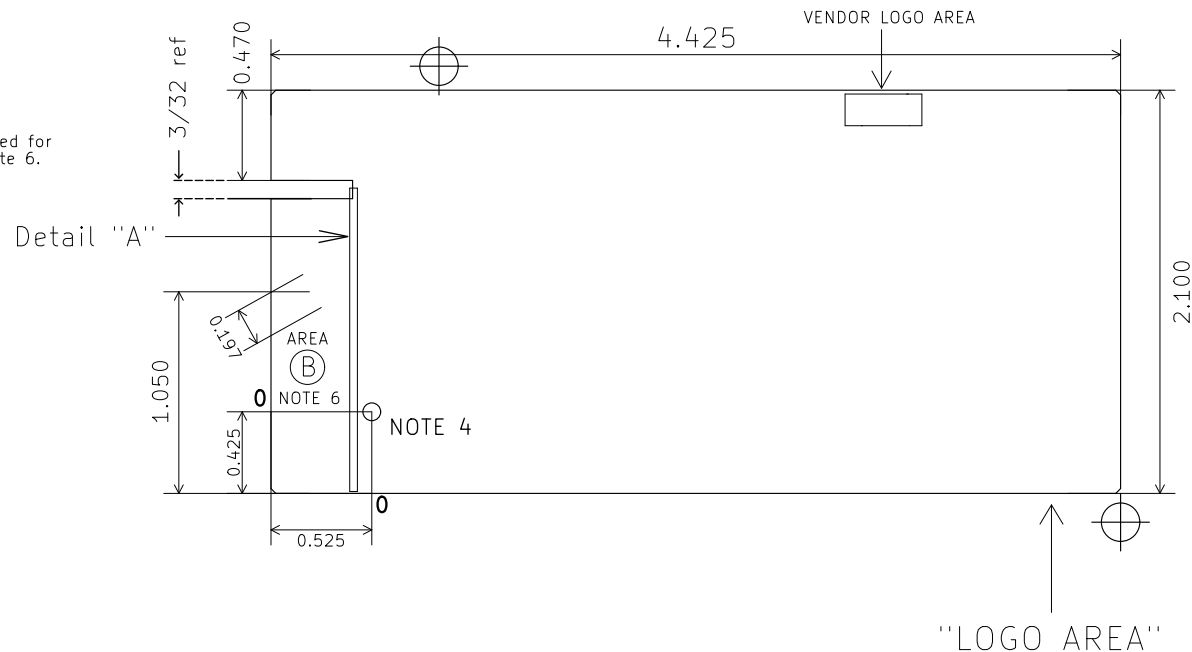

1: DESCRIPTION:

Etched Circuit board, SMT FINE PITCH, 9 mil (W) x 9 mil (S) minimum design rules.

.062" 2-side 1 oz CU with 2 side solder mask, 2 side silkscreen.

Finish dimensions per drawing. $\pm .005''$ on decimals, $\pm 1/64$ on fractions, unless noted. Chamfer or miter corners .025-.05 typ.

Drill file and SMT centroid 0, 0 origin (reference point) located per drawing.

Finished boards shall be panelized for optimum PCB usage. "Indented"-style board-board and board-panel breakaway design required. Implementation details at vendor discretion.

Tab "B" MUST remain attached to PCB after SMT assembly, depanelization, and delivery to Customer. Removal of Tab "B" will be accomplished by Customer. (See also Detail "A", breakaway design example).

BOARD, PC, THOTCON 0x04

Rev: P1

Id: 1/1