


DATE	BY	REVISIONS	ISS
2/9/13	PR	Released for quotes	T2a


## DETAIL "A"

"Indented Breakaway" example



Area "B" MUST remain attached for delivery to Customer per Note 6.

# FOR QUOTE PURPOSES ONLY DO NOT MANUFACTURE FROM THIS DRAWING

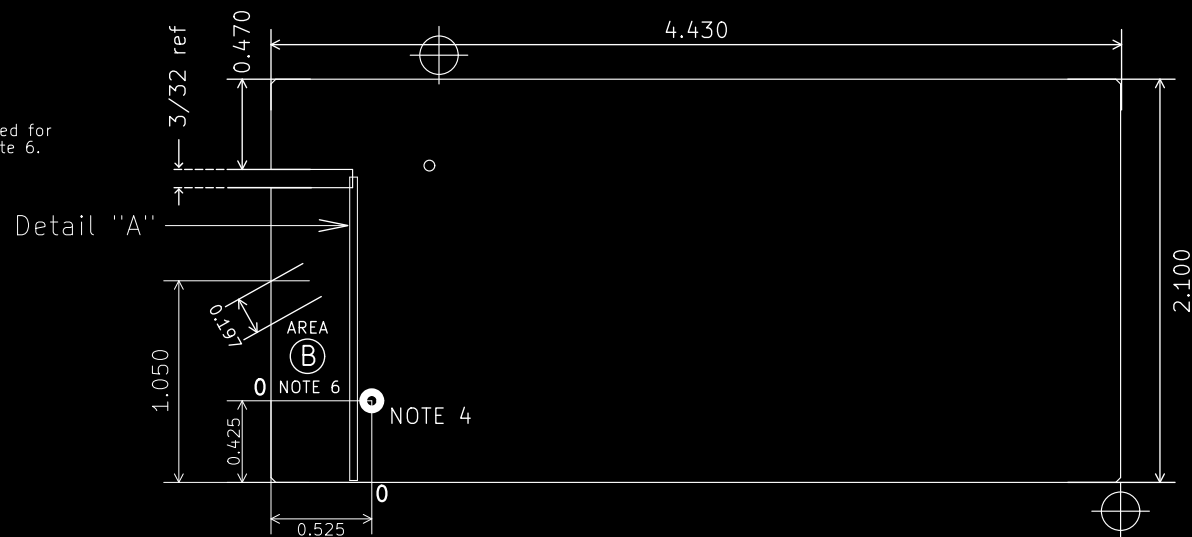

## NOTES:

### 1: DESCRIPTION:

Etched Circuit board, SMT FINE PITCH, 9 mil (W) x 9 mil (S) minimum design rules.

### 2: MATERIAL:

.062" 2-side 1 oz CU with 2 side solder mask, 2 side silkscreen.

### 3: Dimensions:

Finish dimensions per drawing.  $\pm .005$ " on decimals,  $\pm 1/64$  on fractions, unless noted. Chamfer or miter corners .025-.05 typ.

### 4: Co-ordinate System:

Drill file and SMT centroid 0, 0 origin (reference point) located per drawing.

### 5: Panelization:

Finished boards shall be panelized for optimum PCB usage. "Indented"-style board-board and board-panel breakaway design required. Implementation details per vendor discretion.

### 6: Area "B" special note:

Area "B" MUST remain attached to PCB after SMT assembly, depanelization, and delivery to Customer. Removal of area "B" will be accomplished by Customer. See Detail "A".

BOARD, PC, THOTCON 0x04