


Tecnologías: Router On A Stick, VLAN, DHCP, DNS, CDP, SSH

Herramientas: Vmware, Eve-NG, Wireshark, Microsoft Visio, Visual Studio Code

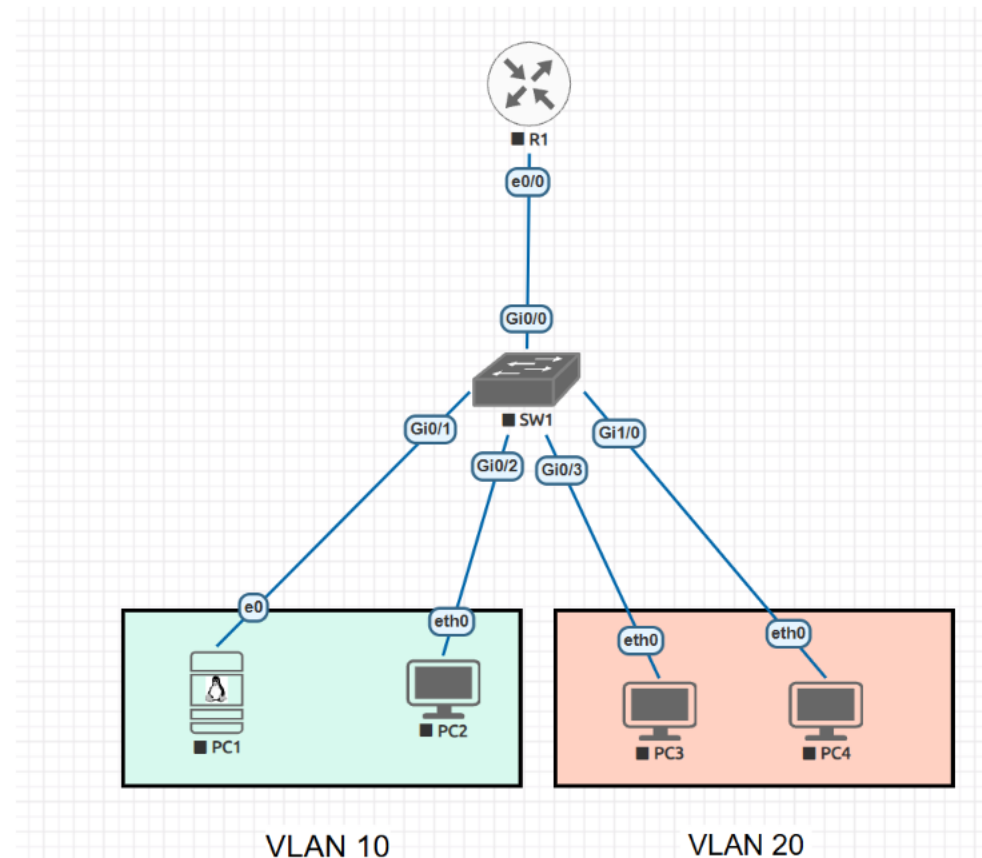

Descripción

En este laboratorio básico configuramos una topología de Router y Switch de acceso con 2 VLANS.

Protocolos y Tecnologías trabajadas: VLAN, DHCP, DNS, CDP, SSH

1. Aplicamos configuración básica de acceso y seguridad en R1 y SW1.

- Configuramos banners y encriptación global de contraseñas
- Utilizamos el algoritmo SCRYPT para las contraseñas locales, la más recomendada por Cisco.
- Segmentamos tráfico en 2 vlans.
- Cambiamos la Vlan nativa para configurar una Vlan Nativa Muerta para evitar VLAN Hopping.
- Hacemos Shutdown a puertos no usados y además los configuramos como switchport de Vlan no Usada.
- Configuramos conectividad entre VLANS con Router on a Stick y subinterfaces.
- Configuramos DHCP y DNS en el router para las VLANS.
- Comprobamos configuraciones y analizamos tráfico en Wireshark de los distintos protocolos

2. Configuramos VLANS y trunk en Router on a Stick.

3. Probamos conectividad y protocolos de servicios como DHCP y DNS y capturamos el tráfico con Wireshark.

4. Probamos SSH y capturamos con Wireshark.

Topología de la Red

Microsoft Visio

Topologia Logica

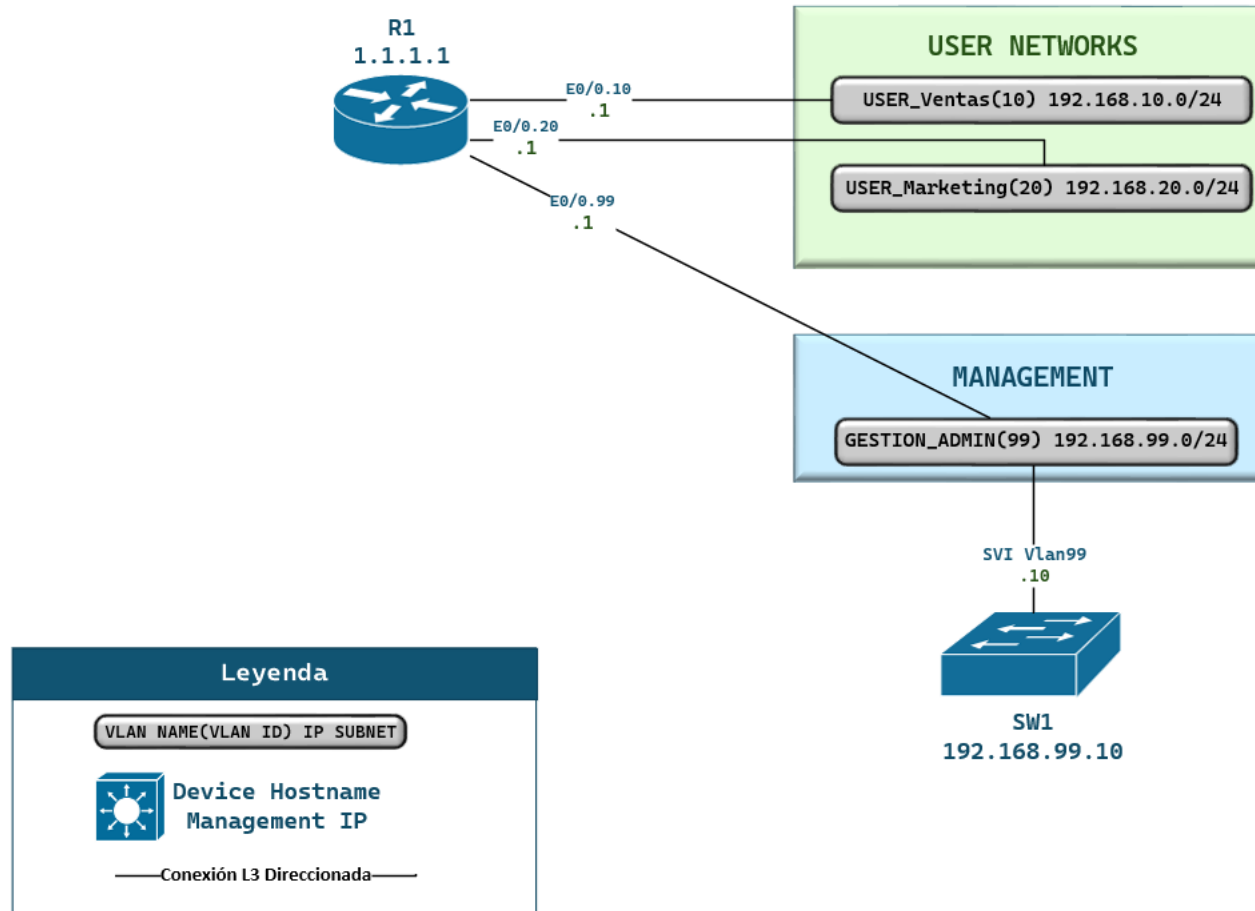


Tabla de Direcccionamiento

Dispositivo	Interfaz	Dirección IP	Vlan	Máscara	Gateway Predeterminado	Descripción
R1	e0/0.10	192.168.10.1	10	255.255.255.0	N/A	Gateway Vlan 10 (Usuarios Ventas)
R1	e0/0.20	192.168.20.1	20	255.255.255.0	N/A	Gateway Vlan 20 (Usuarios Marketing)
R1	e0/0.99	192.168.99.1	99	255.255.255.0	N/A	Gateway Vlan 20 (Gestión)
SW1	Vlan 99 SVI	192.168.99.10	99	255.255.255.0	192.168.99.1	IP de administración
Pc1	eth0	DHCP	10	255.255.255.0	192.168.10.1	Host de prueba Linux
Pc2	eth0	DHCP	10	255.255.255.0	192.168.10.1	Host de prueba VPC
Pc3	eth0	DHCP	20	255.255.255.0	192.168.20.1	Host de prueba VPC
Pc4	eth0	DHCP	20	255.255.255.0	192.168.20.1	Host de prueba VPC

Configuración de dispositivos

Las configuraciones completas de cada dispositivo están disponibles en la carpeta [configuraciones/](#) :

Dispositivo	Archivo	Descripción
Router R1	R1config.ios	VLANs, subinterfaces, DHCP, SSH, DNS
Switch SW1	Sw1config.ios	Trunk, VLANs, SVI de gestión
Router R1 (config base)	Config_Basic Router.ios	Configuración acceso y seguridad básico
Switch SW1 (config base)	Config_Basic SW.ios	Configuración acceso y seguridad básico

```
1  ! --- Access & Security Basic Config Router --- !
2  hostname R1
3  no ip domain-lookup
4  security passwords min-length 14
5  service password-encryption
6  !
7  banner motd #
8  =====
9  | AVISO: Acceso restringido y monitoreado
10 | =====
11 |
12 |
13 banner exec #
14 -----
15 [ ACCESO CONCEDIDO ]
16 Dispositivo actual: $(hostname)
17 Entorno: Eve-NG - Lab Win
18 -----
19 #
20 !
21 enable algorithm-type scrypt secret ciscoenpa55
22 !
23 ! --- Admin User --- !
24 username admin privilege 15 algorithm-type scrypt secret ciscoadminpa55
25 !
26 ! --- Remote Access --- !
27 ip domain-name winlab
28 ip ssh version 2
29 crypto key generate rsa general-keys modulus 2048
30 !
31 line vty 0 4
32 | exec-timeout 5 0
33 | logging synchronous
34 | login local
35 | transport input ssh
36 exit
37 !
38 ! --- Console ---- !
39 line con 0
40 | exec-timeout 5 0
41 | logging synchronous
42 | login local
43 exit
44
```

```
1 ! --- Access & Security Basic Config Switch --- !
2 hostname SW1
3 no ip domain-lookup
4 service password-encryption
5 !
6 banner motd #
7 =====
8 | AVISO: Acceso restringido y monitoreado
9 | =====
10 | #
11 banner exec #
12 | -----
13 | [ ACCESO CONCEDIDO ]
14 | Dispositivo actual: $(hostname)
15 | Entorno: Eve-NG - Lab Win
16 | -----
17 | #
18 | !
19 enable algorithm-type scrypt secret ciscoenpa55
20 !
21 ! --- Admin User --- !
22 username admin privilege 15 algorithm-type scrypt secret ciscoadminpa55
23 !
24 ! --- Remote Access --- !
25 ip domain-name winlab
26 ip ssh version 2
27 crypto key generate rsa general-keys modulus 2048
28 !
29 line vty 0 15
30 exec-timeout 5 0
31 logging synchronous
32 login local
33 transport input ssh
34 exit
35 !
36 vlan 99
37 name GESTION_ADMIN
38 exit
39 interface vlan 99
40 description IP_GESTION
41 ip address 192.168.99.10 255.255.255.0
42 no shutdown
43 exit
44 !
45 ip default-gateway 192.168.99.1
46 !
47 ! --- Console ---- !
48 line con 0
49 exec-timeout 5 0
50 logging synchronous
```

```
1  ! --- R1 Config --- !
2  interface loopback 0
3  ip address 1.1.1.1 255.255.255.255
4  exit
5  !
6  ! --- Router on a stick --- !
7  interface e0/0
8  description TRUNK_TO_SW1
9  no shutdown
10 exit
11 !
12 interface e0/0.10
13 encapsulation dot1q 10
14 ip address 192.168.10.1 255.255.255.0
15 exit
16 !
17 interface e0/0.20
18 encapsulation dot1q 20
19 ip address 192.168.20.1 255.255.255.0
20 exit
21 !
22 interface e0/0.99
23 encapsulation dot1q 99
24 ip address 192.168.99.1 255.255.255.0
25 exit
26 !
27 ! --- DHCP, DNS --- !
28 ip dns server
29 ip dhcp excluded-address 192.168.10.1 192.168.10.10
30 ip dhcp excluded-address 192.168.20.1 192.168.20.10
31 ip dhcp pool USERS_Ventas
32 network 192.168.10.0 255.255.255.0
33 default-router 192.168.10.1
34 dns-server 192.168.10.1
35 exit
36 ip dhcp pool USERS_Marketing
37 network 192.168.20.0 255.255.255.0
38 default-router 192.168.20.1
39 dns-server 192.168.20.1
40 exit
41
```

```
1  ! --- SW1 Config --- !
2  vlan 10
3  name USERS_Ventas
4  vlan 20
5  name USERS_Marketing
6  vlan 555
7  name blackhole
8  vlan 999
9  name Nativa_Muerta
10 exit
11 !
12 interface g0/0
13 description TRUNK_TO_R1
14 switchport trunk encapsulation dot1q
15 switchport mode trunk
16 switchport trunk native vlan 999
17 switchport trunk allowed vlan 10,20,99
18 exit
19 interface range g0/1-2
20 description TO_USERS_Ventas_VLAN10
21 switchport mode access
22 switchport access vlan 10
23 spanning-tree portfast
24 spanning-tree bpduguard enable
25 exit
26 interface range g0/3, g1/0
27 description TO_USERS_Marketing_VLAN20
28 switchport mode access
29 switchport access vlan 20
30 spanning-tree portfast
31 spanning-tree bpduguard enable
32 exit
33 !
34 interface range g1/1-3
35 switchport mode access
36 switchport access vlan 555
37 exit
38
```

Pruebas y Verificación

Verificamos conectividad, comandos aplicados y protocolos:

Verificación de Configuración (show commands)

Interfaces del Router R1

```
R1#show ip interface brief
Interface                IP-Address      OK? Method Status          Protocol
Ethernet0/0              unassigned      YES NVRAM    up              up
Ethernet0/0.10           192.168.10.1    YES NVRAM    up              up
Ethernet0/0.20           192.168.20.1    YES NVRAM    up              up
Ethernet0/0.99           192.168.99.1    YES NVRAM    up              up
Ethernet0/1              unassigned      YES NVRAM    administratively down down
Ethernet0/2              unassigned      YES NVRAM    administratively down down
Ethernet0/3              unassigned      YES NVRAM    administratively down down
Loopback0                1.1.1.1         YES NVRAM    up              up
R1#
```

Interfaces del Switch SW1

```
SW1#show ip interface brief
Interface                IP-Address      OK? Method Status          Protocol
GigabitEthernet0/0       unassigned      YES unset    up              up
GigabitEthernet0/1       unassigned      YES unset    up              up
GigabitEthernet0/2       unassigned      YES unset    up              up
GigabitEthernet0/3       unassigned      YES unset    up              up
GigabitEthernet1/0       unassigned      YES unset    up              up
GigabitEthernet1/1       unassigned      YES unset    administratively down down
GigabitEthernet1/2       unassigned      YES unset    administratively down down
GigabitEthernet1/3       unassigned      YES unset    administratively down down
Vlan99                   192.168.99.10   YES NVRAM    up              up
SW1#
```

Estado de las interfaces en SW1

```
SW1#show interface status
```

Port	Name	Status	Vlan	Duplex	Speed	Type
Gi0/0	TRUNK_TO_R1	connected	trunk	auto	auto	unknown
Gi0/1	TO_USERS_Ventas_VL	connected	10	auto	auto	unknown
Gi0/2	TO_USERS_Ventas_VL	connected	10	auto	auto	unknown
Gi0/3	TO_USERS_Marketin	connected	20	auto	auto	unknown
Gi1/0	TO_USERS_Marketin	connected	20	auto	auto	unknown
Gi1/1	UNUSED_PORTS	disabled	555	auto	auto	unknown
Gi1/2	UNUSED_PORTS	disabled	555	auto	auto	unknown
Gi1/3	UNUSED_PORTS	disabled	555	auto	auto	unknown

```
SW1#
```

Configuración de Trunk en SW1

```
SW1#show interface trunk
```

Port	Mode	Encapsulation	Status	Native vlan
Gi0/0	on	802.1q	trunking	999

Port	Vlans allowed on trunk
Gi0/0	10,20,99

Port	Vlans allowed and active in management domain
Gi0/0	10,20,99

Port	Vlans in spanning tree forwarding state and not pruned
Gi0/0	10,20,99

Pruebas de Conectividad y Servicios

Asignación de IP por DHCP en PC1 y Release

```
PC1> dhcp
DDORA IP 192.168.10.12/24 GW 192.168.10.1

PC1> dhcp -x

PC1> show ip all
```

NAME	IP/MASK	GATEWAY	MAC	DNS
PC1	0.0.0.0/0	0.0.0.0	00:50:79:66:68:04	

```
PC1> █
```

Resolución DNS desde PC1 (la segunda línea falla al no tener IPv6 configurado)

```
localhost:~# nslookup pc2
Server:          192.168.10.1
Address:         192.168.10.1:53

Non-authoritative answer:
Name:   pc2
Address: 192.168.10.12

*** Can't find pc2: No answer

localhost:~#
```

Ping entre VLANs — PC1 a PC3, observamos como PC3 hace uso del ARP para conocer la MAC de la IP de su gateway y poder hacer ICMP Reply

22	2026-09-21 20:11:45.041567Z	192.168.10.11	192.168.10.1	DNS	67 Standard query 0xc802 A PC3
23	2026-09-21 20:11:45.041896Z	192.168.10.1	192.168.10.11	DNS	83 Standard query response 0xc802 A PC3 A 192.168.20.11
24	2026-09-21 20:11:45.049889Z	192.168.10.11	192.168.20.11	ICMP	102 Echo (ping) request id=0x0953, seq=0/0, ttl=64 (no response four
25	2026-09-21 20:11:45.049942Z	192.168.10.11	192.168.20.11	ICMP	102 Echo (ping) request id=0x0953, seq=0/0, ttl=63 (reply in 28)
26	2026-09-21 20:11:45.068081Z	Private_66:68:02	Broadcast	ARP	68 Who has 192.168.20.1? Tell 192.168.20.11
27	2026-09-21 20:11:45.072615Z	aa:bb:cc:00:70:00	Private_66:68:02	ARP	64 192.168.20.1 is at aa:bb:cc:00:70:00
28	2026-09-21 20:11:45.097732Z	192.168.20.11	192.168.10.11	ICMP	102 Echo (ping) reply id=0x0953, seq=0/0, ttl=64 (request in 25)

Prueba de DNS y ping desde R1 hacia PC2

```
R1(config)#ip host PC2 192.168.10.14
R1(config)#do show hosts
Default domain is winlab
Name/address lookup uses static mappings

Codes: UN - unknown, EX - expired, OK - OK, ?? - revalidate
temp - temporary, perm - permanent
NA - Not Applicable None - Not defined

Host          Port  Flags      Age Type  Address(es)
PC2           None  (perm, OK) 0   IP    192.168.10.14
R1(config)#do ping PC2
Type escape sequence to abort.
Sending 5, 100-byte ICMP Echos to 192.168.10.14, timeout is 2 seconds:
!!!!
Success rate is 100 percent (5/5), round-trip min/avg/max = 1/4/7 ms
R1(config)#
```

Análisis de Tráfico (Wireshark)

Captura del proceso DHCP en PC1

id	Time	Source	Destination	Protocol	Length	Info
299	2026-09-19 18:06:48.264268Z	0.0.0.0	255.255.255.255	DHCP	406	DHCP Discover - Transaction ID 0xaad9293e
301	2026-09-19 18:06:49.286583Z	192.168.10.1	192.168.10.12	DHCP	342	DHCP Offer - Transaction ID 0xaad9293e
303	2026-09-19 18:06:51.264487Z	0.0.0.0	255.255.255.255	DHCP	406	DHCP Request - Transaction ID 0xaad9293e
304	2026-09-19 18:06:51.270167Z	192.168.10.1	192.168.10.12	DHCP	342	DHCP ACK - Transaction ID 0xaad9293e
357	2026-09-19 18:08:03.096136Z	192.168.10.12	192.168.10.1	DHCP	406	DHCP Release - Transaction ID 0x0

```

Frame 299: Packet, 406 bytes on wire (3248 bits), 406 bytes captured (3248 bits) on int
Ethernet II, Src: Private_66:68:04 (00:50:79:66:68:04), Dst: Broadcast (ff:ff:ff:ff:ff:ff)
Internet Protocol Version 4, Src: 0.0.0.0, Dst: 255.255.255.255
User Datagram Protocol, Src Port: 68, Dst Port: 67
Dynamic Host Configuration Protocol (Discover)
  Message type: Boot Request (1)
  Hardware type: Ethernet (0x01)
  Hardware address length: 6
  Hops: 0
  Transaction ID: 0xaad9293e
  Seconds elapsed: 0
  Bootp flags: 0x0000 (Unicast)
  Client IP address: 0.0.0.0
  Your (client) IP address: 0.0.0.0
  Next server IP address: 0.0.0.0
  Relay agent IP address: 0.0.0.0
  Client MAC address: Private_66:68:04 (00:50:79:66:68:04)
  Client hardware address padding: 00000000000000000000
  Server host name not given
  Boot file name not given
  Magic cookie: DHCP
  Option: (53) DHCP Message Type (Discover)
  Option: (12) Host Name

```

Captura de resolución DNS y ping hacia PC2

8	2026-09-21 19:41:00.5558462	192.168.10.1	192.168.10.1	DNS	63 Standard query 0xc7b6 A PC2
9	2026-09-21 19:41:00.5569332	192.168.10.1	192.168.10.11	DNS	79 Standard query response 0xc7b6 A PC2 A 192.168.10.12
10	2026-09-21 19:41:00.5579622	192.168.10.11	192.168.10.12	ICMP	98 Echo (ping) request id=0x894c, seq=0/0, ttl=64 (reply in 100ms)
11	2026-09-21 19:41:00.5585632	192.168.10.12	192.168.10.11	ICMP	98 Echo (ping) reply id=0x894c, seq=0/0, ttl=64 (request id=0x894c)
12	2026-09-21 19:41:01.5588142	192.168.10.11	192.168.10.12	ICMP	98 Echo (ping) request id=0x894c, seq=1/256, ttl=64 (reply in 100ms)
13	2026-09-21 19:41:01.5592602	192.168.10.12	192.168.10.11	ICMP	98 Echo (ping) reply id=0x894c, seq=1/256, ttl=64 (request id=0x894c)
14	2026-09-21 19:41:02.5653642	192.168.10.11	192.168.10.12	ICMP	98 Echo (ping) request id=0x894c, seq=2/512, ttl=64 (reply in 100ms)
15	2026-09-21 19:41:02.5812672	192.168.10.12	192.168.10.11	ICMP	98 Echo (ping) reply id=0x894c, seq=2/512, ttl=64 (request id=0x894c)
16	2026-09-21 19:41:02.5876232	50.00.00.01:00.01	50.00.00.01:00.01	ICMP	60 Banlu

```

Frame 8: Packet, 63 bytes on wire (504 bits), 63 bytes captured (504 bits) on interface -
Ethernet II, Src: NexaCommunic_00:06:00 (00:50:00:00:06:00), Dst: aa:bb:cc:00:70:00 (aa:b
Internet Protocol Version 4, Src: 192.168.10.11, Dst: 192.168.10.1
User Datagram Protocol, Src Port: 54616, Dst Port: 53
Domain Name System (query)
  Transaction ID: 0xc7b6
  Flags: 0x0100 Standard query
  Questions: 1
  Answer RRs: 0
  Authority RRs: 0
  Additional RRs: 0
  Queries
    > PC2: type A, class IN
    [Response in: 9]
  
```

Importante

Esta es la captura de tráfico CDP entre PC1 y SW1, el CDP es un protocolo que no debería ser activado en puertos de acceso ya que transmite información de la red y dispositivos la cual un atacante puede explotar para mapear la topología y hacer reconocimiento.

Este es el origen del mensaje CDP: Interface G0/1 en SW1

```
SW1#show interface g0/1
GigabitEthernet0/1 is up, line protocol is up (connected)
  Hardware is iGbE, address is 5000.0001.0001 (bia 5000.0001.0001)
  Description: TO_USERS_Ventas_VLAN10
  MTU 1500 bytes, BW 1000000 Kbit/sec, DLY 10 usec,
    reliability 255/255, txload 1/255, rxload 1/255
  Encapsulation ARPA, loopback not set
  Keepalive set (10 sec)
  Unknown, Unknown, link type is auto, media type is unknown media type
  output flow-control is unsupported, input flow-control is unsupported
  Auto-duplex, Auto-speed, link type is auto, media type is unknown
  input flow-control is off, output flow-control is unsupported
  ARP type: ARPA, ARP Timeout 04:00:00
  Last input never, output 00:00:01, output hang never
  Last clearing of "show interface" counters never
  Input queue: 0/75/0/0 (size/max/drops/flushes); Total output drops: 0
  Queueing strategy: fifo
  Output queue: 0/0 (size/max)
  5 minute input rate 0 bits/sec, 0 packets/sec
  5 minute output rate 0 bits/sec, 0 packets/sec
    0 packets input, 0 bytes, 0 no buffer
    Received 0 broadcasts (0 multicasts)
    0 runts, 0 giants, 0 throttles
    0 input errors, 0 CRC, 0 frame, 0 overrun, 0 ignored
    0 watchdog, 0 multicast, 0 pause input
    2084 packets output, 153290 bytes, 0 underruns
    0 output errors, 0 collisions, 2 interface resets
    0 unknown protocol drops
    0 babbles, 0 late collision, 0 deferred
    0 lost carrier, 0 no carrier, 0 pause output
    0 output buffer failures, 0 output buffers swapped out
SW1#
```

No.	Time	Source	Destination	Protocol	Length	Info
22	2026-09-19 17:17:57.860369Z	50:00:00:01:00:01	CDP/VTP/DTP/PagP/UDLD	CDP	455	Device ID: SW1.winlab Port ID: GigabitEthernet0/1
57	2026-09-19 17:18:46.637173Z	50:00:00:01:00:01	CDP/VTP/DTP/PagP/UDLD	CDP	455	Device ID: SW1.winlab Port ID: GigabitEthernet0/1
91	2026-09-19 17:19:37.934449Z	50:00:00:01:00:01	CDP/VTP/DTP/PagP/UDLD	CDP	455	Device ID: SW1.winlab Port ID: GigabitEthernet0/1

> Logical-Link Control	0000 01 00 0c cc cc cc 50 00 00 01 00 01 01 b9 aa aa	P:
> Cisco Discovery Protocol	0010 03 00 00 0c 20 00 02 b4 ef 95 00 01 00 0e 53 57	SW
Version: 2	0020 31 2e 77 69 6e 6c 61 62 00 05 01 33 43 69 73 63	1.winlab ...3Cisc
TTL: 180 seconds	0030 6f 20 49 4f 53 20 53 6f 66 74 77 61 72 65 2c 20	o IOS So ftware,
Checksum: 0xef95 [correct]	0040 76 69 6f 73 5f 6c 32 20 53 6f 66 74 77 61 72 65	vios_12 Software
[Checksum Status: Good]	0050 20 28 76 69 6f 73 5f 6c 32 2d 41 44 56 45 4e 54	(vios_1 2-ADVENT
> Device ID: SW1.winlab	0060 45 52 50 52 49 53 45 4b 39 2d 4d 29 2c 20 56 65	ERPRISEK 9-H), Ve
> Software Version	0070 72 73 69 6f 6e 20 31 35 2e 30 28 54 54 43 5f 32	rsion 15 .0(TTC_2
> Platform: Cisco IOSv	0080 30 31 34 30 36 30 35 29 46 4c 4f 5f 44 53 47 53	0140605) FLO_DSOS
> Addresses	0090 37 2c 20 45 41 52 4c 59 20 44 45 50 4c 4f 59 4d	7, EARLY DEPLOYM
> Port ID: GigabitEthernet0/1	00a0 45 4e 54 20 44 45 56 45 4c 4f 50 4d 45 4e 54 20	ENT DEVE LOPMENT
> Capabilities	00b0 42 55 49 4c 44 2c 20 73 79 6e 63 65 64 20 74 6f	BUILD, s ynced to
> IP Prefixes: 1	00c0 20 20 56 31 35 32 5f 33 5f 30 5f 38 38 5f 50 49	V152_3 _0_88.PI
> Native VLAN: 10	00d0 34 0a 54 65 63 68 60 69 63 61 6c 20 53 75 70 70	4 Techni cal Supp
> Duplex: Half	00e0 6f 72 74 3a 20 68 74 74 70 3a 2f 2f 77 77 77 2e	ort: htt p://www.
> Trust Bitmap: 0x00	00f0 63 69 73 63 6f 2e 63 6f 6d 2f 74 65 63 68 73 75	cisco.co m/techsu
> Untrusted port CoS: 0x00	0100 70 70 6f 72 74 0a 43 6f 70 79 72 69 67 68 74 20	pport.co pyright
> Management Addresses	0110 28 63 29 20 31 39 38 36 2d 32 30 31 34 20 62 79	(c) 1986 -2014 by
Type: Management Address (0x0016)	0120 20 43 69 73 63 6f 20 53 79 73 74 65 6d 73 2c 20	Cisco S ystems,
Length: 17	0130 49 6e 63 2e 0a 43 6f 6d 70 69 6c 65 64 20 54 68	Inc.-Com piled Th
Number of addresses: 1	0140 75 20 30 35 2d 4a 75 6e 2d 31 34 20 30 35 3a 33	u 05-Jun -14 05:3
> IP address: 192.168.99.10	0150 35 20 62 79 20 6a 73 66 65 6e 67 00 06 00 0e 43	5 by jsf eng ...C
	0160 69 73 63 6f 20 49 4f 53 76 00 02 00 11 00 00 00	isco IOS v.....
	0170 01 01 01 cc 00 04 c0 a8 63 0a 00 03 00 16 47 69	 c.....Gi
	0180 67 61 62 69 74 45 74 68 65 72 6e 65 74 30 2f 31	gabiteth ernet0/1
	0190 0a 0a 0a 0a 0a 0a 0a 0a 0a 0a 0a 0a 0a 0a 0a	}

La mejor practica es desactivar CDP en puertos de acceso para evitar, ejemplo:

```
SW1(config)# interface g0/1
SW1(config-if)# no cdp enable
```



Acceso Remoto (SSH)

Conexión SSH desde PC1 hacia R1, hemos utilizado parametros opcionales para el tunel de cifrado y la autentificacion ya que la imagen de IOL no soporta las mas actualizadas

```
localhost:~# ssh -oKexAlgorithms=+diffie-hellman-group14-sha1 -o HostKeyAlgorithms=+ssh-rsa admin@1.1.1.1
The authenticity of host '1.1.1.1 (1.1.1.1)' can't be established.
RSA key fingerprint is: SHA256:y4+h2uGY/3YwD85prt2XU2cs21G0qYnXMpsTDSBKPPw
This key is not known by any other names.
Are you sure you want to continue connecting (yes/no/[fingerprint])? yes
Warning: Permanently added '1.1.1.1' (RSA) to the list of known hosts.
(admin@1.1.1.1) Password:

=====
  AVISO: Acceso restringido y monitoreado
=====

-----
[ ACCESO CONCEDIDO ]
Dispositivo actual: R1
Entorno: Eve-NG - Lab Win
-----

R1#
```

Skills Learned

- Configuración Inicial y puesta en marcha de Switches y Routers Cisco
- Configuración de VLANS
- Configuración de interfaces
- Configuración/Troubleshooting de protocolos DNS, DHCP, SSH, CDP.
- Capturar tráfico y analizarlo en Wireshark
- Conocimiento de Protocolos
- Conocimiento seguridad básica

