



Let's get connected

Phone

+91 91757 78119

E-mail


info@wingspannglobal.com

Website

www.wingspannglobal.com

Company

Wingspan Global Pvt. Ltd.

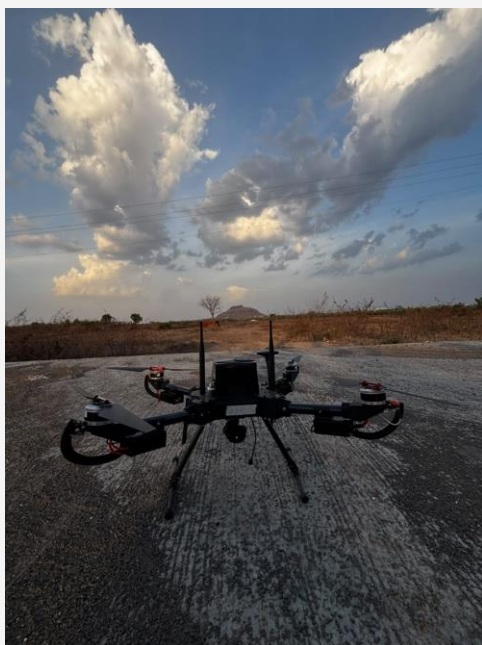

Why Choose THE THIRD EYE?

Built for real-world surveillance operations — not just demonstrations.

- ▶ **Carbon** Fibre airframe — light yet battle-hardened
- ▶ **AES-256** encrypted 1080p @ 60fps video stream
- ▶ **FHSS** Anti-Jam telemetry, unjammable in the field
- ▶ **40**-minute endurance on a single charge
- ▶ **Auto** RTL on low battery, failsafe & geofence breach
- ▶ **GPS** hover accuracy of ± 0.5 m for precision ops
- ▶ **Mission** Planner & QGroundControl ready
- ▶ **Dual**-band 2.4 / 5.8 GHz for interference-free link

Ideal For:

- ◆ Border & Perimeter Security
- ◆ Law Enforcement & Police Operations
- ◆ Industrial Site Monitoring
- ◆ Critical Infrastructure Protection
- ◆ Disaster Response & Search & Rescue



SURVEILLANCE & SECURITY UAV



THE THIRD EYE

Mission-Tuned. Encrypted. Always Watching.

40 MIN | 4.1 KM | AES-256

Wingspan Global Pvt. Ltd.

Why Our Drone

THE THIRD EYE

Stands Apart

Engineered in India for real-world defence, law enforcement, and industrial surveillance. Every component chosen for mission reliability.

Carbon Fibre Airframe

High-modulus Carbon Fibre Composite construction. Only 5 kg MTOW, built to endure 18 km/h winds.

Military-Grade Encryption

AES-256 encrypted video and FHSS Anti-Jam telemetry means your feed stays private and unjammable.

Failsafe Autonomy

Auto Return-to-Launch triggers on low battery (<10%), RC failsafe, or geofence breach. Always comes home.



Technical Specifications

PLATFORM & AIRFRAME

Configuration	Quad-rotor VTOL
Airframe Length	820 mm
MTOW	5 kg
Material	Carbon Fibre
Wind Resistance	18 km/h
Op. Range	4 km

FLIGHT PERFORMANCE

Max Endurance	35–40 Min
Max Speed	45 km/h
Cruise Speed	25 km/h
Datalink Range	4.1 km
Op. Ceiling	3000 m AMSL
Op. Altitude	120 m
Hover Accuracy	±0.5 m (GPS)

EO-(VISIBLE – LIGHT) CAMERA

Resolution	5 MP
Video Resolution	2K @ 30 fps
Sensor Type	1/2.7" CMOS

THERMAL CAMERA

Resolution	640 × 512
Spectral Range	8–14 μm
Thermal FOV	1 48.7° × 38.6°

LASER RANGEFINDER

Range	5-1000 m
Accuracy	±1 m
Thermal FOV	1 48.7° × 38.6°

GIMBAL

Stabilization	3-Axis Gimbal
Image Stabilization	Real-Time Active Stabilization

Payload & Communications

PAYLOAD & COMMS

Payload	180 g
Video Link	AES-256 1080p@60fps
Encryption	AES-256 / FHSS
Frequency	2.4 / 5.8 GHz
GCS	Mission Planner / QGC

SMART FAILSAFE

Low Battery RTL	< 10%
RC Failsafe	Auto RTL
Geofence	Auto RTL
Power Rails	Dual Independent

GET IN TOUCH

- +91 91757 78119
 - info@wingspannglobal.com
 - www.wingspannglobal.com
- Wingspann Global Pvt. Ltd.