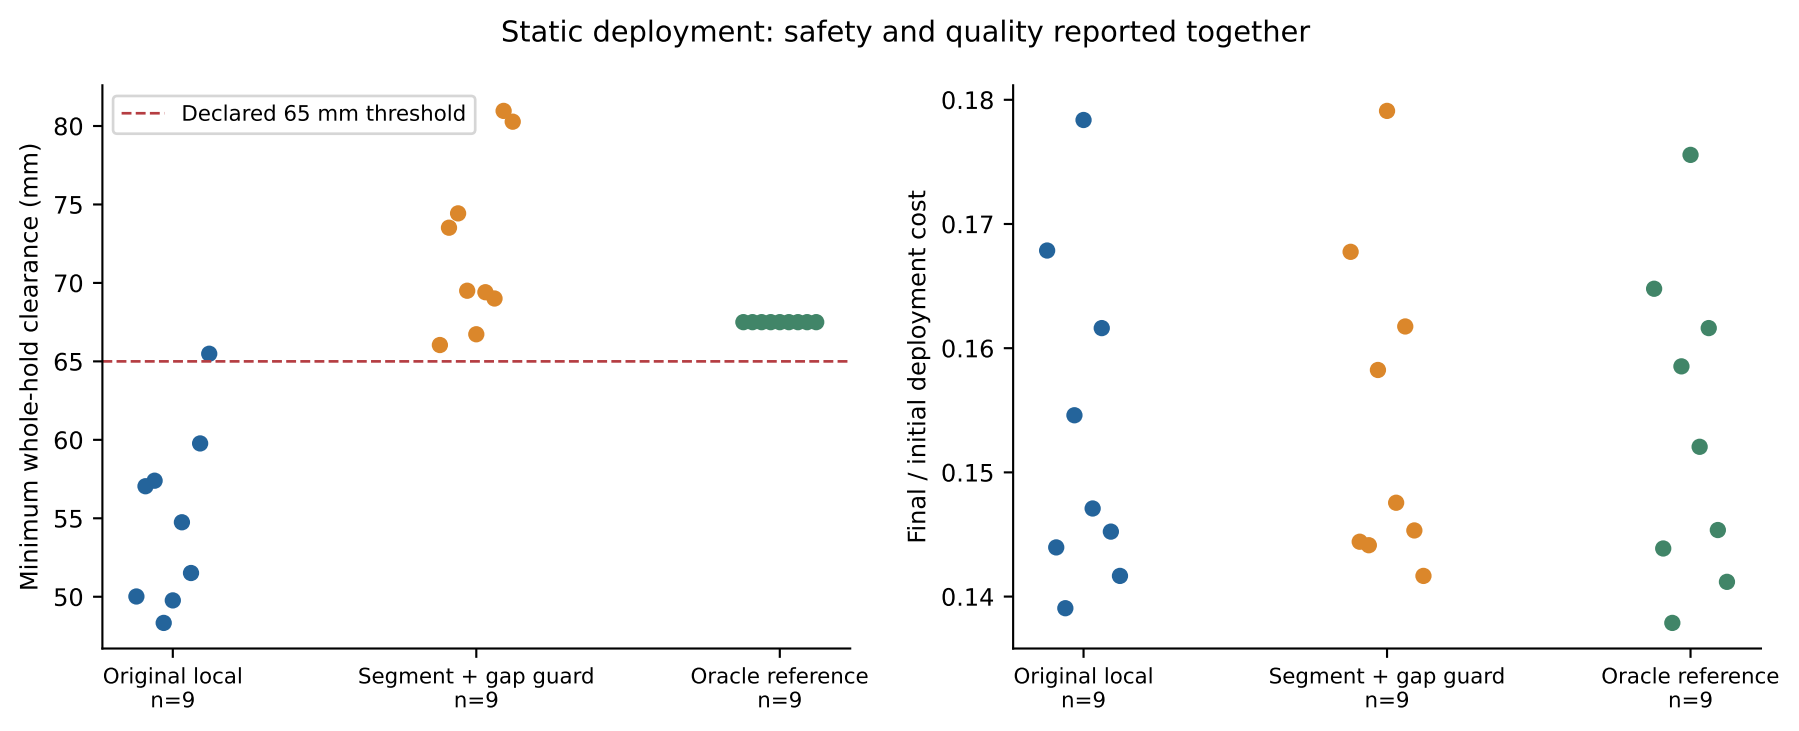
Static deployment: safety and quality reported together
Declared 65 mm threshold
Minimum whole-hold clearance (mm)
80
75
70
65
60
55
50
Original local
n=9
Segment + gap guard
n=9
Oracle reference
n=9
Final / initial deployment cost
0.18
0.17
0.16
0.15
0.14
Original local
n=9
Segment + gap guard
n=9
Oracle reference
n=9