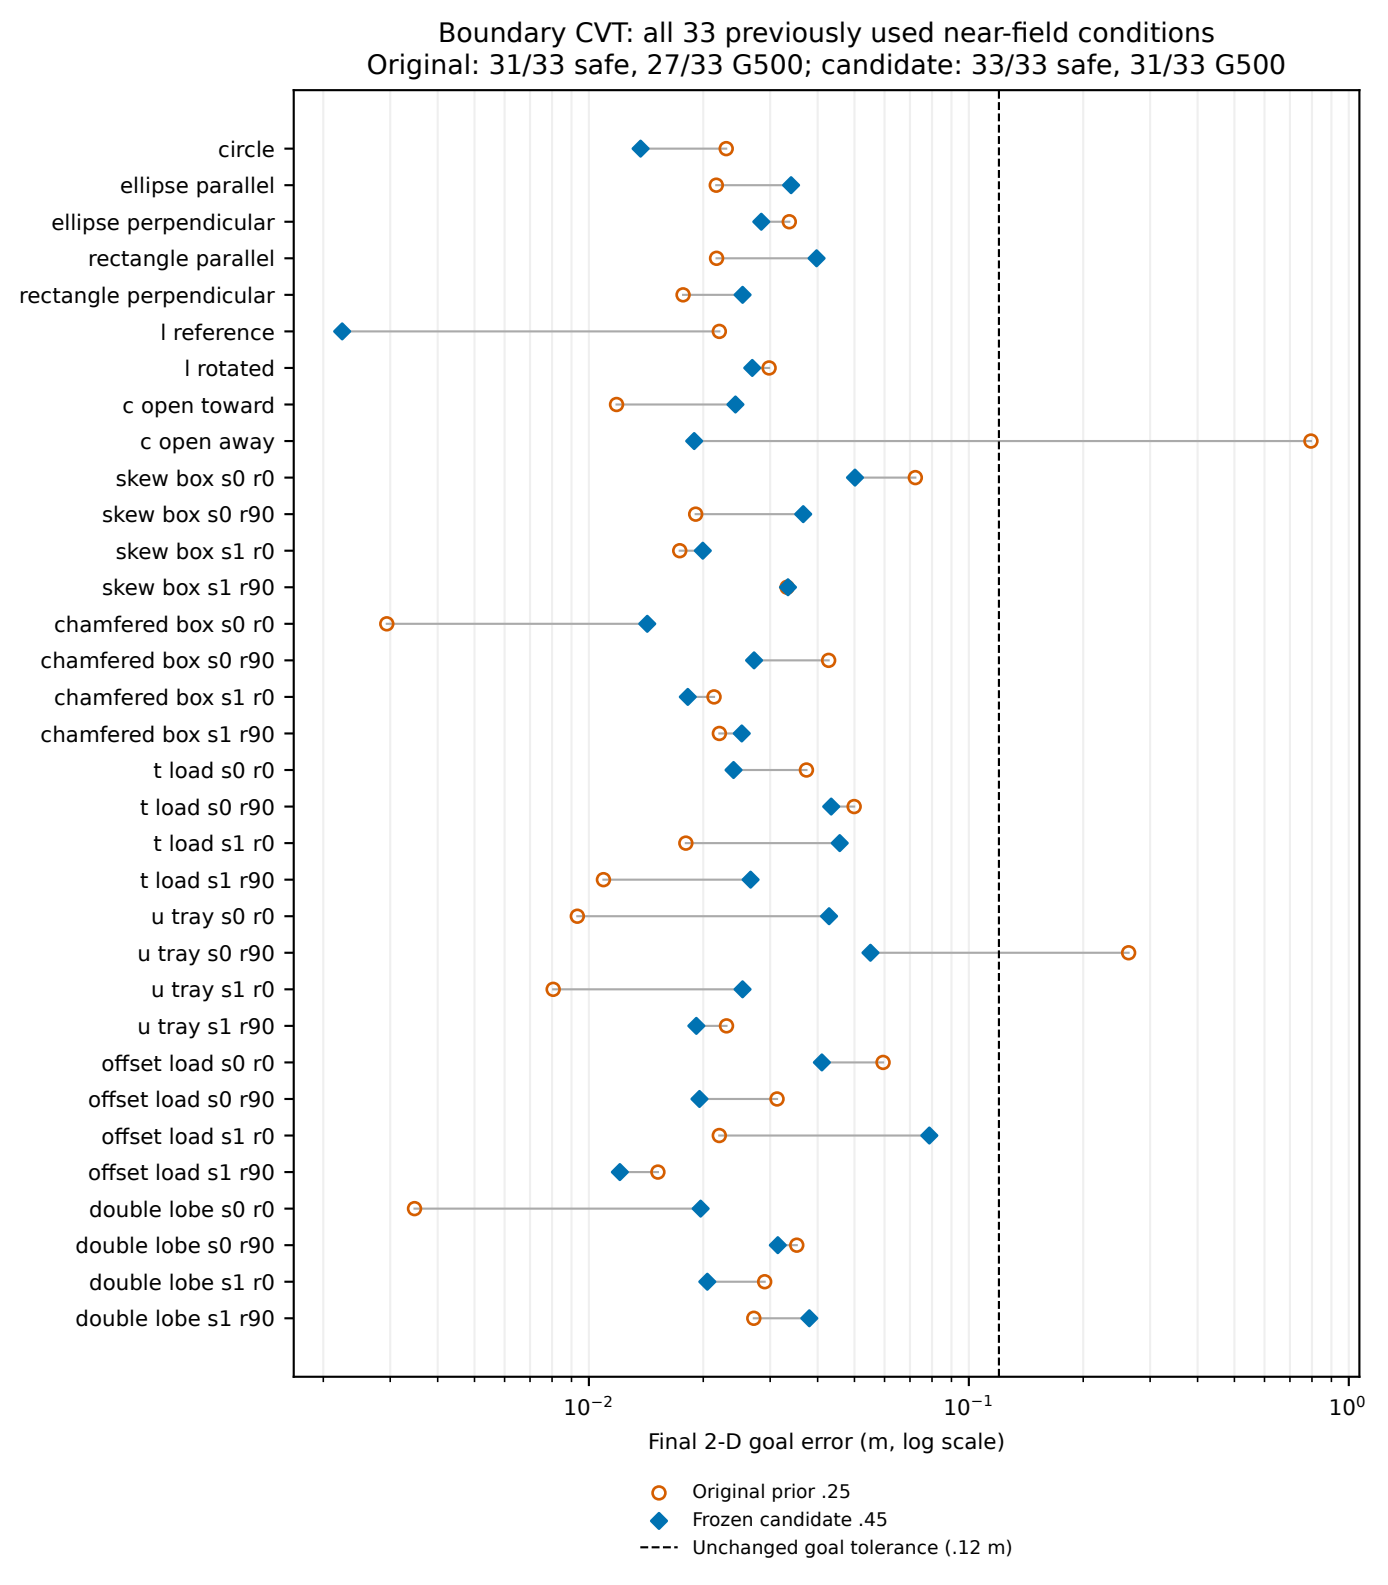
Boundary CVT: all 33 previously used near-field conditions
Original: 31/33 safe, 27/33 G500; candidate: 33/33 safe, 31/33 G500
circle
ellipse parallel
ellipse perpendicular
rectangle parallel
rectangle perpendicular
l reference
l rotated
c open toward
c open away
skew box s0 r0
skew box s0 r90
skew box s1 r0
skew box s1 r90
chamfered box s0 r0
chamfered box s0 r90
chamfered box s1 r0
chamfered box s1 r90
t load s0 r0
t load s0 r90
t load s1 r0
t load s1 r90
u tray s0 r0
u tray s0 r90
u tray s1 r0
u tray s1 r90
offset load s0 r0
offset load s0 r90
offset load s1 r0
offset load s1 r90
double lobe s0 r0
double lobe s0 r90
double lobe s1 r0
double lobe s1 r90
10^{-2}
10^{-1}
10^{0}
Final 2-D goal error (m, log scale)
Original prior .25
Frozen candidate .45
Unchanged goal tolerance (.12 m)