

D-ATIS 128.45
APP01 120.275(124.2)
APP02 126.35(124.2)
APP03 124.825(124.2)
TWR(12R/30L) 118.3(118.85)
TWR(12L/30R) 118.075(118.85)


STANDARD ARRIVAL CHART-INSTRUMENT

VAR4° W

ZHCC ZHENGZHOU/Xinzheng
RNAV RWY12L/12R

BEARINGS ARE MAGNETIC.
ALTITUDES, ELEVATIONS
AND HEIGHTS IN METERS.
DME DISTANCES IN
NAUTICAL MILES.
DISTANCES IN KM.


TL 3600
TA 3000
3300(QNH ≥ 1031hPa)
2700(QNH ≤ 979hPa)



RNAV1 GNSS, RADAR REQUIRED	or RNP1 GNSS
-------------------------------	--------------------

Notes:

- Holding procedure MAX IAS205kt(3000m and below)
IAS230kt(3600m and above).
- Ⓐ If necessary, ATC may instruct ALT for ARR FM
NOPIN and LEKUB, pilot shall strictly follow instructions.

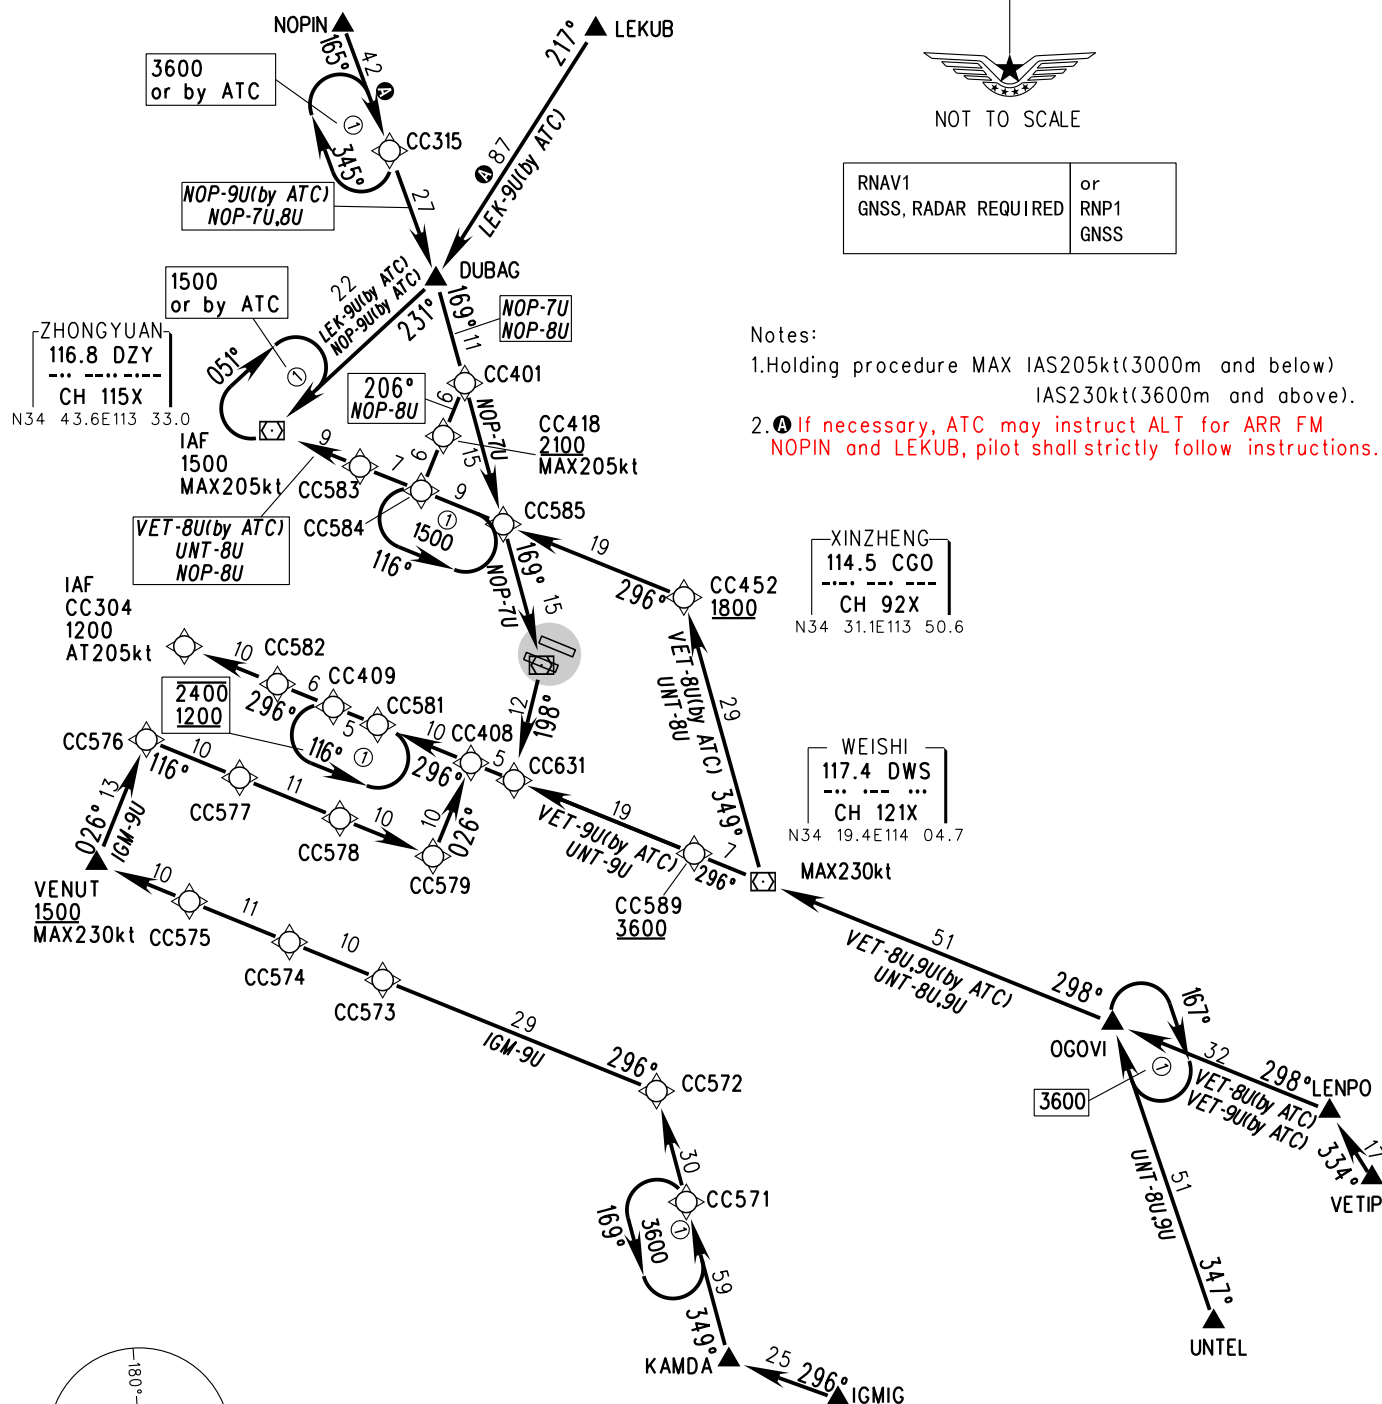

Changes: Note.