

STANDARD DEPARTURE
CHART-INSTRUMENT

VAR4.9° W


APP01 121.2(119.15)
APP02 126.3(125.6)
APP03 119.575(119.15)

APP04 120.8(121.2)
APP05 by ATC

D-ATIS(DEP) 126.2
05L: TWR02 118.025(118.1)
05R: TWR03 123.65(118.1)


ZHHH WUHAN/Tianhe
RWY05L/05R

BEARINGS ARE MAGNETIC.
ALTITUDES, ELEVATIONS
AND HEIGHTS IN METERS.
DME DISTANCES IN
NAUTICAL MILES.
DISTANCES IN KM.



- Notes:
- 1. While simultaneous operation implemented, turn LEFT after take-off shall be permitted by ATC.
 - 2. Initial departure turn MAX IAS410km/h.
 - 3. Turning is forbidden before DER.

TL 3600
TA 3000
3300(QNH ≥ 1031hPa)
2700(QNH ≤ 979hPa)

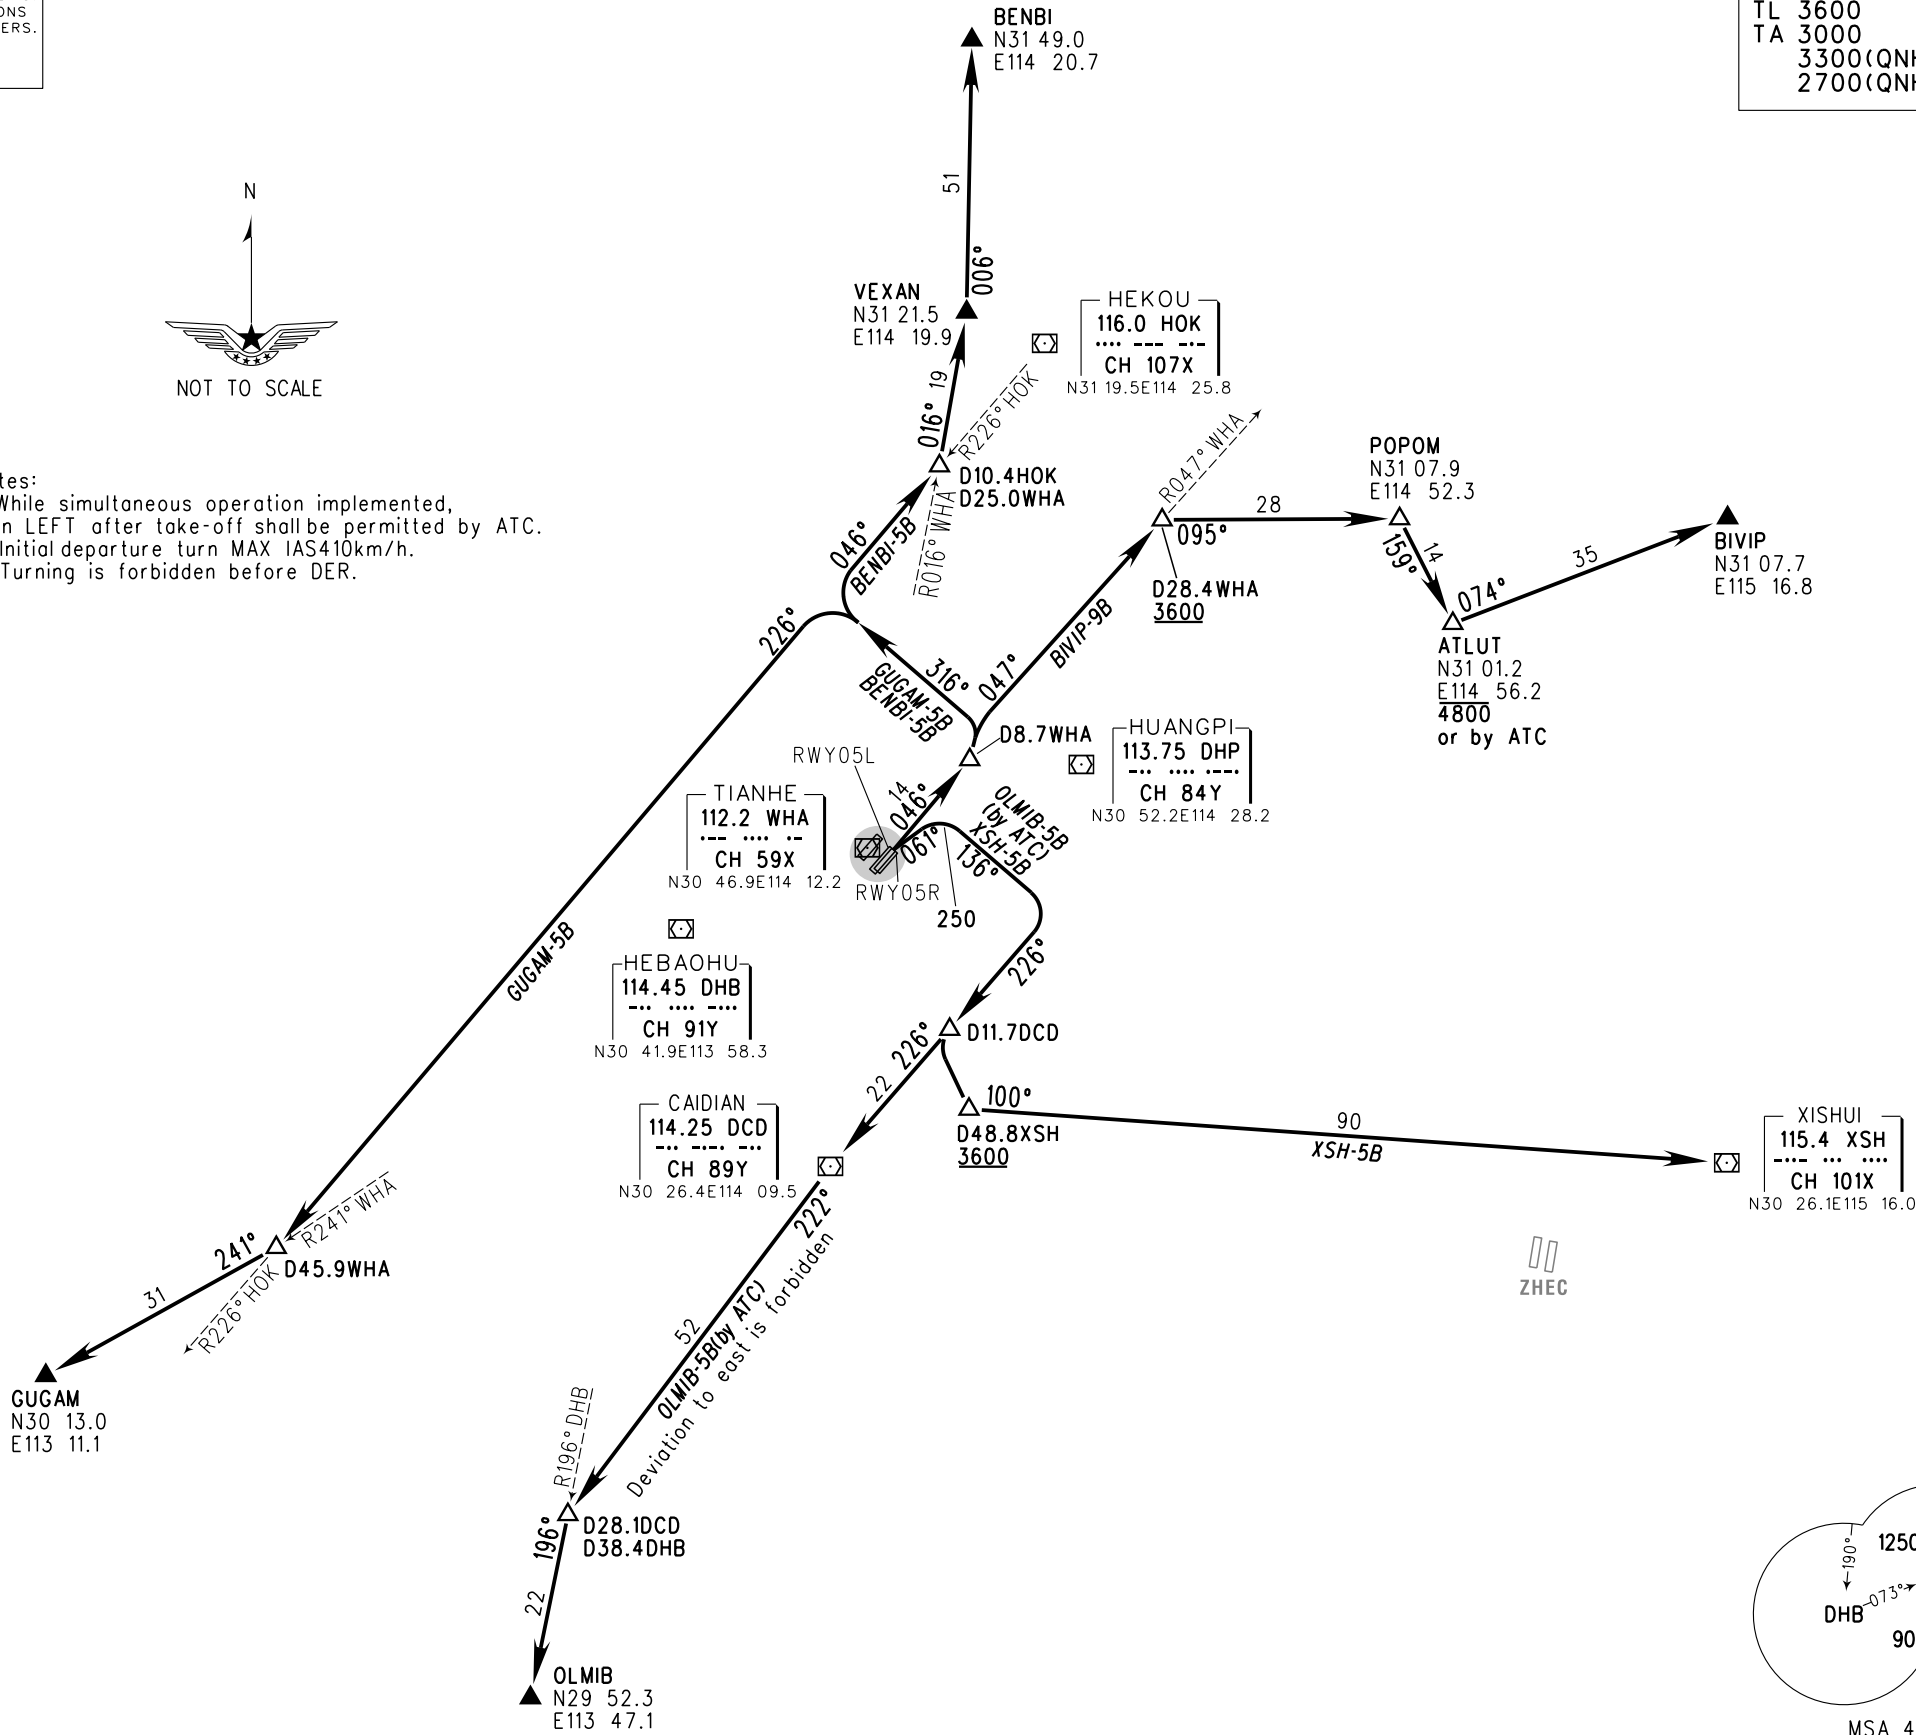

Changes: New chart.