

STANDARD DEPARTURE
CHART-INSTRUMENT

VAR4.9° W

APP01 121.2(119.15)
APP02 126.3(125.6)
APP03 119.575(119.15)

APP04 120.8(121.2)
APP05 by ATC

D-ATIS(DEP) 126.2
23R:TWR02 118.025(118.1)
23L:TWR03 123.65(118.1)


ZHHH WUHAN/Tianhe
RWY23R/23L

BEARINGS ARE MAGNETIC.
ALTITUDES, ELEVATIONS
AND HEIGHTS IN METERS.
DME DISTANCES IN
NAUTICAL MILES.
DISTANCES IN KM.

TL 3600
TA 3000
3300(QNH ≥ 1031hPa)
2700(QNH ≤ 979hPa)



Notes:
1. While simultaneous operation implemented,
turn RIGHT after take-off shall be permitted by ATC.
2. Initial departure turn MAX IAS410km/h.

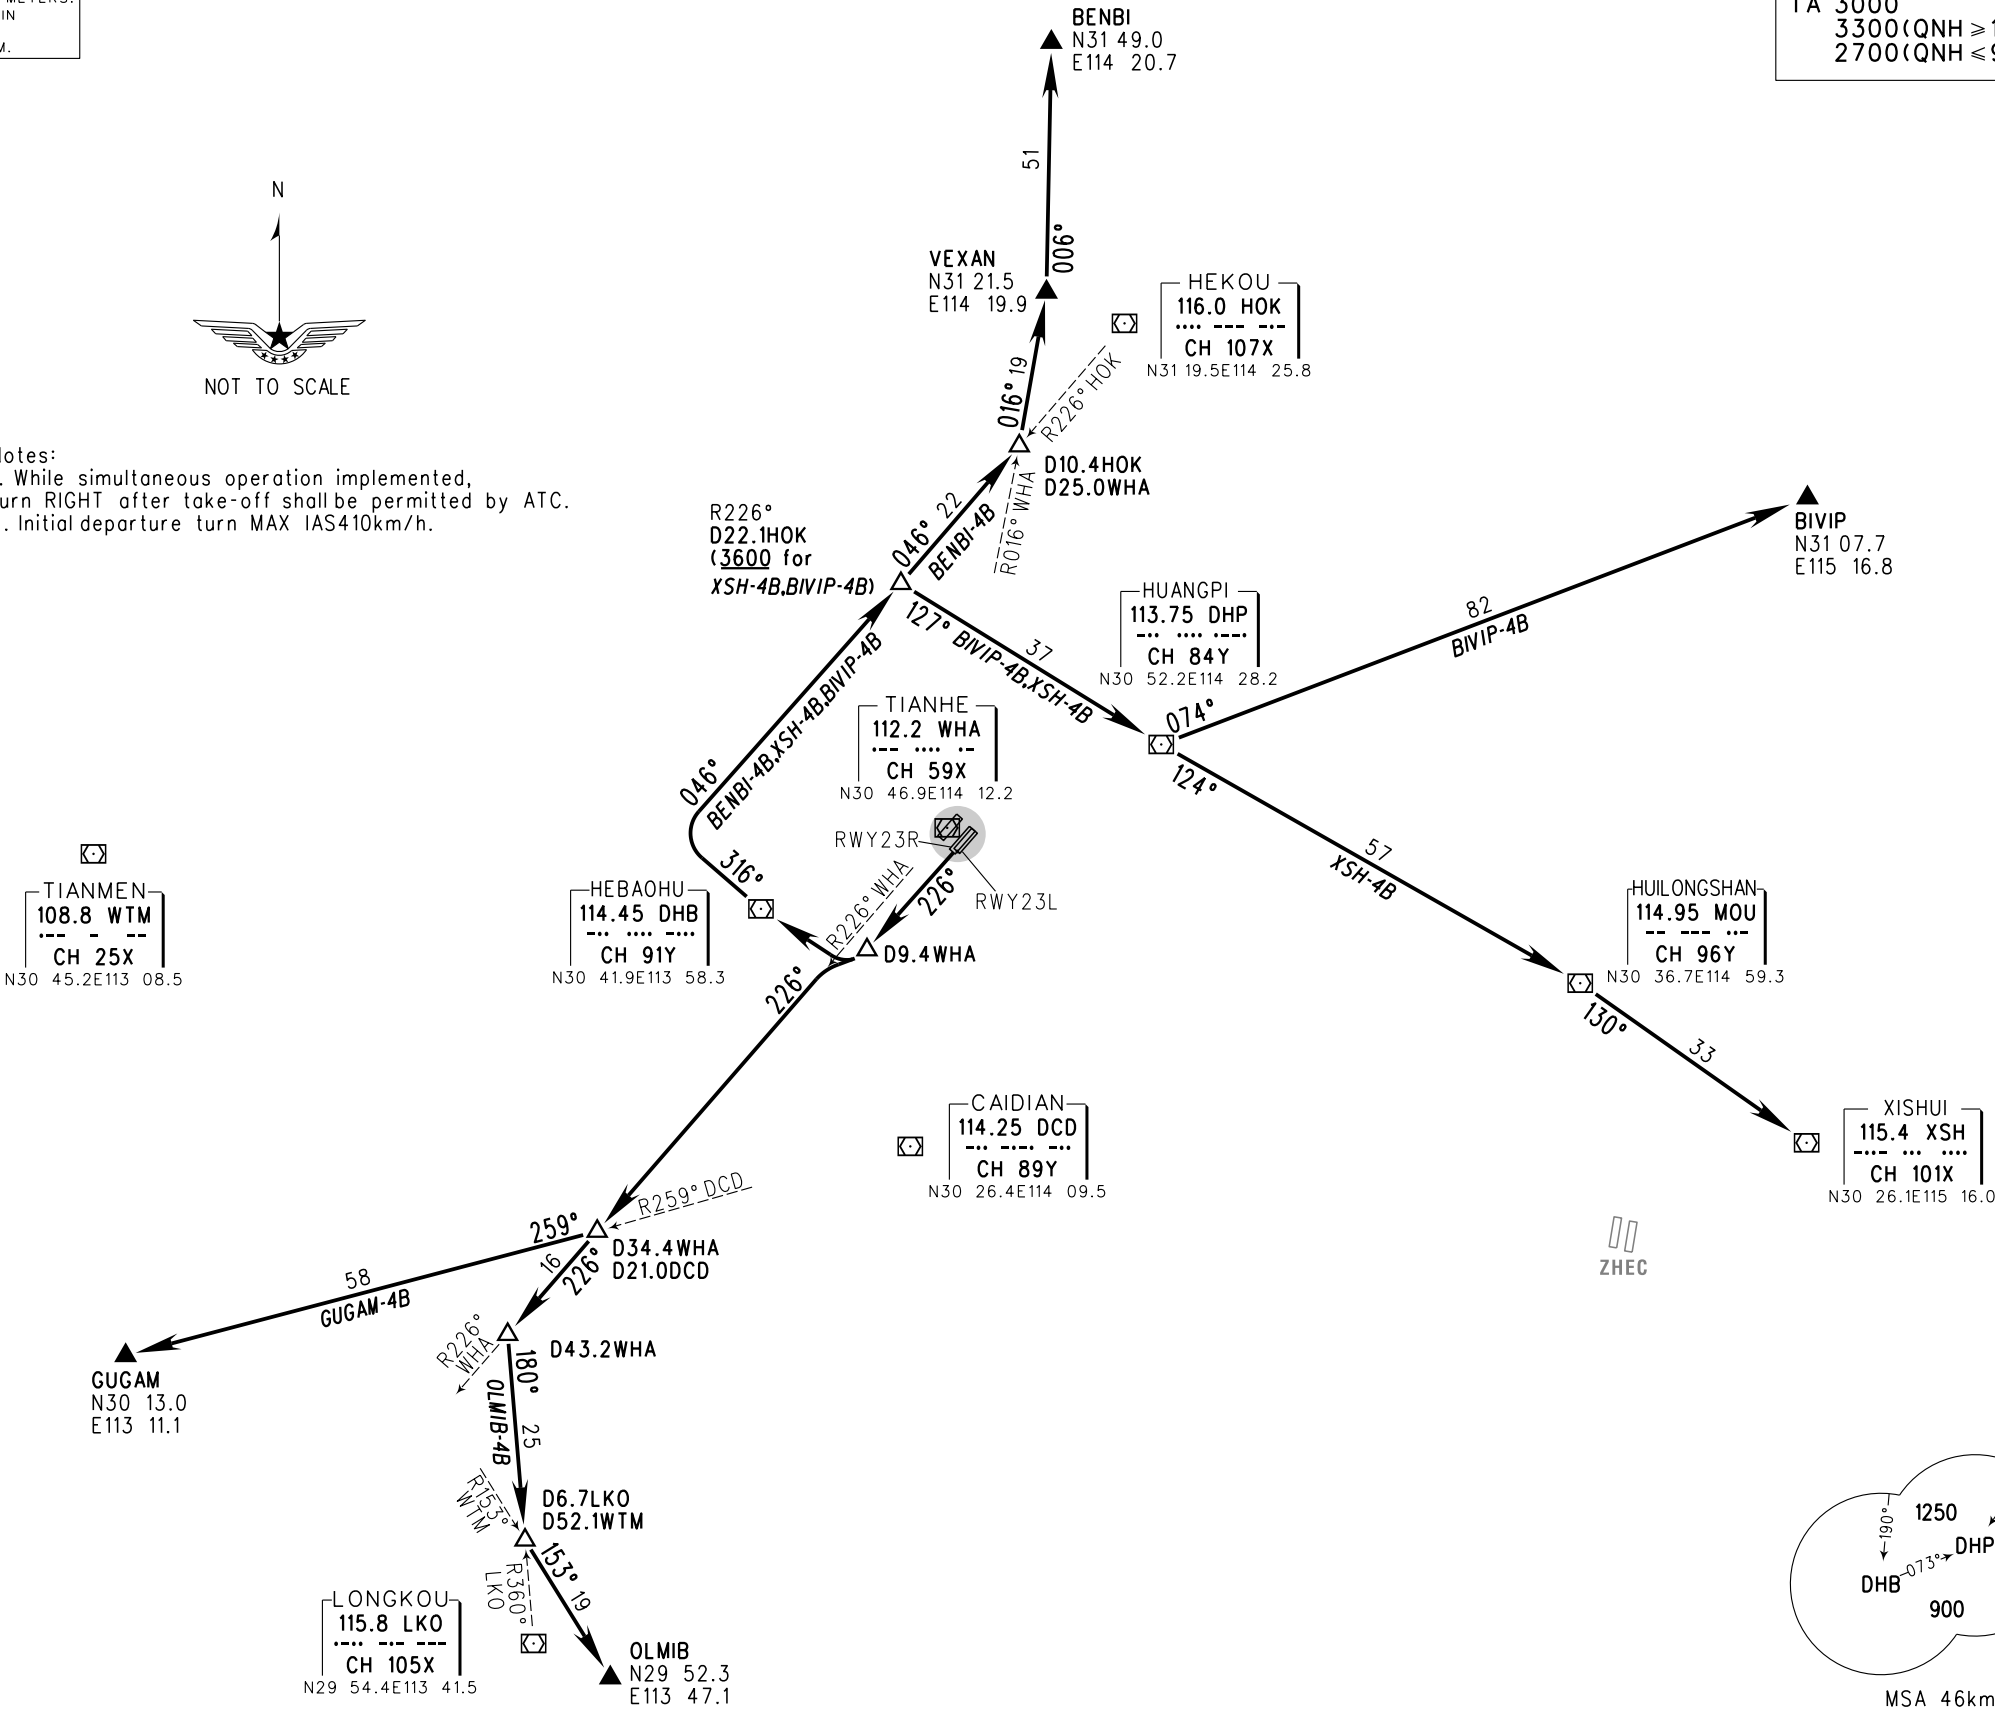

Changes: New chart.