


STANDARD ARRIVAL CHART-INSTRUMENT

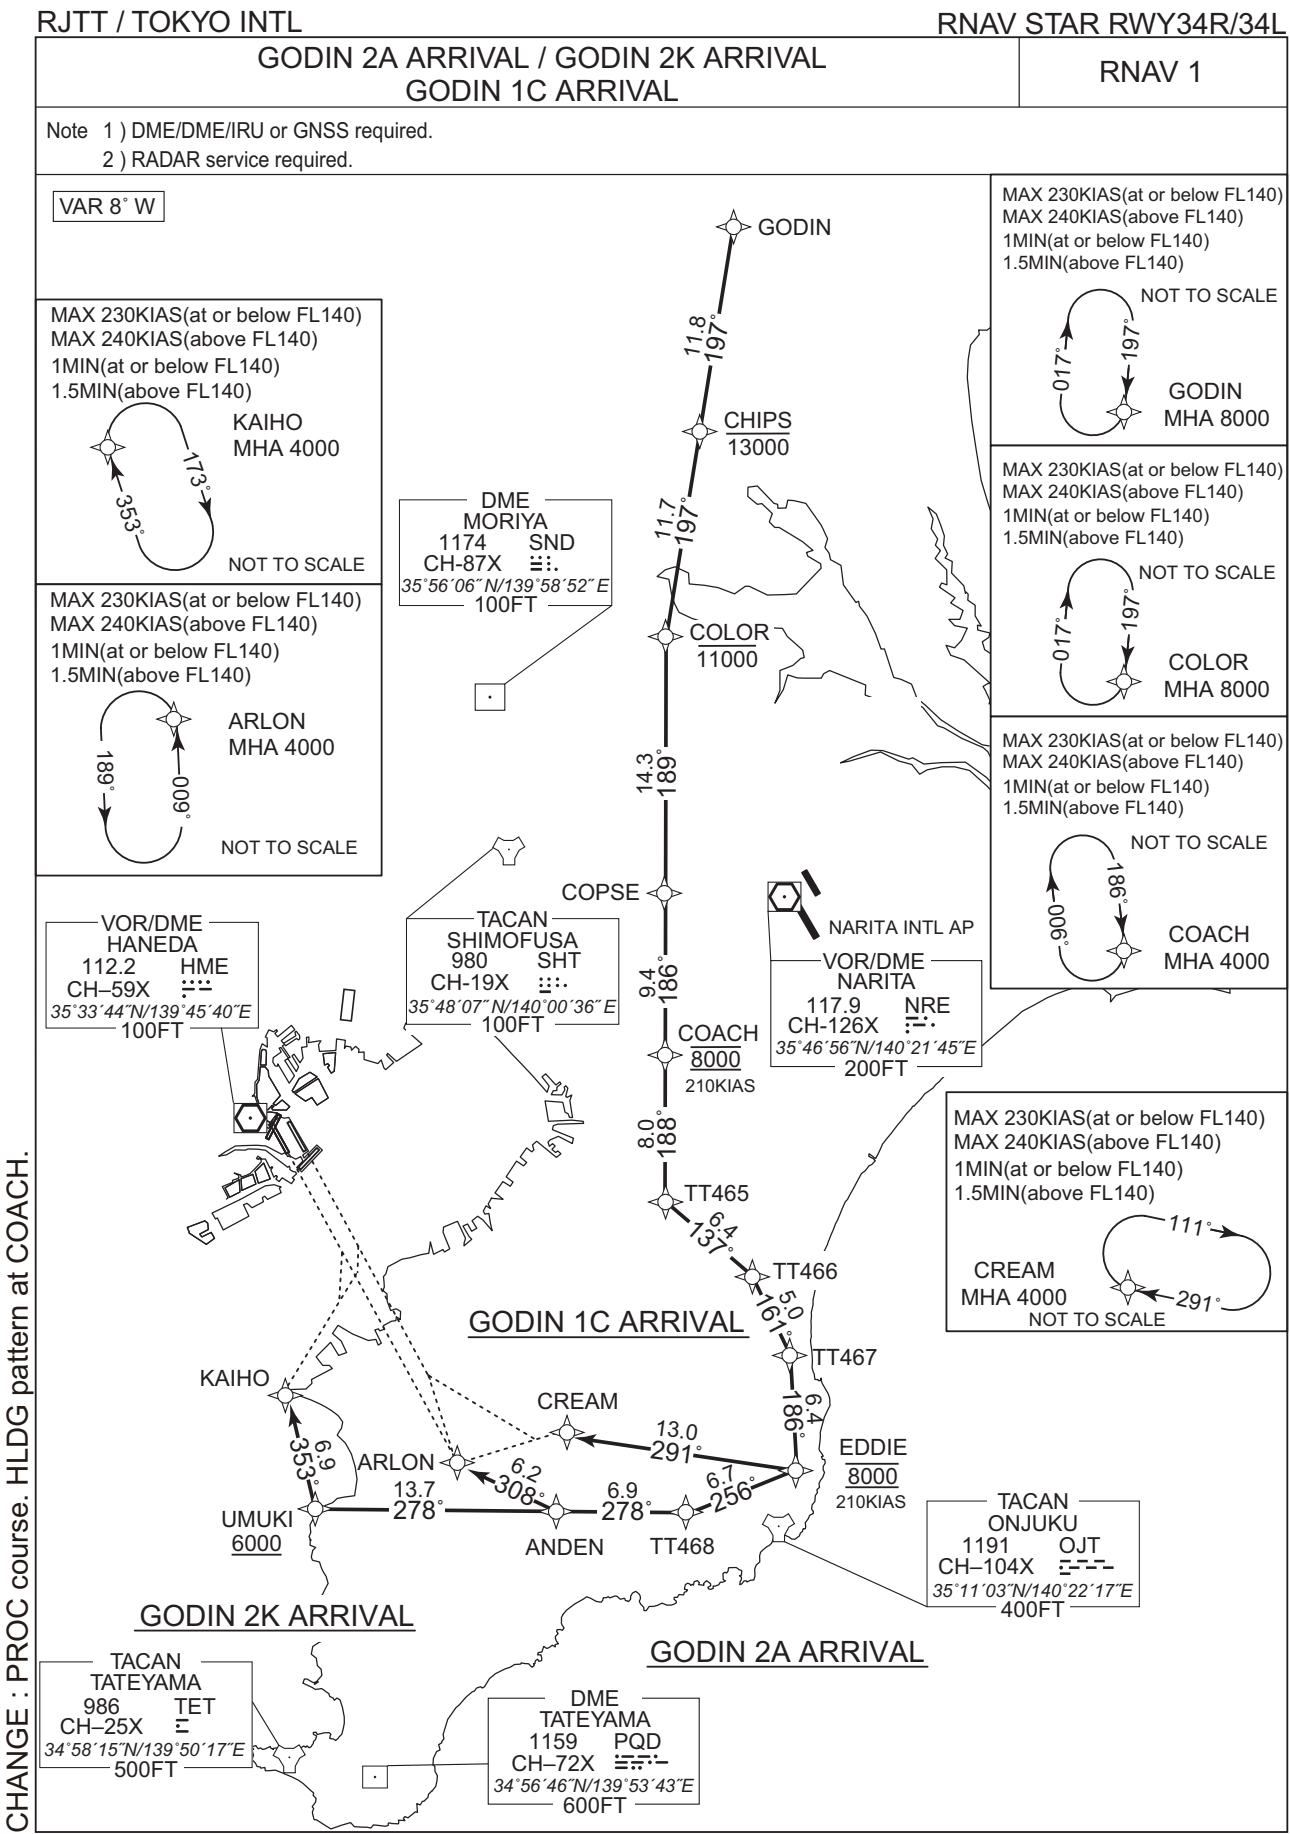

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY34R/34L

GODIN 2A ARRIVAL

From GODIN, to CHIPS at or below 13000FT, to COLOR at or below 11000FT, to COPSE, to COACH at 8000FT, to TT465, to TT466, to TT467, to EDDIE at 8000FT, to TT468, to ANDEN, to ARLON.

Critical DME	—
DME GAP	—
Inappropriate NavAids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	GODIN	—	—	-7.9	—	—	—	—	—	RNAV1
002	TF	CHIPS	—	197 (189.1)	-7.9	11.8	—	-13000	—	—	RNAV1
003	TF	COLOR	—	197 (189.1)	-7.9	11.7	—	-11000	—	—	RNAV1
004	TF	COPSE	—	189 (180.8)	-7.9	14.3	—	—	—	—	RNAV1
005	TF	COACH	—	186 (177.8)	-7.9	9.4	—	8000	210	—	RNAV1
006	TF	TT465	—	188 (179.6)	-7.9	8.0	—	—	—	—	RNAV1
007	TF	TT466	—	137 (128.9)	-7.9	6.4	—	—	—	—	RNAV1
008	TF	TT467	—	161 (153.5)	-7.9	5.0	—	—	—	—	RNAV1
009	TF	EDDIE	—	186 (178.0)	-7.9	6.4	—	8000	210	—	RNAV1
010	TF	TT468	—	256 (248.1)	-7.9	6.7	—	—	—	—	RNAV1
011	TF	ANDEN	—	278 (270.2)	-7.9	6.9	—	—	—	—	RNAV1
012	TF	ARLON	—	308 (300.2)	-7.9	6.2	—	—	—	—	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	GODIN	197 (189.2)	-7.9	1.0(-14000) 1.5(+14001)	—	R	8000	—	-230(-14000) -240(+14001)	RNAV1
Hold	COLOR	197 (189.1)	-7.9	1.0(-14000) 1.5(+14001)	—	R	8000	—	-230(-14000) -240(+14001)	RNAV1
Hold	COACH	186 (177.8)	-7.9	1.0(-14000) 1.5(+14001)	—	R	4000	—	-230(-14000) -240(+14001)	RNAV1
Hold	ARLON	009 (001.6)	-7.9	1.0(-14000) 1.5(+14001)	—	L	4000	—	-230(-14000) -240(+14001)	RNAV1

CHANGE : PROC course. VAR. HLDG pattern at COACH.

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTLRNAV STAR RWY34R/34L

GODIN 2K ARRIVAL

From GODIN ,to CHIPS at or below 13000FT, to COLOR at or below 11000FT, to COPSE, to COACH at 8000FT, to TT465, to TT466, to TT467, to EDDIE at 8000FT, to TT468, to ANDEN, to UMUKEI at or above 6000FT, to KAIHO.

Critical DME	—
DME GAP	—
Inappropriate Navaids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	GODIN	—	—	-7.9	—	—	—	—	—	RNAV1
002	TF	CHIPS	—	197 (189.1)	-7.9	11.8	—	-13000	—	—	RNAV1
003	TF	COLOR	—	197 (189.1)	-7.9	11.7	—	-11000	—	—	RNAV1
004	TF	COPSE	—	189 (180.8)	-7.9	14.3	—	—	—	—	RNAV1
005	TF	COACH	—	186 (177.8)	-7.9	9.4	—	8000	210	—	RNAV1
006	TF	TT465	—	188 (179.6)	-7.9	8.0	—	—	—	—	RNAV1
007	TF	TT466	—	137 (128.9)	-7.9	6.4	—	—	—	—	RNAV1
008	TF	TT467	—	161 (153.5)	-7.9	5.0	—	—	—	—	RNAV1
009	TF	EDDIE	—	186 (178.0)	-7.9	6.4	—	8000	210	—	RNAV1
010	TF	TT468	—	256 (248.1)	-7.9	6.7	—	—	—	—	RNAV1
011	TF	ANDEN	—	278 (270.2)	-7.9	6.9	—	—	—	—	RNAV1
012	TF	UMUKI	—	278 (270.2)	-7.9	13.7	—	+6000	—	—	RNAV1
013	TF	KAIHO	—	353 (345.5)	-7.9	6.9	—	—	—	—	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	GODIN	197 (189.2)	-7.9	1.0(-14000) 1.5(+14001)	—	R	8000	—	-230(-14000) -240(+14001)	RNAV1
Hold	COLOR	197 (189.1)	-7.9	1.0(-14000) 1.5(+14001)	—	R	8000	—	-230(-14000) -240(+14001)	RNAV1
Hold	COACH	186 (177.8)	-7.9	1.0(-14000) 1.5(+14001)	—	R	4000	—	-230(-14000) -240(+14001)	RNAV1
Hold	KAIHO	353 (345.5)	-7.9	1.0(-14000) 1.5(+14001)	—	R	4000	—	-230(-14000) -240(+14001)	RNAV1

CHANGE : PROC course. VAR. HLDG pattern at COACH.

STANDARD ARRIVAL CHART-INSTRUMENT

RJTT / TOKYO INTL

RNAV STAR RWY34R/34L

GODIN 1C ARRIVAL

From GODIN ,to CHIPS at or below 13000FT, to COLOR at or below 11000FT, to COPSE, to COACH at 8000FT, to TT465, to TT466, to TT467, to EDDIE at 8000FT, to CREAM.

Critical DME	—
DME GAP	—
Inappropriate NavAids	See AD1.1.6.10.3. Inappropriate NAVAIDs for RNAV1

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	GODIN	—	—	-7.9	—	—	—	—	—	RNAV1
002	TF	CHIPS	—	197 (189.1)	-7.9	11.8	—	-13000	—	—	RNAV1
003	TF	COLOR	—	197 (189.1)	-7.9	11.7	—	-11000	—	—	RNAV1
004	TF	COPSE	—	189 (180.8)	-7.9	14.3	—	—	—	—	RNAV1
005	TF	COACH	—	186 (177.8)	-7.9	9.4	—	8000	210	—	RNAV1
006	TF	TT465	—	188 (179.6)	-7.9	8.0	—	—	—	—	RNAV1
007	TF	TT466	—	137 (128.9)	-7.9	6.4	—	—	—	—	RNAV1
008	TF	TT467	—	161 (153.5)	-7.9	5.0	—	—	—	—	RNAV1
009	TF	EDDIE	—	186 (178.0)	-7.9	6.4	—	8000	210	—	RNAV1
010	TF	CREAM	—	291 (283.1)	-7.9	13.0	—	—	—	—	RNAV1

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	GODIN	197 (189.2)	-7.9	1.0(-14000) 1.5(+14001)	—	R	8000	—	-230(-14000) -240(+14001)	RNAV1
Hold	COLOR	197 (189.1)	-7.9	1.0(-14000) 1.5(+14001)	—	R	8000	—	-230(-14000) -240(+14001)	RNAV1
Hold	COACH	186 (177.8)	-7.9	1.0(-14000) 1.5(+14001)	—	R	4000	—	-230(-14000) -240(+14001)	RNAV1
Hold	CREAM	291 (283.1)	-7.9	1.0(-14000) 1.5(+14001)	—	R	4000	—	-230(-14000) -240(+14001)	RNAV1

Waypoint Coordinates

Waypoint Identifier	Coordinates	Waypoint Identifier	Coordinates
ANDEN	351217.9N / 1400534.7E	GODIN	362425.3N / 1401655.9E
ARLON	351525.3N / 1395859.8E	KAIHO	351857.8N / 1394642.4E
CHIPS	361247.7N / 1401436.9E	TT465	352939.2N / 1401235.4E
COACH	353736.0N / 1401231.5E	TT466	352539.0N / 1401840.1E
COLOR	360116.3N / 1401219.8E	TT467	352110.2N / 1402124.4E
COPSE	354658.8N / 1401205.4E	TT468	351216.4N / 1401402.6E
CREAM	351743.4N / 1400612.4E	UMUKI	351219.1N / 1394849.2E
EDDIE	351447.4N / 1402140.9E		

CHANGE : PROC course. VAR. HLDG pattern at COACH.