
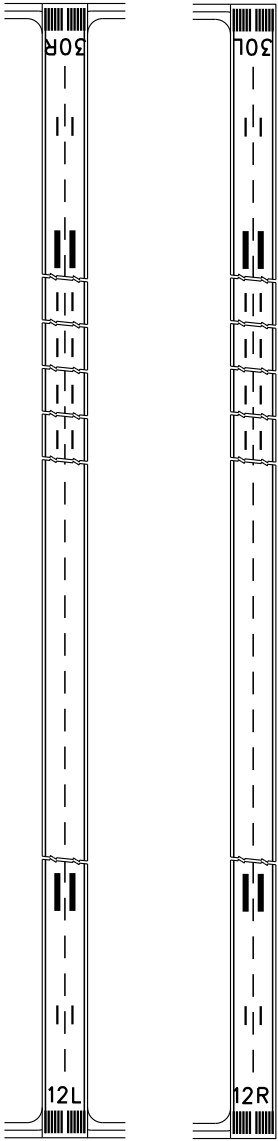


BEARINGS ARE MAGNETIC.
ALTITUDES, DISTANCES,
ELEVATIONS AND HEIGHTS
IN METERS.

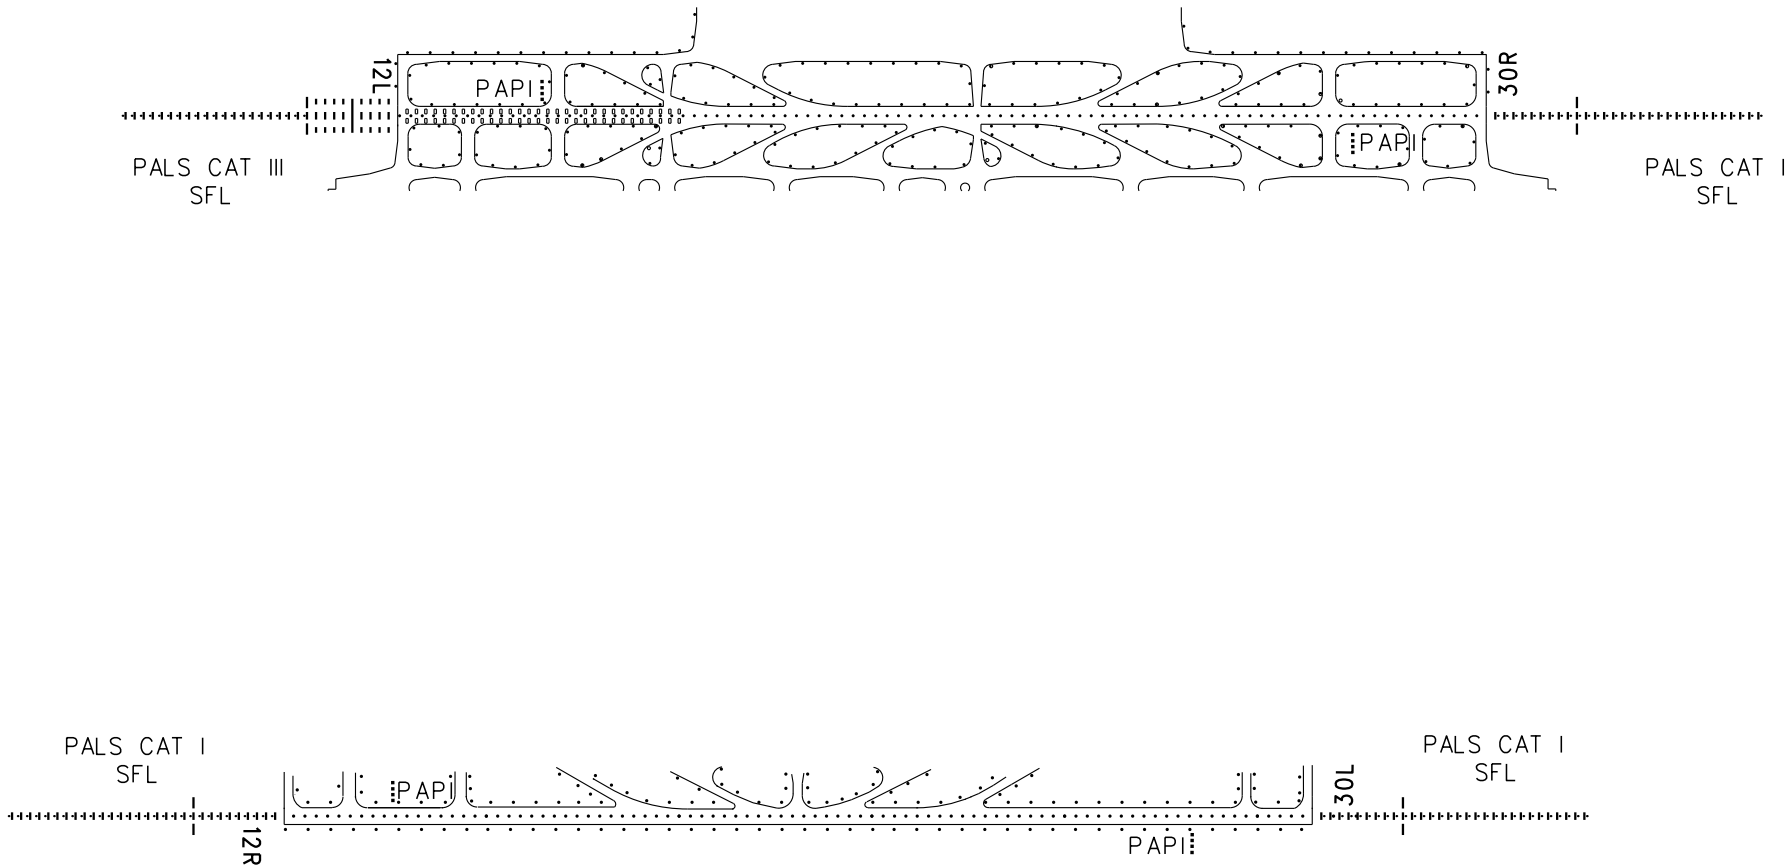

TAKE-OFF MINIMA(WITH RELIABLE ALTN)(m)						LIGHTS	
ACFT Type	RWY12R/30L,12L/30R		LVP in force, REDL RCLL			RWY12L	RWY12R/30L/30R
	REDL	NIL(Day only)	RWY12L/30R	RWY12L	RWY30R		
2 TURB ENG or 3&4 ENG	A	RVR400 VIS800	RVR200	RVR150	RVR200	PALS CAT III SFL PAPI RTZL REDL RCLL RENL	PALS CAT I SFL PAPI REDL RCLL RENL
	B						
	C		RVR250				
	D						
Other 1&2 ENG	RVR1600/VIS1600						
Note:							
Changes: Nil							