

RJTT / TOKYO INTL


RNAV HLDG PATTERN

Note 1) DME/DME/IRU or GNSS required.
2) RADAR service required.

RNAV 1

1.Outbound Time / Distance
2.Speed
→See Tabular Description.

CHANGE : HLDG pattern (CHIBA) established.

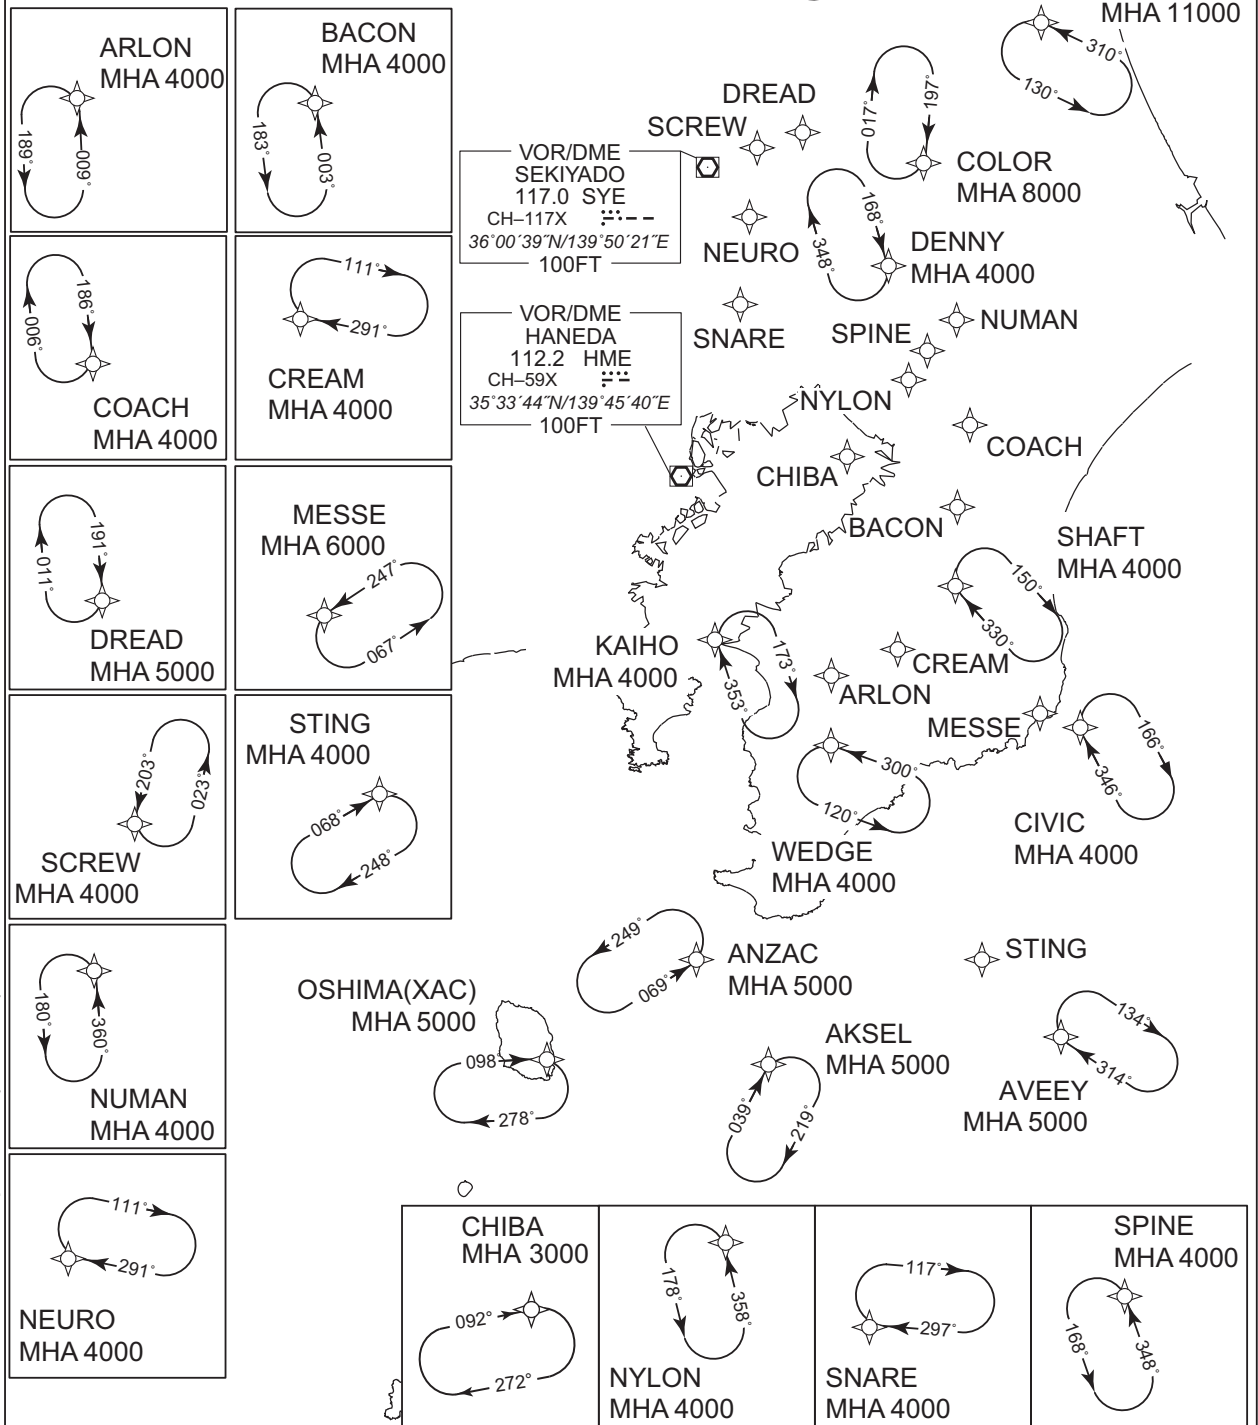

RJTT / TOKYO INTL

RNAV HLDG PATTERN

CHANGE : HLDG pattern (CHIBA) established.

Path	Waypoint Identifier	Inbound Course 'M('T)	Magnetic Variation	Outbound Time (MIN)	Outbound Distance (NM)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	Navigation Specification
Hold	AKSEL	039 (031.2)	-7.9	1.0(-14000) 1.5(+14001)	—	R	5000	—	-230(-14000) -240(+14001)	RNAV1
Hold	ANZAC	069 (060.8)	-7.9	1.0(-14000) 1.5(+14001)	—	L	5000	—	-230(-14000) -240(+14001)	RNAV1
Hold	ARLON	009 (001.6)	-7.9	1.0(-14000) 1.5(+14001)	—	L	4000	—	-230(-14000) -240(+14001)	RNAV1
Hold	AVEEY	314 (306.1)	-7.9	1.0(-14000) 1.5(+14001)	—	R	5000	—	-230(-14000) -240(+14001)	RNAV1
Hold	BACON	003 (355.2)	-7.9	1.0(-14000) 1.5(+14001)	—	L	4000	—	-230(-14000) -240(+14001)	RNAV1
Hold	CHIBA	092 (083.7)	-7.9	1.0(-14000)	—	R	3000	—	-230(-14000)	RNAV1
Hold	CIVIC	346 (337.7)	-7.9	1.0(-14000) 1.5(+14001)	—	R	4000	—	-230(-14000) -240(+14001)	RNAV1
Hold	COACH	186 (177.8)	-7.9	1.0(-14000) 1.5(+14001)	—	R	4000	—	-230(-14000) -240(+14001)	RNAV1
Hold	COLOR	197 (189.1)	-7.9	1.0(-14000) 1.5(+14001)	—	R	8000	—	-230(-14000) -240(+14001)	RNAV1
Hold	CREAM	291 (283.1)	-7.9	1.0(-14000) 1.5(+14001)	—	R	4000	—	-230(-14000) -240(+14001)	RNAV1
Hold	DENNY	168 (159.9)	-7.9	1.0(-14000) 1.5(+14001)	—	R	4000	—	-230(-14000) -240(+14001)	RNAV1
Hold	DREAD	191 (183.1)	-7.9	1.0(-14000) 1.5(+14001)	—	R	5000	—	-230(-14000) -240(+14001)	RNAV1
Hold	GODIN	197 (189.2)	-7.9	1.0(-14000) 1.5(+14001)	—	R	8000	—	-230(-14000) -240(+14001)	RNAV1
Hold	KAIHO	353 (345.5)	-7.9	1.0(-14000) 1.5(+14001)	—	R	4000	—	-230(-14000) -240(+14001)	RNAV1
Hold	MESSE	247 (238.8)	-7.9	1.0(-14000) 1.5(+14001)	—	L	6000	—	-230(-14000) -240(+14001)	RNAV1
Hold	NEURO	291 (282.9)	-7.9	1.0(-14000) 1.5(+14001)	—	R	4000	—	-230(-14000) -240(+14001)	RNAV1
Hold	NOVEL	264 (256.4)	-7.9	1.0(-14000) 1.5(+14001)	—	L	5000	—	-230(-14000) -240(+14001)	RNAV1
Hold	NUMAN	360 (352.5)	-7.9	1.0(-14000) 1.5(+14001)	—	L	4000	—	-230(-14000) -240(+14001)	RNAV1
Hold	NYLON	358 (350.0)	-7.9	1.0(-14000) 1.5(+14001)	—	L	4000	—	-230(-14000) -240(+14001)	RNAV1
Hold	POLIX	310 (302.3)	-7.9	1.0(-14000) 1.5(+14001)	—	L	11000	—	-230(-14000) -240(+14001)	RNAV1
Hold	SCREW	203 (195.2)	-7.9	1.0(-14000) 1.5(+14001)	—	L	4000	—	-230(-14000) -240(+14001)	RNAV1
Hold	SHAFT	330 (322.4)	-7.9	1.0(-14000) 1.5(+14001)	—	R	4000	—	-230(-14000) -240(+14001)	RNAV1
Hold	SNARE	297 (289.1)	-7.9	1.0(-14000) 1.5(+14001)	—	R	4000	—	-230(-14000) -240(+14001)	RNAV1
Hold	SPINE	348 (340.6)	-7.9	1.0(-14000) 1.5(+14001)	—	L	4000	—	-230(-14000) -240(+14001)	RNAV1
Hold	STING	068 (059.6)	-7.9	1.0(-14000) 1.5(+14001)	—	R	4000	—	-230(-14000) -240(+14001)	RNAV1
Hold	WEDGE	300 (292.4)	-7.9	1.0(-14000) 1.5(+14001)	—	L	4000	—	-230(-14000) -240(+14001)	RNAV1
Hold	XAC	098 (090.3)	-7.9	1.0(-14000) 1.5(+14001)	—	R	5000	—	-230(-14000) -240(+14001)	RNAV1

RJTT / TOKYO INTL

RNAV HLDG PATTERN

Waypoint Coordinates

Waypoint Identifier	Coordinates	Waypoint Identifier	Coordinates
AKSEL	344039.5N / 1395126.9E	MESSE	351100.8N / 1402214.7E
ANZAC	345028.8N / 1394146.7E	NEURO	355727.6N / 1395441.3E
ARLON	351525.3N / 1395859.8E	NOVEL	362106.9N / 1400004.9E
AVEEY	344155.9N / 1402158.0E	NUMAN	354714.4N / 1401204.9E
BACON	353155.0N / 1401215.1E	NYLON	354018.5N / 1400919.9E
CHIBA	353522.2N / 1400400.0E	POLIX	361237.1N / 1402622.5E
CIVIC	350840.6N / 1402552.1E	SCREW	360301.2N / 1395400.4E
COACH	353736.0N / 1401231.5E	SHAFT	352227.4N / 1401313.3E
COLOR	360116.3N / 1401219.8E	SNARE	354731.1N / 1395238.1E
CREAM	351743.4N / 1400612.4E	SPINE	354213.5N / 1401125.8E
DENNY	354828.8N / 1400556.4E	STING	345157.9N / 1401453.4E
DREAD	360359.2N / 1395856.9E	WEDGE	350900.4N / 1395846.5E
GODIN	362425.3N / 1401655.9E	XAC	344244.1N / 1392450.5E
KAIHO	351857.8N / 1394642.4E		

CHANGE : HLDG pattern (CHIBA) established.