

STANDARD DEPARTURE
CHART-INSTRUMENT

VAR5.7° W

D-ATIS 127.25
TWR(N) 123.65(118.75)
TWR(S) 118.3(118.75)

ZSHC HANGZHOU/Xiaoshan
RNAV RWY06/24

BEARINGS ARE MAGNETIC.
ALTITUDES, ELEVATIONS
AND HEIGHTS IN METERS.
DME DISTANCES IN
NAUTICAL MILES.
DISTANCES IN KM.


APP01 120.05(124.65)
APP02 125.55(119.15)
APP03 126.05(125.275)
APP04 120.4(119.15)
APP05 119.425(125.275)
APP07 127.7(124.65)

Only used for CCO

TL 3600
TA 3000
3300(QNH ≥1031hPa)
2700(QNH ≤979hPa)



RNAV1
GNSS, RADAR REQUIRED or
RNP1
GNSS

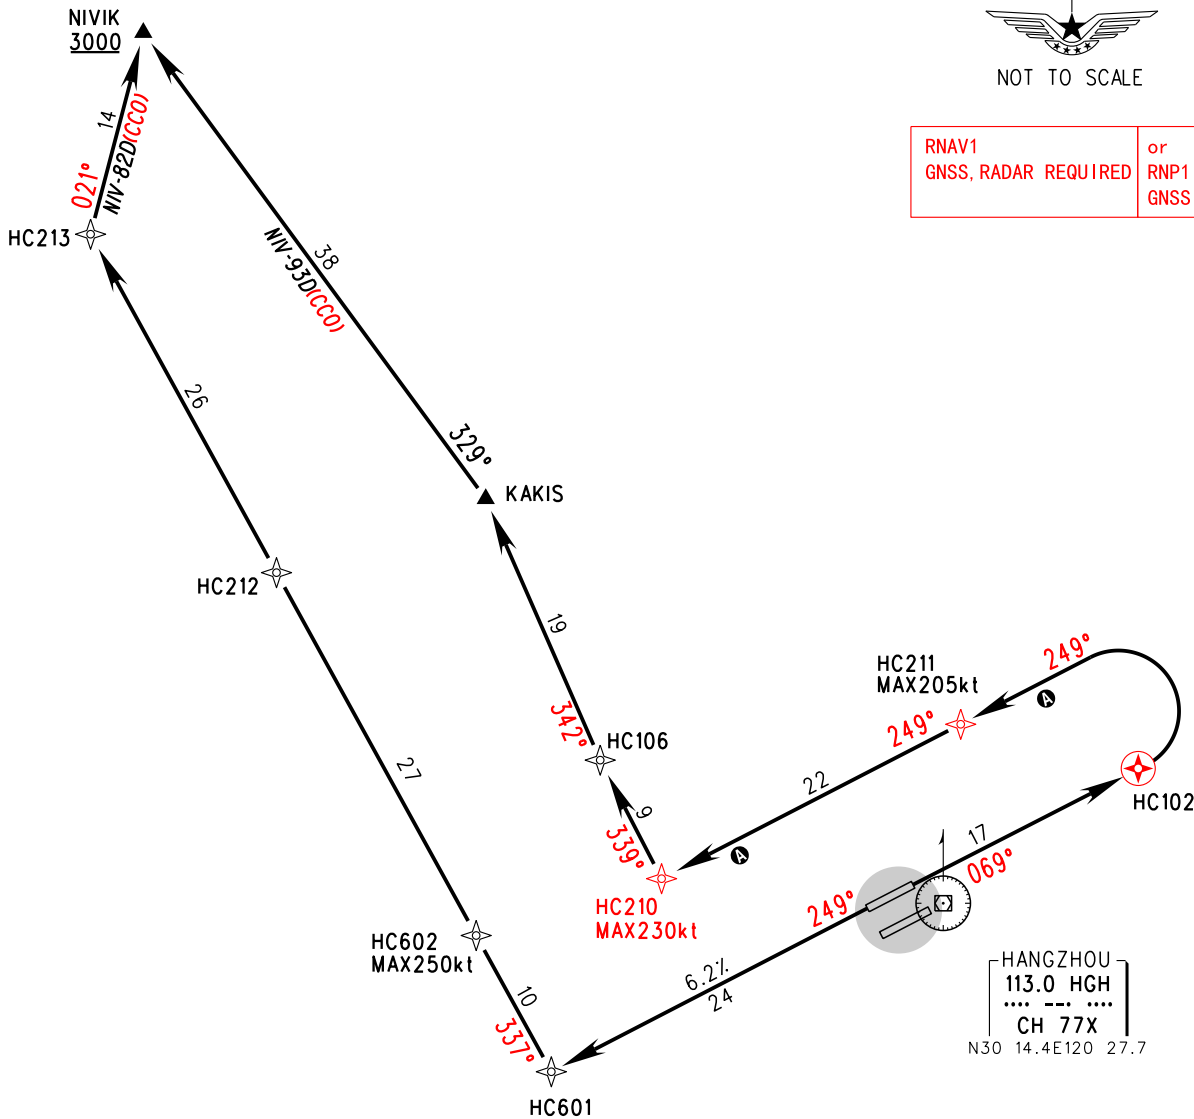

Note:

1. Use this chart need ATC permission.
2. Pay attention to keeping track, veering northerly is forbidden.

SID	ROUTING
NIV-93D(CCO)	(RWY06)DER-HC102-HC211-HC210-HC106-KAKIS-NIVIK
NIV-82D(CCO)	(RWY24)DER-HC601-HC602-HC212-HC213-NIVIK

Changes: MAG VAR, angle, navigation specification.