

ZYMD MUDANJIANG/Hailang



N44° 31.4'E129° 34.2' ELEV 269.6m

RWY	Direction	Bearing strength
04	036°	PCR 570/R/B/W/T: RWY04/22 ASPH PCR 740/R/B/W/T: TWY A(RWY04 TWYL) PCR 690/R/A/W/T: TWY D PCR 680/R/A/W/T: TWY A(RWY22 TWYL)
22	216°	PCR 580/R/C/W/T: TWY A(Main) PCR 540/R/C/W/T: TWY F PCR 690/R/A/W/T: Stand Nr.2 PCR 560/R/A/W/T: Stand Nr.3, Stand Nr.4 PCR 520/R/A/W/T: Stand Nr.1

BEARINGS ARE MAGNETIC.
ALTITUDES, DISTANCES,
ELEVATIONS AND HEIGHTS
IN METERS.



Note: × Area not available.

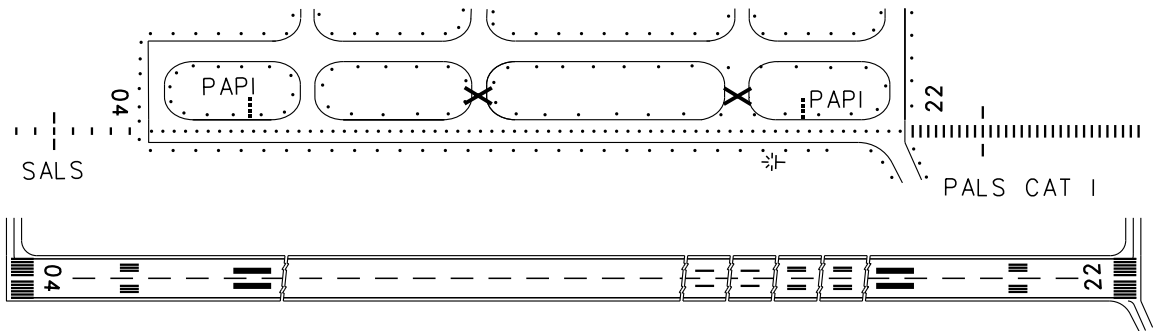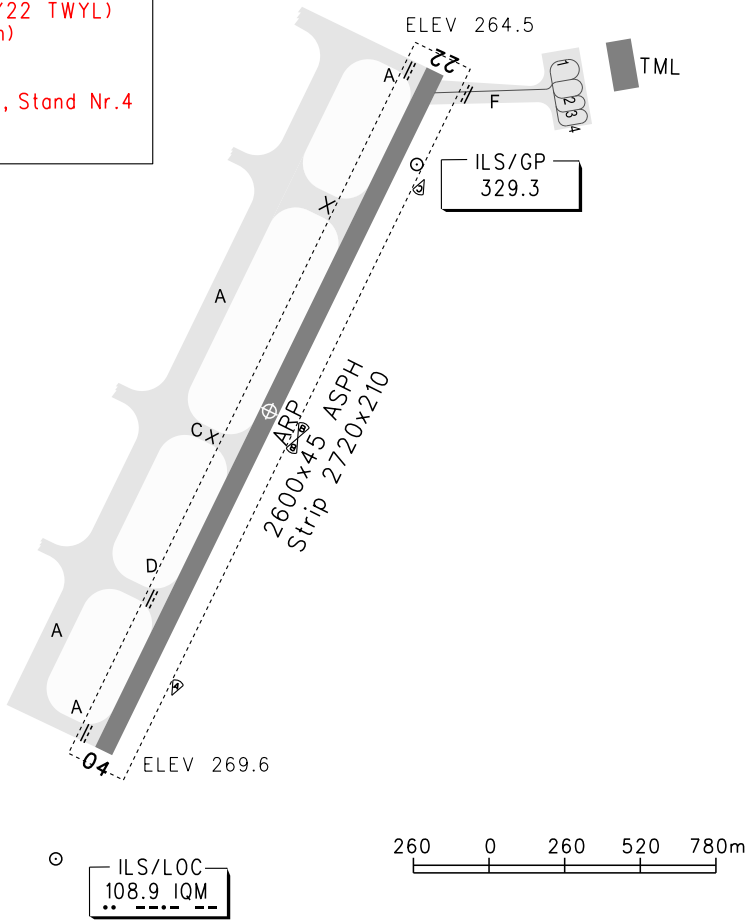

TAKE-OFF MINIMA(WITH RELIABLE ALTN)(m)						LIGHTS	
ACFT Type		RWY04		RWY22		RWY04	RWY22
		REDL	NIL(Day only)	REDL	NIL(Day only)		
2 TURB ENG or 3&4 ENG	A	RVR400 VIS800	RVR500 VIS800	RVR400 VIS800	RVR500 VIS800	SALS PAPI REDL RCLL RENL	PALS CAT I PAPI REDL RCLL RENL
	B						
	C						
	D						
Other 1&2 ENG		VIS1600					
Note: RWY04: ceiling 70m/VIS 2000m, if climbing gradient <6.4%							

Changes: PCR.