

STANDARD ARRIVAL
CHART-INSTRUMENT


VAR7° W

D-ATIS 126.65
APP01 123.85(127.95)
APP02 119.6(127.95)
APP03 121.05(127.95)

TWR 118.25(118.85)

ZYTL DALIAN/Zhoushuizi
RNAV Rwy10(CHI/RUPID)

BEARINGS ARE MAGNETIC.
ALTITUDES, ELEVATIONS
AND HEIGHTS IN METERS.
DME DISTANCES IN
NAUTICAL MILES.
DISTANCES IN KM.




NOT TO SCALE

RNAV1
GNSS, RADAR REQUIRED

TL 3600
TA 3000
3300(QNH ≥ 1031hPa)
2700(QNH ≤ 979hPa)

- Note:
- 1. When aircraft ALT is 3000m or below, MAX IAS is 250kt.
 - 2. DUAL GNSS&IRU required for Rwy10 RNP AR PROCEDURE.
 - 3. Under radar control, actual ALT by ATC.

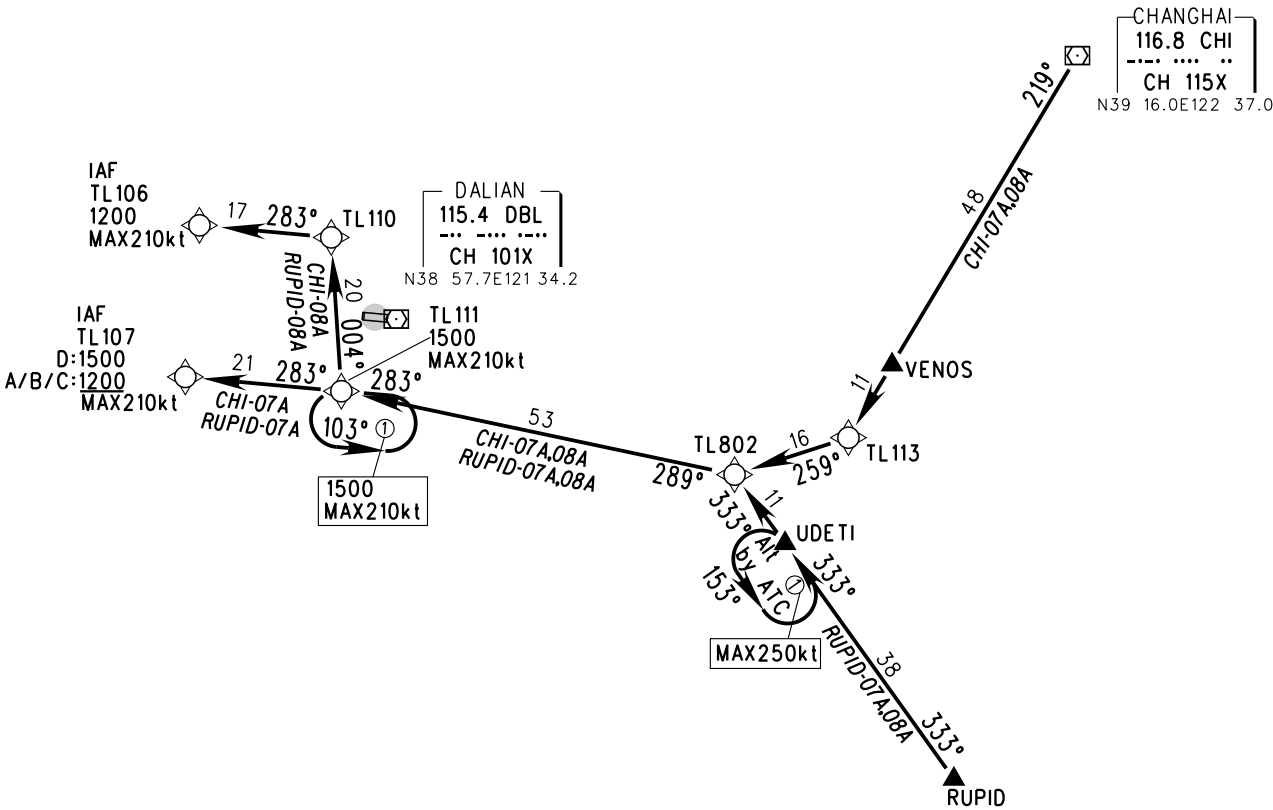

STAR	ROUTING
CHI-07A	CHI-VENOS-TL113-TL802-TL111-TL107
CHI-08A	CHI-VENOS-TL113-TL802-TL111-TL110-TL106
RUPID-07A	RUPID-UDETI-TL802-TL111-TL107
RUPID-08A	RUPID-UDETI-TL802-TL111-TL110-TL106

Changes: Delete ALT limit at UDETI.

