
N30° 20.5'E115° 01.7' ELEV 23.4m

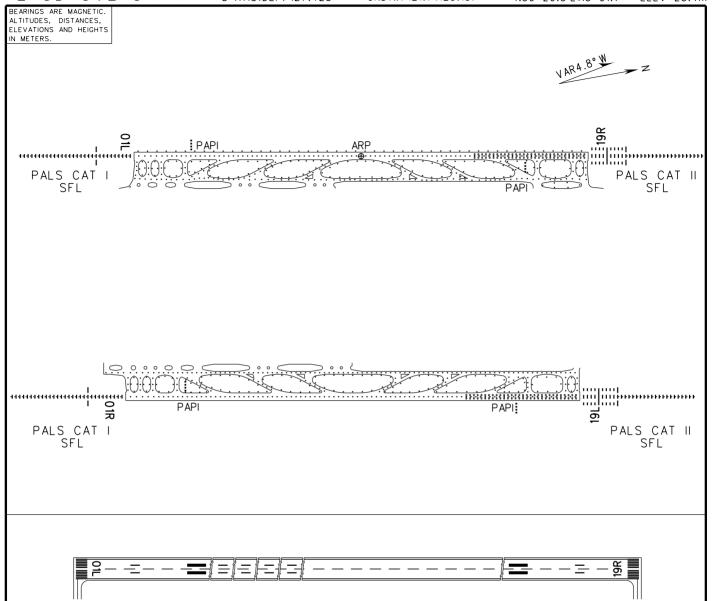

<u> </u>	<u>= = - 6 </u>
	<u>=</u> = - ₫

TAKE-OFF MINIMA(WITH RELIABLE ALTN)(m)					LIGHTS		
ACFT Type	RWY01L/19R,01R/19L		LVP in force RWY01L/19R,01R/19L	RWY01L/01R	RWY19L/19R		
	REDL	NIL(Day only)	REDL RCLL	11 1 5 12 1 5			
2 TURB ENG or 3&4 ENG	A B C D	RVR400 VIS800	RVR500 VIS800	RVR200 RVR250	PALS CAT I SFL PAPI Simple RTZL REDL	PALS CAT II SFL PAPI RTZL REDL	
Other 1&2 ENG RVR1600/VIS1600				RCLL	RCLL		
Note:					RENL	RENL	
Changes: Add Simple RTZL.							