
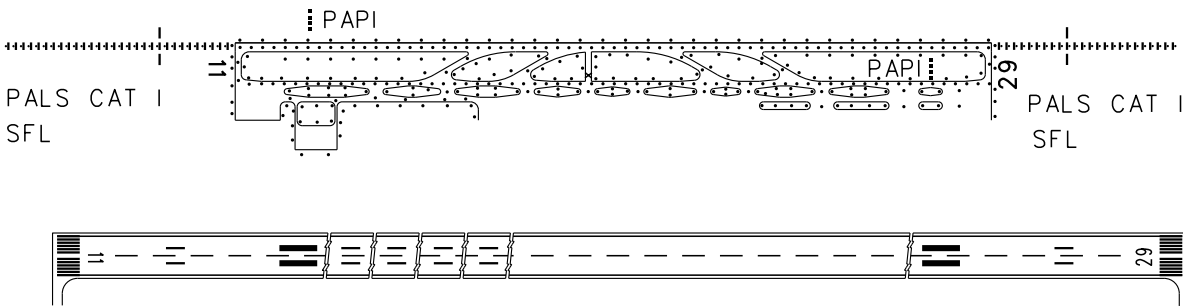
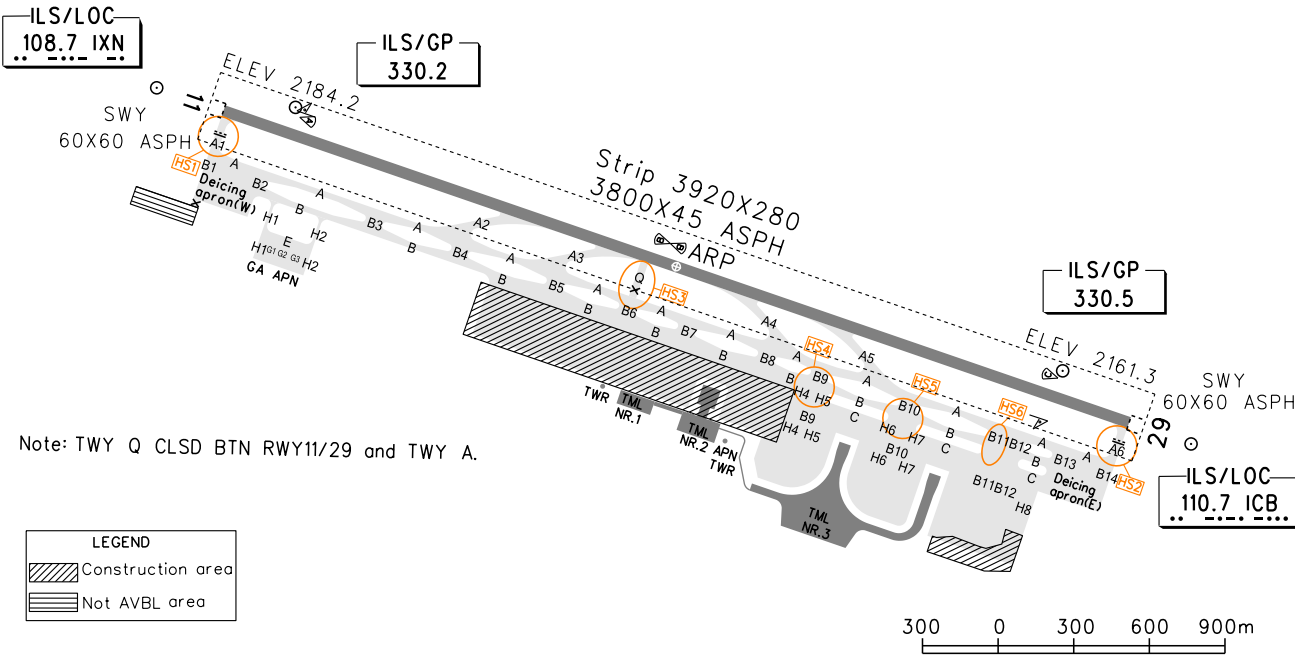


RWY	Direction	Bearing strength	BEARINGS ARE MAGNETIC. ALTITUDES, DISTANCES, ELEVATIONS AND HEIGHTS IN METERS.
11	111°	PCR 1510/F/C/W/T: RWY11/29 ASPH PCR 1650/F/C/W/T: TWY A6 PCR 1580/F/C/W/T: TWY A4 PCR 1530/F/C/W/T: TWY A2 PCR 1420/F/D/W/T: TWY A PCR 1350/F/C/W/T: TWY A5 PCR 1200/F/D/W/T: TWY A3 PCR 1070/F/C/W/T: TWY A1 PCR 880/R/A/W/T: TWY B, C, H4-H8 PCR 840/R/A/W/T: TWY B1-B14 PCR 360/R/A/W/T: TWY E, G1-G3, H1, H2	
29	291°		



TAKE-OFF MINIMA(WITH RELIABLE ALTN)(m)					LIGHTS		
ACFT Type		RWY11		RWY29		RWY11	RWY29
		REDL	NIL(Day only)	REDL	NIL(Day only)		
2 TURB ENG or 3&4 ENG	A	RVR550 VIS800		RVR550 VIS800		PALS CAT I SFL PAPI REDL RCLL RENL	PALS CAT I SFL PAPI REDL RCLL RENL
	B						
	C						
	D						
Other 1&2 ENG		VIS1600					
Note:							
Changes: New chart.							