
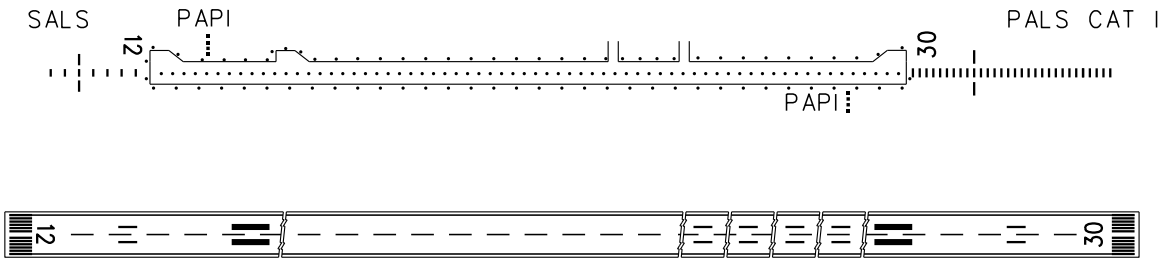


RWY	Direction	Bearing strength
12	117°	PCR 600/R/A/W/T: RWY12/30 CONC
30	297°	PCR 620/R/A/W/T: A
		PCR 610/R/A/W/T: B

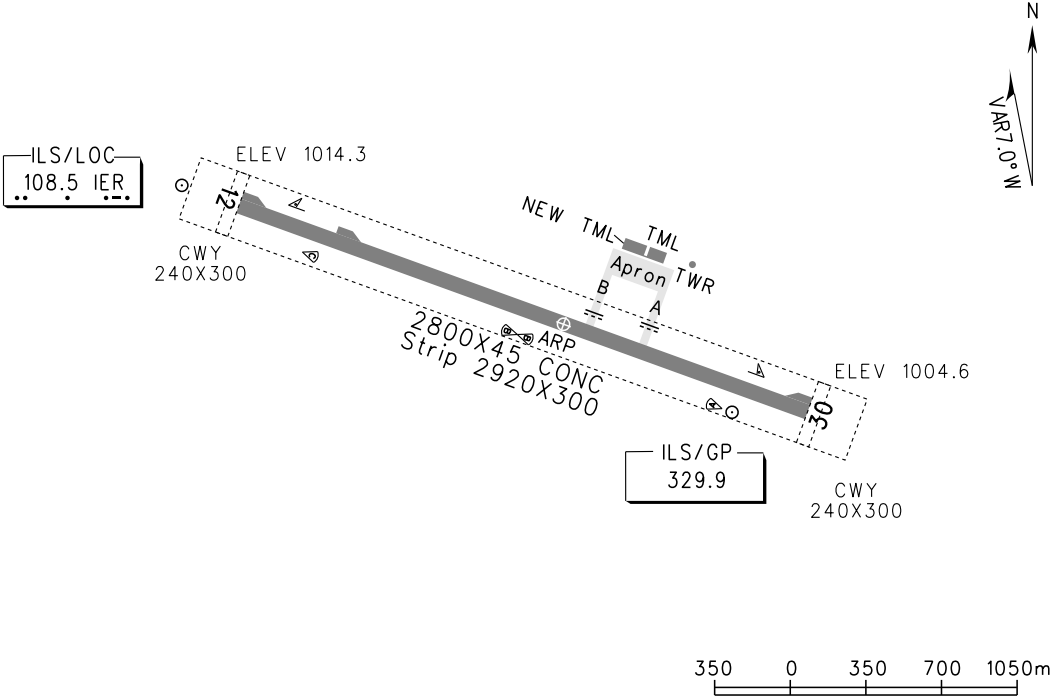

TAKE-OFF MINIMA(WITH RELIABLE ALTN)(m)						LIGHTS	
ACFT Type		RWY12		RWY30		RWY12	RWY30
		REDL	NIL(Day only)	REDL	NIL(Day only)		
2 TURB ENG or 3&4 ENG	A	RVR400 VIS800	RVR500 VIS800	RVR400 VIS800	RVR500 VIS800	SALS PAPI REDL RCLL RENL	PALS CAT I PAPI REDL RCLL RENL
	B						
	C						
	D						
Other 1&2 ENG		VIS1600					
Note:							

Changes: New chart.