

STANDARD ARRIVAL
CHART-INSTRUMENT

D-ATIS 127.4
APP01 119.65(127.75)
APP02 119.05(127.75)
APP03 120.65(127.75)

TWR01 118.7(118.1)
TWR02 118.325(118.1)

ZYHB HARBIN/ Taiping
RNAV **RWY23L/R**
(**PIGAM/LARUN**)

BEARINGS ARE MAGNETIC.
ALTITUDES, ELEVATIONS
AND HEIGHTS IN METERS.
DME DISTANCES IN
NAUTICAL MILES.
DISTANCES IN KM.


Only used for CDO

TL 3600
TA 3000
3300(QNH ≥ 1031hPa)
2700(QNH ≤ 979hPa)



RNAV1
GNSS, RADAR REQUIRED

- Notes:
- 1.MAX IAS250kt when arrival altitude not exceed 3000.
 - 2.Using this chart need ATC approval.
 - 3.CDO terminated once ATC give heading instructions.

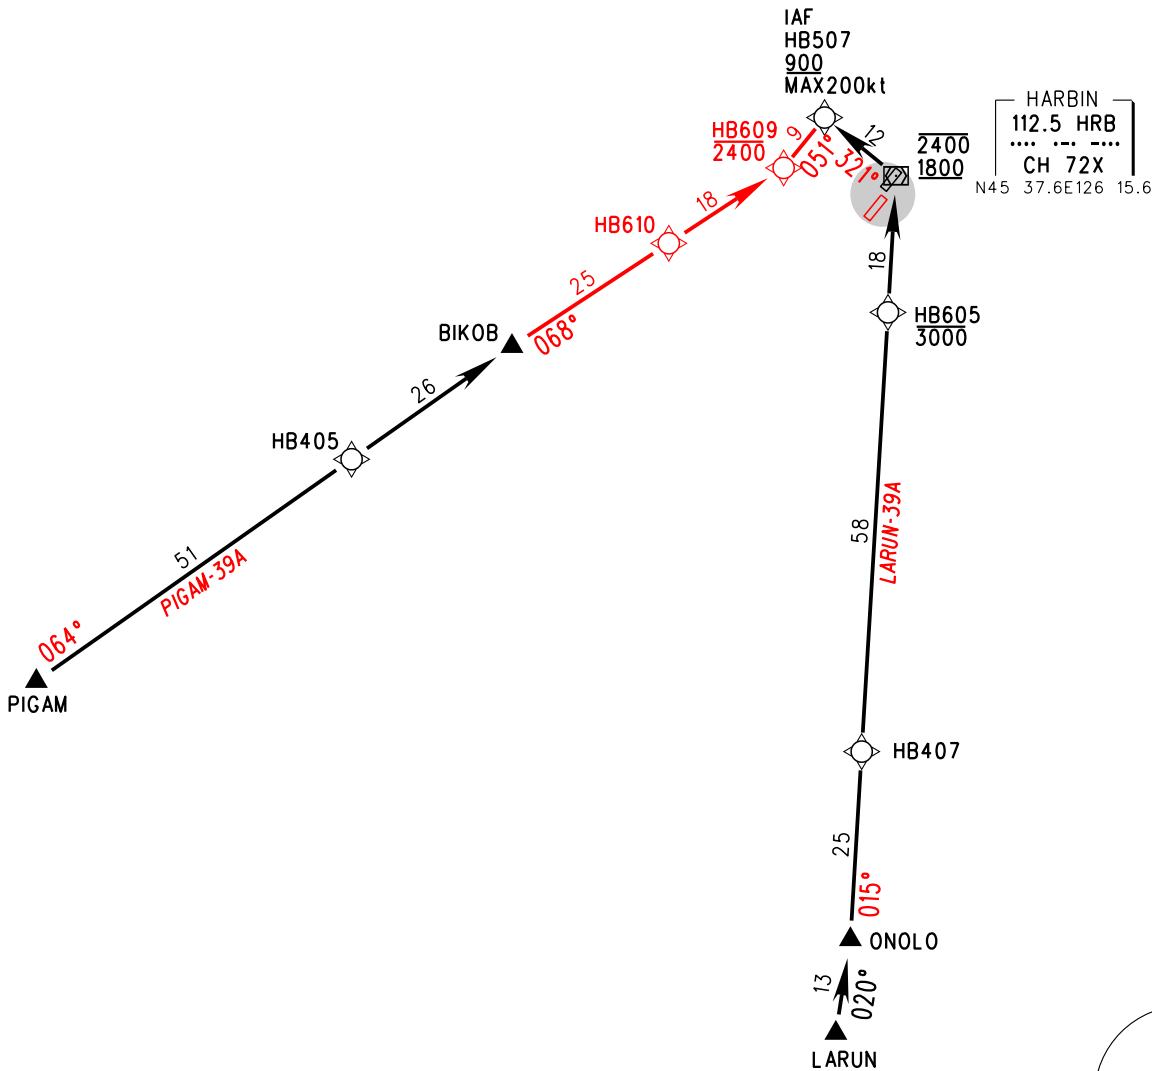

STAR	ROUTING
LARUN-39A	LARUN-ONOLO-HB407-HB605-HRB-HB507
PIGAM-39A	PIGAM-HB405-BIKOB-HB610-HB609-HB507

Changes: Procedure.