

STANDARD DEPARTURE
CHART-INSTRUMENT

VAR11.3° W

D-ATIS 127.4
TWR01 118.7(118.1)
TWR02 118.325(118.1)

ZYHB HARBIN/Taiping
RNAV RWY23R(DUKIR/LEGAG)

TL 3600
TA 3000
3300(QNH ≥1031hPa)
2700(QNH ≤979hPa)


APP01 119.65(127.75)
APP02 119.05(127.75)
APP03 120.65(127.75)

BEARINGS ARE MAGNETIC.
ALTITUDES, ELEVATIONS
AND HEIGHTS IN METERS.
DME DISTANCES IN
NAUTICAL MILES.
DISTANCES IN KM.



RNAV1
GNSS, RADAR REQUIRED

Note:
1.MAX IAS250kt when departure altitude not exceed 3000
2.DUKIR-18D, LEGAG-18D using CCO need ATC approval
3. CCO terminated once ATC give heading instructions

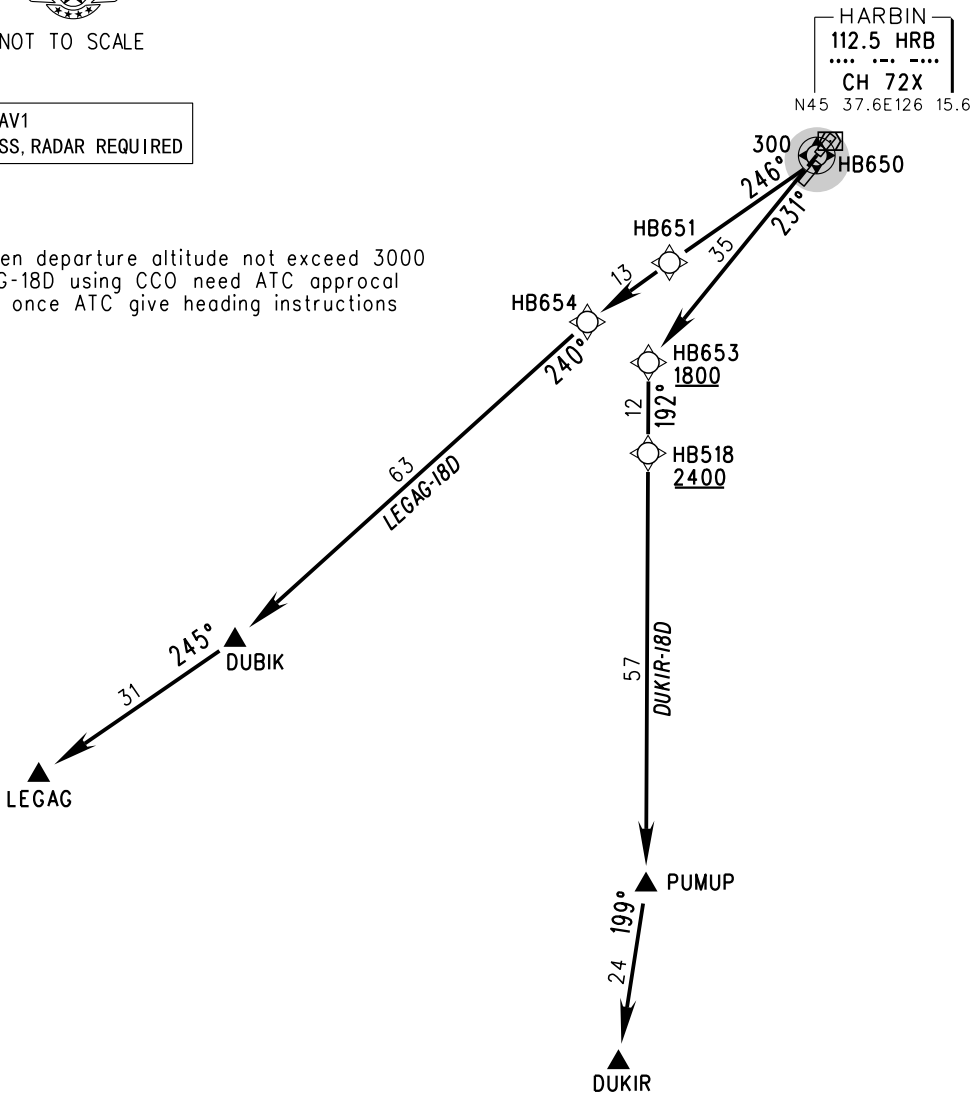

SID	ROUTING
DUKIR-18D	HB650-HB653-HB518-PUMUP-DUKIR
LEGAG-18D	HB650-300-HB651-HB654-DUBIK-LEGAG

Changes: Procedure.