

STANDARD DEPARTURE CHART-INSTRUMENT


D-ATIS 127.45(DEP)
TWR 130.35(118.05)(E)
118.45(130.35)(W)

ZGSZ SHENZHEN/Baoan
RNP RWY15/16


BEARINGS ARE MAGNETIC.
ALTITUDES, ELEVATIONS
AND HEIGHTS IN METERS.
DME DISTANCES IN
NAUTICAL MILES.
DISTANCES IN KM.

Zhuhai APP01 120.35(125.525)
Zhuhai APP02 119.55(126.025)
Zhuhai APP03 123.85(126.025)
Zhuhai APP04 119.025(125.525)
Zhuhai APP05 127.95(126.025)
Zhuhai APP06 119.9(125.525)
Zhuhai APP07 121.4(125.525)

Only used for noise abatement procedures



RNP1
GNSS

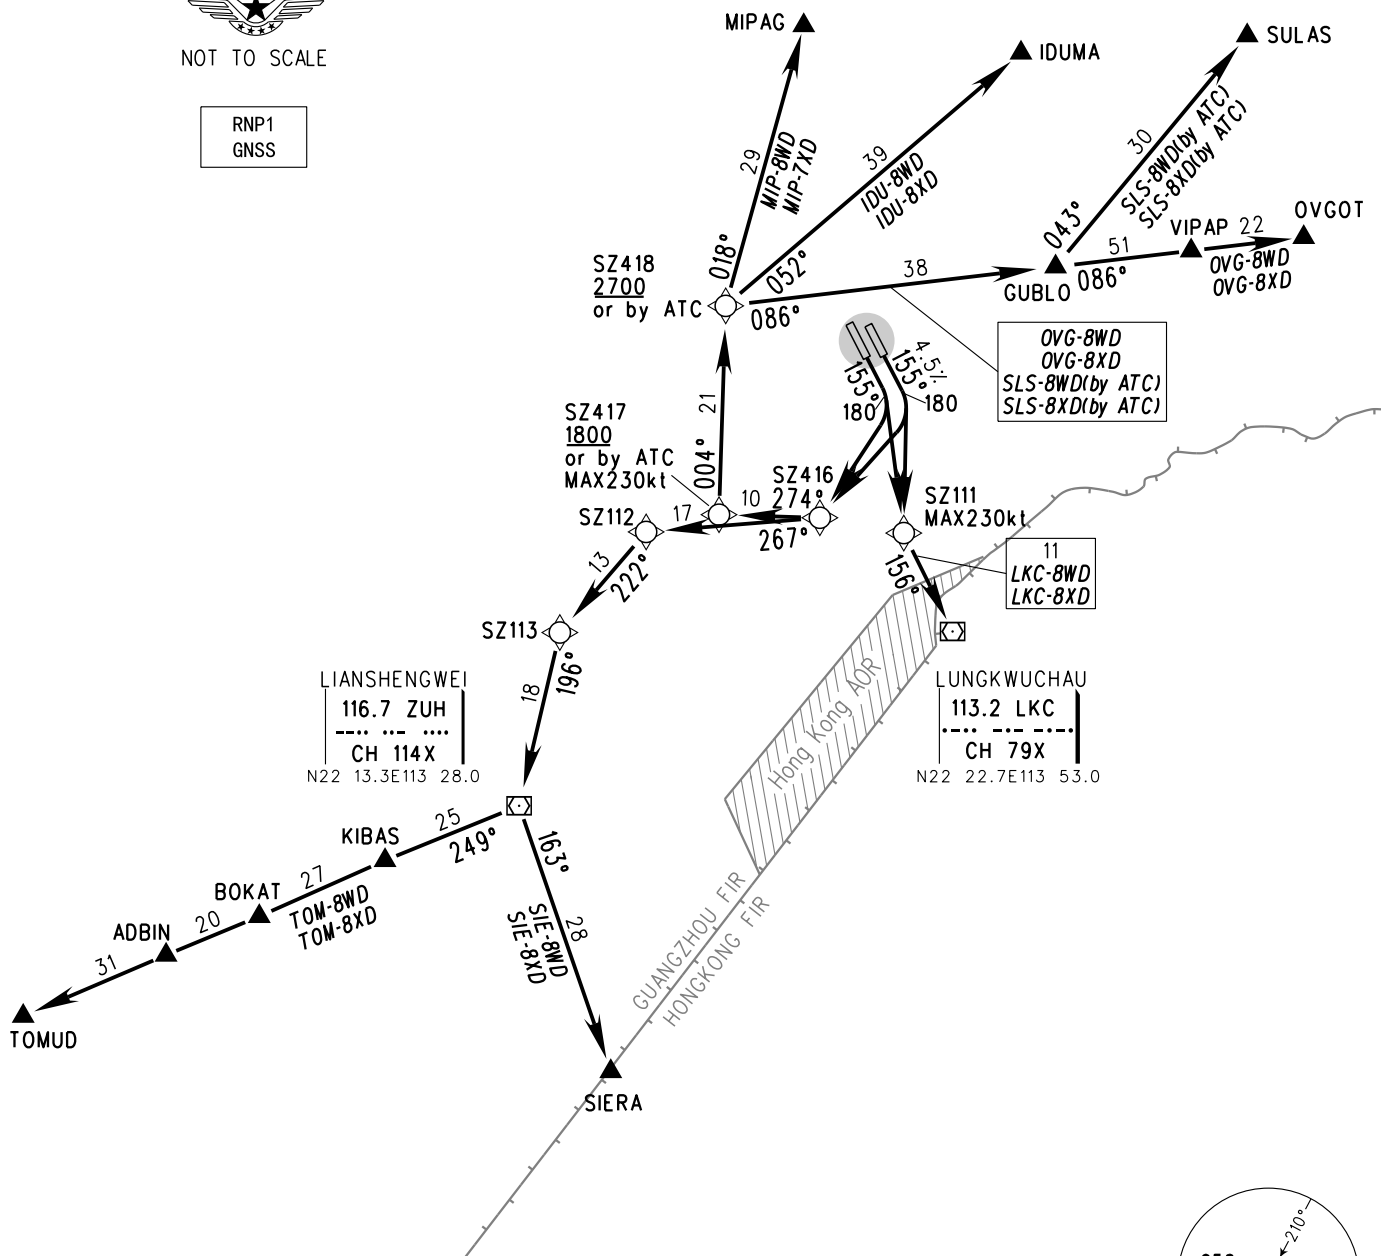

- Note:
- Noise abatement procedures use for single runway at night.
 - Noise abatement procedures use by ATC.
 - No other noise abatement measures require during noise abatement procedures.
 - Departure turning before DER is forbidden.

Changes: APP FREQ.