
AIP HONG KONG 28 NOV 24

STANDARD DEPARTURE CHART-**INSTRUMENT (SID) - ICAO**

Transition Altitude 9 000 ft Hong Kong Tower 118.7 Hong Kong Departure 123.8

HONG KONG / Intl (VHHH) RNAV (GNSS) DALOL 1E SID RWY 07L

- 1. In the event that PBN performance ceases to comply with the requirements for RNP 1 after departure, pilots must notify ATC as soon as possible. ATC assistance would be provided as necessary.
- 2. Only specific categories of flights (e.g. SAR) as stated in GEN 1.5 para 3.5.3.5 are exempted from the RNP 1 requirement. These flights shall fly the contingency procedures as detailed in VHHH AD 2.22 para 2.2.3.5.
- 3. ROVER is a **FLY-OVER** waypoint. All other waypoints are fly-by.

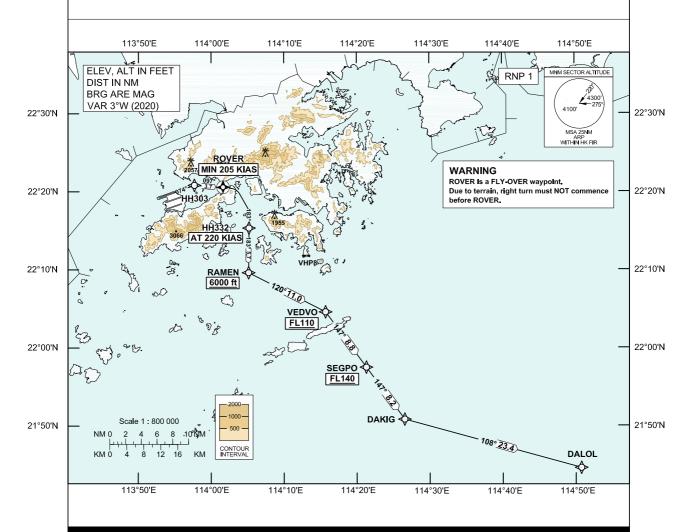

DALOL 1E SID RWY 07L

CLIMB REQUIREMENT

Initial climb to 5 000 ft. Expect further climb when instructed by ATC. Comply with all the published altitude restrictions. If unable to comply with the vertical profile, pilot shall inform ATC prior to start-up.

TERRAIN CLEARANCE

Minimum climb gradient of 3.3% (201 ft/NM).

SPEED RESTRICTION

Speed restriction of 205 KIAS or greater at ROVER and 220 KIAS until HH332.

AD 2-VHHH-SID-DALOL-E V01 240513kr

CHANGE: New

I

FMC Database Coding Reference for Hong Kong RNAV_(GNSS) SID

TABULAR DESCRIPTION: DALOL 1E RWY 07L

Serial Number	Path Descriptor	Waypoint Identifier	Fly- over	Course °M (°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (ft)	Speed (KIAS)	Navigation Specification
01	CF	HH303	-	074 (071)	+3.0	-	-	-	-	RNP 1
02	TF	ROVER	Υ	097 (094)	+3.0	3.7	-	-	+205	RNP 1
03	CF	HH332	-	183 (180)	+3.0	-	R	-	@220	RNP 1
04	TF	RAMEN	-	183 (180)	+3.0	5.7	-	+6000	-	RNP 1
05	TF	VEDVO	-	120 (117)	+3.0	11.0	-	+FL110	-	RNP 1
06	TF	SEGPO	-	147 (144)	+3.0	8.8	-	+FL140	-	RNP 1
07	TF	DAKIG	-	147 (144)	+3.0	8.2	-	-	-	RNP 1
08	TF	DALOL	,	108 (105)	+3.0	23.4	-	-	-	RNP 1

WAYPOINT LIST

DALOL 1E RWY 07L									
Waypoint Identifier	Coordinates (WGS-84)								
HH303	22 20 50.02N	113 57 42.83E							
ROVER	22 20 35.58N	114 01 39.12E							
HH332	22 15 22.17N	114 05 13.00E							
RAMEN	22 09 39.22N	114 05 09.89E							
VEDVO	22 04 38.19N	114 15 43.05E							
SEGPO	21 57 32.77N	114 21 18.59E							
DAKIG	21 50 52.90N	114 26 33.33E							
DALOL	21 44 36.90N	114 50 45.34E							