

STANDARD ARRIVAL
CHART-INSTRUMENT


VAR7° W

D-ATIS 126.65
APP01 123.85 (127.95)
APP02 119.6 (127.95)
APP03 121.05 (127.95)

TWR 118.25 (118.85)

ZYTL DALIAN/Zhoushuizi
RNAV RWY28(INTIV/NIXEP/ORIXA)


BEARINGS ARE MAGNETIC.
ALTITUDES, ELEVATIONS
AND HEIGHTS IN METERS.
DME DISTANCES IN
NAUTICAL MILES.
DISTANCES IN KM.



RNAV1
GNSS, RADAR REQUIRED

TL 3600
TA 3000
3300(QNH ≥ 1031hPa)
2700(QNH ≤ 979hPa)

Note:
1.When aircraft ALT is 3000m or below, MAX IAS is 250kt.
2.Under radar control, actual ALT by ATC.

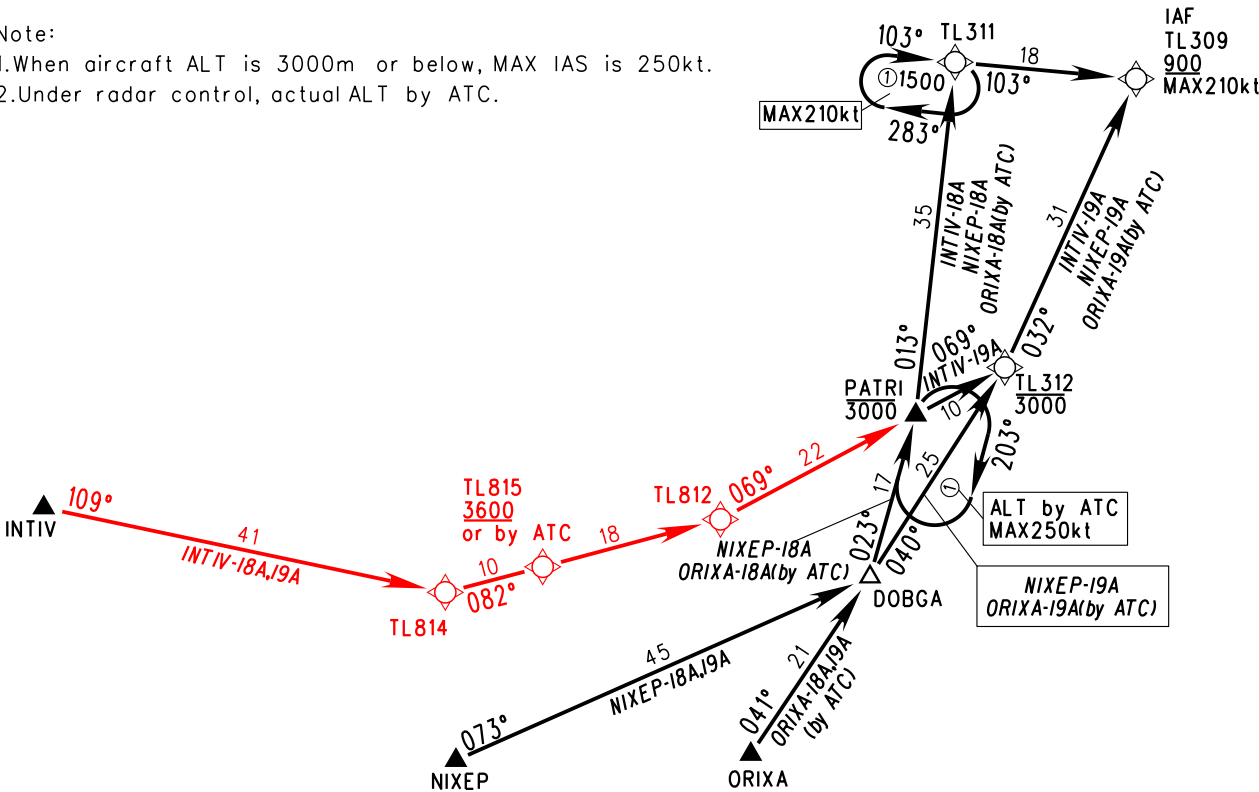

STAR	ROUTING
INTIV-18A	INTIV-TL814-TL815-TL812-PATRI-TL311-TL309
INTIV-19A	INTIV-TL814-TL815-TL812-PATRI-TL312-TL309
NIXEP-18A	NIXEP-DOBGA-PATRI-TL311-TL309
NIXEP-19A	NIXEP-DOBGA-TL312-TL309
ORIXA-18A (by ATC)	ORIXA-DOBGA-PATRI-TL311-TL309
ORIXA-19A (by ATC)	ORIXA-DOBGA-TL312-TL309

Changes: INTIV-18A, INTIV-19A.