

STANDARD DEPARTURE
CHART-INSTRUMENT

VAR1.8° W


D-ATIS 126.275
TWR(W) 130.6(118.85)

ZPPP KUNMING/Changshui
RNAV RWY03(NODIB)

BEARINGS ARE MAGNETIC.
ALTITUDES, ELEVATIONS
AND HEIGHTS IN METERS.
DME DISTANCES IN
NAUTICAL MILES.
DISTANCES IN KM.

APP01 119.0(125.55)
APP02 123.8(125.55)
APP03 120.35(127.9)
APP04 121.15(126.55)
APP05 124.25(127.9)
APP07 119.225


TL 6000
TA 5400
5700(QNH ≥ 1031hPa)
5100(QNH ≤ 979hPa)



NOT TO SCALE

| | |
|---|--------------------|
| RNAV1 GNSS or DME/DME/IRU RADAR REQUIRED | or RNP1 GNSS |
|---|--------------------|

- Notes:
- While RWY simultaneous operation implemented, NOD-9W by ATC.
 - Under radar control service, actual ALT by ATC.
 - Departure turning is forbidden before DER.

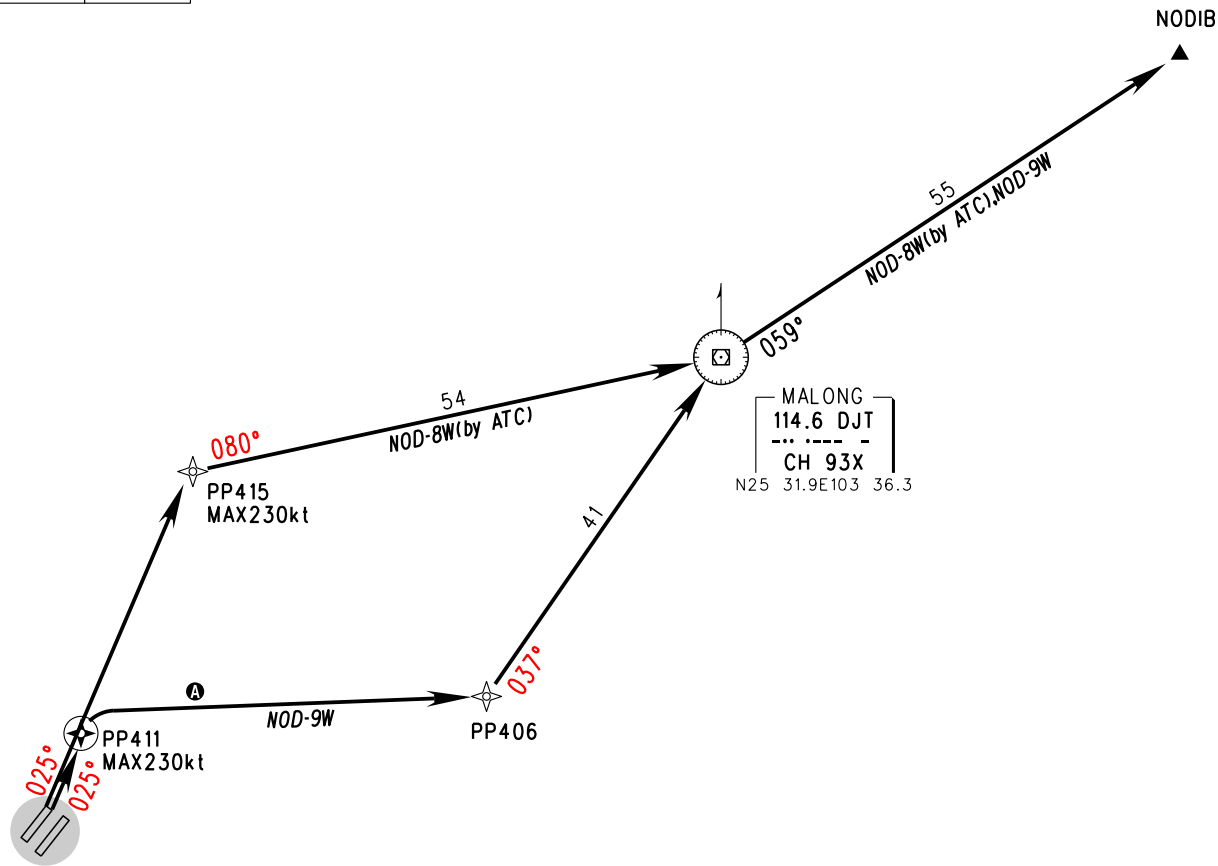

| SID | Routing |
|--------------------|---------------------------|
| NOD-8W (by ATC) | DER-PP415-DJT-NODIB |
| NOD-9W | DER-PP411-PP406-DJT-NODIB |

Changes: VAR, Magnetic course.