

STANDARD ARRIVAL  
CHART-INSTRUMENT

VAR7° W

D-ATIS 126.65  
APP01 123.85(127.95)  
APP02 119.6(127.95)  
APP03 121.05(127.95)

TWR 118.25(118.85)

ZYTL DALIAN/Zhoushuizi  
RNAV RWY10(INTIV/NIXEP/ORIXA)

BEARINGS ARE MAGNETIC.  
ALTITUDES, ELEVATIONS  
AND HEIGHTS IN METERS.  
DME DISTANCES IN  
NAUTICAL MILES.  
DISTANCES IN KM.


TL 3600  
TA 3000  
3300(QNH ≥ 1031hPa)  
2700(QNH ≤ 979hPa)

Note:


- 1.When aircraft ALT is 3000m or below, MAX IAS is 250kt.
- 2.DUAL GNSS&IRU required for RWY10 RNP AR PROCEDURE.
- 3.Under radar control, actual ALT by ATC.



RNAV1  
GNSS, RADAR REQUIRED

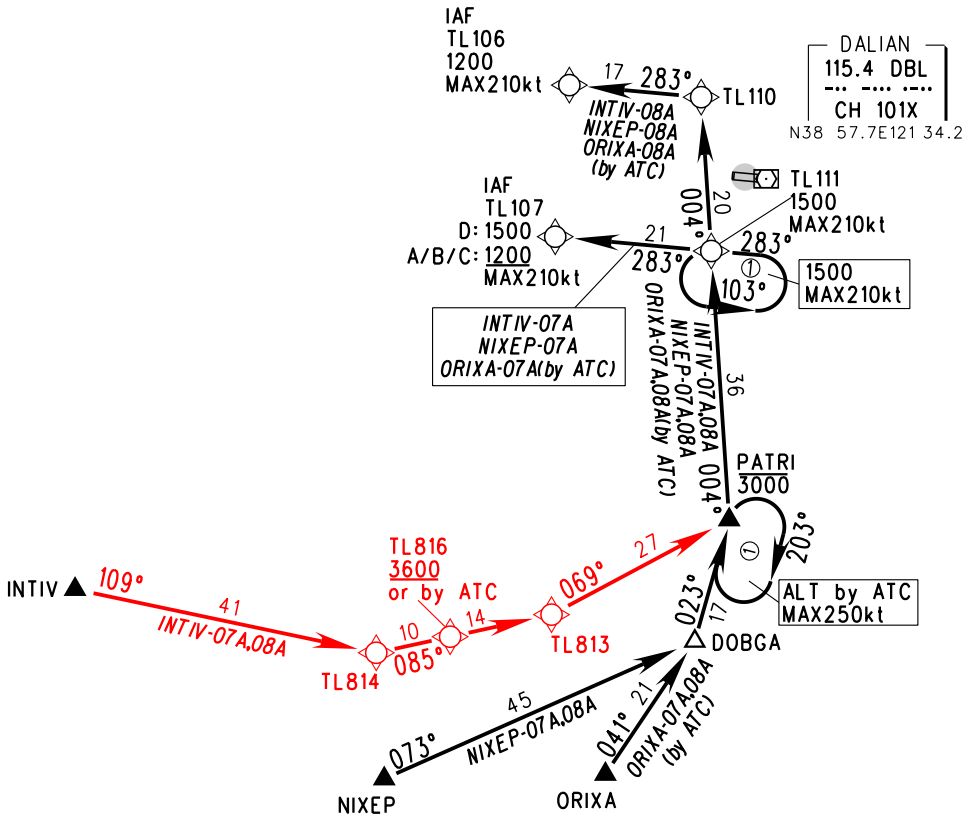

STAR	ROUTING
INTIV-07A	INTIV-TL814-TL816-TL813-PATRI-TL111-TL107
INTIV-08A	INTIV-TL814-TL816-TL813-PATRI-TL111-TL110-TL106
NIXEP-07A	NIXEP-DOBGA-PATRI-TL111-TL107
NIXEP-08A	NIXEP-DOBGA-PATRI-TL111-TL110-TL106
ORIXA-07A (by ATC)	ORIXA-DOBGA-PATRI-TL111-TL107
ORIXA-08A (by ATC)	ORIXA-DOBGA-PATRI-TL111-TL110-TL106



Changes: INTIV-07A, INTIV-08A.