



INSTRUMENT
APPROACH
CHART-ICAO

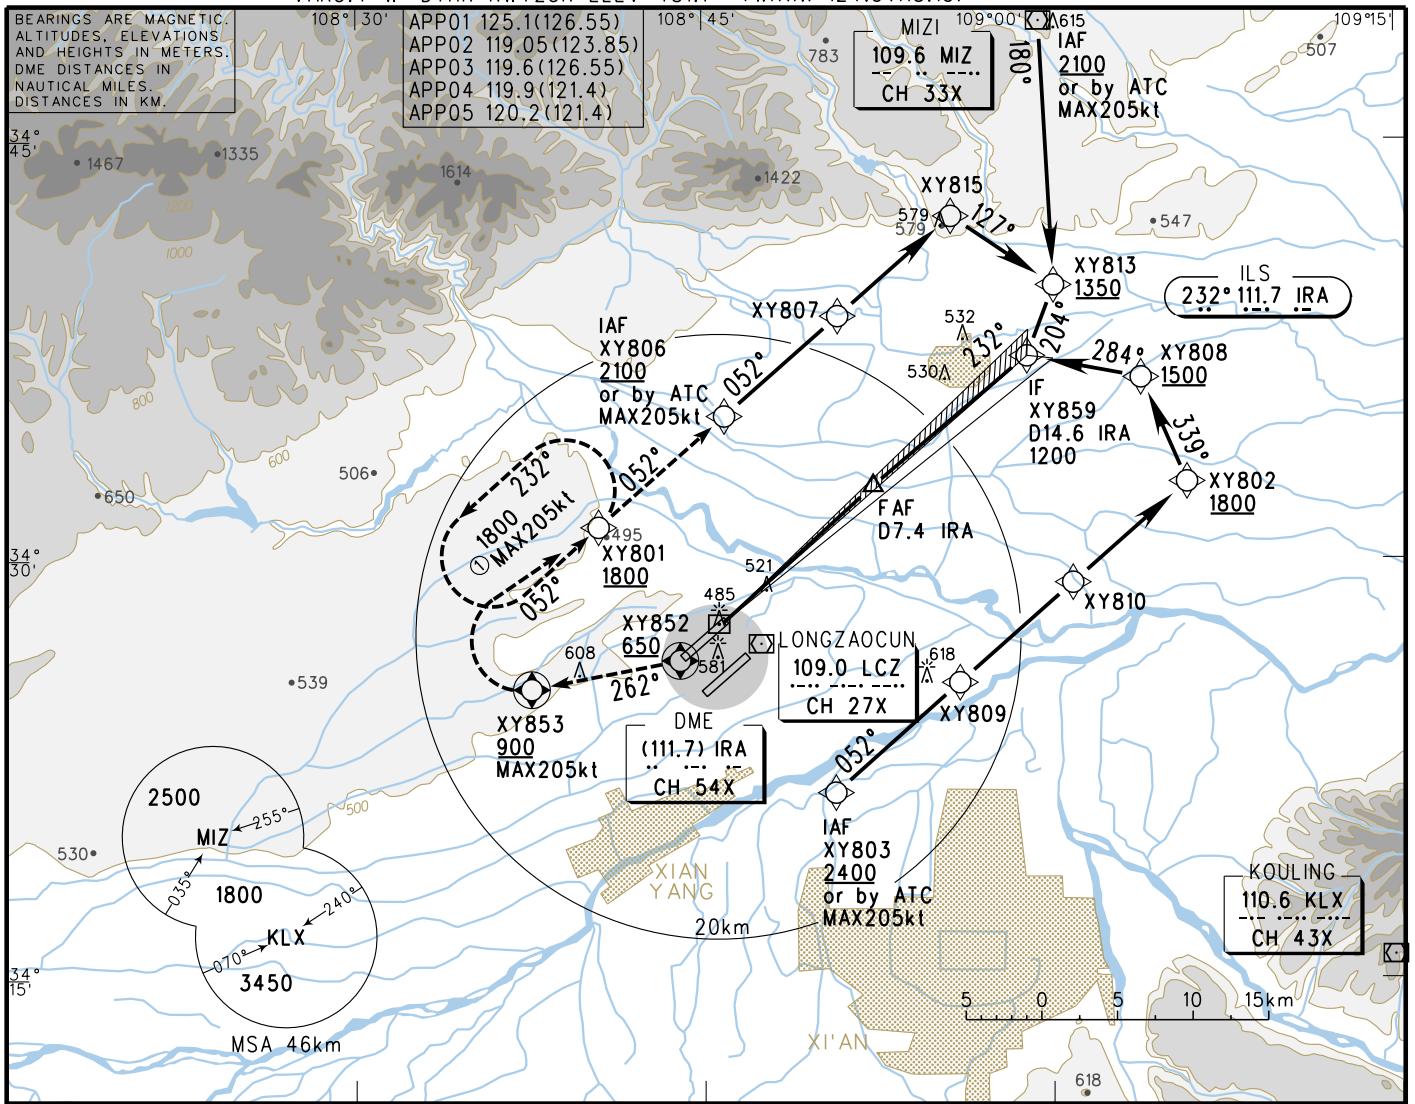

GP INOP	DME (IRA) (NM)	2	3	4	5	6	7	8
	ALT (m)	675	772	869	966	1063	1160	

MISSED APPROACH

Climb straight ahead to XY852 at 650 or above, climb to XY853 at 900 or above, turn RIGHT to XY801 and climb to 1500, after obtaining ATC permission, climb to 1800 or above and fly to XY801, join the holding pattern or fly to XY806 approach again.

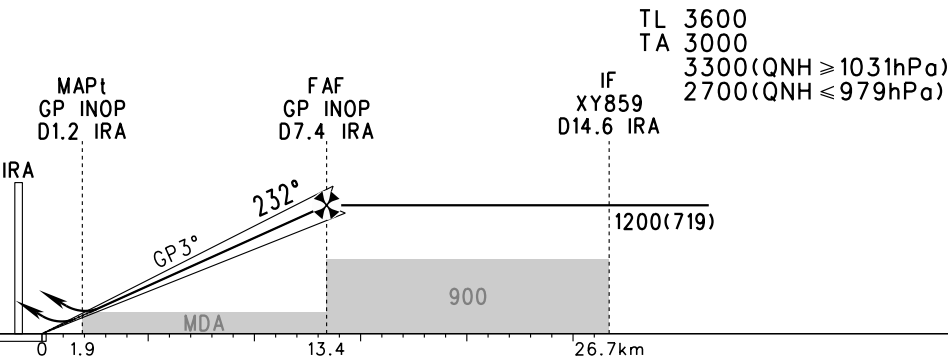

	A	B	C	D	FAF-MAPt(GP INOP) 11.5km							
ILS/DME	DA(H) RVR/VIS A	54(60) 800/800			GS in	kt km/h	80 150	100 185	120 220	140 260	160 295	180 335
					Time	min:sec	4:39	3:44	3:06	2:40	2:20	2:04
GP INOP	MDA(H) VIS	600(119) 1400			Rate of descent	m/s	2.2	2.7	3.2	3.8	4.3	4.9
CIRCLING	MDA(H) VIS	730(247) 3600			① HUD Special CAT I: (DH)(45),(RA)(47),RVR450. ② RVR 550m can be implemented when using approved HUD or AP or FD for ILS/DME approach.							