

STANDARD DEPARTURE
CHART-INSTRUMENT

VAR3.0°W

ZGGG GUANGZHOU/Baiyun
RNAV RWY01L/01R/02L/02R/19L/19R/20L/20R(LMN)

BEARINGS ARE MAGNETIC.
ALTITUDES, ELEVATIONS
AND HEIGHTS IN METERS.
DME DISTANCES IN
NAUTICAL MILES.
DISTANCES IN KM.

TL 3300(QNH ≥ 980hPa)
3600(QNH < 980hPa)
TA 2700

Notes:
1.RWY01L/R, 19L, 02L: Departure turn
is forbidden until DER.
2.RWY19R, 20L/R: ACFT shall adjust
track after flying over DER and
reaching ALT 150m.
3.CCO AVBL with ATC clearance CCO
operation time 1700-2200, CCO terminated
once ATC give heading instruction.

NOT TO SCALE

RNAV1
GNSS
or DME/DME/IRU
RADAR REQUIRED


or
RNP1
GNSS

LMN-1


D-ATIS(Chinese) 127.0
D-ATIS(English) 128.6

APP01 126.55(127.75)
APP02 119.7(127.75)
APP03 126.35(119.6)
APP04 121.05(124.2)
APP05 120.4(124.2)
APP06 121.175(127.75)
APP07 119.425(124.2)
APP08 125.6(124.2)

TWR(01L/19R) 118.325(118.875)
TWR(01R/19L) 118.8(118.875)
TWR(02L/20R) 118.1(118.875)
TWR(02R/20L) 118.25(118.875)

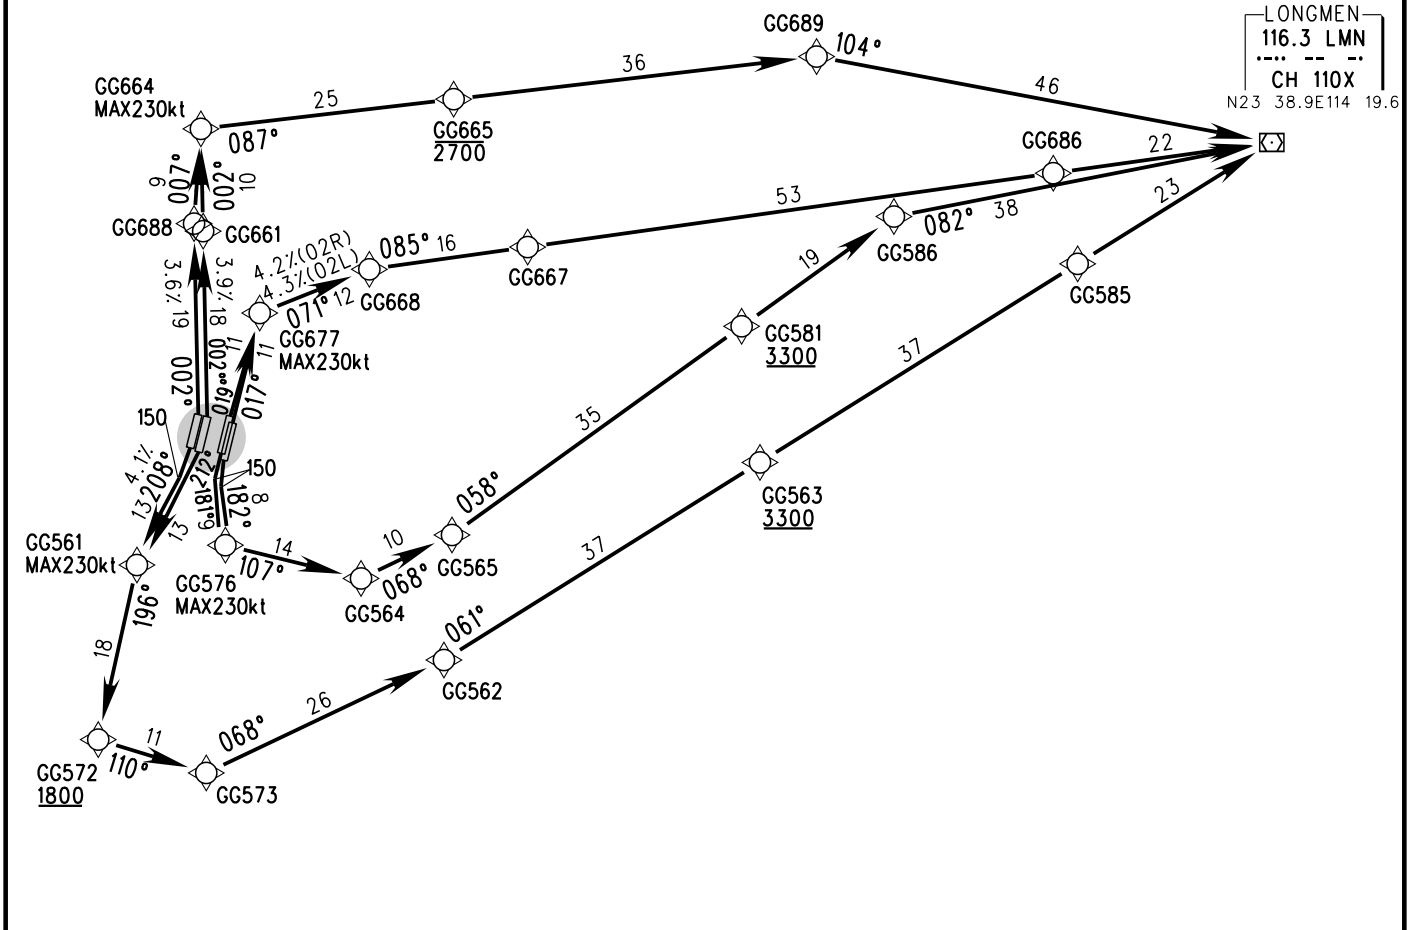

RWY	SID	ROUTING
01L	LMN-1	GG688-GG664-GG665-GG689-LMN
01R		GG661-GG664-GG665-GG689-LMN
02L		GG677-GG668-GG667-GG686-LMN
02R		
19L		GG561-GG572-GG573-GG562-GG563-GG585-LMN
19R		150-GG561-GG572-GG573-GG562-GG563-GG585-LMN
20L		150-GG576-GG564-GG565-GG581-GG586-LMN
20R		



Changes: Add APP frequency.