



NOTES
1. VFD: Noritake CU20029ECPB-W1J (2x20). JP2 OPEN = M68 (HD44780) mode, 8-bit bus. JP3 open: pin 3 = NC.
2. VFD draws 400 mA typ., up to ~800 mA inrush - power it from a separate 5 V supply, NOT from the Arduino 5V pin.
   Arduino UNO: do not connect +5V_VFD to the UNO 5V pin while USB is plugged in. Only GND is common.
3. C1/C2 and C3/C4 sit right at each display connector (pins 1-2).
4. Both displays share RS, R/W, DB0-DB7; each has its own E (D11 = left, D6 = right).
5. Keep the bus wires short (< 20 cm), especially E.




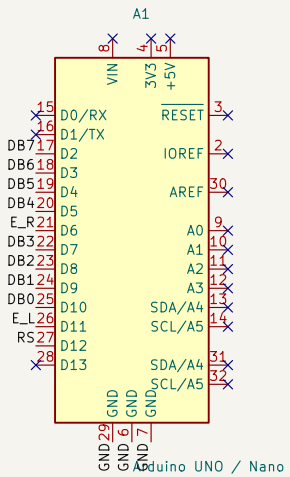









2x Noritake CU20029ECPB-W1J + Arduino UNO / Nano, 8-bit bus

Sheet: /
File: vfd-spectrum.kicad_sch

Title: VFD Spectrum Analyzer

Size: A4	Date: 2026-10-27	**Rev: 1**
KiCad E.D.A. 10.0.6		Id: 1/1