2018
MCM/ICM
Summary Sheet

How does climate change influence regional instability?

Summary

In the present airport construction, the reliability and efficiency of security inspection are of vital significance, while the occurrence of congestion in checkpoints is undeniably frequent. This report aims to analyze the current process of airport security checkpoints and propose rational modifications.

Firstly, we do the parameter analysis and process division based on the current situation and data. We assume that the flow of passengers obeys **PoissonDistribution**, and that the checking time obeys **Exponential Distribution**. According to the data given, we estimate related parameters using **Moment Estimation**, and obtain the quantitative model. Meanwhile, we perform the integral analysis of the system and figure out the relationship between the maximal flow of passengers and the proportion of ID-Check entrance number to screening lane number. After the simulation, we conclude that the bottleneck appears owing to screening lanes.

Secondly, we propose two modifications to our model. According to the time consumed in different areas, we figure out the ideal proportion of the number of entrances and lanes so as to reach the highest throughput. Applying the M/M/S model in **Queuing Theory**, we obtain several **dynamic optimization** functions based on the principle of minimizing the fluctuation of the average waiting time. Considering both mentalities of passengers and construction costs of airports, we attain the final optimization.

Thirdly, we do **sensitivity analysis** of the modified model. In previous analysis, we assume that passengers all obey rules and act normally, but due to discrepancies of cultural environment, passengers tend to behavior diversely, which could impact our model. Therefore, we mainly analyze three types of passengers and impacts of their behaviors on our model. Passengers who are queue-jumpers may cause disputes leading to the paralysis of specific entrances, and those who dress special may prolong the screening time. Furthermore, ones who hold obscure perception of contraband may be more prone to get additional screening.

Finally, we propose policy and recommendations for security managers based on our optimal model. For instance, rearrange the number of entrances or lanes according to the current throughput, establish a baggage buffer at the end of X-ray belts, and promote Pre-Check.

Contents

1 Introduction

A **fragile state** is a low-income country or a sovereign state that is characterized by weak state capacity and/or weak state legitimacy[1]. It increases the vulnerability of citizens towards a range of shocks, including economic fluctuation, political upheaval, and so forth.

Particularly, **climate shock** such as unpredictable natural disasters, extreme weather, decreasing cultivated land and changing ranges of plants and animals may dramatically aggravate fragile states and may further leads to regional violent conflicts when social fragmentation and weak governance exist as well. Therefore, it is of vital significance to research on how climate change will affect the instability or fragility of a state and how human intervention can mitigate such negative impact.

In this paper, we mainly focus on analyzing the influence of climate change on regional instability and fragility. More specifically, we pay attention to the following issues:

- Develop a model that determines the fragility of a country and identify when a state is fragile, vulnerable, or stable. Simultaneously, the model will measure the impact of climate change and analyze direct and indirect means by which climate change increases the fragility.

- Select A, one of the top 10 most fragile states as determined by the Fragile State Index (http://fundforpeace.org/fsi/data/) and use the model to analyze how climate change has increased the fragility of it and show in what way(s) A may be less fragile without these effects.

- Apply the model on B to measure its fragility, and determine in what way and when climate change may increase the fragility of the state. Identify any definitive indicators. Define a tipping point and predict when B may reach it.

- Use the model to show which state driven interventions could alleviate the risk of climate change and prevent a country from becoming a fragile state. Explain the effect of human intervention and predict the total cost of intervention for this country.

- Analyze whether the model will correctly work on smaller states (such as cities) or larger states (such as continents) and modify the models accordingly.

- Assess strengths and weaknesses of the model.

In the following chapters, we will demonstrate and illustrate our model in details, as well as evaluating the model in all directions.

2 Assumption

- Assume that climate change is random and cannot be controlled by human.

- Assume that the variation of economy, society and policy factors in a country is only dependent on current country status if there is no climate change.

- Assume that there is no sudden revolution in the country analyzed.

- Assume the time delay between climate change and national response is short enough.

- Assume that all countries have the same evaluation function and prediction function.

3 A common model for most countries

In this section, we draw a relationship schema of several vital factors to show the direct influences between them. Take economic policy as an example, it has a strong direct effect on GDP under most circumstances. And in the schema, we can also see the indirect influence since all the boxes are connected by arrow lines.

After that, an evaluation function can be determined by weighting the factors contribution to fragility. Even more, we can also gain a recursion function to predict the country's fragility in a few years. Using these functions to evaluate current status of some typical countries, an evaluation standard then be settled.

3.1 Model establishing without climate change

Based on the schema, we focus on several factors that might have the most impact on a country's fragility. Policies issued by government, military activities, social problems and economic crisis are four major factors effecting fragility. These factors also have interconnections, which makes this model more realistic and manageable.

Additionally, the quantities involved in the function are shown in **Table 1** and **Table 2**. We list subscripts and primary notations apart.

Subscript	Definition
N	N_{th} year

Table 1: Definition of Subscripts in the model
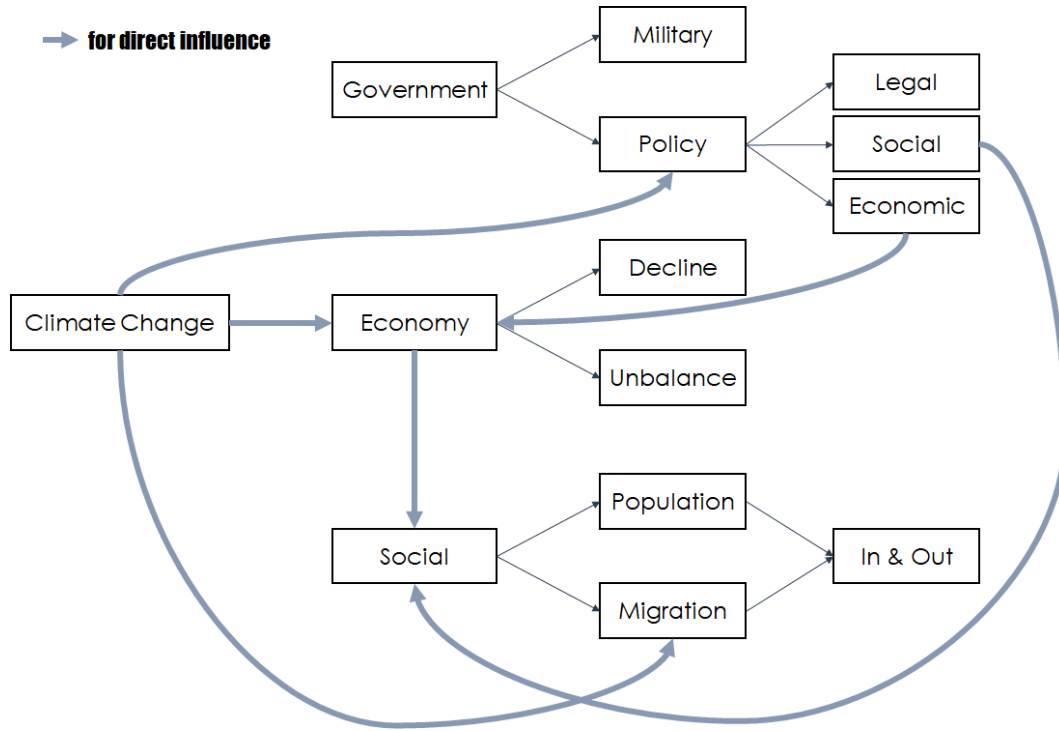
Figure 1: Stage-structured model of current process

Notation	Definition
F	Degree of Fragility
C	Climate factor
E	Economic factor
S	Social factor
P	Policy factor
M	Military factor
X	External Intervention

Table 2: Definition of notations in the model

As assumed, if climate and external intervention remains zero, our major factors should be a **Markov Model**, which is

$$\begin{pmatrix} P_{N+1} \\ M_{N+1} \\ E_{N+1} \\ S_{N+1} \end{pmatrix} = \begin{pmatrix} k_{11} & k_{12} & k_{13} & k_{14} \\ k_{21} & k_{22} & k_{23} & k_{24} \\ k_{31} & k_{32} & k_{33} & k_{34} \\ k_{41} & k_{42} & k_{43} & k_{44} \end{pmatrix} \begin{pmatrix} P_N \\ M_N \\ E_N \\ S_N \end{pmatrix}$$

Specifically, P is the negative effect of improper policy issued by the government, M is the decrease of security apparatus, E is economic declining, and S is social unrest.

3.2   Modified Markov Model including climate change

We can find in the schema that climate change has direct influence on policy factor, economy factor and social factor, which indicates that there are several modifications to make. Since only the military factor is not affected, the modified prediction function should be as follow

$$
\begin{pmatrix} P_{N+1} \\ M_{N+1} \\ E_{N+1} \\ S_{N+1} \end{pmatrix} = \begin{pmatrix} k_{11} & k_{12} & k_{13} & k_{14} \\ k_{21} & k_{22} & k_{23} & k_{24} \\ k_{31} & k_{32} & k_{33} & k_{34} \\ k_{41} & k_{42} & k_{43} & k_{44} \end{pmatrix} \begin{pmatrix} P_N \\ M_N \\ E_N \\ S_N \end{pmatrix} + \begin{pmatrix} k_{CP} \\ 0 \\ k_{CE} \\ k_{CS} \end{pmatrix} C
$$

There may be doubts whether military factor will be affected. As a matter of fact, military factor will change, but not on the direct effect of climate change. The indirect influence from climate change will appear while running the modified prediction function. For example, catastrophe causes social instability, then the military level changes, which might take some time for strategic planning.

3.3   !

Hypothesis	P_N	M_N
Abnormal precipitation	2 support, 1 none, 1 opposite	1 support, 2 none, 1 opposite
Abnormal temperature	1 support, 2 none, 1 opposite	1 support, 1 none, 1 opposite
Natural disasters	2 support, 1 opposite	1 none
Sea level rising	2 support, 1 none, 1 opposite	1 support, 1 none, 1 opposite
Energy deficiency	2 support, 1 opposite	3 none
Less vegetation	2 none	1 none
Hypothesis	E_N	S_N
Abnormal precipitation	3 support, 1 some support	2 support, 1 opposite
Abnormal temperature	4 support, 1 none, 2 opposite	2 support, 1 none, 1 opposite
Natural disasters	6 support, 1 opposite	6 support, 2 opposite
Sea level rising	3 support, 1 none, 1 opposite	2 none
Energy deficiency	2 support, 1 opposite	2 support, 1 none, 1 opposite
Less vegetation	3 support, 1 none, 1 opposite	2 support, 1 opposite

Table 3: Influence of climate change - Quantitative study

For the ID-check, the basic sketch is shown in **Figure 3**.
For the screening lanes, the basic sketch is shown in **Figure 4**.

Hypothesis	P_N	M_N
P_N	3 support	2 support, 1 none, 2 opposite
M_N	2 support, 1 none, 2 opposite	4 support
E_N	4 support, 1 none	1 support, 1 opposite
S_N	1 support, 1 none	2 support, 1 none, 1 opposite
Hypothesis	E_N	S_N
P_N	3 support, 1 none, 1 opposite	1 support, 1 none
M_N	1 support, 2 none	1 support, 1 none
E_N	3 support	1 support, 2 none
S_N	1 support, 2 none	1 support

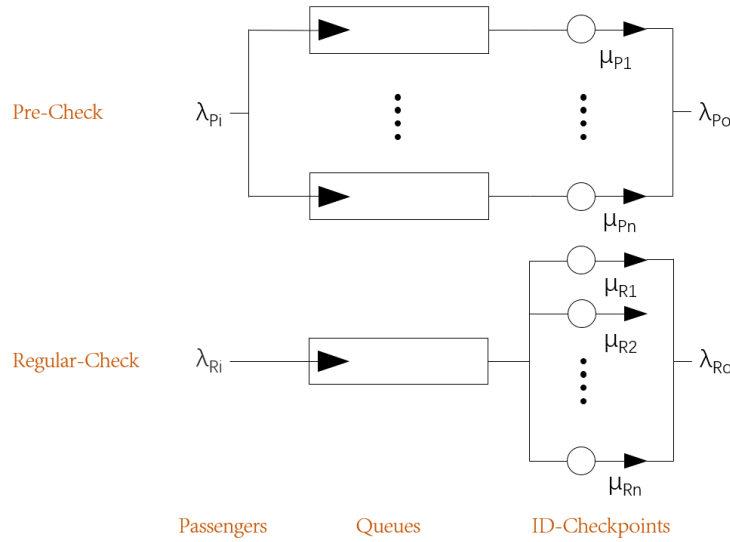Table 4: Interplay of different factors - Quantitative study

Figure 2: Basic sketch for ID-check

In order to build the model clearly and precisely, we have to make some assumptions. Since the data of most airports are inaccessible, we assume the distribution functions of the flow of passengers, of time for ID check and of time for security check as below.

- The number of arriving passengers per second is subject to Poisson Distribution. For the Pre-Check Entrance and Regular Entrance, we have

$$P(\lambda_{Pi} = k) = \frac{e^{-\lambda_P}(\lambda_P)^k}{k!}$$

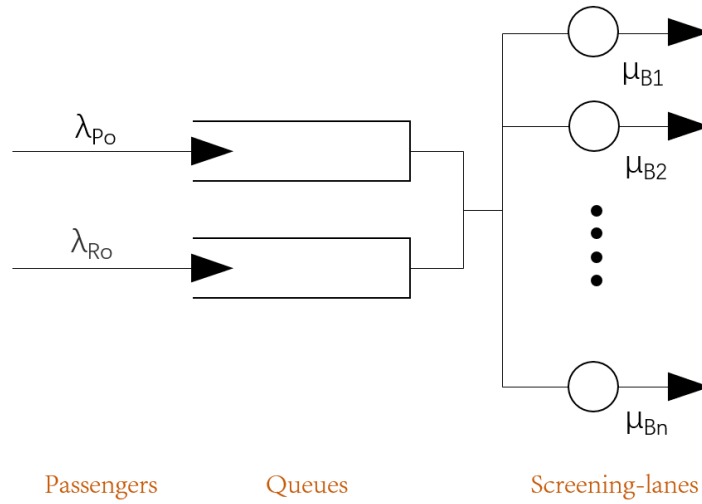$$P(\lambda_{Ri} = k) = \frac{e^{-\lambda_R}(\lambda_R)^k}{k!}$$

Figure 3: Basic sketch for screening lanes

- The time it takes at each ID-Checkpoint per person is subject to exponential distribution

$$F(t) = 1 - e^{-\mu_A t}$$

- The time it takes to pass Zone B per person is subject to exponential distribution as well

$$F(t) = 1 - e^{-\mu_B t}$$

Based on data we have received, we can attain the estimated value for λ_P, λ_R, μ_A, and μ_B (See details about the data in **Appendix A**). We use Successive Minus to calculate the average value. For the number of the arriving passengers per second, the average time interval $\overline{\Delta t_P}$ between every 29 persons at the Pre-Checkpoint is 286.6s. Therefore, due to Moment Estimation, λ_P is given by

$$\widehat{\lambda_P} = \frac{\overline{n_{Pi}}}{\overline{\Delta t_P}} = 0.1012 s^{-1}$$

By similar method, we can obtain the estimated values for λ_R as well ($\overline{\Delta t_R}$ is the average time interval between every 23 persons at the regular checkpoint)

$$\widehat{\lambda_R} = \frac{\overline{n_{Ri}}}{\overline{\Delta t_R}} = 0.0668 s^{-1}$$

Existing data provide two samples of ID-Check process time. By calculating the average time costing for each TSA officer and taking the average of these results again($\overline{t_A}$), we can acquire the estimated value for μ_A

$$\widehat{\mu_A} = \frac{1}{\overline{t_A}} = 0.0877 s^{-1}$$

Based on the time costed at Zone B for each passenger, we can get μ_B

$$\widehat{\mu_B} = \frac{1}{\overline{t_B}} = 0.0349 s^{-1}$$

3.4 Current process analysis

As the additional screening is not always happening, we can assume the proportion of this unexpected case to be a certain small constant η. Since η is small, every passenger who gets additional searching will not wait in Zone D, as a result, the change of flow can be approximatively ignored. If given the maximum of passenger flow f_{max}, the function to describe exit passengers' number is

$$f_o = \begin{cases} f_{max}, & f_i \geq f_{max} \\ f_i, & f_i < f_{max} \end{cases} \tag{1}$$

Assume that t_{Pk}, t_{Rk}, t_{Lk} are time through the Pre-Check entrance, regular-check entrance and screening lanes for the kth sample, so we can easily find that

$$f_{max} = min\{\sum_{k=1}^{N_P} \frac{1}{t_{Pk}} + \sum_{k=1}^{N_R} \frac{1}{t_{Rk}}, \sum_{k=1}^{N_L} \frac{1}{t_{Lk}}\}$$

We use the estimated values to calculate the numerical solution, since the situation when $f_i < f_{max}$ is quite simple, we only aim to find the max flow for current process, which is the index of the bottleneck.

The simplified function is

$$f_{omax} = min\{\sum_{k=1}^{N_P} \mu_{Pk} + \sum_{k=1}^{N_R} \mu_{Rk}, \sum_{k=1}^{N_L} \mu_{Bk}\}$$

As given, $3N_P = N_R$. And the Pre-Check is not faster than regular check at the ID-Checkpoint, so $U_P = U_R = U_A$.

$$f_{omax} = min\{4N_P\mu_A, N_L\mu_B\}$$

Figure 5 shows the relationship between N_L/N_P and f_{omax}
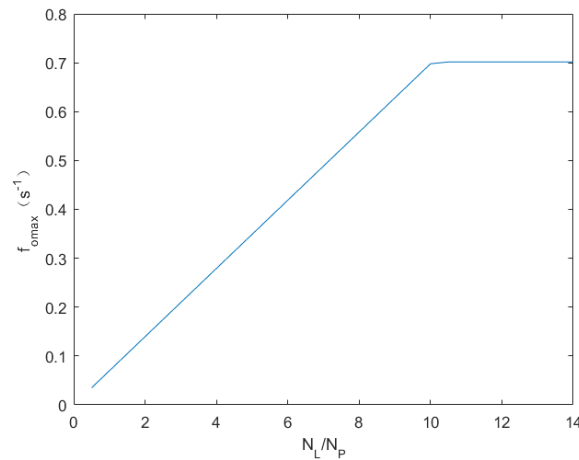

Figure 4: $f_{omax} - N_L/N_P$

When $4N_P\mu_A = N_L\mu_B$, which is $N_L \approx 10N_P$, f_{omax} reaches its peak. However, if N_L gets larger, there will be unused screening lanes, which lower the efficiency of the whole security system.

3.5   Assessment and conclusion

This model is only an estimation of the current operating system at one certain airport, and it has some limitations. First of all, we use moment estimators of passenger flow and passing time to calculate relevant parameters, which suits well mostly under the circumstance that sampling time is long enough and that people's arriving possibility is equal all the time. If not, the accuracy of the result can not be completely gauaranteed. Secondly, we did not consider the differences among people. For example, the elder are more likely to act slowlier than youngsters, and we wonder if this difference would cause changes in some parameters. Finally, we did not consider the time saved for those who have bought Pre-Check service, as we did not attain the relevant data. However, it is undeniably an important factor when calculating the passing time of screening.

So, we draw the conclusion that, when all the assumptions are positive, the passenger flow firstly increases as the input flow gets up, then when the ID-Checkpoint or screening check-lanes reach saturation, the flow of departing passengers starts to maintain a stable value. As for the maximum throughput for the current model, we have attained the result that when $N_L/N_P = 10$, the flow of departing passengers reaches its peak, which is the bottleneck of the input flow for current model. However, as we can see from the figure given, $N_L/N_P < 10$, so the screening check-lanes reach saturation earlier than ID-Checkpoint. As a result, the problem area mainly exists in **Zone B**.

4   Modifications for current process

After analyzing the flow of passengers and existing bottlenecks of the current process of security check, we propose several modifications in order to increase the throughput of passengers and reduce variance in waiting time. Since the calculation of the average waiting time depends on the values of N_P, N_R, N_B and N_X (See **Figure 6**), we first modify the ratio of N_P, N_R, N_B and N_X so as to maximize the throughput, and on that basis we develop a dynamic optimization fuction to adjust the number of entrances as the flow of passengers entering the checkpoint changes, by which we can minimize variance in waiting time.

4.1   Modifications for increasing passenger throughput

We find three small modifications to increase passenger flow when the throughput gets saturated.
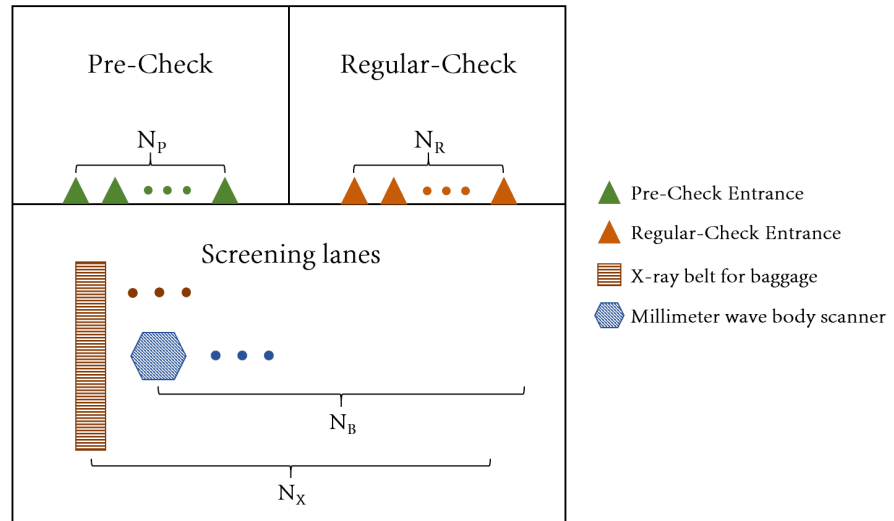
Figure 5: Skecth of a security checkpoint

4.1.1 Change ratio of N_X to N_B

We look into the data provided, and find that the time for people's properties getting scanned is much more than the time costed on themselves. So, if we could change N_X/N_B to a more suitable value, the time utilization ratio can be developed. We analyze the data and use Successive Minus to calculate the ratio of average time spent on properties and persons, then we find that

$$t_X : t_B = 2.2 : 1$$

So, when we do not have a large number of screening-lanes, we can set

$$N_X : N_B = 2 : 1$$

That is to say, when every two people share one millimeter wave body scanner and use two screening belt, the waiting time reach its minimum value and the efficiency of Zone B gets maximum. There is an accurate definition for "waiting" here that one person stops waiting as soon as he(she) puts his(her) baggage on the X-ray belt.

4.1.2 Change ratio of N_P to N_R

We have calculated the ratio of people choosing Pre-Check to people choosing Regular-Check in our basic model according to the data.

$$\lambda_P : \lambda_R = 3 : 2$$

Generally, we can set the ratio to

$$N_P : N_R = 3 : 2$$

4.1.3　Change the ratio of $(N_P + N_R)$ to N_X

The modification above applied, the average time for passengers passing the screening-lanes is shortened, and the average flow for each lane is enlarged

$$\widehat{\mu_B} = \frac{1}{\overline{t_B}'} = 0.0714 s^{-1}$$

μ_A is still the same value. Thus, due to the stability equation

$$(N_P + N_R)\mu_A = N_X \mu_B$$

We can find when

$$N_X = 1.2(N_P + N_R)$$

the whole system is stable and there will be no congestion inside the security checkpoint. The further modifications are all based on these three basic principles.

4.2　Modifications for reducing time variance

In this section, we apply the Queuing Theory Model to simulate the process of security check. According to the Queuing Theory Model, we can obtain a relationship between W_q (average waiting time for every passenger) and s (the number of entrances). In order to minimize the variance of W_q, the airport should adjust s based on various flow of passengers entering the checkpoint, which is related to λ.

According to the assumptions we have already proposed, the number of arriving passengers per unit time obey Poisson Distribution $\pi(\lambda)$, and time passing through the ID-check or screening area obey Exponential Distribution $E(\mu)$. Define $\rho = \frac{\lambda}{s\mu}$. From the Queuing Theory Model, we can obtain the following results:

- When the number of entrances is s, the probability $P_n(s)$ when there are n passengers in the system is

$$P_n(s) = \begin{cases} \frac{(s\rho)^n}{n!} P_0(s), & n = 1, 2, \ldots, s \\ \frac{s^s \rho^n}{s!} P_0(s) = \rho^{n-s} P_s(s), & n = s+1, s+2, \ldots \end{cases} \tag{2}$$

$$P_0(s) = [\sum_{n=0}^{s-1} \frac{(s\rho)^n}{n!} + \frac{(s\rho)^s}{s!}(\frac{1}{1-\rho})]^{-1}$$

- The average number of passengers waiting in queues L_q is

$$L_q = \sum_{n=s+1}^{\infty} (n-s)P_n(s) = \frac{(s\rho)^s \rho}{s!(1-\rho)^2} P_0(s)$$

- The average number of passengers in the checkpoint L_s is

$$L_S = L_q + s\rho$$

- The average time waiting in queues W_q is

$$W_q = \frac{L_q}{\lambda}$$

- The average time spending in the checkpoint W_s is

$$W_s = \frac{L_s}{\lambda}$$

More specifically, since in the previous modifiations we rearranged the proportianal relationship between N_P and N_R so as to make sure the passengers uniformly entering every entrances. Therefore, we consider the whole checkpoint as a M/M/S system, where s is the sum of N_P and N_R, and λ is the number of passengers arriving at every entrance per unit time. Furthermore, since the total servce time is the sum of time in Zone A and Zone B, μ can be attained as follows.

$$\mu = \frac{1}{\frac{1}{\mu_A} + \frac{1}{\mu_B}} = 0.0433s^{-1}$$

Then, we use Matlab to simulate our model. Firstly, we assign different values to s from 2 to 15 and calculate the corresponding λ on condition that W_q keeps constant ($25s$). Results are shown in **Table 3**.

s	$\lambda\ (s^{-1})$
2	0.0866
3	0.1299
4	0.1732
5	0.2156
6	0.2598
7	0.3031
8	0.3464
9	0.3897
10	0.4330
11	0.4763
12	0.5196
13	0.5629
14	0.6062
15	0.6495

Table 5: $s - \lambda$

From the data above, it can be discovered that s and λ are directly propotional. Therefore, assuming that s and λ are continuous, we can figure out the fuctional relationship between λ and s:

$$s = \frac{\lambda}{0.0433}$$

We notice that $\mu = 0.0433s^{-1}$, so we can draw the conclution that

$$s = \frac{\lambda}{\mu}$$

Then, we apply different approaches to round s to appropriate integers. See **Figure 7**.

Moreover, we draw the fitting figure between W_q and λ in **Figure 8** in order to assess different approaches. In **Figure 8**, (1) and (2) will lead to long waiting time under specific conditions, which is due to the unstable state of the system. Such unstability is the result of $\rho = \frac{\lambda}{s\mu} > 1$. As for (3) and (4), such unstability can be avoided, but (3) brings higher cost. Thus, we apply the approach in (4) to round s.

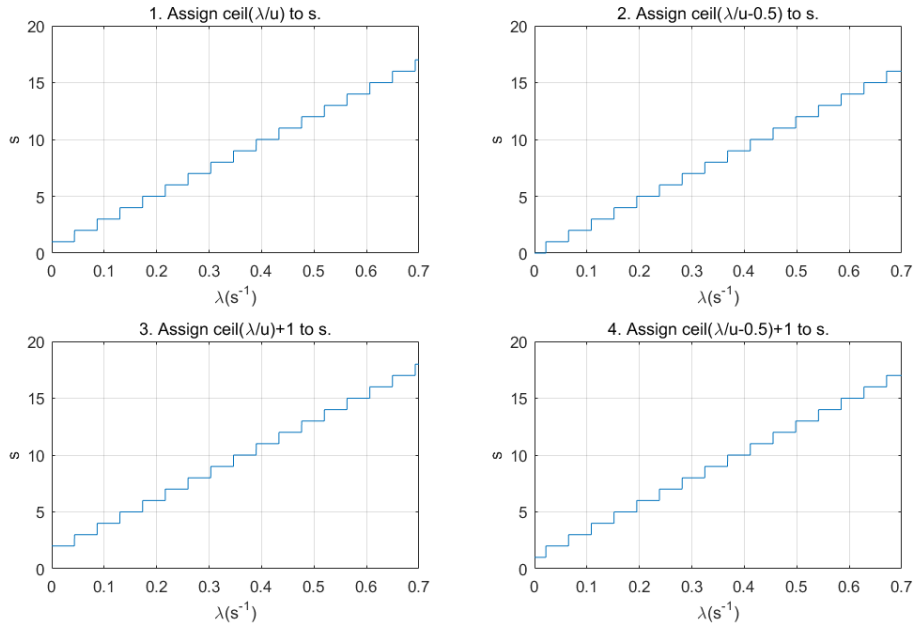Figure 6: $s - \lambda$ of different approaches

In conclusion, as λ changes, we set s as $s = \lceil \frac{\lambda}{\mu} - 0.5 \rceil + 1$, which means when the flow of passengers entering the checkpoint increase, the airport need to increase the number of entrances according to the relationship above. By this method, we can reduce variance in waiting time by $\Delta W_q \leq \pm 19.4s$.
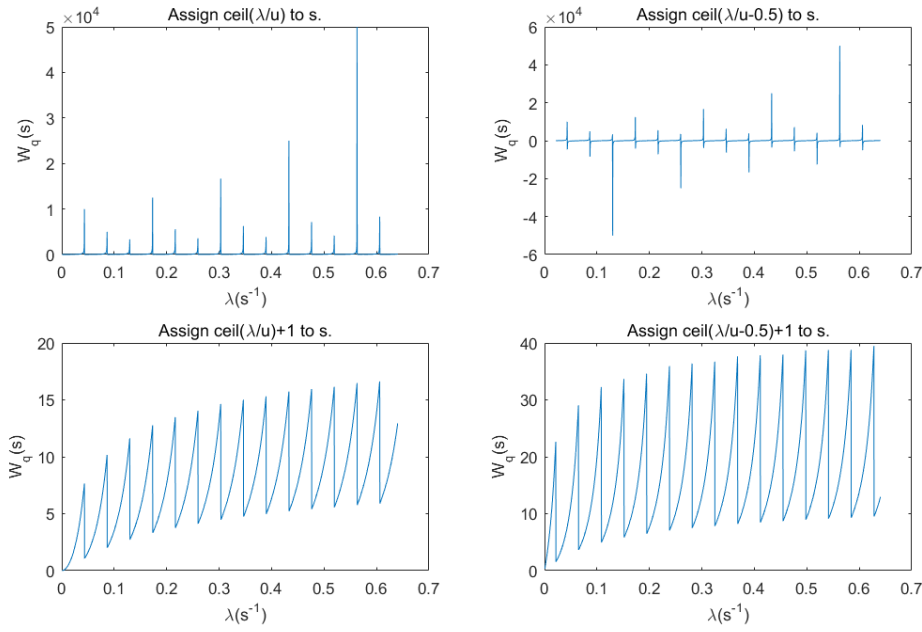
Figure 7: $W_q - \lambda$ of different approaches

5 Sensitivity analysis on cultural diversity

Since passengers from different areas have their own customs and norms, their behaviors are different, which could possibly influence our model. In this chapter, we analyze three representative types of passengers and how their cultural diversities impact our model. In the end, we demonstrate how our model accommodate these differences.

5.1 Entrances paralyzed due to cutting in lines

Passengers from some areas have the concept of prioritizing individual efficiency, so the probability of cutting in lines may increase. Meanwhile, if the dispute caused by cutting in lines can not be solved in time, it may lead to the temporary paralysis of an entrance.

We assume that the number of lanes paralyzed obeys Poisson Distribution. Due to scarcity of concrete data, we assume that it obeys $\pi(0.01)$. We have

$$P(S_{paralyzed} = k) = \frac{e^{-0.01}(0.01)^k}{k!}$$

From the calculation we can attain that the probability of a entrance paralyzed is approximately 1%, of two entrances paralyzed is about 0.005%, and of more entrances paralyzed is almost 0. Assumptions above are appropriate for the time

period of general passenger flow. Therefore, we analyze the sensitivity according to the situation that there are only one or two entrances paralyzed.

Based on the previous optimization, we have already obtained that without the possibility of entrances paralyzed W_q is about 20s, and no more than 40s .

5.1.1 One entrance paralyzed

From previous analysis, although the actual number of entrances is one less than the number we anticipate, it will result in the rapid increase of W_q. Assume that there is one entrance paralyzed, which means that passengers who are supposed to go through this entrance will wait in other entrances. The increase of other entrances should obey

$$\Delta L_q = \frac{\lambda \Delta t}{s(s-1)}$$

From what has been deduced before

$$s = \lceil \frac{\lambda}{\mu} - 0.5 \rceil + 1$$

We have

$$\frac{dL_q}{dt} = \frac{\lambda}{\lceil \frac{\lambda}{\mu} - 0.5 \rceil (\lceil \frac{\lambda}{\mu} - 0.5 \rceil + 1)}$$
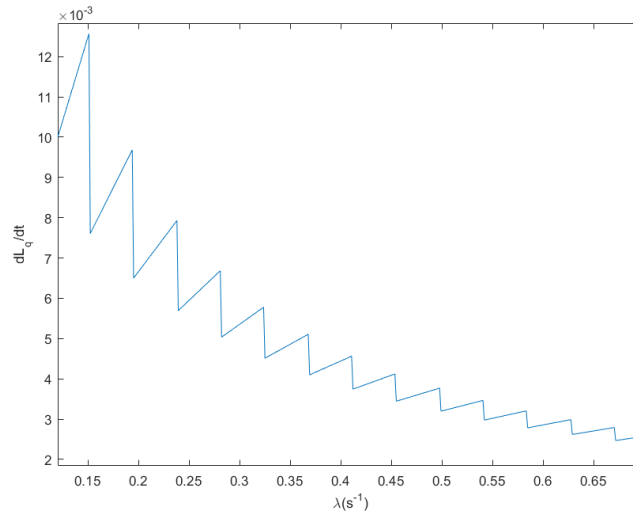
Figure 8: $\frac{dL_q}{dt} - \lambda$ when one entrance paralyzed

Under such rule, when there is one entrance paralyzed, the speed of increases of the number of passengers waiting in other entrances is shown in **Figure 9**. We assume that most of disputes will be solved in five minutes. From the figure we can estimate that the number of people increasing for every entrance is 3.9, and is at most 4, which is to say, W_q at most will increase by 1.5 minutes with the probability of 1%.

5.1.2 Two entrances paralyzed

Similarly, when there are two entrances paralyzed, the speed of increases of the number of passengers for each entrances is

$$\frac{dL_q}{dt} = \frac{2\lambda}{\lceil \frac{\lambda}{\mu} - 0.5 \rceil (\lceil \frac{\lambda}{\mu} - 0.5 \rceil + 1)}$$

If the flow of passengers is so little that the entrances open are less than two, the paralysis hardly happens. As a consequence, we omit the situation when $\lambda < 0.1$ in the **Figure 10**. Under such situation, we also assume that a dispute can be
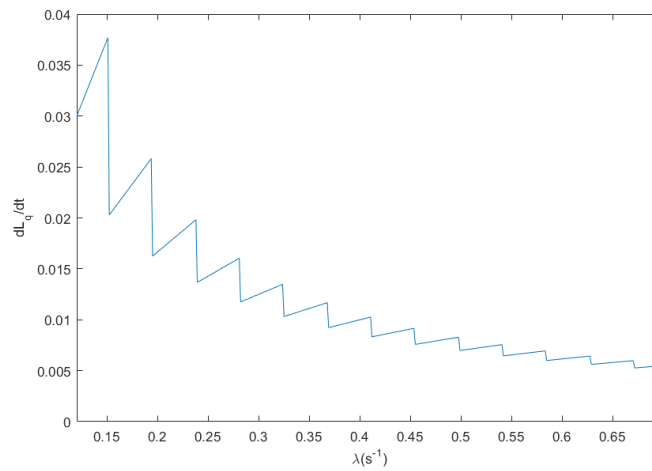
Figure 9: $\frac{dL_q}{dt} - \lambda$ when two entrances paralyzed

solved in five minutes. Thus, the increasing number of passengers for each entrance is at most 12. Passengers can markedly feel the increase of passengers, but the waiting time for each individual still will increase no more than 5 minutes.

The sensitivity analysis above is based on the distribution $\pi(0.01)$. If such paralyzing happens in a large scale, we do not need such model to analyze it. From our analysis, we can draw the conclusion that the influence of W_q due to cutting in queues is small. To be more specific, the time will increase no more than 5 minutes.

5.2 Longer screening time

Passengers from different areas spend different time for security check. For instance, Egyptians and Jews are used to wearing kerchiefs while Americans are used to wearing simple jeans and T-shirt, which will absolutely result in different checking time.
Assume that in this case

$$W_q' = 1.2W_q$$

Then

$$\mu' = \frac{1}{1.2}\mu = 0.83\mu = 0.0359$$

After calculation, the changed functional relationship is $s = \frac{\lambda}{0.0359}$. **Figure 11** shows $s - \lambda$, and **Figure 12** shows $W_q - \lambda$.
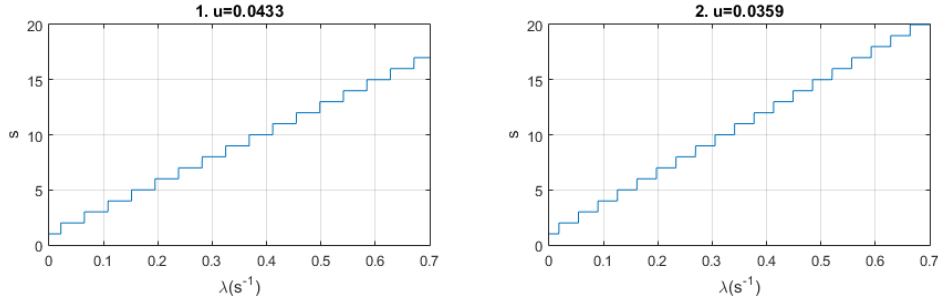
Figure 10: $s - \lambda$ with longer screening time
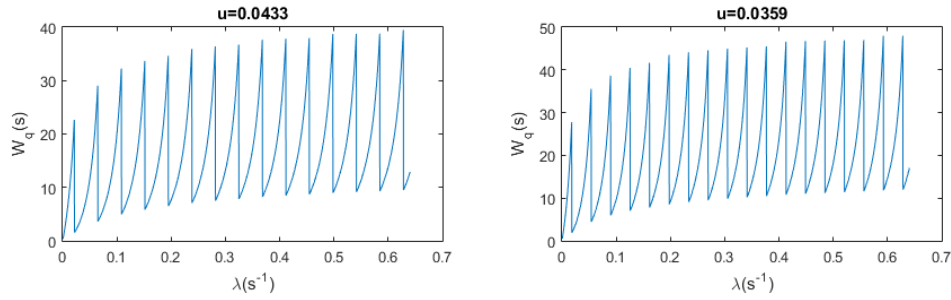
Figure 11: $W_q - \lambda$ with longer screening time

In this case, $\Delta W_q \leq \pm 24.0s$ when W_q is constant (25s). Campared with the previous result $\Delta W_q \leq \pm 19.4s$, we can conclude that longer screening time due to different dressing has little impact on our model.

5.3 More passengers getting additional screening

Due to the culture discrepancies, passengers from different areas may have different understanding of definitions of contrabands. It is possible that some items are not allowed to take through the security checkpoint in some areas while such items can be safely carried in other areas. Furthermore, different countries have different norms of limited power of specific electronic equipments. Therefore, such discrepancies may lead to the increase of the probability of passengers from specific areas getting additional searching, which will decrease the efficiency of the whole system.

In the previous chapter, we assume that the proportion of passengers getting additional screening is a small constant η whose influence on the whole system can be ignored. Now considering the influences of culture discrepancies, we assume that $\eta = 0.02$ which is large enough to affect the throughput of passengers. Assume that the additional searching time also obey Exponential Distribution $E(\mu_D)$, and $\mu_D = \frac{1}{10}\mu_B$. Then we have

$$\mu' = \frac{1}{\frac{\eta}{\mu_D} + \frac{1}{\mu_A} + \frac{1}{\mu_B}} = \frac{1}{\frac{10\eta}{\mu_B} + \frac{1}{\mu}}$$

Similarly, we show the relationship between $s - \lambda$ and $W_q - \lambda$ in **Figure 13** and **Figure 14**.
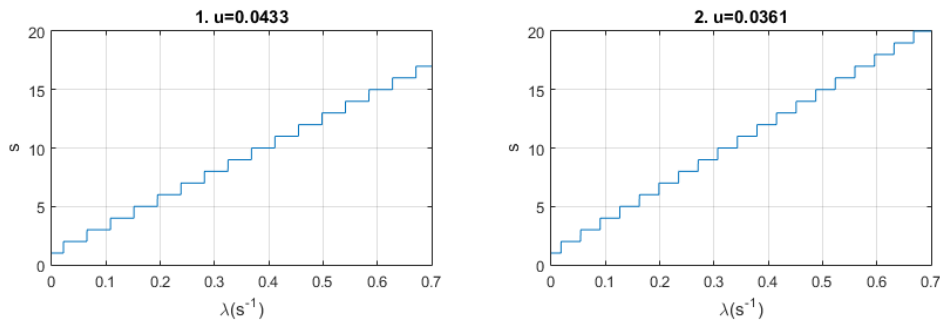
Figure 12: $s - \lambda$ with more passengers in Zone D
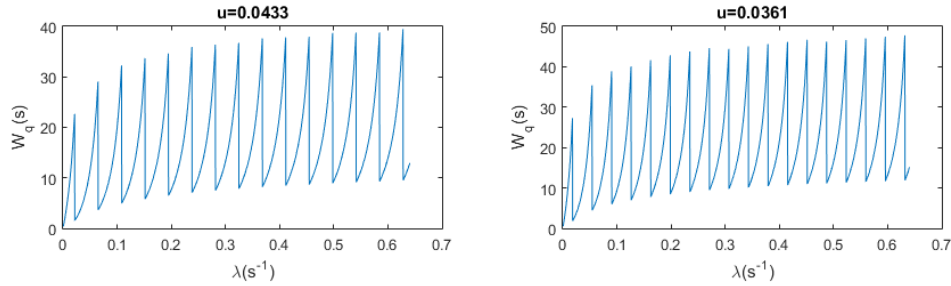
Figure 13: $W_q - \lambda$ with more passengers in Zone D

When $W_q = 25s$, we can calculate $\Delta W_q \leq \pm 23.9$. Campared with the previous result $\Delta W_q \leq \pm 19.4s$, we can safely draw theconclusion that more passengers in Zone D due to obsure perceptions of contraband have little impact on our model.

6 Policy and recommendations

- Based on the model established primitively, the speed of document check is twice over that of screening, as a consequence, the screening process

contributes most to the appearance of bottlenecks. Therefore, the airport should dispatch more skilled TSA officers to the screening area and expedite the speed of screening.

- Rationally arrange the number of entrances and lanes. From the optimization we have made, the best arrangement is shown below

$$N_X : N_B = 2 : 1$$

$$\lambda_P : \lambda_R = 3 : 2$$
$$N_X = 1.2(N_P + N_R)$$

- Monitor the flow of passengers in real time, and arrange the number of entrances according to the acquired values in order to reduce the cost on the basis of rational efficiency. The optimal result we obtain according to data we have is

$$s = \lceil \frac{\lambda}{\mu} - 0.5 \rceil + 1$$

- Arrange different number of TSA officers and security staffs in different security checkpoints in order to adjust the average waiting time of passengers. For instance, in the checkpoints with more queue-jumpers, we should arrange more staffs to insure that disputes caused by cutting will not continue for a long period. In the sensitivity analysis, the increasing velocity of queues satisfy that

$$\frac{dL_q}{dt} = \frac{\lambda s_{paralyzed}}{s(s - s_{paralyzed})}$$

We assumed that all kinds of disputes will be solved in five minutes, and if such time increases, the queue will be so long that passengers may suffer from anxiety.

- Promote Pre-Check service, and increase the number of Pre-Check entrances, which will provide convenience to passengers and save the checking time. It is mentioned that 45% of passengers enroll in Pre-Check, but since Pre-Check passengers tend to travel more frequently by plane, such proportion cannot be the criterion when deciding the number of Pre-Check entrances and regular entrances.

- Establish a baggage buffer that used to temporarily store the baggage that has been checked. Since in our optimization each lane for body screening is accompanied with two lanes for baggage screening, which will increase the probability of baggage checked faster than passengers, such buffer can prevent the occurrence of congestion and improve the security level of baggage.

- In the sensitivity analysis, we find that culture discrepancies will not impact greatly the queuing time, and the existing congestion mainly due to the insufficiency of entrances. Therefore, we propose that if cost permitting,

the airport should open more entrances and disperse entrances as much as possible in order to disperse passengers, which will relief the anxiety of them.

7 Strengths and weaknesses

7.1 Strengths

- Our model separates the whole process of security check into ID-check part and screening part, and independently calculates the corresponding queuing conditions, which avoid the possible errors due to the complicated model.

- We estimate the arrival rate for each passenger and the checking time for each TSA officer, and assume that the former obeys Poisson Distribution and the latter obeys Exponential Distribution, which conform to the general principles.

- We apply the moment estimation to estimate relevant parameters of the system so as to obtain the basic model.

- We apply the Queuing Theory, and consider the average waiting time and the flow of passengers as our principal evaluation indexes, which correspond with profits of airports and passengers.

- When analyzing the sensitivity and improving the current model, we consider the difference of average waiting time and the maximal flow of passengers as our principal evaluation indexes, which guarantee that the airport can provide every passengers with the approximately same service with the maximal efficiency.

7.2 Weaknesses

- Since we do not have enough data, we have to estimate related parameters using moment estimation of data given. The error can be large when the data size is small.

- The bound between service time and waiting time is not explicit enough. We assume that when passengers put their baggage on the belt, they finish waiting and service time begins, but actually perhaps passengers consider the time between the moment they put down their baggage and the moment they receive body screening is also the waiting time.

- Since we have less estimation of costs and utilization of space, our model considers efficiency and flying experience of passengers as the principal

indexes. In fact, we should modify our model according to actual costs of airport construction.

- We did not take the scale of the airport into account, and modeling based on the given data. If the scale of the airport is large enough, we need to rewrite some of our codes to obtain a more graceful result.

References

[1] https://en.wikipedia.org/wiki/Fragile_state#Defining_fragile_states

[2] Gan Y A, Tian F, Lee W Z, Lee M S, Chen B Z, Hu Y Q, Gu J F, Guo Y H, Qian S D. Operational research. Tsinghua University Press, 2005.

[3] Clara V. Marin, Colin G. Drury, Rajan Batta, Li Lin. Server Adaptation in an Airport Security System Queue[J].The OR Society, 2007, Vol.20:22-31.

[4] Zeng Junjie. Optimization and Configuration of Airport Security. Wide Angle, 2009:173-174.

[5] MI Kamien,NL Schwartz. Dynamic Optimization: The Calculus of Variations and Optimal Control in Economics & Management.North Holland, 1981, 31(1):1252-1257.

[6] Zhang Guofen, Huang B Q, Zhang C Y. Probability Theory, Mathematical Statistics and Stochastic Process. Zhejiang University Press, 2011.

[7] Ivo Adan, Jacques Resing. Queueing Systems.Department of Mathematics and Computing Science Eindhoven University of Technology, P.O. Box 513, 5600 MB Eindhoven, The Netherlands, 2015.

[8] Queueing theory (https://en.wikipedia.org/wiki/Queueing_theory).

Appendices

Appendix A   First appendix

Here are data about how passengers proceed through each step of the security screening process.

A	B	C	D	E	F	G	H
00:00.	00:00.	00:08.	00:15.	00:09.	00:03.	00:00.	0:48
00:11.	00:09.	00:05.	00:12.	00:20.	00:06.	00:02.	0:45
00:13.	00:10.	00:11.	00:15.	00:33.	00:07.	00:03.	0:28
00:14.	00:11.	00:10.	00:20.	00:36.	00:09.	00:11.	0:25
00:15.	00:13.	00:09.	00:08.	00:43.	00:20.		0:22
00:25.	00:14.	00:09.	00:08.	00:52.	00:22.		0:24
00:34.	00:16.	00:13.	00:11.	01:05.	00:25.		0:17
00:54.	00:27.	00:15.		01:16.	00:41.		0:33
00:56.	00:57.	00:12.		01:25.	01:07.		0:08
01:15.	01:21.			01:32.	01:09.		0:10
01:16.	02:16.			01:43.	01:18.		0:26
01:44.	02:24.			01:58.			0:32
01:49.	02:27.			02:09.			0:21
02:04.	02:43.			02:26.			0:37
02:26.	02:44.			02:40.			1:08

Appendix B   Second appendix

Here are simulation programmes we used in our model as follow.

Draw the figure of f_{omax} and N_L/N_P

```
%show the relationbetween fomax and NL/NP
uA=0.0877;      %Mathematical expectation of the number of Pre-Check
               %passengers per unit time entering the entrance

uB=0.0349;      %Mathematical expectation of the number of regular-check
               %passengers per unit time entering the entrance

NP=2;           %set the number of Pre-Check entrance as 2
NL=zeros(1,28);
Y=zeros(1,28);
for i=1:28
    NL(i)=i;
    Y(i)=min(4*NP*uA,NL(i)*uB);%specific derivation of the function relation
                              %is at section '3.4 Current process
                              %analysis' in the paper
end
plot(NL/NP,Y);%draw the relation curve of 'fomax' and 'NL/NP'
xlabel('NL/NP');
ylabel(' f_o_m_a_xčÍs^-^1čl'');
```

Find the zero point of the function $test$

```
y=fzero('test',0.1)   %get the nearest from 0.1 solution of the equation.
```

Calculate W_q for every specific s

```
function Wq=test(lamda)
```

A	B	C	D	E	F	G	H
02:54.	03:06.			02:47.			0:40
02:58.	03:13.			02:54.			0:18
02:59.	03:15.			03:06.			0:26
03:01.	03:27.			03:25.			0:08
03:06.	03:29.			03:34.			0:21
03:09.	04:27.			04:11.			0:23
03:10.	04:42.			04:22.			0:28
03:20.	04:48.			04:35.			0:50
03:22.	05:00.			04:47.			0:28
03:34.	05:09.			05:00.			0:48
03:53.	05:40.			05:11.			0:28
04:17.	05:57.			05:18.			0:36
04:35.	06:00.			05:26.			0:27
04:36.	06:20.			05:41.			0:05
04:37.	07:39.			05:48.			
04:38.	07:51.			05:59.			
05:06.	08:01.			06:09.			
05:13.	08:02.			06:36.			
05:37.	08:04.			06:45.			
05:42.	08:06.			06:54.			
05:46.	08:18.			07:05.			
06:03.	08:20.			07:15.			
06:06.	08:21.			07:24.			
06:11.	08:22.			07:36.			
06:46.	08:33.			07:43.			
06:47.	08:46.						
06:49.	08:54.						
06:50.	08:56.						
07:06.	09:13.						
07:07.	09:34.						
07:27.	09:53.						
07:36.	09:56.						
07:41.							
07:41.							
07:42.							
07:47.							
08:16.							
08:23.							
08:25.							
08:26.							
08:27.							
08:43.							
08:44.							

Symbol	Process	Notes
A	TSA PreCheck Arrival Times	Airport checkpoint recoding individuals entering the pre-check queue.
B	Regular Arrival Times	Airport checkpoint recoding individuals entering the regular queue.
C	ID Check TSA officer 1	The time the arrival of the passenger to the ID check station until the TSA officer calls the next passenger forward.
D	ID Check TSA officer 2	Same as column C, but for a different TSA officer.
E	mm wave scan times	Time stamps as passenger exited the milimeter wave scanner.
F	X-Ray Scan Time 1	Time stamps as bags exited the x-ray screening.
G	X-Ray Scan Time 2	Same as column F, but for a different TSA officer.
H	Time to get scanned property	Time it takes people from arriving at the belt to place items to be scanned, until they retrieved their items off the post-xray belt.

```
syms temp;   %a intermediate variables to calculate Lq
syms rou;    %the service intensity
syms Po;     %a intermediate variables to calculate Lq
syms Lq;     %the average length of the queues
syms Wq;     %the average wait time of the passengers
u=0.0433;
temp=0;
s=2;
%the relations following are from queuing theory
rou=lamda/(s*u);
for k=0:1:s-1
    temp=temp+power(s*rou,k)/factorial(k);
end
temp=temp+power(s*rou,s)/(factorial(s)*(1-rou));
Po=1/temp;
Lq=(power(s*rou,s)*rou/(factorial(s)*power(1-rou,2)))*Po;
Wq=Lq/lamda-60;
```

Draw figures of s and λ when approaches to rounding s are different

```
u=0.0433;
X=zeros(1,10000);
Y=zeros(1,10000);
dx=0.00007;           %set the micro element as dx=0.00007

%draw figure 1 to show the relation between s and lamda on
%condition that 's=ceil(lamda/u)'
for i=1:10000
    X(i)=i*dx;
    Y(i)=ceil(i*dx/u);
end
```

```matlab
subplot(2,2,1);
plot(X,Y);
grid on;
xlabel('\lambda(s^-^1)');
ylabel('s');
title('1. Assign ceil(\lambda/u) to s.');

%draw figure 2 to show the relation between s and lamda on
%condition that 's=ceil(lamda/u-0.5)'
for i=1:10000
    X(i)=i*dx;
    Y(i)=ceil(i*dx/u-0.5);
end
subplot(2,2,2);
plot(X,Y);
grid on;
xlabel('\lambda(s^-^1)');
ylabel('s');
title('2. Assign ceil(\lambda/u-0.5) to s.');

%draw figure 3 to show the relation between s and lamda on
%condition that 's=ceil(lamda/u)+1'
for i=1:10000
    X(i)=i*dx;
    Y(i)=ceil(i*dx/u)+1;
end
subplot(2,2,3);
plot(X,Y);
grid on;
xlabel('\lambda(s^-^1)');
ylabel('s');
title('3. Assign ceil(\lambda/u)+1 to s.');

%draw figure 4 to show the relation between s and lamda on
%condition that 's=ceil(lamda/u-0.5)+1'
for i=1:10000
    X(i)=i*dx;
    Y(i)=ceil(i*dx/u-0.5)+1;
end
subplot(2,2,4);
plot(X,Y);
grid on;
xlabel('\lambda(s^-^1)');
ylabel('s');
title('4. Assign ceil(\lambda/u-0.5)+1 to s.');
```

Draw figures of W_q and λ when approaches to rounding s are different

```matlab
X=zeros(1,2000);
Y=zeros(1,2000);

%Figure 1:Assign ceil(1/u*lamda) to s.
%Calculate the average wait time Wq
for i=1:2000
    k=i+1;
    lamda=k*0.00032;
```

```matlab
        s=ceil(1/0.0433*(lamda));
        X(i)=lamda;
        u=0.0433;          %service speed
        temp=0;
        rou=lamda/(s*u);  %service intensity
        for k=0:1:s-1
            temp=temp+power(s*rou,k)/factorial(k);
        end
        temp=temp+power(s*rou,s)/(factorial(s)*(1-rou));
        Po=1/temp;
        Lq=(power(s*rou,s)*rou/(factorial(s)*power(1-rou,2)))*Po;
        Wq=Lq/lamda;
        Y(i)=Wq;
end
subplot(2,2,1);
plot(X,Y);
xlabel('\lambda(s^-^1)');
ylabel('W_q(s)');
title('Assign ceil(\lambda/u) to s.');

%Figure 2:Assign ceil(1/u*lamda-0.5) to s.
%Calculate the average wait time Wq
for i=1:2000
    k=i+1;
    lamda=k*0.00032;
    s=ceil(1/0.0433*(lamda-0.0433/2));
    X(i)=lamda;
    u=0.0433;
    temp=0;
    rou=lamda/(s*u);
    for k=0:1:s-1
        temp=temp+power(s*rou,k)/factorial(k);
    end
    temp=temp+power(s*rou,s)/(factorial(s)*(1-rou));
    Po=1/temp;
    Lq=(power(s*rou,s)*rou/(factorial(s)*power(1-rou,2)))*Po;
    Wq=Lq/lamda;
    Y(i)=Wq;
end
subplot(2,2,2);
plot(X,Y);
xlabel('\lambda(s^-^1)');
ylabel('W_q(s)');
title('Assign ceil(\lambda/u-0.5) to s.');

%Figure 3:Assign ceil(1/u*lamda)+1 to s.
%Calculate the average wait time Wq
for i=1:2000
    k=i+1;
    lamda=k*0.00032;
    s=ceil(1/0.0433*(lamda))+1;
    X(i)=lamda;
    u=0.0433;
    temp=0;
    rou=lamda/(s*u);
```

```matlab
        for k=0:1:s-1
            temp=temp+power(s*rou,k)/factorial(k);
        end
        temp=temp+power(s*rou,s)/(factorial(s)*(1-rou));
        Po=1/temp;
        Lq=(power(s*rou,s)*rou/(factorial(s)*power(1-rou,2)))*Po;
        Wq=Lq/lamda;
        Y(i)=Wq;
end
subplot(2,2,3);
plot(X,Y);
xlabel('\lambda(s^-^1)');
ylabel('W_q(s)');
title('Assign ceil(\lambda/u)+1 to s.');

%Figure 4:Assign ceil(1/u*lamda-0.5)+1 to s.
%Calculate the average wait time Wq
for i=1:2000
    k=i+1;
    lamda=k*0.00032;
    s=ceil(1/0.0433*(lamda-0.0433/2))+1;
    X(i)=lamda;
    u=0.0433;
    temp=0;
    rou=lamda/(s*u);
    for k=0:1:s-1
        temp=temp+power(s*rou,k)/factorial(k);
    end
    temp=temp+power(s*rou,s)/(factorial(s)*(1-rou));
    Po=1/temp;
    Lq=(power(s*rou,s)*rou/(factorial(s)*power(1-rou,2)))*Po;
    Wq=Lq/lamda;
    Y(i)=Wq;
end
subplot(2,2,4);
plot(X,Y);
xlabel('\lambda(s^-^1)');
ylabel('W_q(s)');
title('Assign ceil(\lambda/u-0.5)+1 to s.');
```

Draw figures of s and λ when screening time is longer

```matlab
X=zeros(1,10000);
Y=zeros(1,10000);
dx=0.00007;
%draw figure 1 to show the relation between s and lamda on
%condition that 'u=0.0433'
u=0.0433;
for i=1:10000
    X(i)=i*dx;
    Y(i)=ceil(i*dx/u-0.5)+1;
end
subplot(1,2,1);
plot(X,Y);
grid on;
xlabel('\lambda(s^-^1)');
```

```matlab
ylabel('s');
title('1. u=0.0433');

%draw figure 1 to show the relation between s and lamda on
%condition that 'u=0.0359'
u=0.0359;
for i=1:10000
    X(i)=i*dx;
    Y(i)=ceil(i*dx/u-0.5)+1;
end
subplot(1,2,2);
plot(X,Y);
grid on;
xlabel('\lambda(s^-^1)');
ylabel('s');
title('2. u=0.0359');
```

Draw figures of W_q and λ when screening time is longer

```matlab
X=zeros(1,2000);
Y=zeros(1,2000);

%Figure 1:Assign u=0.0433.
%Calculate the average wait time Wq
for i=1:2000
    k=i+1;
    lamda=k*0.00032;
    s=ceil(1/0.0433*(lamda-0.0433/2))+1;
    X(i)=lamda;
    u=0.0433;
    temp=0;
    rou=lamda/(s*u);
    for k=0:1:s-1
        temp=temp+power(s*rou,k)/factorial(k);
    end
    temp=temp+power(s*rou,s)/(factorial(s)*(1-rou));
    Po=1/temp;
    Lq=(power(s*rou,s)*rou/(factorial(s)*power(1-rou,2)))*Po;
    Wq=Lq/lamda;
    Y(i)=Wq;
end
subplot(1,2,1);
plot(X,Y);
xlabel('\lambda(s^-^1)');
ylabel('W_q(s)');
title('u=0.0433');

%Figure 2:Assign u=0.0359.
%Calculate the average wait time Wq
for i=1:2000
    k=i+1;
    lamda=k*0.00032;
    s=ceil(1/0.0359*(lamda-0.0359/2))+1;
    X(i)=lamda;
    u=0.0359;
    temp=0;
```

```
        rou=lamda/(s*u);
        for k=0:1:s-1
            temp=temp+power(s*rou,k)/factorial(k);
        end
        temp=temp+power(s*rou,s)/(factorial(s)*(1-rou));
        Po=1/temp;
        Lq=(power(s*rou,s)*rou/(factorial(s)*power(1-rou,2)))*Po;
        Wq=Lq/lamda;
        Y(i)=Wq;
end
subplot(1,2,2);
plot(X,Y);
xlabel('\lambda(s^-^1)');
ylabel('W_q(s)');
title('u=0.0359');
```

Draw figures of s and λ when there are more passengers entering Zone D

```
X=zeros(1,10000);
Y=zeros(1,10000);
dx=0.00007;

%draw figure 1 to show the relation between s and lamda on
%condition that 'u=0.0433'
u=0.0433;
for i=1:10000
    X(i)=i*dx;
    Y(i)=ceil(i*dx/u-0.5)+1;
end
subplot(1,2,1);
plot(X,Y);
grid on;
xlabel('\lambda(s^-^1)');
ylabel('s');
title('1. u=0.0433');

%draw figure 2 to show the relation between s and lamda on
%condition that 'u=0.0361'
u=0.0361;
for i=1:10000
    X(i)=i*dx;
    Y(i)=ceil(i*dx/u-0.5)+1;
end
subplot(1,2,2);
plot(X,Y);
grid on;
xlabel('\lambda(s^-^1)');
ylabel('s');
title('2. u=0.0361');
```

Draw figures of W_q and λ when there are more passengers entering Zone D

```
X=zeros(1,2000);
Y=zeros(1,2000);

%Figure 1:Assign u=0.0433.
```

```matlab
%Calculate the average wait time Wq
for i=1:2000
    k=i+1;
    lamda=k*0.00032;
    s=ceil(1/0.0433*(lamda-0.0433/2))+1;
    X(i)=lamda;
    u=0.0433;
    temp=0;
    rou=lamda/(s*u);
    for k=0:1:s-1
        temp=temp+power(s*rou,k)/factorial(k);
    end
    temp=temp+power(s*rou,s)/(factorial(s)*(1-rou));
    Po=1/temp;
    Lq=(power(s*rou,s)*rou/(factorial(s)*power(1-rou,2)))*Po;
    Wq=Lq/lamda;
    Y(i)=Wq;
end
subplot(1,2,1);
plot(X,Y);
xlabel('\lambda(s^-^1)');
ylabel('W_q(s)');
title('u=0.0433');

%Figure 1:Assign u=0.0361.
%Calculate the average wait time Wq
for i=1:2000
    k=i+1;
    lamda=k*0.00032;
    s=ceil(1/0.0361*(lamda-0.0361/2))+1;
    X(i)=lamda;
    u=0.0361;
    temp=0;
    rou=lamda/(s*u);
    for k=0:1:s-1
        temp=temp+power(s*rou,k)/factorial(k);
    end
    temp=temp+power(s*rou,s)/(factorial(s)*(1-rou));
    Po=1/temp;
    Lq=(power(s*rou,s)*rou/(factorial(s)*power(1-rou,2)))*Po;
    Wq=Lq/lamda;
    Y(i)=Wq;
end
subplot(1,2,2);
plot(X,Y);
xlabel('\lambda(s^-^1)');
ylabel('W_q(s)');
title('u=0.0361');
```

Draw the figure of $dW_q/dt - \lambda$ when there is one entrance paralyzed

```matlab
syms lamda
mu=0.0433;
k=lamda/((ceil(lamda/mu-0.5)+1)*(ceil(lamda/mu-0.5)));
ezplot(k,[0.12,0.7]);
xlabel('\lambda(s^-^1)');
```

```
ylabel('dL_q/dt');
```

Draw the figure of $dW_q/dt - \lambda$ when there are two entrances paralyzed

```
syms lamda;
mu=0.0433;
k=2*lamda/((ceil(lamda/mu-0.5)+1)*(ceil(lamda/mu-0.5)-1));
ezplot(k,[0.12,0.7]);
xlabel('\lambda(s^-^1)');
ylabel('dL_q/dt');
```

mu=0.0433;