Applied Physics NS (1001)

Motion in two/three dimensions Position and Displacement

One general way of locating a particle (or particle-like object) is with a **position vector**, which is a vector that extends from a reference point (usually the origin) to the particle.

$$\vec{r} = x\hat{i} + y\hat{j} + z\hat{k} \tag{4.1}$$

where x, y, and z are the vector components of and the coefficients x, y, and z are its scalar components.

Fig. 4-1 shows a particle with position vector

$$\vec{r} = (-3 \text{ m})\hat{i} + (2 \text{ m})\hat{j} + (5 \text{ m})\hat{k}$$

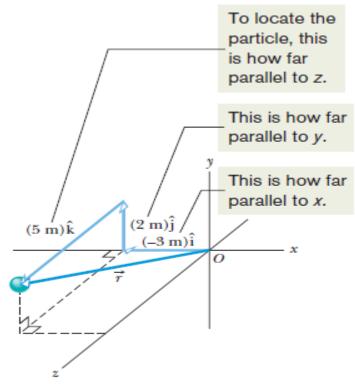


Figure 4-1 The position vector \vec{r} for a particle is the vector sum of its vector components.


Position and Displacement

Position vector: extends from the origin of a coordinate system to the particle.

$$\vec{r} = x\hat{i} + y\hat{j} + z\hat{k} \tag{4.1}$$

Displacement vector: represents a particle's position change during a certain time interval.

$$\Delta \vec{r} = \vec{r}_2 - \vec{r}_1 = (x_2 - x_1)\hat{i} + (y_2 - y_1)\hat{j} + (z_2 - z_1)\hat{k}$$
(4.2)

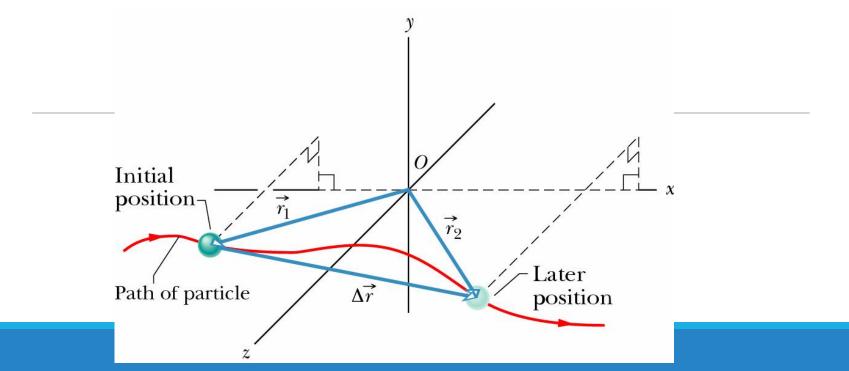

Average Velocity and Instantaneous Velocity


If a particle moves through a displacement $\Delta \vec{r}$ in a time interval Δt , then its average velocity \vec{v}_{avg} is

average velocity =
$$\frac{\text{displacement}}{\text{time interval}}$$
,

$$\vec{v}_{\text{avg}} = \frac{\Delta \vec{r}}{\Delta t}$$
.

Average velocity:

$$\vec{v}_{avg} = \frac{\Delta \vec{r}}{\Delta t} = \frac{\Delta x}{\Delta t} \hat{i} + \frac{\Delta y}{\Delta t} \hat{j} + \frac{\Delta z}{\Delta t} \hat{k}$$

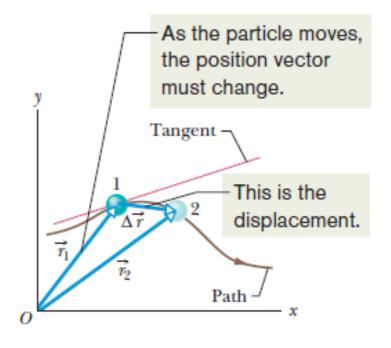


Instantaneous velocity:

When we speak of the **velocity** of a particle, we usually mean the particle's **instantaneous velocity** \vec{v} at some instant. This \vec{v} is the value that \vec{v}_{avg} approaches in the limit as we shrink the time interval Δt to 0 about that instant. Using the language of calculus, we may write \vec{v} as the derivative

$$\vec{v} = v_x \hat{i} + v_y \hat{j} + v_z \hat{k} = \frac{d\vec{r}}{dt} = \frac{dx}{dt} \hat{i} + \frac{dy}{dt} \hat{j} + \frac{dz}{dt} \hat{k} \qquad \qquad \vec{v} = \frac{d\vec{r}}{dt}.$$

the particle's position

-The direction of the instantaneous velocity of a particle is always tangent to the particle's path at



Average acceleration:

When a particle's velocity changes from \vec{v}_1 to \vec{v}_2 in a time interval Δt , its average acceleration \vec{a}_{avg} during Δt is


$$\frac{\text{average}}{\text{acceleration}} = \frac{\text{change in velocity}}{\text{time interval}},$$

$$\vec{a}_{avg} = \frac{\vec{v}_2 - \vec{v}_1}{\Delta t} = \frac{\Delta \vec{v}}{\Delta t} \tag{4.5}$$

These are the x and y components of the vector at this instant.

Instantaneous acceleration:

$$\vec{a} = a_x \hat{i} + a_y \hat{j} + a_z \hat{k} = \frac{d\vec{v}}{dt} = \frac{dv_x}{dt} \hat{i} + \frac{dv_y}{dt} \hat{j} + \frac{dv_z}{dt} \hat{k}$$
 (4.6)



TWO-DIMENSIONAL MOTION WITH CONSTANT ACCELERATION

The position vector for a particle moving in the xy plane can be written

$$\mathbf{r} = x\mathbf{i} + y\mathbf{j}$$

$$\mathbf{v} = v_x\mathbf{i} + v_y\mathbf{j}$$


$$\begin{aligned} \mathbf{v}_f &= \mathbf{v}_i + \mathbf{a}t \\ v_{yf} &= v_{xi} + a_x t \\ v_{yf} &= v_{yi} + a_y t \end{aligned}$$

$$\mathbf{r}_f &= \mathbf{r}_i + \mathbf{v}_i t + \frac{1}{2} \mathbf{a} t^2$$

$$\begin{cases} x_f &= x_i + v_{xi} t + \frac{1}{2} a_x t^2 \\ y_f &= y_i + v_{yi} t + \frac{1}{2} a_y t^2 \end{cases}$$

Checkpoint 1

The figure shows a circular path taken by a particle. If the instantaneous velocity of the particle is $\vec{v} = (2 \text{ m/s})\hat{i} - (2 \text{ m/s})\hat{j}$, through which quadrant is the particle moving at that instant if it is traveling (a) clockwise and (b) counterclockwise around the circle? For both cases, draw \vec{v} on the figure.



Checkpoint 2

Here are four descriptions of the position (in meters) of a puck as it moves in an xy plane:

(1)
$$x = -3t^2 + 4t - 2$$
 and $y = 6t^2 - 4t$ (3) $\vec{r} = 2t^2\hat{i} - (4t + 3)\hat{j}$

(2)
$$x = -3t^3 - 4t$$
 and $y = -5t^2 + 6$ (4) $\vec{r} = (4t^3 - 2t)\hat{i} + 3\hat{j}$

Are the x and y acceleration components constant? Is acceleration \vec{a} constant?

Example

A rabbit runs across a parking lot on which a set of coordinate axes has, strangely enough, been drawn. The coordinates (meters) of the rabbit's position as functions of time *t* (seconds) are given by

$$x = -0.31t^2 + 7.2t + 28 \tag{4-5}$$

and

$$y = 0.22t^2 - 9.1t + 30. (4-6)$$

(a) At t = 15 s, what is the rabbit's position vector \vec{r} in unit-vector notation and in magnitude-angle notation?

For the rabbit in the preceding sample problem, find the velocity \vec{v} at time t = 15 s.

For the rabbit in the preceding two sample problems, find the acceleration \vec{a} at time t = 15 s.

$$\vec{r}(t) = x(t)\hat{\mathbf{i}} + y(t)\hat{\mathbf{j}}.$$
 (4-7)

(We write $\vec{r}(t)$ rather than \vec{r} because the components are functions of t, and thus \vec{r} is also.)

At t = 15 s, the scalar components are

$$x = (-0.31)(15)^2 + (7.2)(15) + 28 = 66 \text{ m}$$

and
$$y = (0.22)(15)^2 - (9.1)(15) + 30 = -57 \text{ m},$$

so
$$\vec{r} = (66 \text{ m})\hat{i} - (57 \text{ m})\hat{j}$$
, (Answer)

$$r = \sqrt{x^2 + y^2} = \sqrt{(66 \text{ m})^2 + (-57 \text{ m})^2}$$

= 87 m, (Answer)

$$\theta = \tan^{-1} \frac{y}{x} = \tan^{-1} \left(\frac{-57 \text{ m}}{66 \text{ m}} \right) = -41^{\circ}.$$
 (Answer)

$$v_x = \frac{dx}{dt} = \frac{d}{dt} (-0.31t^2 + 7.2t + 28)$$

= -0.62t + 7.2. (4-13)

At t = 15 s, this gives $v_x = -2.1$ m/s. Similarly, applying the v_y part of Eq. 4-12 to Eq. 4-6, we find

$$v_y = \frac{dy}{dt} = \frac{d}{dt} (0.22t^2 - 9.1t + 30)$$
$$= 0.44t - 9.1. \tag{4-14}$$

At t = 15 s, this gives $v_y = -2.5$ m/s. Equation 4-11 then yields $\vec{v} = (-2.1 \text{ m/s})\hat{i} + (-2.5 \text{ m/s})\hat{j}, \quad \text{(Answer)}$

$$v = \sqrt{v_x^2 + v_y^2} = \sqrt{(-2.1 \text{ m/s})^2 + (-2.5 \text{ m/s})^2}$$

$$= 3.3 \text{ m/s} \qquad (\text{Answer})$$

$$\theta = \tan^{-1} \frac{v_y}{v_x} = \tan^{-1} \left(\frac{-2.5 \text{ m/s}}{-2.1 \text{ m/s}}\right)$$

$$= \tan^{-1} 1.19 = -130^{\circ}. \qquad (\text{Answer})$$

$$a_x = \frac{dv_x}{dt} = \frac{d}{dt} (-0.62t + 7.2) = -0.62 \text{ m/s}^2.$$

Similarly, applying the a_y part of Eq. 4-18 to Eq. 4-14 yields the y component as

$$a_y = \frac{dv_y}{dt} = \frac{d}{dt} (0.44t - 9.1) = 0.44 \text{ m/s}^2.$$

We see that the acceleration does not vary with time (it is a constant) because the time variable t does not appear in the expression for either acceleration component. Equation 4-17 then yields

$$\vec{a} = (-0.62 \text{ m/s}^2)\hat{i} + (0.44 \text{ m/s}^2)\hat{j}, \text{ (Answer)}$$

$$a = \sqrt{a_x^2 + a_y^2} = \sqrt{(-0.62 \text{ m/s}^2)^2 + (0.44 \text{ m/s}^2)^2}$$

= 0.76 m/s². (Answer)


For the angle we have

$$\theta = \tan^{-1} \frac{a_y}{a_x} = \tan^{-1} \left(\frac{0.44 \text{ m/s}^2}{-0.62 \text{ m/s}^2} \right) = -35^\circ.$$

Free Fall and Gravitational Acceleration

A free-falling object is one which is falling under the sole influence of gravity. This definition of free fall leads to two important characteristics about a free-falling object:

- > Free-falling objects do not encounter air resistance
- ➤ All free-falling objects (on Earth) accelerate downwards at a rate of -9.8 m/s²
 - This rate is commonly referred to as g





Free Fall and Gravitational Acceleration


All of the equations that work for HORIZONTAL (x-direction) motion ALSO work for VERTICAL (y-direction) motion.

Simply substitute g for a and Δy for Δx

Generally, free falling objects start falling from rest, so it tends to simplify the equations by eliminating v_i

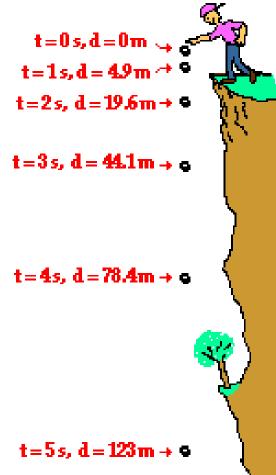

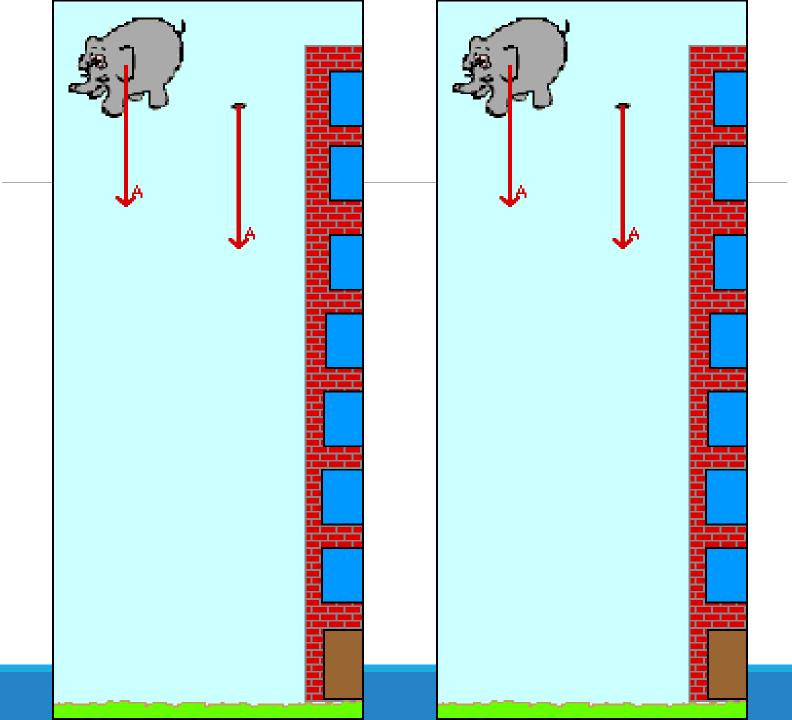

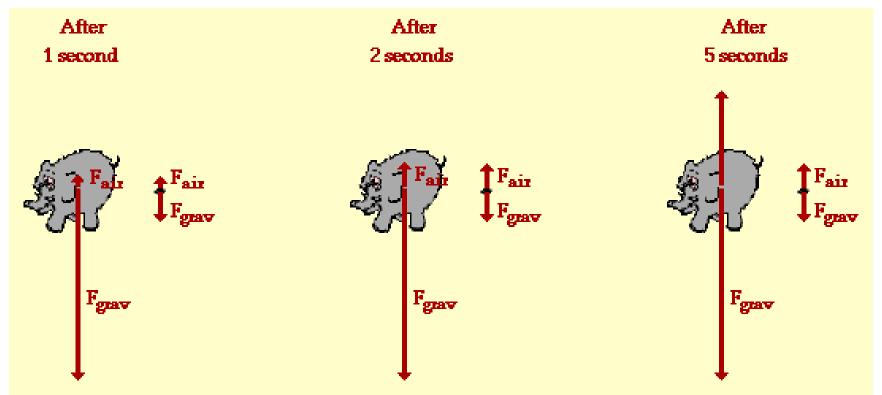


Free-body diagrams for the elephant and the feather at various times during the course of their fall reveal that the feather quickly reaches terminal velocity while the elephant continues to accelerate for the entire fall.

Terminal Velocity

Forces cause objects to accelerate (2nd Law). When the force of gravity on a falling object equals the force of the air resistance going against gravity, the forces balance out and the object stops accelerating.


The object will travel at a constant velocity - the terminal velocity.



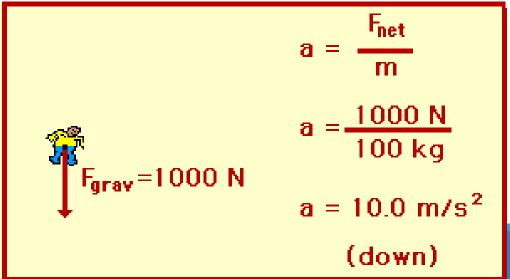

UNIFORM CIRCULAR MOTION


The acceleration vector in uniform circular motion is always perpendicular to the path and always points toward the center of the circle. An Acceleration of this nature is called a centripetal (center-seeking) acceleration, and its magnitude is



$$a = \frac{v^2}{r}$$
 (centripetal acceleration), $T = \frac{2\pi r}{v}$ (period).

Consider a particle moving along a curved path where the velocity changes both in direction and in magnitude

The acceleration vector always points toward the center.



$$\vec{v} = v_x \hat{i} + v_y \hat{j} = (-v \sin \theta) \hat{i} + (v \cos \theta) \hat{j}.$$


replace sin with y_p/r and cos with x_p/r


$$\vec{v} = \left(-\frac{vy_p}{r}\right)\hat{\mathbf{i}} + \left(\frac{vx_p}{r}\right)\hat{\mathbf{j}}.$$

$$\vec{a} = \frac{d\vec{v}}{dt} = \left(-\frac{v}{r}\frac{dy_p}{dt}\right)\hat{\mathbf{i}} + \left(\frac{v}{r}\frac{dx_p}{dt}\right)\hat{\mathbf{j}}. \quad \vec{a} = \left(-\frac{v^2}{r}\cos\theta\right)\hat{\mathbf{i}} + \left(-\frac{v^2}{r}\sin\theta\right)\hat{\mathbf{j}}.$$

$$a = \sqrt{a_x^2 + a_y^2} = \frac{v^2}{r} \sqrt{(\cos \theta)^2 + (\sin \theta)^2} = \frac{v^2}{r} \sqrt{1} = \frac{v^2}{r}$$

$$\tan \phi = \frac{a_y}{a_x} = \frac{-(v^2/r)\sin \theta}{-(v^2/r)\cos \theta} = \tan \theta.$$






Tangential and Radial Acceleration


Radial acceleration


$$a_r = \frac{v^2}{}$$

Tangential acceleration

Total acceleration



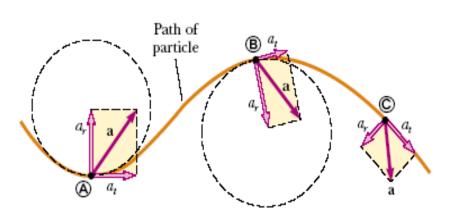



Projectile Motion

Two-dimensional motion of an object

- Vertical
- Horizontal



Types of Projectile Motion

Horizontal


- Motion of a ball rolling freely along a level surface
- Horizontal velocity is ALWAYS constant

Vertical

- Motion of a freely falling object
- Force due to gravity
- Vertical component of velocity changes with time


Parabolic

 Path traced by an object accelerating only in the vertical direction while moving at constant horizontal velocity

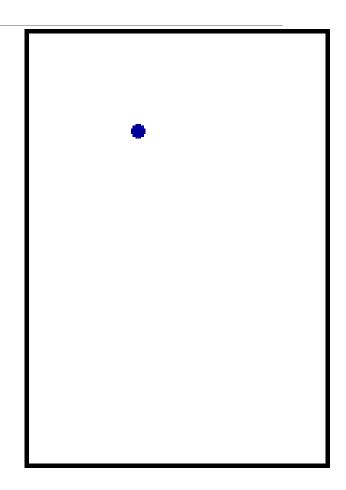

Examples of Projectile Motion

Launching a Cannon ball

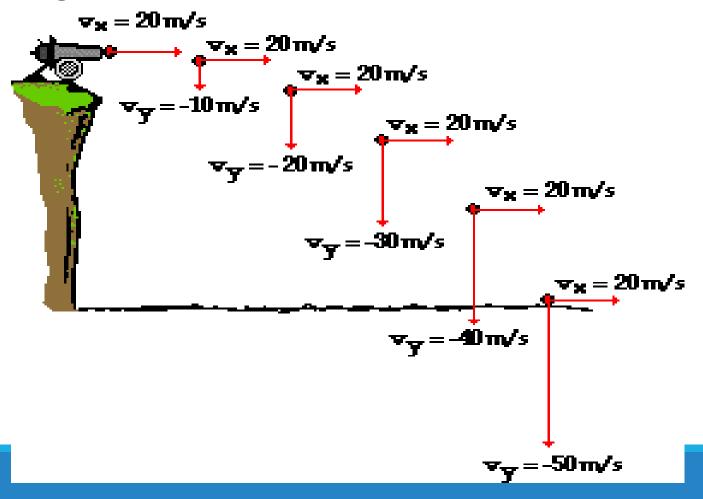


Final Horizontal and Vertical component of velocity:

$$vx_f = v Cos\theta$$

 $vy_f = v Sin\theta - gt$

The projectile motion is the superposition of two motions:

- (1) constant velocity motion in the horizontal direction and
- (2) free-fall motion in the vertical direction.

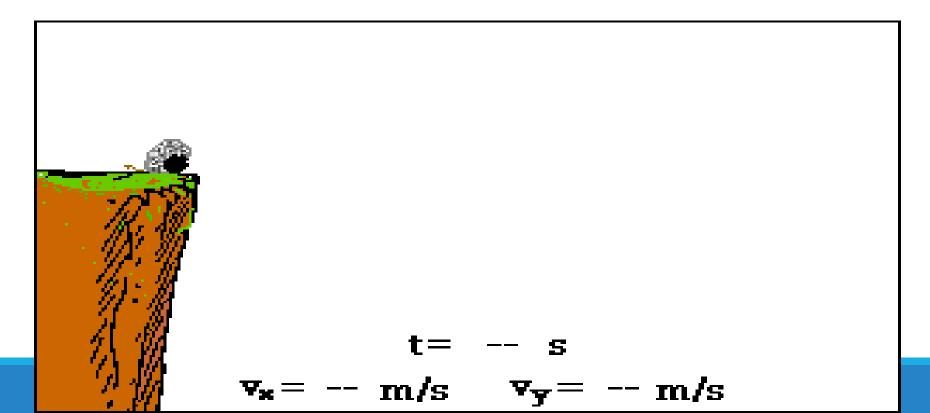

Equations

X- Component

$$x_f = x_i + v_{xi}t$$

Y- Component

$$y_{f} = y_{i} + v_{yi}t - \frac{1}{2}gt^{2}$$
 $v_{yf}^{2} = v_{yi}^{2} - 2g\Delta y$
Note: g= 9.8
 $v_{yf} = v_{yi} - gt$

$$v_{xi} = v_i \cos(\theta)$$
$$v_{yi} = v_i \sin(\theta)$$

Checkpoint 3

At a certain instant, a fly ball has velocity $\vec{v} = 25\hat{i} - 4.9\hat{j}$ (the x axis is horizontal, the y axis is upward, and \vec{v} is in meters per second). Has the ball passed its highest point?

The Horizontal Motion

There is *no acceleration* in the horizontal direction, the horizontal component v_x of the projectile's velocity remains unchanged from its initial value v_{0x} throughout the motion

$$a = 0$$

the initial x and y components of velocity are

$$x - x_0 = v_{0x}t$$
.

$$v_{xi} = v_i \cos \theta_i$$
 $v_{yi} = v_i \sin \theta_i$

Because $v_{0x} = v_0 \cos \theta_0$, this becomes

$$x - x_0 = (v_0 \cos \theta_0)t.$$

The Vertical Motion

In vertical the acceleration is constant i.e

$$a = -g$$

$$y - y_0 = v_{0y}t - \frac{1}{2}gt^2$$

= $(v_0 \sin \theta_0)t - \frac{1}{2}gt^2$,

$$v_y = v_0 \sin \theta_0 - gt$$

$$v_y^2 = (v_0 \sin \theta_0)^2 - 2g(y - y_0).$$

The Equation Path

$$y = (\tan \theta_0)x - \frac{gx^2}{2(v_0 \cos \theta_0)^2}$$
 (trajectory).

The path of a projectile, which we call its *trajectory*, is always a parabola

The Horizontal Range

The *horizontal range R* of the projectile is the *horizontal* distance the projectile has traveled when it returns to its initial height (the height at which it is launched). To find range R, let us put $x - x_0 = R$ and $y - y_0 = 0$

$$R = (v_0 \cos \theta_0)t$$

and

$$0 = (v_0 \sin \theta_0)t - \frac{1}{2}gt^2.$$

Eliminating t between these two equations yields


$$R = \frac{2v_0^2}{g} \sin \theta_0 \cos \theta_0.$$

Using the identity $\sin 2\theta_0 = 2 \sin \theta_0 \cos \theta_0$ (see Appendix E), we obtain

$$R = \frac{v_0^2}{g} \sin 2\theta_0$$
. The horizontal range R is maximum for a launch angle of 45°.

Maximum Height

$$h = \frac{v_i^2 \sin^2 \theta_i}{2g}$$

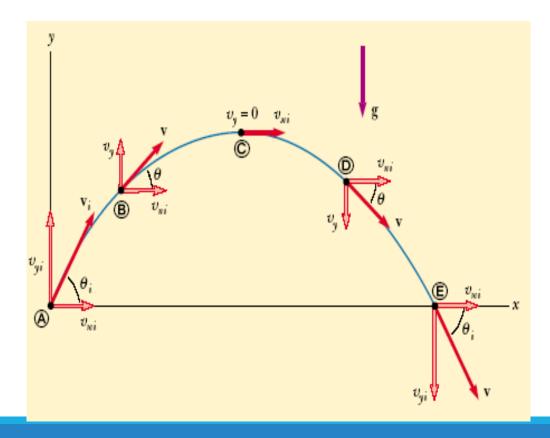

A particle moves in the xy plane with an x component of acceleration only, given by $a_x = 4$ m/s^2 . The particle starts from the origin at t =0 with an initial velocity having an x component of 20 m/s and a y component of -15 m/s. (a) Determine the components of velocity vector as a function of time and total velocity vector at any time .(b)Calculate the velocity and speed of the particle at t=5sec. (c) Determine the x and y coordinates at any time t and the displacement vector at this time.

(a)
$$V = [(20 + 4t)i - 15j]m/s$$

(b)
$$V = 42.7 \text{ m/s}$$

(c)
$$x = (20t + 2t^2)$$

$$y = -15 t m$$

r = 168m at t = 5sec

A long –jumper leaves the ground at an angle of 20° to the horizontal and the a speed of 11 m/s. How far does he jump and what is the maximum height reached?

R = 7.93 m

H = .7222

R = vi^2 Sin 2theta/g

H = vi^2 Sin ^2theta/ 2g

A stone is thrown from the top of a building upward at an angle of 30° to the horizontal and with an initial speed of 20m/s, as in figure-1. If the height of the building is 45 m. (a) How long is the stone "in flight" (b) What is the speed of the stone just before it strikes the ground?

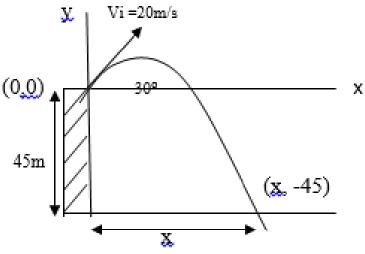


Figure-1

Vxi = 17.3 m/s

Vyi = 10m/s

T = 4.22s

|Vf| = 35.9 m/s

A ski jumper travel down a slope and leaves the ski track moving in the horizontal direction with a speed of 25m/s as in figure-2. The landing incline below him falls off with a slope of 35°. Where does he land on the incline?

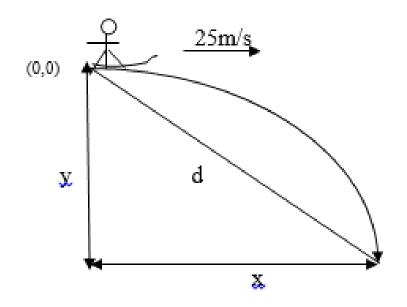


Figure-2

X = 25 t

 $Y = Vyi - \frac{1}{2} gt^2 = -4.9 t^2$

X = d cos theta

Y = d sintheta

d = 109m

X = 89.3 m

Y = -26.5m

A tire 0.500 m in radius rotates at a constant rate of 200 rev/min. Find the speed and acceleration of a small stone lodged in the tread of the tire (on its outer edge).

R = .5

Speed = total distance / total time = 200 X 2pi R /60 sec

V = 10.5 m/s

 $a = v^2/r$

a = 220m/s^2