

SenseTime

—

SenseNebula AIM M30 AI Module

(V 0.3)

Product Specification

www.sensetime.com

PRODUCT
MANUAL



1 Product Introduction

1.1 Product summary

SenseNebula AIM M30 AI module (hereinafter referred to as M30) is an embeddable face recognition module product. Based on self-developed living body algorithm and face recognition algorithm from SenseTime, it provides application functions such as living body detection, face recognition and RGB image output, and is widely used in various indoor/semi-outdoor scenes such as office buildings, schools, hospitals, and homes.



1.2 Product Features

Fast and accurate recognition : 0.3s face recognition, recognition accuracy rate is higher than 99.9%, support 0.5-2m recognition distance.

Large capacity of recognition library: Maximum support 20,000 people in the local database.

Powerful detection function: real-time detection and tracking of human faces, accurate detection in scenes such as side faces, half occlusions, and blurs.


Diversified recognition: The device supports recognition of regular faces and faces wearing masks, and user can be recognized normally in the presence of interference such as glasses and beards.

Infrared live detection: effective defense against non-living attacks such as 3D printing, electronic screens, videos, pictures, masks, hoods, etc ;

Interface standardization: the device supports standard USB2.0 interface, which is convenient for external host computer integration.

2 Product specification

2.1 Appearance

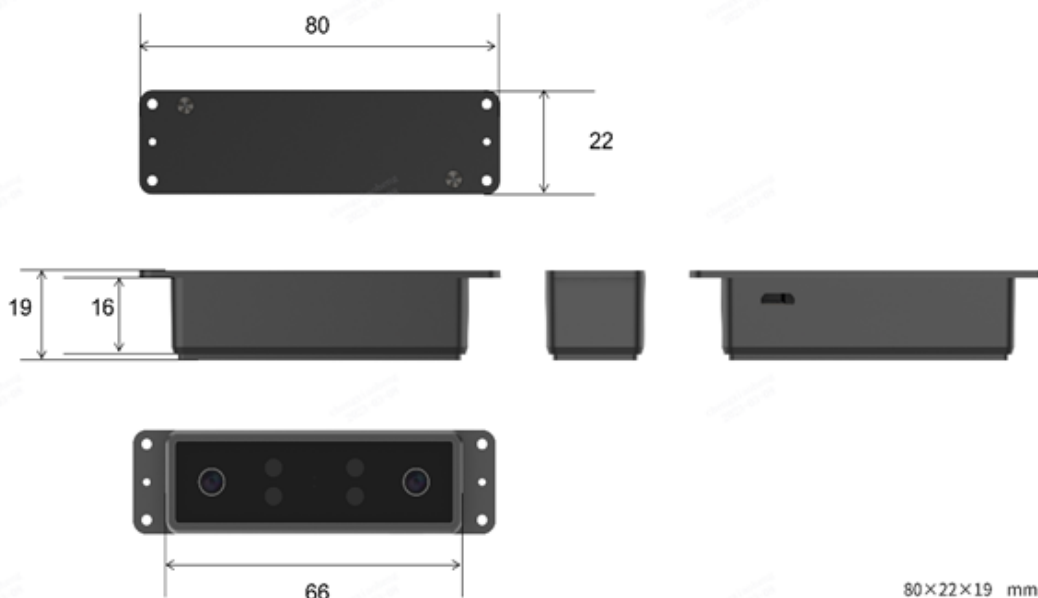


2.2 Specifications

SenseNebula AIM M30 AI module		
Features	Main function	Living body detection, face recognition
	Use environment	Indoor/semi-outdoor
	Recognition distance	0.5-2m(Recommended) 0.3~3m (Max Range)
	Recognition duration	≤0.3s
	Mask Detection	support
	Local face database	20000
	Size	88 X 22 X 19mm
	Weight	50g
	Shell material	Aluminum alloy
	Color	Gray


RGB Camera	Pixels	2 MP Resolution, 1920x1080
	Sensor Size	1/2.8"
	F.NO.	2.8
	FOV	70.4°(D) 62.9°(V)37.9(H)
	Focusing Distance	0.6m
	Focusing Range	0.33m~3.35m
	HDR	Support
IR Camera	Pixels	2 MP Resolution, 1920x1080
	Sensor Size	1/2.8"
	F.NO.	2.8
	FOV	70.4°(D) 62.9°(V)37.9(H)
	Focusing Distance	0.6m
	Focusing Range	0.33m~3.35m
Fill light	Infrared fill light	850nm X4
System	Operating system	Linux
	NPU	1.2T
Power Supply	Through USB port	DC 5V - 1.2A
Interface	Power Switch	Micro USB
	USB interface	Micro USB
	UART Port (inside the shell)	1 UART_TX 2 UART_RX 3 DEBUG_UART_TX 4 DEBUG_UART_RX 5 GND
Environmental requirements	Operation temperature	-20-50°C(Deployment of cooling scheme)
	Storage temperature	-30-80°C
	Operation humidity Storage humidity	0-93% RH
Installation	Installation	Embed

2.3 Equipment Function & Dimensions

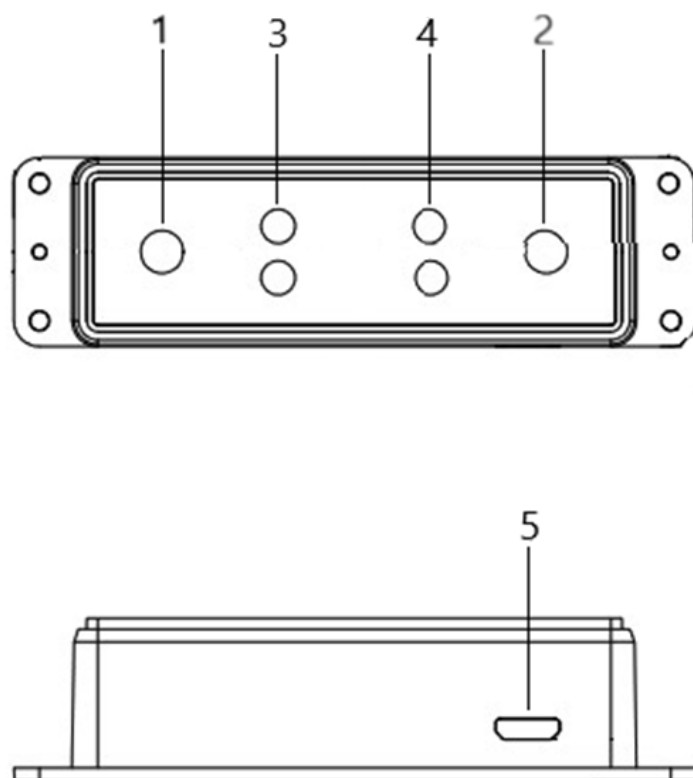

Part number	Function
1	IR camera
2	RGB camera
3&4	Infrared LED
5	Micro USB interface

TOP VIEW

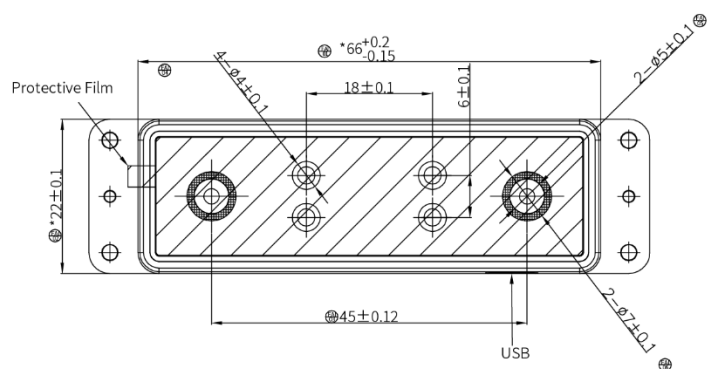

SIDE VIEW








Image schematic after ISP processing

BOTTOM VIEW

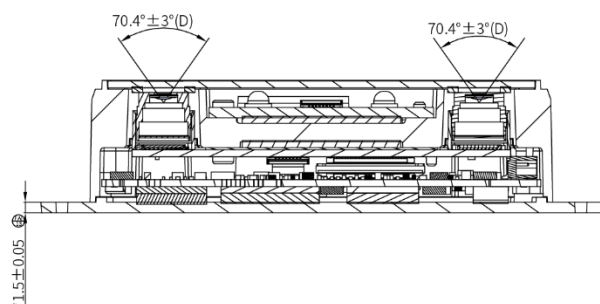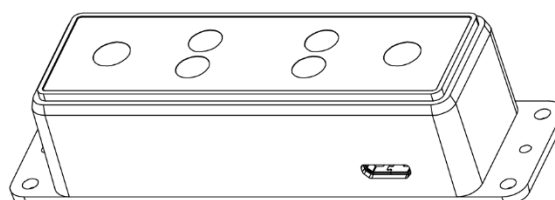

Follow us on:

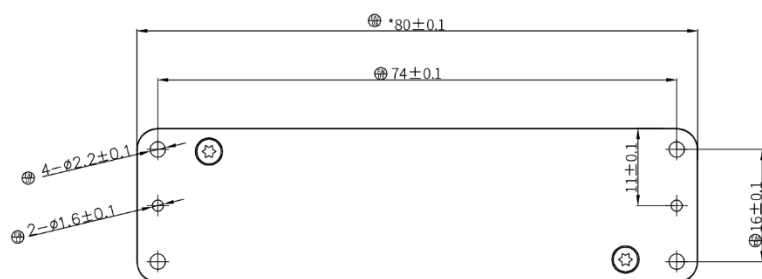

LinkedIn: [linkedin.com/ sensetime-group-limited](https://www.linkedin.com/company/sensetime-group-limited)



Facebook: [facebook.com/ sensetimegroup](https://www.facebook.com/sensetimegroup)



Twitter: [twitter.com/ sensetime_ai](https://twitter.com/sensetime_ai)

Business Inquiry

business@sensetime.com

Media Contact

pr@sensetime.com