FCC PART 15B

TEST REPORT

For

Quanzhou STAYTRUE Electronic Technology Co.,Ltd

Unit 1A-2,1st Floor,Building 1,Fengshu Logistics Park,No. 920,Binhu South Road,Taiwan Investment Zone,Quanzhou,Fujian Province, China

Tested Model: SDC-LE-02HD

Report Type:	**Product Name:**
Original Report	Module SDC-LE-02HD

Report Number:	2607T23039E-EM-01
Report Date:	2026-05-25
Reviewed By:	Ash Lin
Approved By:	Miles Chen
Prepared By:	Bay Area Compliance Laboratories Corp. (Xiamen) Unit 102, No. 902 Meifeng South Road, Binhai West Avenue, Science and Technology Innovation Park, Torch High Tech Zone Xiamen, People's Republic of China Tel: +86-592-3200111 www.baclcorp.com.cn

TABLE OF CONTENTS

REPORT REVISION HISTORY **3**

GENERAL INFORMATION **4**

PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) 4
OBJECTIVE 4
TEST FACILITY 4
MEASUREMENT UNCERTAINTY 5

SYSTEM TEST CONFIGURATION **6**

TEST MODE AND VOLTAGE 6
EUT EXERCISE SOFTWARE 6
SPECIAL ACCESSORIES 6
EQUIPMENT MODIFICATIONS 6
SUPPORT EQUIPMENT LIST AND DETAILS 6
EXTERNAL I/O CABLE 6
BLOCK DIAGRAM OF TEST SETUP 7

SUMMARY OF TEST RESULTS **8**

TEST EQUIPMENT LIST **9**

FCC §15.107 - CONDUCTED EMISSION **10**

APPLICABLE STANDARD 10
TEST SYSTEM SETUP 10
EMI TEST RECEIVER SETUP 10
TEST PROCEDURE 10
RESULT &MARGIN CALCULATION 11
TEST DATA 12

FCC §15.109 - RADIATED EMISSION(30MHz-1GHz) **14**

APPLICABLE STANDARD 14
TEST SYSTEM SETUP 14
EMI TEST RECEIVER SETUP 14
TEST PROCEDURE 14
RESULT &MARGIN CALCULATION 15
TEST DATA 16

FCC §15.109 - RADIATED EMISSION IN FREQUENCY ABOVE 1GHz **18**

APPLICABLE STANDARD 18
TEST SYSTEM SETUP 18
EMI TEST RECEIVER SETUP 18
TEST PROCEDURE 18
RESULT & MARGIN CALCULATION 19
TEST DATA 20

EXHIBIT A - EUT PHOTOGRAPHS **22**

EXHIBIT B - TEST SETUP PHOTOGRAPHS **23**

REPORT REVISION HISTORY

Number of Revisions	Report No.	Version	Issue Date	Description
0	2607T23039E-EM-01	R1V1	2026-05-25	Initial Release

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Applicant:	Quanzhou STAYTRUE Electronic Technology Co.,Ltd
Product Name:	Module SDC-LE-02HD
Tested Model:	SDC-LE-02HD
Multiple Model(s):	N/A
Trade mark:	SDC-LE-02HD
Power Supply:	DC 3.3V
Firmware Version:	N/A
Software Version:	N/A
★Highest Operating Frequency:	2480 MHz
EUT Received Status:	Good
Note: *1. The highest operating frequency is provided by the applicant.* *2. All measurement and test data in this report was gathered from production sample serial number: 3LJ2-1 (Assigned by the BACL (Xiamen). The EUT supplied by the applicant was received on 2026-05-08).*	

Objective

This report is prepared for *Quanzhou STAYTRUE Electronic Technology Co.,Ltd* in accordance with Part 2-Subpart J, and Part 15-Subparts A and B of the Federal Communication Commission's rules.

The objective of the manufacturer is to determine the compliance of EUT with FCC Part 15, Class B device.

Test Facility

The test site used by Bay Area Compliance Laboratories Corp. (Xiamen) to collect test data is located on the Unit 102, No. 902 Meifeng South Road, Binhai West Avenue, Science and Technology Innovation Park, Torch High tech Zone XiaMen, People's Republic of China.

Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the product as specified in CISPR 16-4-2. This uncertainty represents expanded uncertainty expressed at 95% confidence level using a coverage factor of k=2.

$$u_c(y) = \sqrt{\sum_i c_i^2 \; u^2(x_i)}$$

Item	Frequency Range	U_{lab}= 2 u_c (y) (Confidence of 95%)
Conducted Emissions	150kHz-30MHz	2.52 dB
Radiated Emissions	30MHz~200MHz(Horizontal)	3.33 dB
	30MHz~200MHz(Vertical)	3.51 dB
	200MHz~1GHz(Horizontal)	4.87 dB
	200MHz~1GHz(Vertical)	4.99 dB
	1GHz~6GHz	4.88 dB
	6GHz~18GHz	4.95 dB

SYSTEM TEST CONFIGURATION

Test Mode and Voltage

The system was configured for testing in a typical mode (as normally used by a typical user).	
Test mode:	Test Mode 1: Operation
Test voltage:	DC 3.3 V from Debug board(AC 120V/60Hz)
Remark:	During all emission tests, the EUT was configured to measure its highest possible emission level and the worst case's test data was presented in this test report.

EUT Exercise Software

No exercise software was used to test.

Special Accessories

No special accessory was used.

Equipment Modifications

No modification was made to the EUT tested.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
Lenovo	Laptop	Lenovo 14w Gen 2	PW01PJ6E
Unknown	Debug board	Unknown	Unknown

External I/O Cable


Cable Description	Length (m)	From Port	To Port
Cable	0.3	Debug board	EUT

Block Diagram of Test Setup

Conducted Emission:

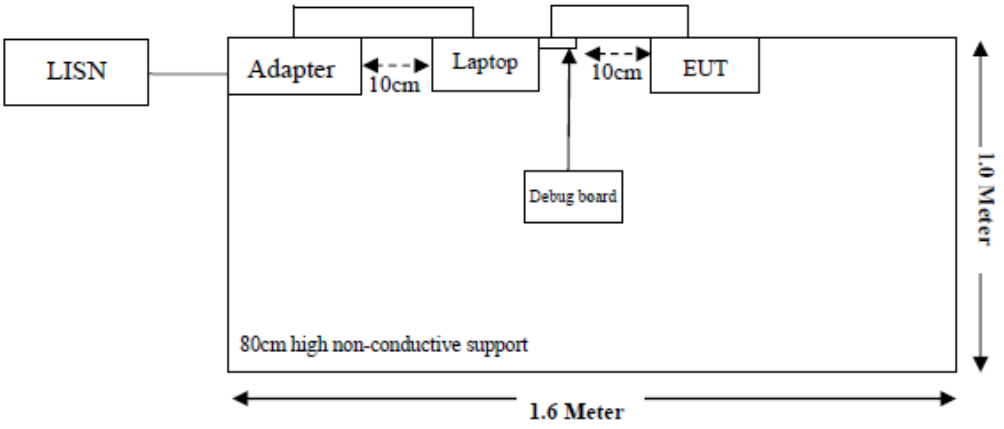

Radiated Emission:

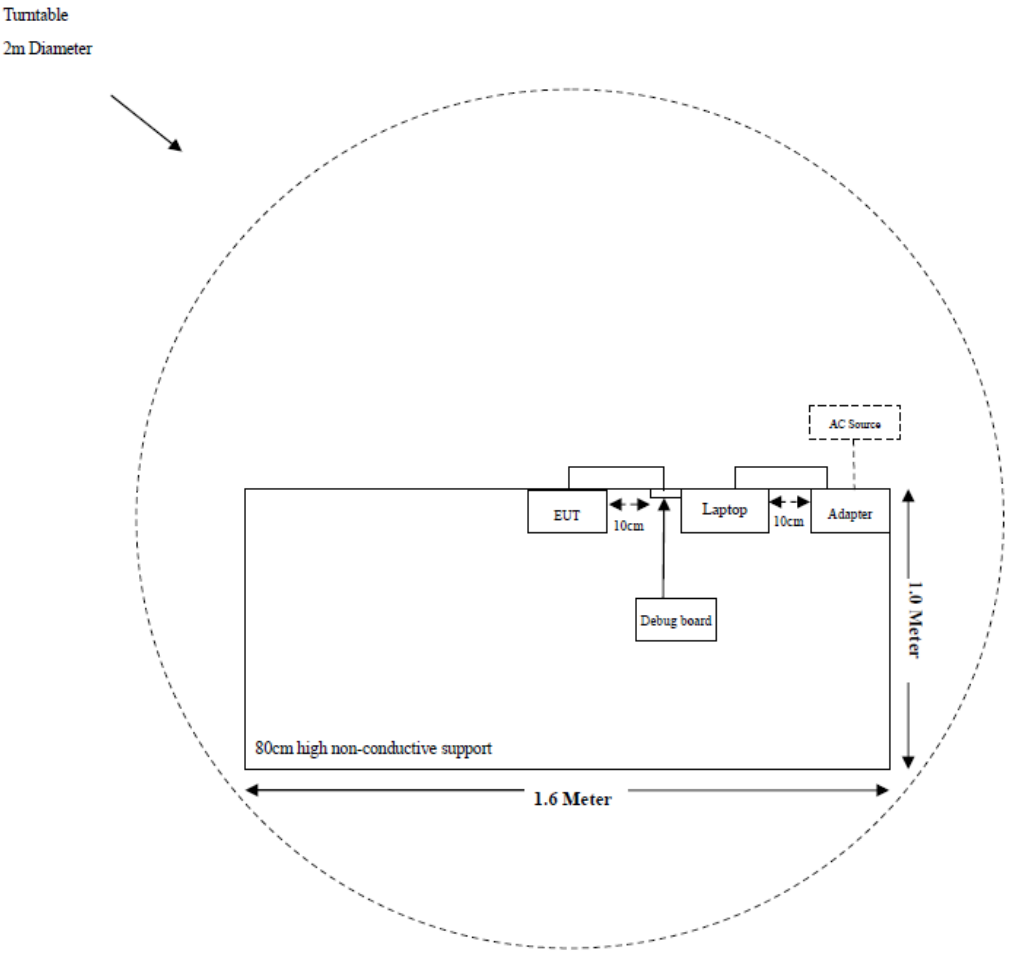

SUMMARY OF TEST RESULTS

FCC PART 15B		
Rule Part	**Description of Test**	**Results**
§15.107	Conducted Emission	Compliant
§15.109	Radiated Emission(30MHz-1000MHz)	Compliant
§15.109	Radiated Emission(Above 1GHz)	Compliant

TEST EQUIPMENT LIST

Test Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due Date
Conducted Emission					
EMI Test Receiver	Rohde & Schwarz	ESR	103105	2026/01/21	2027/01/20
LISN	Rohde & Schwarz	ENV216	100129	2026/01/21	2027/01/20
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	0357.8810.54	2026/01/21	2027/01/20
Coaxial Cable	XINHANGWEIBO	XH400T-N-4M	CC001	2026/01/20	2027/01/19
Test Software	Audix	E3	18621a	N/A	N/A
Radiated Emission Below 1 GHz					
EMI Test Receiver	Rohde & Schwarz	ESR	103103	2026/01/21	2027/01/20
Hybrid Antenna	Sunol Sciences	JB6	A122022-5	2023/07/27	2026/07/26
Amplifier	Sonoma	310B	120903	2026/01/22	2027/01/21
Coaxial Cable	XINHANGWEIBO	XH400T-N-4M	CC002	2026/01/20	2027/01/19
Coaxial Cable	XINHANGWEIBO	XH460B-N-2M	CC006	2026/01/20	2027/01/19
Coaxial Cable	XINHANGWEIBO	XH460B-N-12M	CC007	2026/01/20	2027/01/19
Test Software	Audix	E3	18621a	N/A	N/A
Radiated Emission Above 1GHz					
Spectrum Analyzer	Rohde & Schwarz	FSU	100405	2026/01/21	2027/01/20
Horn Antenna	EMCO	3115	9002-3355	2024/11/19	2027/11/18
Preamplifier	GLOBAL	1313-A100M18G	4121301	2026/01/14	2027/01/13
Coaxial Cable	XINHANGWEIBO	XH800A-N-6M	CC003	2026/01/20	2027/01/19
Coaxial Cable	XINHANGWEIBO	XH800A-N-1M	CC005	2026/01/20	2027/01/19
Test Software	Audix	E3	18621a	N/A	N/A


Statement of Traceability: Bay Area Compliance Laboratories Corp. (Xiamen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §15.107 - CONDUCTED EMISSION

Applicable Standard

FCC §15.107

Test System Setup

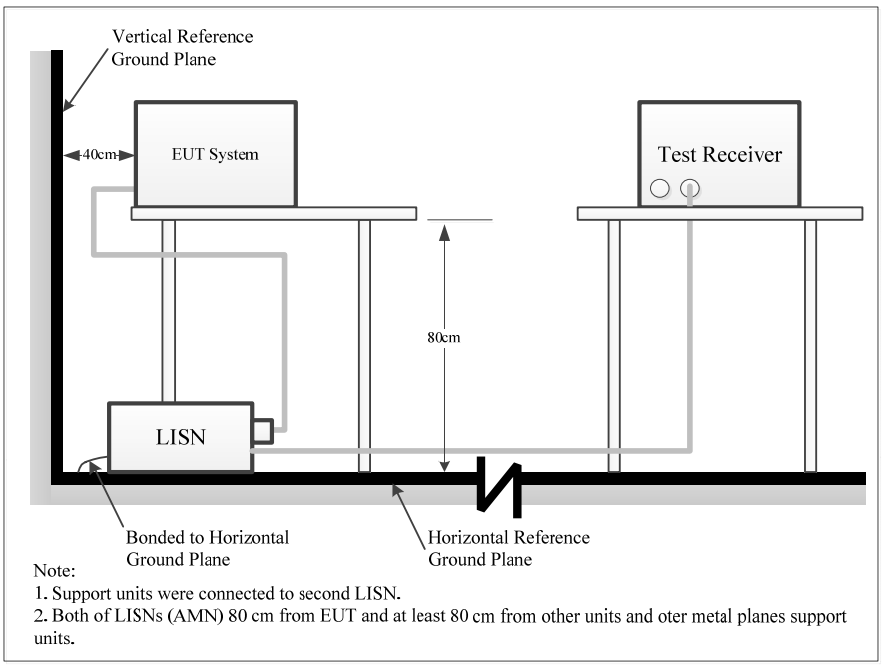

Note:
1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at least 80 cm from other units and oter metal planes support units.

The measurement procedure of test setup is according with ANSI C63.4-2014. The related limit was specified in FCC Part 15.107 Class B limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

If the maximum peak value of the emissions is below the average limit, the QP value and average value measurement will not need to be performed and only record the maximum peak measured value to meet the requirements.

Result &Margin Calculation

The Result is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation from the Meter Reading. The basic equation is as follows:

Factor (dB) = LISN VDF (dB) + Cable Loss (dB) + Transient Limiter Attenuation (dB)
Result (dBμV) = Reading (dBμV) + Factor (dB)


The "**Margin**" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

Margin (dB) = Limit (dBμV) – Result (dBμV)

Test Data

Project No.: 2607T23039E-EM
Test Mode: MODE1
EUT Model: SDC-LE-02HD

Temp/Humi/ATM: 22.4℃/60%/100.1kPa
Tested by: Luke Hong
Power Source: AC 120V/60Hz

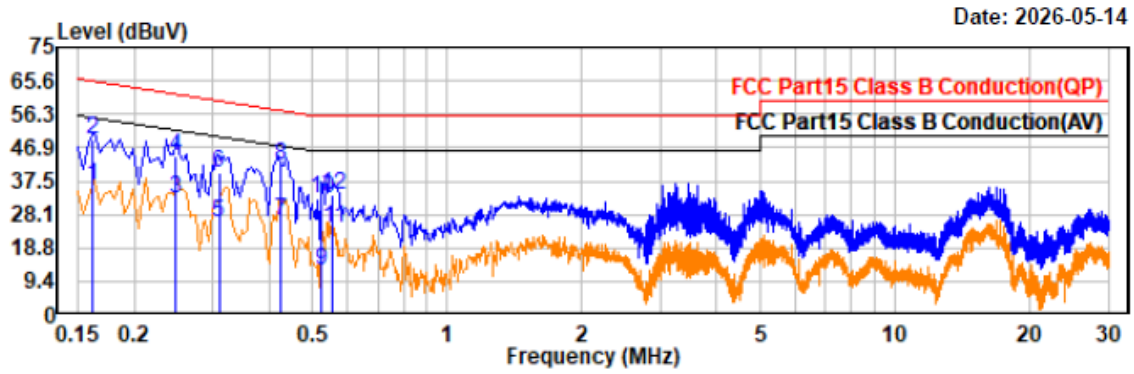


Trace: 1
Condition: IF B/W 9kHz PK/AV

Freq MHz	Reading dBuV	Factor dB	Result dBuV	Limit dBuV	Margin dB	Phase	Remark
0.162	15.54	20.45	35.99	55.34	19.35	Line	Average
0.162	28.52	20.45	48.97	65.34	16.37	Line	QP
0.247	12.30	20.48	32.78	51.87	19.09	Line	Average
0.247	23.84	20.48	44.32	61.87	17.55	Line	QP
0.309	5.44	20.42	25.86	49.99	24.13	Line	Average
0.309	19.17	20.42	39.59	59.99	20.40	Line	QP
0.424	6.13	20.34	26.47	47.37	20.90	Line	Average
0.424	21.70	20.34	42.04	57.37	15.33	Line	QP
0.523	-7.86	20.28	12.42	46.00	33.58	Line	Average
0.523	12.36	20.28	32.64	56.00	23.36	Line	QP
0.557	4.28	20.28	24.56	46.00	21.44	Line	Average
0.557	13.13	20.28	33.41	56.00	22.59	Line	QP

Project No.: 2607T23039E-EM
Test Mode: MODE1
EUT Model: SDC-LE-02HD

Temp/Humi/ATM: 22.4℃/60%/100.1kPa
Tested by: Luke Hong
Power Source: AC 120V/60Hz

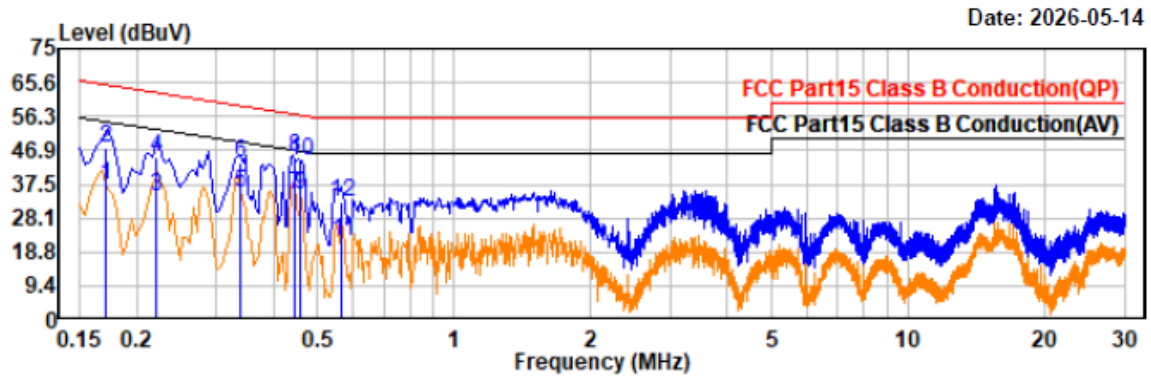

Trace: 1
Condition: IF B/W 9kHz PK/AV


Freq MHz	Reading dBuV	Factor dB	Result dBuV	Limit dBuV	Margin dB	Phase	Remark
0.171	16.80	20.48	37.28	54.90	17.62	Neutral	Average
0.171	27.05	20.48	47.53	64.90	17.37	Neutral	QP
0.221	13.53	20.52	34.05	52.78	18.73	Neutral	Average
0.221	24.65	20.52	45.17	62.78	17.61	Neutral	QP
0.337	14.58	20.42	35.00	49.27	14.27	Neutral	Average
0.337	23.17	20.42	43.59	59.27	15.68	Neutral	QP
0.447	14.22	20.35	34.57	46.94	12.37	Neutral	Average
0.447	24.59	20.35	44.94	56.94	12.00	Neutral	QP
0.461	14.51	20.34	34.85	46.68	11.83	Neutral	Average
0.461	23.41	20.34	43.75	56.68	12.93	Neutral	QP
0.567	1.42	20.27	21.69	46.00	24.31	Neutral	Average
0.567	12.44	20.27	32.71	56.00	23.29	Neutral	QP

FCC §15.109 - RADIATED EMISSION(30MHz-1GHz)

Applicable Standard

FCC §15.109

Test System Setup

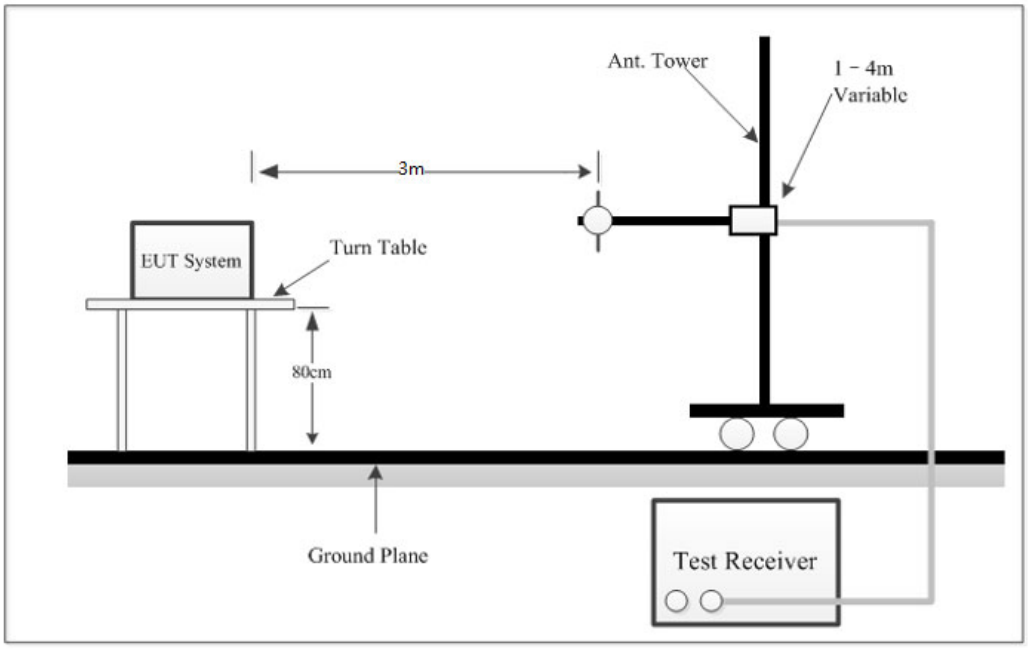

The radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.4-2014. The specification used was the FCC Part 15.109 Class B limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The system was investigated from 30 MHz to 1 GHz.

During the radiated emission test, the EMI test receiver was set with the following configurations:

Frequency Range	RBW	VBW	Measurement	Detector
30 MHz – 1000 MHz	100 kHz	300 kHz	PK	PK
	120 kHz	/	QP	QP

Test Procedure

Maximizing procedure was performed on the six (6) highest emissions to ensure that the EUT complied with all installation combinations.

If the measured peak level of the emissions that the measuring receiver reading level plus corrected factor is at least 10 dB below the QP emission limit, there's no need to record the measured QP level of the emissions in the report.

Result &Margin Calculation

The Result is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

Factor (dB/m) =Antenna Factor (dB/m) + Cable Loss (dB) - Amplifier Gain (dB)
Result (dBμV/m) = Reading (dBμV) + Factor (dB/m)


The "**Margin**" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

Margin (dB) = Limit (dBμV/m) – Result (dBμV/m)

Test Data

Project No.: 2607T23039E-EM
Test Mode: Mode1
EUT Model: SDC-LE-02HD
Test distance: 3m

Temp/Humi/ATM: 22.5℃/62%/100.1kPa
Tested by: Zane Zhang
Power Source: AC 120V/60Hz

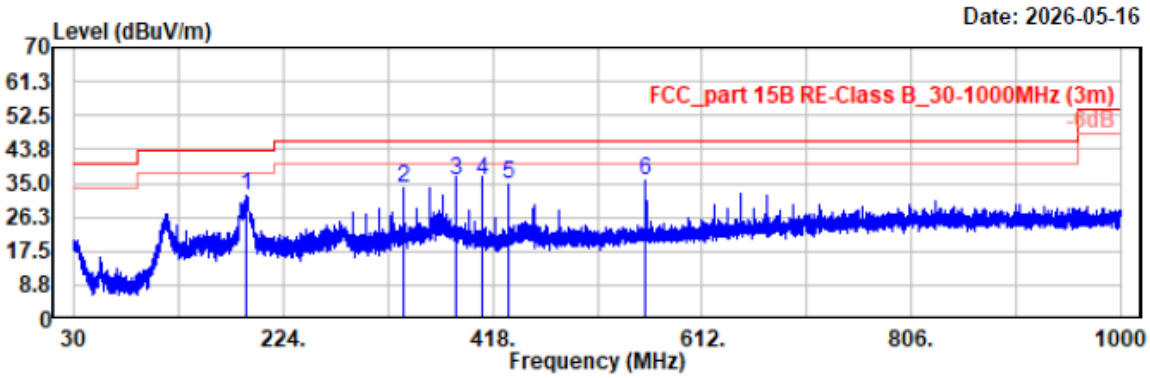


Condition: PK RBW:100kHz VBW:300kHz SWT:auto

Freq	Reading	Factor	Result	Limit	Margin	Polarity	Remark
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
188.89	44.06	-12.40	31.66	43.50	11.84	Horizontal	Peak
336.04	41.92	-8.35	33.57	46.00	12.43	Horizontal	Peak
384.05	42.58	-6.93	35.65	46.00	10.35	Horizontal	QP
408.01	41.81	-6.07	35.74	46.00	10.26	Horizontal	QP
432.07	40.09	-5.34	34.75	46.00	11.25	Horizontal	Peak
560.01	38.31	-2.57	35.74	46.00	10.26	Horizontal	Peak

Project No.: 2607T23039E-EM
Test Mode: Mode1
EUT Model: SDC-LE-02HD
Test distance: 3m

Temp/Humi/ATM: 22.5℃/62%/100.1kPa
Tested by: Zane Zhang
Power Source: AC 120V/60Hz

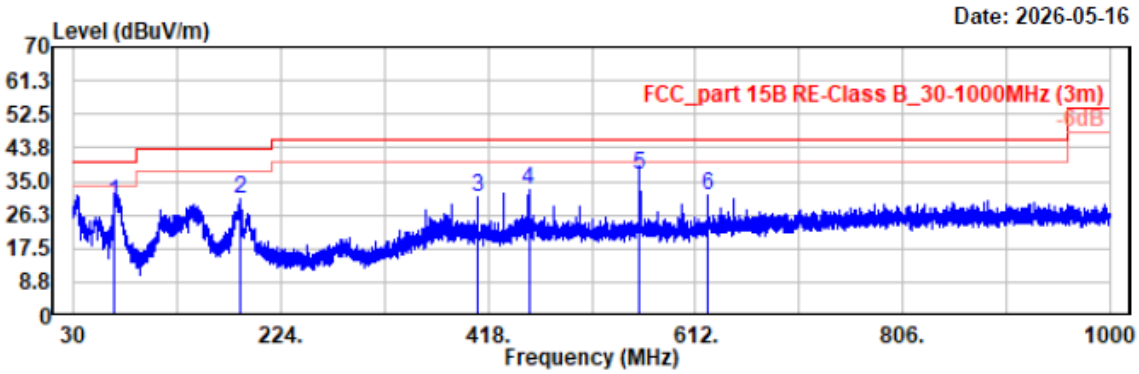

Condition: PK RBW:100kHz VBW:300kHz SWT:auto


Freq	Reading	Factor	Result	Limit	Margin	Polarity	Remark
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
68.70	46.78	-17.14	29.64	40.00	10.36	Vertical	QP
185.59	42.88	-12.50	30.38	43.50	13.12	Vertical	Peak
408.01	36.97	-6.07	30.90	46.00	15.10	Vertical	Peak
456.02	37.31	-4.67	32.64	46.00	13.36	Vertical	Peak
560.01	39.46	-2.57	36.89	46.00	9.11	Vertical	QP
624.03	32.58	-1.41	31.17	46.00	14.83	Vertical	Peak

FCC §15.109 - RADIATED EMISSION IN FREQUENCY ABOVE 1GHz

Applicable Standard

FCC §15.109

Test System Setup

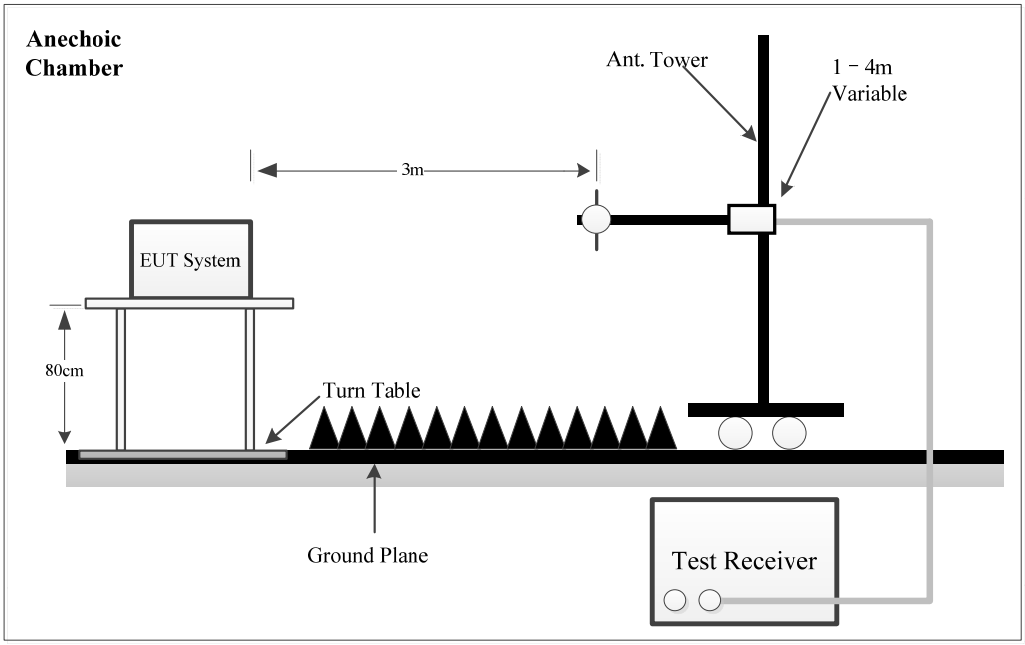

The radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.4-2014. The specification used was the FCC Part 15.109 Class B limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The system was investigated above 1GHz.

During the radiated emission test, the EMI test receiver was set with the following configurations:

Frequency Range	RBW	VBW	Measurement	Detector
Above 1 GHz	1 MHz	3 MHz	PK	PK
	1 MHz	10 Hz	AV	PK

Test Procedure

Maximizing procedure was performed on the six (6) highest emissions to ensure that the EUT complied with all installation combinations.

If the maximum peak value of the emissions is below the average limit, the average value measurement will not need to be performed and only record the maximum peak measured value to meet the requirements.

Result & Margin Calculation

The Result is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

Factor (dB/m) =Antenna Factor (dB/m) + Cable Loss (dB) - Amplifier Gain (dB)
Result (dBμV/m) = Reading (dBμV) + Factor (dB/m)


The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

Margin (dB) = Limit (dBμV/m) – Result (dBμV/m)

Test Data

Project No.: 2607T23039E-EM
Test Mode: Mode1
EUT Model: SDC-LE-02HD
Test distance: 3m

Temp/Humi/ATM: 23.5℃/59%/100.1kPa
Tested by: Zane Zhang
Power Source: AC 120V/60Hz

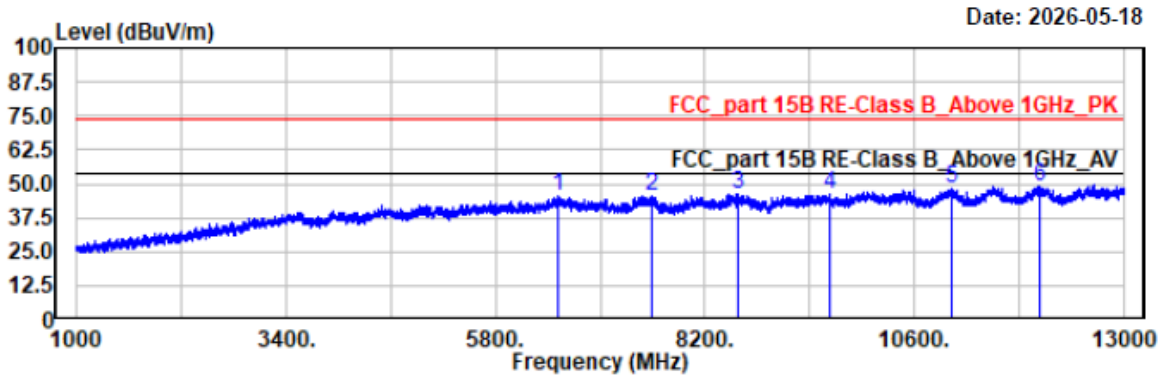


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq	Reading	Factor	Result	Limit	Margin	Polarity	Remark
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
6514.00	47.41	-1.91	45.50	74.00	28.50	horizontal	Peak
7591.60	47.76	-1.96	45.80	74.00	28.20	horizontal	Peak
8580.40	46.76	-0.22	46.54	74.00	27.46	horizontal	Peak
9628.00	45.58	0.96	46.54	74.00	27.46	horizontal	Peak
11038.00	46.23	2.14	48.37	74.00	25.63	horizontal	Peak
12043.60	45.92	3.17	49.09	74.00	24.91	horizontal	Peak

Project No.: 2607T23039E-EM
Test Mode: Mode1
EUT Model: SDC-LE-02HD
Test distance: 3m


Temp/Humi/ATM: 23.5℃/59%/100.1kPa
Tested by: Zane Zhang
Power Source: AC 120V/60Hz

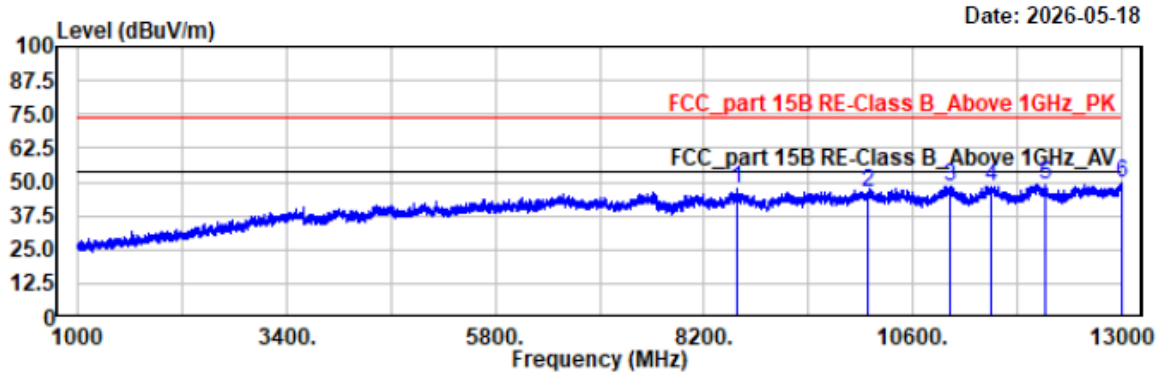

Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq	Reading	Factor	Result	Limit	Margin	Polarity	Remark
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
8584.00	47.68	-0.23	47.45	74.00	26.55	vertical	Peak
10081.60	44.93	1.50	46.43	74.00	27.57	vertical	Peak
11036.80	46.36	2.13	48.49	74.00	25.51	vertical	Peak
11508.40	45.56	3.02	48.58	74.00	25.42	vertical	Peak
12119.20	45.75	3.16	48.91	74.00	25.09	vertical	Peak
12995.20	45.17	4.31	49.48	74.00	24.52	vertical	Peak

EXHIBIT A - EUT PHOTOGRAPHS

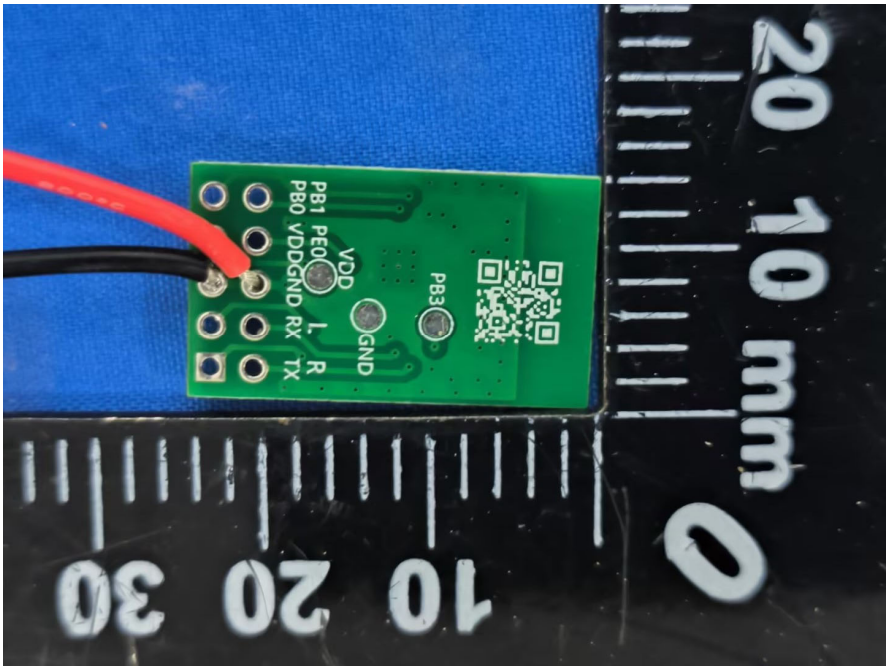



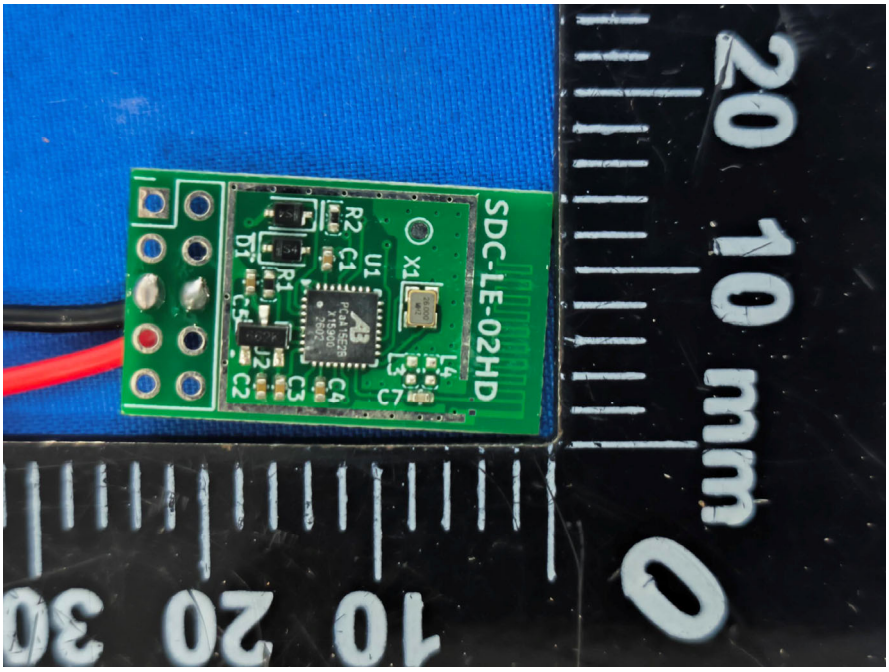


EXHIBIT B - TEST SETUP PHOTOGRAPHS


CE - Front View

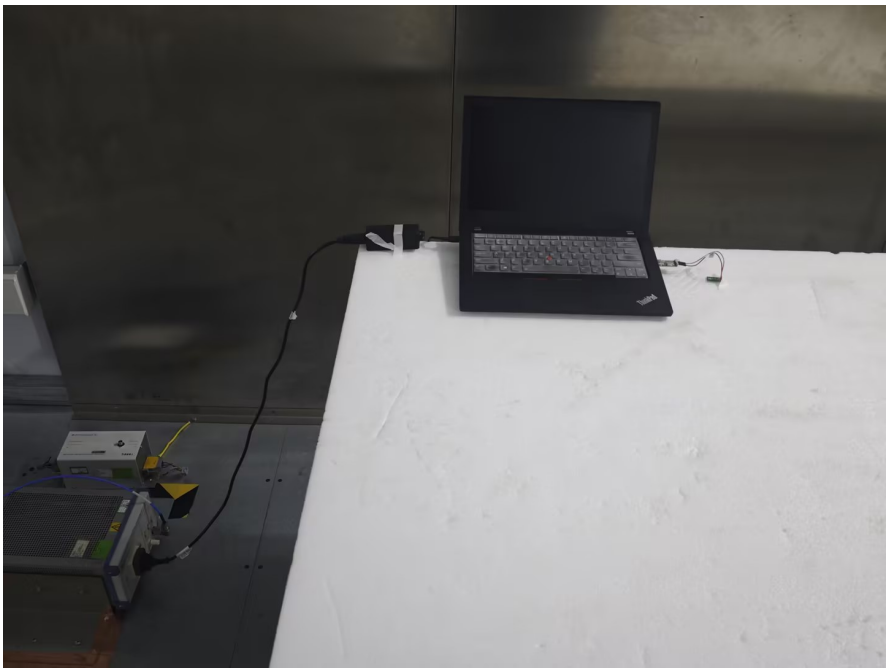

CE - Near View

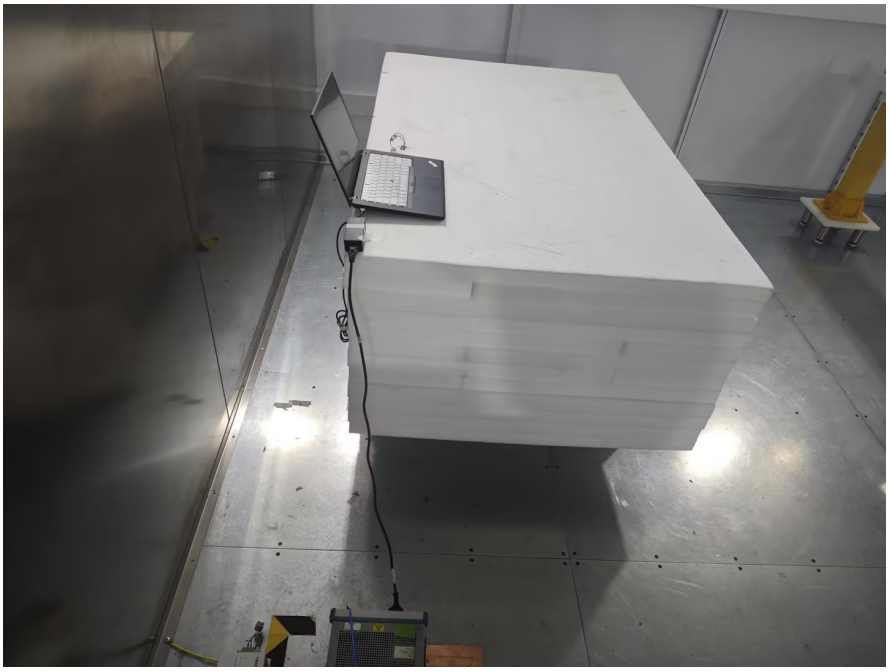


RE - Front View (Below 1GHz)

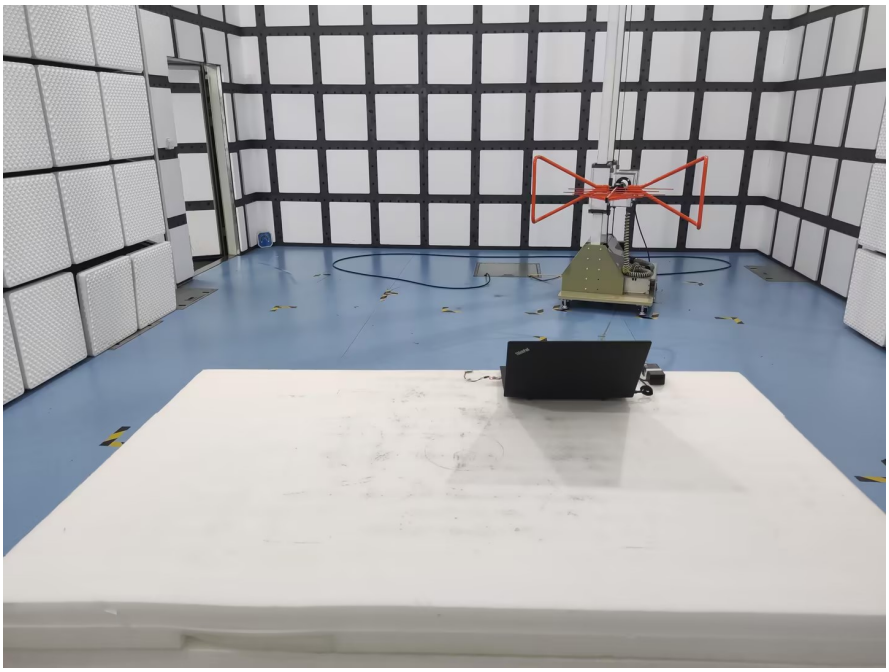


RE - Back View (Below 1GHz)



RE - Front View (Above 1GHz)

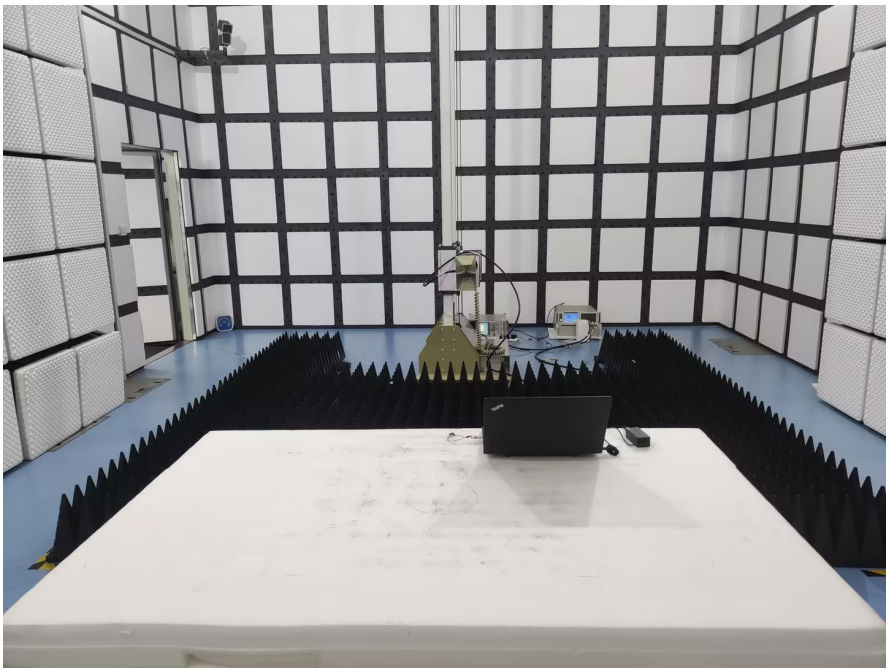

RE - Back View (Above 1GHz)

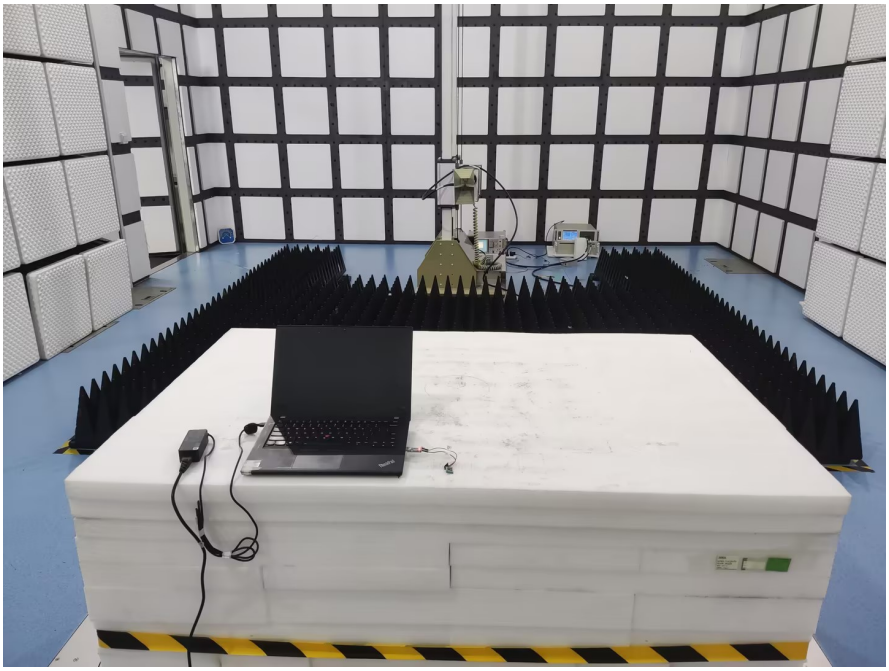

Declarations

1. Bay Area Compliance Laboratories Corp. (Xiamen) is not responsible for authenticity of any information provided by the applicant. Information from the applicant that may affect test results are marked with an asterisk "★".

2. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested.

3. Unless required by the rule provided by the applicant or product regulations, then decision rule in this report did not consider the uncertainty.

4. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor k=2 with the 95% confidence interval.

5. This report cannot be reproduced except in full, without prior written approval of Bay Area Compliance Laboratories Corp. (Xiamen).

6. This report is valid only with a valid digital signature. The digital signature may be available only under the adobe software above version 7.0.

*******END OF REPORT*******