



Cutoff frequency of the low pass filters are 1.59kHz


Schmitt Trigger unused parts

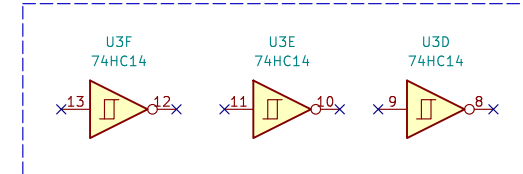

The schmitt trigger selected is part of basic components of JLCPCB. This allow to save about \$5 of manual P&P load during manufacturing.

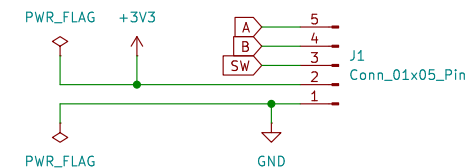

Mounting hole and connector are designed to fit into a breadboard.



License : CERN-OHL-P

Xavier Berger

Sheet: /

File: RotaryEncoderDebounce.kicad_sch

Title: Rotary Encoder Debounced

Size: A4

Date: 2025-06-23

KiCad E.D.A. 9.0.2

Rev: 1.0

Id: 1/1