

Coarrays in the Context of XcalableMP

H. Iwashita and M. Nakao

Abstract @@@ XcalableACC (XACC) is an extension of XcalableMP for accelerated clusters. It is defined as a diagonal integration of XcalableMP and OpenACC, which is another directive-based language designed to program heterogeneous CPU/accelerator systems. XACC has features for handling distributed-memory parallelism, inherited from XMP, offloading tasks to accelerators, inherited from OpenACC, and two additional functions: data/work mapping among multiple accelerators and direct communication between accelerators.

Hidetoshi Iwashita

Fujitsu Limited, 140 Miyamoto, Numazu-shi, Shizuoka 410-0396, Japan, e-mail: iwashita.hideto@fujitsu.com

Masahiro Nakao

RIKEN Center for Computational Science, 7-1-26 Minatojima-minami-machi, Chuo-ku, Kobe, Hyogo 650-0047, Japan, e-mail: masahiro.nakao@riken.jp

1 Introduction

Omni XMP は、PC クラスタコンソーシアムの XcalableMP 規格部会が制定する並列言語 XcalableMP (XMP) の実装である。XMP は、Fortran と C をベースとし、ディレクティブ行の挿入によって並列化を記述するが、Fortran 2008 で定義される coarray 機能も仕様として含んでいる。前者は「逐次プログラムに指示を与えて並列化する」という考え方からグローバルビューと呼ばれ、並列プログラミングが容易にできることを狙う。後者は「個々のノード（イメージ）の挙動を記述する」という考え方でローカルビューと呼ばれる。後者は、前者では記述困難な領域のアプリケーションを記述するため、それと、局所的に性能を出したい部分を MPI よりも容易なプログラミング言語という手段で記述するために導入された。そのため、XMP の文脈の中で自然な解釈ができて同時に使用できることと、同時に、MPI に匹敵する高い性能が求められた。

我々は、XMP コンパイラの一つの機能として、Fortran 2008 仕様で定義された Coarray 機能を実装した。また、言語仕様を Fortran に準じて、C 言語ベースの Coarray 機能もサポートした。Fortran で定義される image は XMP 仕様で定義される node に 1 対 1 に mapping されるため、coarray 変数の定義・参照は node 間の put/get の片側通信としてそれぞれ実現される。

To implement one-sided communication, the XcalableMP (XMP) runtime library selects one of the **communication libraries**, MPI-3, GASNet, or Fujitsu's native interface FJ-RDMA, as specified at build time. All coarray data must be **registered** to the communication library to be referenced or defined via the communication library.

本章では、coarray 機能を高性能で実現するために要求された技術と、その実現方法を示す。通信ライブラリの特質から、Coarray データの割付けは可能な限り利用者プログラムの実行前に集約すべきである。片側通信ベースなので、遠隔側のアドレス計算を低コストで実現する工夫が必要となる。通信が簡単に記述できることから、小粒度の頻繁な通信が起こりがちになるので、それらを aggregate して高速化する技術が要求される。

これらに対応した実装により、【評価の成果を】

【要修正】 This chapter describes how the compiler and runtime techniques are implemented in the XMP compiler with some evaluation. In the rest of this chapter, Section 2 shows the basic implementation for coarray features, Section 3 describes how the implementation has solved the issues shown above, Section 4 evaluates the implementation with basic and practical applications, and Section 5 concludes.

2 Requirements from Coarray Features

XMP Fortran language specification supports a major part of coarray features defined in Fortran 2008 standard [5], and intrinsic procedures CO_SUM, CO_MAX, CO_MIN and CO_BROADCAST defined in Fortran 2018 standard [6] were supported. And also XMP C language specification extended to support coarray features.

This section introduces the coarray features and what is required to the compiler in order to implement the coarray features.

2.1 Images Mapped to XMP Nodes

In the Fortran standard, an **image** is defined as a instance of a program. Each image executes the same program and has its own data individually (SPMD: Single Program/Multiple Data). Each image has a different image index, which is one of $1, \dots, n$, where n is the number of images determined at runtime. While the Fortran standard does not define where each image is executed, XMP defines the mapping of the images to the executing nodes as follows; image k is always executed on executing node k , where $1 \leq k \leq n$ and n is the number of images and also the number of the executing nodes. In addition, since each MPI rank number of `MPI_COMM_WORLD` (0-origin) is always mapped to an XMP node number in order, local data on image k can be accessed with MPI functions as data on rank $(k - 1)$.

Note that the executing nodes can be a subset of the entire (initial) node set. For example, two distinct node sets can execute two coarray subprograms concurrently. The first executing images at the start of the program is the entire images. Coarray features are compatible to the ones of the Fortran standard unless the `TASK` and `END TASK` directives are used. If the execution encounters a `TASK` directive specified with a subset of nodes, the corresponding subset of the images will be the executing images for the task region. The current number of images and my image number, which are given by inquire functions `num_images` and `this_image`, also match with the executing images, and the `SYNC_IMAGES` statement synchronizes among the executing images. When the execution encounters the `END TASK` directive corresponding to the `TASK` directive, the set of executing image is reinstated.

Requirement to the compiler. The runtime library should change the executing image set and my position of the set at the entry point of the task, and reinstate them at the exit point of the task.

2.2 Allocation of Coarrays

A **coarray** or a coarray variable is a variable that can be referred from the other images. A coarray with the `ALLOCATABLE` attribute is called an **allocatable coarray**, otherwise called a non-allocatable coarray. A non-allocatable coarray may not be a pointer and must have an explicit shape and the `SAVE` attribute. In order to help intuitive understanding, we call a non-allocatable coarray as a **static coarray**. The lifetime of a static coarray is throughout execution of the program on all images even if the coarray is declared in a procedure called with a subset of images.

On the other hand, an allocatable coarray is allocated with the `ALLOCATE` statement and freed either explicitly with the `DEALLOCATE` statement or implicitly at the end of the scope in which the `ALLOCATE` statement is executed (**automatic deallocation**).

Static coarrays can be declared as scalar or array variables as follows:

```
real(8), save :: a(100,100)[*]
type(user_defined_type), save :: s[2,2,*]
```

The square bracket notation in the declaration distinguishes coarray variables from the others (non-coarrays). It declares the virtual shape of the images and the last dimension must be deferred (as `*`).

Allocatable coarrays can be declared as follows:

```
real(8), allocatable :: b(:,:)[:]
type(user_defined_type), allocatable :: t[:,:,:]
```

A notable constraint is that at any synchronization point in program execution, coarrays must have the same dimensions (sizes of all axes) between all images (**sym-metric memory allocation**). Therefore, an static coarray must have the same shape between all images during the program execution, and an allocatable coarray must be allocated and deallocated collectively at the same time with the same dimensions between the executing images. Thanks to the syn-metric memory allocation rule, all executing images can have the same symmetrical memory layout, which makes it possible to calculate the address of the remote coarray with no prior inter-image communication.

Requirement to the compiler. Static coarrays must be allocated and made accessible remotely before the execution of the user program, and made inaccessible remotely and be freed after the execution of the user program. In contrast, allocatable coarrays must be allocated and made accessible remotely when the `ALLOCATE` statement is encountered, and made inaccessible remotely and be freed when the `DEALLOCATE` statement or the exit point of the scope that the corresponding `ALLOCATE` statement is encountered is encountered.

2.3 Communications

Coarray features include three types of communications between images, i.e.,

- reference and definition to remote coarrays (GET and PUT communication),
- collective communication (intrinsic subroutines `CO_SUM`, `CO_MAX`, `CO_MIN` and `CO_BROADCAST`), and
- atomic operations (`ATOMIC_DEFINE` and `ATOMIC_REF`).

Omni compiler implements the latter two communications using the corresponding functions in MPI. The rest of this section describes the former communication.

2.3.1 PUT communication

PUT communication is caused by an assignment statement with a **coindexed variable** as the left-hand side expression, e.g.,

$$a(i, j)[k] = \alpha * b(i, j) + c(i, j)$$

This statement is to cause the PUT communication to the array element $a(i, j)$ on image k with the value of the left-hand side.

Fortran の配列代入文を使えば、配列から配列への PUT 通信を記述することもできる。例えば以下の配列代入文は、 MN 要素の PUT 通信を生じさせる。

$$a(1:M, 1:N)[k] = \alpha * b(1:M, 1:N) + c(1:M, 1:N)$$

Requirement to the compiler. 配列代入文では、一般には右辺の評価結果を Fortran システムが一時領域に置くが、通信バッファをできる限り多重にしない工夫が必要である。右辺が配列の参照だけの場合はゼロコピー通信とすることが望ましい。

2.3.2 GET communication

GET communication is caused by referencing the **coindexed object**, which is represented by a coarray variable with cosubscripts enclosed by square brackets, e.g., $s[1, 2]$ and $a(i, j)[k]$, where s and a are scalar and two-dimensional array coarrays, respectively. Coindexed objects can appear in most expressions.

値を配列とする配列式を使うと配列に対する GET 通信を行うことができる。例えば coindexed-object $a(1 : M, 1 : N)[k]$ の値は a と同じ型で形状 $[M, N]$ の 2 次元配列である。

Requirement to the compiler. ローカル側は、獲得したデータがすぐに消費されることから non-blocking 化は適さない。バッファリングを回避してゼロコピーとすることで効率化したい。通常は式の引用に対して（それが配列式であっても）ライブラリに変換するが、右辺に 1 つの coindexed-object しかない配列代入文は、最適化として文全体をライブラリに変換する。例えば、

$$a(1:M, 1:N) = b(1:M, 1:N)[k]$$

では、 a が DMA の要件を満たす場合には、受信先をバッファでなく直接 a にすることで、ゼロコピーにできる。

2.4 Inter-image Synchronization

Basically, the Fortran language specification does not guarantee the inter-image data dependency unless any image control statements are explicitly used. Figure 1 shows an example of program fragment describing inter-image communication and synchronization by the reference and definition of coarrays and SYNC ALL statement.

Here, all variables `a`, `b`, `c`, `x`, `y` and `z` are coarrays. An **image control statement**, such as `SYNC ALL` and `SYNC IMAGES` statements, separates a procedure into **segments**. In Figure 1, portions between lines 2 and 9 and between lines 11 and 20 are segments. The synchronization between images does not need to complete until encountering the image control statements. And the compiler optimization does not allowed to perform the code motion across the image control statement. In Figure 1, `sync all` in line 10 should wait for completion of the definition to coarray `a` in line 4, and should prevent the code motion of lines 4 and 5 and lines 16, 17 and 19 from crossing the `sync all` in line 10.

緩い同期である。ここに最適化のチャンスがある。

```

1      sync all
2
3      if (this_image()==1) then
4          a[2]=
5          b[2]=
6          =c[2]
7          x=
8          y=
9          =z
10     endif
11
12     sync all
13
14     if (this_image()==2) then
15         =a
16         b=
17         c=
18         =x[1]
19         y[1]=
20         z[1]=
21     endif
22
23     sync all

```

Fig. 1 Example of inter-image synchronization

各イメージの中では、従来の Fortran 仕様に従う依存関係の維持が必要である。non-coarray データに関しては従来とおりだが、coarray について注意が必要。In order to keep data dependency among the definitions and references in the coarray, the non-blocking communication should be restricted. Figure 2 に data dependency に気をつけないといけない例を示す。同じリモートデータに対して同じ segment 内で複数回アクセスする場合である。

Requirement to the compiler. To reduce the latency overhead, non-blocking one-sided communication is effective. The compiler should generate non-blocking GET communication as long as possible. In usual case, the completion point of the non-blocking is the end of the segment, as shown in Figure 1. However, the

```

1      if (this_image()==2) then
2          a[2]=
3              ! should wait for the completion of line 2 to keep flow dependency.
4          a[2]=      ! should wait for the completion of line 3 to keep anti dependency.
5      endif

```

Fig. 2 Example of intra-image communication blocking

possibility to meet the condition shown in Figure 2 should be taken account. If the PUT communication is always in blocking, only the flow dependency should be care; the previous PUT communication (line 2) should be completed before the following GET communication (line 3).

2.5 Subarrays and Data Contiguity

In Fortran, if an array, except dummy argument, is declared as `real a(1:M,1:N)`, the reference to the whole array (i.e., `a` or `a(:, :)` or `a(1:M,1:N)`) is defined **contiguous**. We defined a term **contiguous length** as the length how long the data is partially contiguous. For example, the contiguous lengths of `a(2,3)` and `a(2:5,3)` are 1 and 4 respectively. `a(1:M,1:3)` is two-dimensionally contiguous and has contiguous length $2 \times M$. `a(1:M-1,1:3)` is one-dimensionally contiguous and has contiguous length $(M - 1)$.

Requirement to the compiler. 通信の高速化のためには、十分に長い範囲の連続性を実行時に抽出する必要がある。一般にノード間通信で立ち上がりレイテンシ時間がほぼ無視できるようになるデータ量は数千バイトであることから、配列や部分配列の1次元め（Fortran では1番左の添字）が連続であっても数千要素に満たない場合には、次元を跨いだ連続性まで抽出して、十分に長い連続データとして通信する技術が必要である。【fx100-latency のグラフから数千バイトを言ってもよい。】

GET 通信と同様、`a(i,j)[k]` は代わりに全体配列にも部分配列にもなれるので、`coindexed variable` についても次元を跨いだ連続性の抽出が必要である。それに加えて、ローカル側、すなわち、右辺式データの連続性も意識に入れなければならない。高速な通信を実現するには、左辺と右辺で共通に連続な区間を検出してその単位で通信を反復するか、右辺データは連続区間に `pack` して左辺の連続区間を単位として通信を反復するなどの戦略がある。

2.6 Coarray C Language Specifications

C 言語にも配列式、配列代入を導入することで Fortran と同様な coarray features を仕様定義した。

coarray はデータ実体に限る。ポインタは coarray になれない。形式的には、1) 基本型、2) ポインタを含まない構造型、または、3) 1or2or3 の配列とする。C の coarray においても static と allocatable がある。ファイル直下で宣言するか static 指示した coarray は static coarray である。ライブラリ関数 xxx をつかって割付けたデータ領域は allocatable coarray であり、ライブラリ関数は allocatable coarray へのポインタを返す。C の coarray は、通常の C の変数と同じように、引数渡しや cast 演算によって自由にその型と形状の解釈を変えることができる。

これらの仕様と制限は、C プログラマにとっての使いやすさを考えて、C らしいプログラミングスタイルを認めた。Coarray C++とは違うアプローチである。

cf. `air:/Users/iwashita/Desktop/coarray/Project_Coarray/`の下にいくつか

3 Implementation

3.1 Omni XMP Compiler Framework

The CAF translator was added into the Omni XMP compiler as shown in Figure 3. The Omni XMP compiler is a source-to-source translator that converts XMP programs into the base language (Fortran or C). The component ‘coarray translator’ is located in front of the XMP translator to solve coarray features previously. The output of the decompiler is a standard Fortran/C program that may include calls to the XMP runtime library.

The following procedures are generated in advance or in the coarray translator to initialize static coarray variables prior to the execution of the user program:

- The built-in main program calls subroutine `xmpf_traverse_init`, the entry procedure of initialization subroutines, before executing the user main program.
- Subroutine `xmpf_traverse_init` is generated by the coarray translator to call initialization subroutines corresponding to all user-defined procedures.
- Each initialization subroutine `xmpf_init_foo` is generated from user-defined procedure `foo` by the coarray translator. It initializes all static coarrays declared in `foo`.

3.2 Allocation and Registration

To be accessed using the underlying communication library, the allocated coarray data must be registered to the library. The registration contains all actions to allow the data to be accessed from the other nodes, including pin-down memory, acquirement of the global address, and sharing information among all nodes.

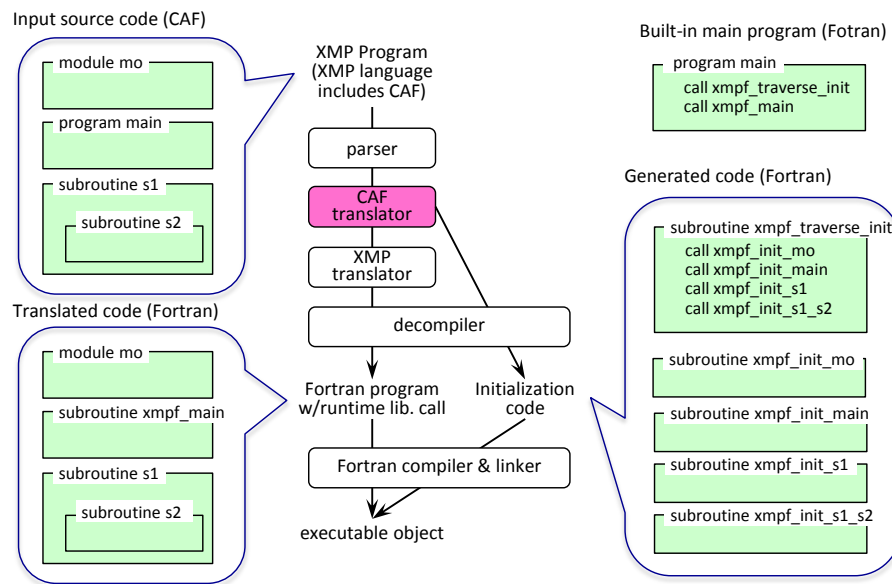


Fig. 3 XMP compiler and an example of coarray program compilation
CAF translator → coarray translator

3.2.1 Three methods of memory management

The coarray translator and the runtime library implements three methods of memory management.

- The **Runtime Sharing (RS) Method** allocates and registers a large memory for all static and dynamic coarrays at the initialization phase. The registered memory is shared by all static and allocatable coarrays.
- The **Runtime Allocation (RA) Method** allocates and registers a large memory for all static coarrays at the initialization phase. And it allocates and registers each allocatable coarray at runtime.
- The **Compiler Allocation (CA) Method** allocates all coarray objects by the Fortran system (at compile time or at runtime) and the address is passed to the runtime library to be registered.

For the RS and RA methods, because the allocated memory address is determined in the runtime library, the object code must accept the address allocated inside the runtime system as an address of a regal Fortran variable. To make this connection, it was necessary to use the Cray pointer, which is not in the Fortran standard. In the case of the CA method, the runtime library accepts the address allocated in the Fortran system, and registers to the communication library.

3.2.2 Initial Allocation for Static Coarrays

Static coarrays are allocated and registered in the initialization subroutines `xmpf_init_foo`.

On the RS and RA methods, static coarrays are initialized before the execution of the user program, as follows.

- In the first pass, all sizes of static (non-allocatable) coarrays are summed. The size of each static coarray is evaluated from the lower and upper bounds specified in the dimension declaration statement of each coarray. The lower and upper bound expressions, possibly including binary and unary operations, reference to name of constants, and basic intrinsic functions such as min/max and sum, are evaluated by constant folding techniques. Since the size of the structure that contains allocatable or pointer components differs depending on for the target compiler, the coarray translator get the necessary parameters to calculate the size of structures at the build time.
- Then, the total size of static coarrays is allocated and the address and the size is registered to the underlying communication library.
- In the second pass, the addresses of the all coarrays are calculated to share the registered data. Due to the language specification, sizes of the same coarray are the same among all images (nodes). So the offset from the base address of the registered data for each coarray can be the same among all images.

In the RS method, allocatable coarrays are also shared the registered memory. The total size of the memory to be registered should be specified with an environment variable by the user. While in the RA method, the total size is fully calculated by the runtime library and no information is required to the user because allocatable coarrays will be dynamically allocated on the other memories.

On the CA method, the Fortran processor allocates each coarray and then the runtime library registers the address. Each static coarray is converted into a common (external) variable to share between the user-defined procedure (say *foo*) and its initialization procedure (`xmpf_init_foo`). The data is statically allocated by the Fortran system similarly to the usual common variable. the address is registered in the initialization procedure via the runtime library.

3.2.3 Runtime Allocation for Allocatable Coarrays

For the RS method, the runtime library has a memory management system for cutting out and retrieving memory for each allocation and deallocation of coarrays.

Figure 4 illustrates the memory allocation and registration for allocatable coarrays on the RA and CA methods.

These methods are properly used by the underlying communication library. On GASNet, only the RS method is adopted because its allocation function can be used only once in the program. On MPI-3, the CA method is not suitable because frequent allocation and deallocation of coarrays cause expensive creation and freeing MPI

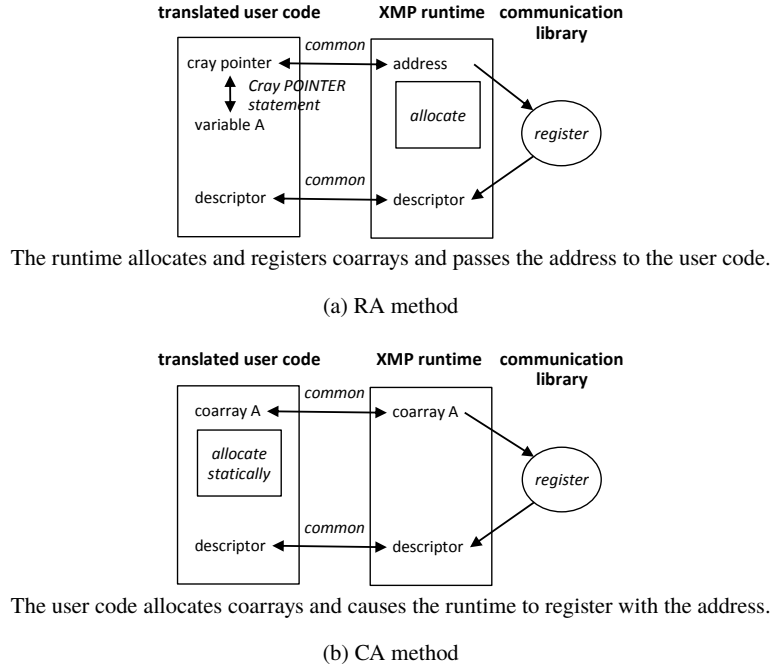


Fig. 4 Memory allocation for coarrays in RA and CA methods

windows. Over FJ-RDMA, the RS method has no advantage over the other methods. Since the allocated address is used for registration to FJ-RDMA, no advantage was found for managing memory outside of the Fortran system. The unusual connection through the Cray pointer causes the degrade of the Fortran compiler optimization.

3.3 PUT/GET Communication

To avoid disturbing the execution on the remote image, PUT and GET communications are implemented always using Remote Direct Memory Access (RDMA) provided by the communication library (except coarrays with pointer/allocatable structure components). In contrast, local data access is selective between using Direct Memory Access (DMA) or using a local buffer. For the buffer scheme, one of four algorithms will be chosen.

3.3.1 Determining Possibility of DMA

coarray 変数は割付け時に registration することで RDMA アクセスが可能になる。一方で、PUT の source または GET の target となるローカル側データは、registration されていないとどの DMA の対象にならないので、あらかじめ registration されたバッファを介して通信することになる。しかし、ローカルデータも registration された coarray であることは比較的多く、その場合には DMA できる。ローカルデータが仮引数の場合、それが registered かどうかは実行時にしか分からないので、runtime による判定が望ましい。

runtime library では、ローカルデータが registration されているか否かを binary tree で高速に判定する仕組みを持っている。データ量が大きい場合、この判定のコストは相対的に十分小さいので、まずこの判定を行い、可能なら DMA-RDMA 通信を行っている。データ量が小さいときには、この判定の時間よりバッファリングする時間の方が短くなるため、バッファリングを選ぶ。

3.3.2 Buffering Communication Methods

For the buffer scheme, one of four algorithms will be chosen depending on three parameters, the size of the local buffer B and the local and remote contiguous lengths N_L and N_R . B should be large enough to ignore communication latency overhead and we use about 400 kilo-bites in default. Unlike the case of MPI message passing, coarray PUT/GET communication requires only one local buffer for any numbers of other images. N_L and N_R can be evaluated at runtime. The Fortran syntax guarantees that N_L is a multiple of N_R or N_R is a multiple of N_L . An algorithm to get the contiguous length is shown in the paper [?].

Table 1 summarizes our algorithm for PUT/GET communication for five cases. The unit size is the chunk length of the PUT/GET communication. Case 0 shows the algorithm using RDMA-DMA PUT/GET communication and Cases 1 through 4 shows the algorithms using RDMA and local-buffering. Due to its strict condition, the DMA scheme is rarely used. And it is not always faster than the buffering scheme cases 2 and 3 because of the difference of the unit sizes. The merit of cases 2 and 3 is that the unit size is extended to a multiple of N_L by gathering number of short contiguous data in the buffer, or by scattering from the buffer into number of short contiguous data.

3.3.3 Non-blocking one-sided communication

GET 通信をできる限り non-blocking とし、そして、その完了待ちを可能なら次の image control statement まで遅延したい。Figure 2 に示したような、同じ segment 内で同じリモートデータへ書いて読むようなケースは大変まれで、殆どの場合には次の image control statement まで遅延できる。添字式やイメージ番号が定数でないことが多いので、コンパイル時の判定では遅い方に倒れて

Table 1 Summary of the PUT/GET algorithm related to N_L , N_R and B

scheme	case	condition	unit size
DMA		Local data is registered.	$\min(N_L, N_R)$
buffering	1	$N_R \leq B, N_R \leq N_L$	N_R
	2	$N_L < N_R \leq B$	N_R
	3	$N_L < B < N_R$	multiple of N_L ($\leq B$)
	4	$B < N_R, B \leq N_L$	B (or less than B at last)

scheme	case	PUT action for each unit	GET action for each unit
DMA		put once	get once
buffering	1	buffer once and put once	get once and unbuffer once
	2	buffer for each N_L , and put once	get once, and unbuffer for each N_L
	3	buffer for each N_L , and put once	get once, and unbuffer for each N_L
	4	buffer once and put once	get once and unbuffer once

しまう。まれなケースだけを軽いコストで正しく除外できる実行時判定が望まれる。

現在の実装では、実行時の環境変数によって blocking と non-blocking 通信を選択する。以下の条件に該当する場合には、低速となる blocking を選択しなければならない。リモートの coarray データを更新した後で、同じセグメントの中で、同じデータを参照している。ほとんどの場合には該当しないことを利用者が分かるので、non-blocking のオプションを選択することを期待する。

3.4 Runtime Libraries

The layer of the runtime libraries are shown in Figure 5. One of the three underlying communication libraries is selected at the build time of the Omni compiler. The coarray runtime consists of layered three libraries.

- The **lower-level runtime library (LRL)** abstracts the difference between the communication libraries except the memory management of coarray data.
- The **upper-level runtime library (URL)** solves each coarray features in the coarray program.
- The **Fortran wrapper** mediates the arguments and the result value of the translated user program (written in Fortran) and URL (written in C).

3.5 Underlying Communication libraries

MPI-3 can be selected for all platform on which MPI-3 is implemented. Coarrays are registered and deregistered at the start and end point of the MPI window. Coarrays

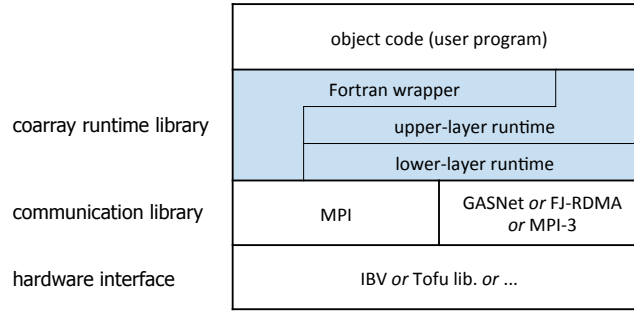


Fig. 5 Software stack for coarray features

are performed one-sided communication by `MPI_Put` and `MPI_Get`, and synchronized by `MPI_Win_fence`. Implementation on MPI incurs certain costs for dynamic allocation of coarrays and waiting for communication completion.

GASNet can be selected for more advanced implementation over InfiniBand. Since allocation and registration of are inseparable and can be done only once on GASNet, the implementation allocates and registers a pool of memory whose size should be large enough to contain all static and allocatable coarrays. The XMP runtime should allocate and deallocate coarrays not using the Fortran library but using the memory manager made for the pool.

FJ-RDMA can be selected for the implementation over Tofu interconnect of the K computer and Fujitsu PRIMEHPC FX series supercomputers. Basically, each coarray is allocated by the Fortran library and registered the address with the FJ-RDMA interface `FJMPI_Rdma_reg_mem`. And it is deregistered with `FJMPI_Rdma_dereg_mem` before deallocated (freed) by the Fortran library. One-sided communication is performed with `FJMPI_Rdma_put` and `FJMPI_Rdma_get`.

3.6 Lower-layer runtime library (LRL)

LRL abstracts the difference between the communication libraries except which allocates the coarray data between the coarray runtime (by the RS and RA methods) and the Fortran system (by the CA method). The features for multi-dimensional data developed for the C implementation are not used for the Fortran implementation.

The LRL functions currently used in the Fortran implementation are as follows.

- A set of functions to allocate and register a specified size of coarray, and a set of functions to register an already-allocated coarray. They are alternatively used in the RS and RA methods and in the CA method. Corresponding to each, a set

of functions to deregister and deallocate and a set of functions to deregister are provided.

- A function for RDMA-DMA GET communication with specified-length contiguous data, and the one of DMA-RDMA PUT communication. They assume that both remote and local data are previously registered. Blocking and non-blocking can be switched and the only way to wait for the completion of the non-blocking communication is using the function corresponding to SYNC MEMORY.
- Functions corresponding to the SYNC ALL, SYNC IMAGES and SYNC MEMORY statements. The function corresponding to SYNC MEMORY waits for completion of all current non-blocking communications.
- Functions corresponding to the ATOMIC_DEFINE and ATOMIC_REF intrinsic subroutines. Each has two versions for self and remote images. Unlike PUT/GET functions, they always work in blocking.
- Some inquire functions.

3.7 Upper-layer runtime library (URL)

URL implements three kinds of coarray communications as follows:

- For one-sided PUT/GET communications caused by the reference of coindexed variables/objects, the algorithm shown in Section 3.3 is implemented in URL. The algorithm requires only the contiguous communication between pre-registered local and remote data. The Fortran wrapper mediates the argument interfaces.
- For collective communications caused by intrinsic subroutines CO_SUM, CO_MAX, CO_MIN and CO_BROADCAST, URL lost the role in the latest implementation. The Fortran wrapper uses MPI library functions directly.
- For atomic communications caused by intrinsic subroutines ATOMIC_DEFINE and ATOMIC_REF, URL calls the corresponding function of LRL after address calculation.

3.8 Fortran wrapper

While the coarray runtime is written in C, coarray features are based on array notations specified in Fortran 90 or later. The Fortran wrapper is a part of the coarray runtime and mediates Fortran and C argument interfaces.

For example, suppose
 tt a is a two-dimensional array coarray of 16-byte complex type. The value of a coindexed object:

`a(1:10,2:19)[k]`

should be a two-dimensional array shaped [10, 18]. The coarray translator converts it to a wrapper function call:

`xmpf_coarray_get_generic(desc_a, k, a(1:10,2:19))`

where *desc_a* is the descriptor of coarray *a*. Note that the generic function name is used in the output of the coarray translator. The corresponding specific name is selected in the following Fortran compiler as shown below:

`xmpf_coarray_get2d_z16(desc_a, k, a(1:10,2:19))`

where `xmpf_coarray_get2d_z16` means the wrapper function of GET communication for two-dimensional and 16-byte complex type. The last argument is a mold expression to get the communication pattern and the shape of the result value. At last, this function invokes the C-written runtime function:

`xmpf_coarray_get_array(desc_a, base, 16, k, dst, 2, skip, extent)`

where,

- *base* is the address of *a*(1,2) that is the base address of *a*(1:10,2:19),
- *dst* is the result variable of 16-byte complex shaped [10, 18] in Fortran, or, the pointer to 16 × 10 × 80-byte memory in C, and
- *skip* and *extent* are two-dimensional integer arrays to represent the pattern of the communication data.

As shown in this example, the Fortran wrapper solves multi-dimensional array segments of Fortran into C, and vise versa. It also converts a C pointer to a Fortran pointer with the shape, using the Cray pointer and tricky coding.

3.9 Tips

- 引数の拡張。同期に visible coarray を並べる。MPI 参照。どこかの文を持つてくる。
- descriptor の逆引き。coarray の引数渡して新しいインタフェースをつかわず non-coarray と同じインタフェースを使う。coarray 変数が引数渡しされる場合、その global address を含む descriptor を渡す。実引数が coarray 変数であっても、手続き側の仮引数は non-coarray 変数として受け取る場合、呼出し側は従来のインタフェース、つまり、先頭アドレスだけを渡すか、形状引継ぎの場合には dope vector を含む Fortran の descriptor を、実引数に載せる。呼出し側の翻訳でこのスイッチをするため、Fortran 文法では呼出し側手続きに明示的引用仕様を求める。しかし我々は、明示的引用仕様の如何に関わらず、従来インタフェースを用いることとした。手続き側では通常の変数として受け取り、これに対応する descriptor は、上述の仕組みで必要なときに runtime でその local address からハッシュ検索する。

4 Evaluation

HPCC CAF benchmark
測定環境 FX100 HA-PACS

4.1 Ping-pong

	PUT version	GET version	MPI version
ping phase	<pre> if (me == 1) then x(1:n)[2] = x(1:n) sync images(2) else if (me == 2) then sync images(1) end if </pre>	<pre> if (me == 1) then sync images(1) else if (me == 2) then x(1:n) = x(1:n)[1] sync images(1) end if </pre>	<pre> if (id == 0) then call MPI_Send(x, n, ... 1, ...) else if (id == 1) then call MPI_Recv(x, n, ... 0, ...) end if </pre>
pong phase	<pre> if (me == 1) then sync images(2) else if (me == 2) then x(1:n)[1] = x(1:n) sync images(1) end if </pre>	<pre> if (me == 1) then x(1:n) = x(1:n)[2] sync images(2) else if (me == 2) then sync images(1) end if </pre>	<pre> if (id == 0) then call MPI_Recv(x, n, ... 1, ...) else if (id == 1) then call MPI_Send(x, n, ... 0, ...) end if </pre>

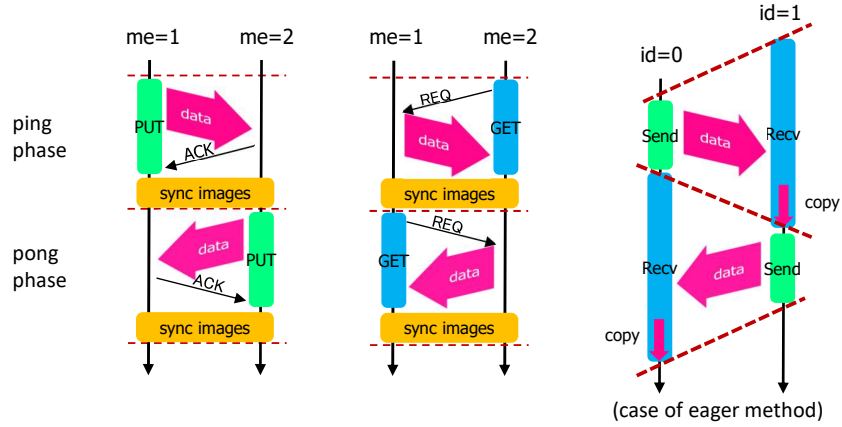


Fig. 6 pingpong-code.pdf

Using EPCC Fortran Coarray micro-benchmark [10], we evaluated ping-pong performance of PUT and GET communications compared with MPI_Send/Recv. The programming code and communication pattern is illustrated in Figure 6. PUT and GET execute explicit synchronization at each end of the phase to inform the

change of the active and passive images each other. Instead of the overhead of the synchronization, MPI_Send/Recv has overhead of unbuffering copy.

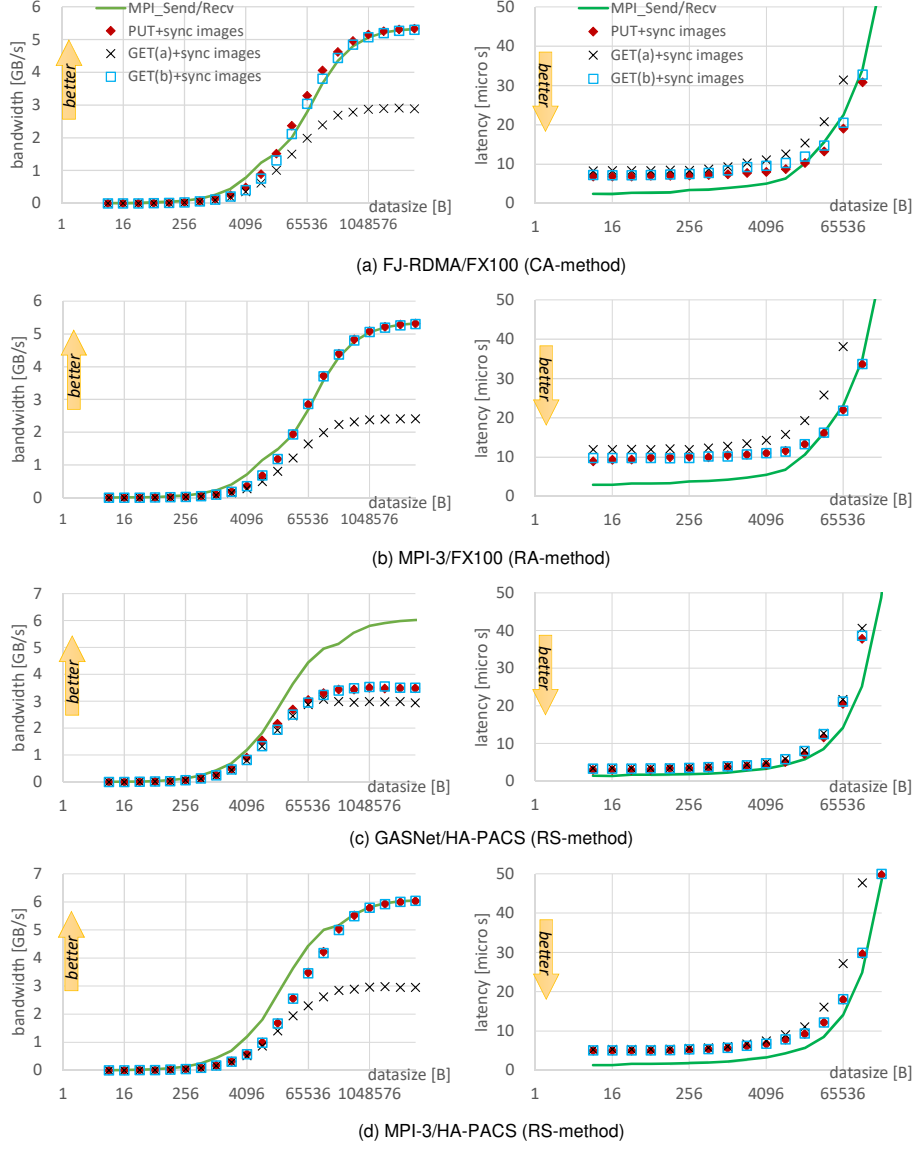


Fig. 7 Ping-pong performance on Fujitsu FX100 and HA-PACS/TCA

Table 2 Specs of the computers used for evaluation

	Fujitsu PRIMEHPC FX100	HA-PACS/TCA in U. of Tsukuba
CPU	SPARK64™XIfx, 1.975GHz, 1CPU per node, 4-SIMD × 32-core	E5-2680 v2 (Ivy Bridge), 10-core, 224GFlops, 2CPU per node
memory	32GB per node, bandwidth 480GB/s per node	DDR3 SDRAM 128GB per node, 119.4GB/s
interconnect	Tofu2, 12.5GB/s × 2	InfiniBand FDR, 7GB/s
compiler	Fujitsu Fortran Ver. 2.0.0 P-id:T01776-01	Intel Fortran 16.0.4
MPI	Fujitsu MPI Ver. 2.0.0 P-id:T01776-01 (OpenMPI base)	Intel MPI 5.1.3
comm. layer	Tofu library (uTofu)	GASNet 1.24.2 built as IBV-conduit with Intel compilers

Figure 7 shows the result of the comparison of coarray PUT and GET and MPI_Send/Recv on Fujitsu PRIMEHPC FX100 and HA-PACS/TCA, whose specs are described in Table 2.

CA, RA and RS method are evaluated on FJ-RDMA/FX100, on MPI-3/FX100, and on GASNet/HA-PACS, respectively. Bandwidth is the communication data size per elapsed time. Latency is half of the ping-pong elapsed time. The difference between GET(a) and (b) is the compile-time optimization level of the Omni CAF translator described in Section 2.3.2.

The EPCC Fortran Coarray microbenchmark [10] consists of three kinds of benchmarks, cafpt2pt (ping-pong performance), calsync (image control statements) and calhalo (halo communications). Using cafpt2pt, we evaluated the bandwidth and latency of PUT and GET communications in comparison with MPI send/recv communication. Figure 6 (a) and (b) shows the result on two supercomputers and (c) shows the communication and synchronization performed as the ping-pong communication. Note that PUT and GET must execute explicit synchronization once per phase to inform the remote image that you can start the next phase now, but MPI_Send/Recv need not. The difference between GET(a) and (b) is the compile-time optimization level of the CAF translator as shown in Table 1. PUT-GET(b) is not included in the original cafpt2pt but added to evaluate the performance of one-sided (PUT/GET) communication without synchronization overhead. The Omni XMP compiler used the RA and CA methods over FJ-RDMA and the RS method over GASNet and MPI-3. Bandwidth is the communication data size per elapsed time. Latency is the half of the elapsed time to execute a set of ping and pong phases.

(1) Bandwidth. In the case of FJ-RDMA and MPI-3, PUT and GET(b) provide as high bandwidth as MPI_Send/Recv for 1MB or more sizes of data. We confirmed that the implementation of PUT and GET(b) to FJ-RDMA achieved zero-copy communication. In contrast, the bandwidth of GET(a) is half that of MPI_Send/Recv in all cases. We found the cause to be the two memory copies that have arisen from the GET(a) conversion; one is the copy from localBuf to the return variable of the library function shown in GET(a) of Table 1 and the other is the execution of the array

assignment statement. In contrast, the GET(b) conversion makes the statement zero-copy subroutine call. The result shows that the optimization of GET(a) to GET(b) in the CAF translator was very effective. In the case of GASNet, it is not clear why PUT and GET(b) provide such low bandwidth compared to MPI_Send/Recv.

By the comparison between RA and CA methods on FJ-RDMA/FX100, it was found only that the peak bandwidth of GET(a) on CA method is 16% higher than the one on RA method. Since the data accepted by the XMP runtime are the same, the reason of the difference must be the part of Fortran execution for the different codes. In addition, the bandwidth of GET(a) on CA/FJ-RDMA is 20% higher than the one on RS/MPI-3.

(2) Latency. In all cases, the latency of PUT, GET(a) and GET(b) are larger than that of MPI_Send/Recv. The primary reason is the cost of the synchronization sync images shown in (c) of Figure 6. The costs of sync images we evaluated with the cfsync benchmark of the EPCC Coarray microbenchmark were 3.40, 4.15, 1.64 and 1.56 [μ s] for FJ-RDMA/FX100, MPI-3/FX100, GASNet/HA-PACS and MPI3/HA-PACS, respectively. The differences in the latency for 8-byte data between PUT and MPI_Send/Recv were, respectively 4.38, 6.26, 1.50 and 3.61 [μ s]. By comparison, it can be said that the major part of the difference in each case is the cost of the synchronization, which is not needed in the case of MPI_Send/Recv. (Note that the values evaluated in the cfsync benchmark are not exactly the same as the costs of synchronizations in the cafpt2pt benchmark.)

The latency of PUT-GET(b) is 36% to 45% shorter than the ones of PUT and GET(b) for every case of 8-byte data. The difference appears to be the cost of sync images. For GASNet/HA-PACS, the latency of PUT-GET(b) is almost as short as the one of MPI_Send/Recv. These results suggest that the CAF programmer should decrease the number of synchronization in the program as much as possible to achieve higher performance. One sync images costs the same latency as kilobytes of PUT or GET communication.

Bandwidth: 【要再読】 In the case of FJ-RDMA and MPI-3, PUT and GET(b) provide as high bandwidth as MPI_Send/Recv for 1MB or more sizes of data. We confirmed that the implementation of PUT and GET(b) to FJ-RDMA achieved zero-copy communication. The reason why the buffering is not necessary in the local side is that the local side variable is a coarray in this benchmark as shown in Table 2 and thus already registered. In contrast, the bandwidth of GET(a) is half that of MPI_Send/Recv in all cases, due to the two memory copies. The result shows that the optimization of GET(a) to GET(b) in the Omni CAF translator was very effective. In the case of GASNet, it is not clear why PUT and GET(b) provide such low bandwidth compared to MPI_Send/Recv.

Latency: In all cases, the latency of PUT, GET(a) and GET(b) are larger than that of MPI_Send/Recv for smaller data than 16kB. The analysis and the discussion is given later.

結果は Figure 8

As the result, coarray PUT and GET are slightly outperforms MPI rendezvous message-passing for large data. In Figure 8, the bandwidth of PUT and GET are

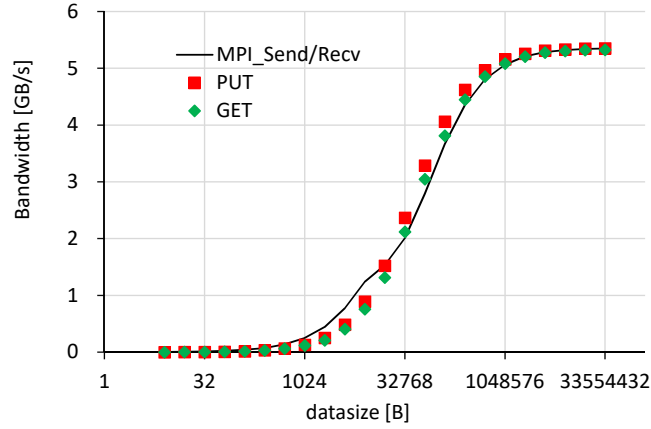


Fig. 8 fx100-bw.pdf FJ-RDMA CA-method

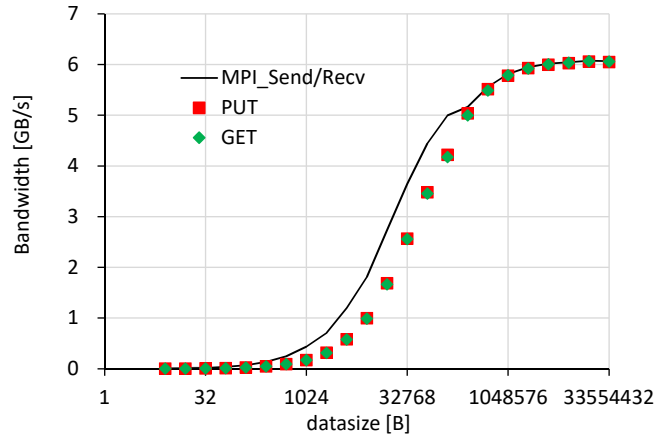


Fig. 9 HAPACS-bw.pdf MPI-3 RS-method

respectively +0.1% to +18% and -0.4% to +9.3% higher than MPI rendezvous in the rendezvous range of 32k through 32M bytes. Also in Figure 9, respectively +0.3% to +0.8% and +0.1% to +1.3% higher in the rendezvous range of 512k through 32M bytes.

However, coarray PUT and GET are clearly slower than the MPI eager communication in the range of shorter length data.

分析: PUT/GET が eager に比べて遅い理由は、ack 待ちと sync all のオーバーヘッド eager にはこのようなオーバーヘッドがない。RDMA でないのでコピーがあるけれども。

改善を検討 (Figure 10)。文面はどこかにある。

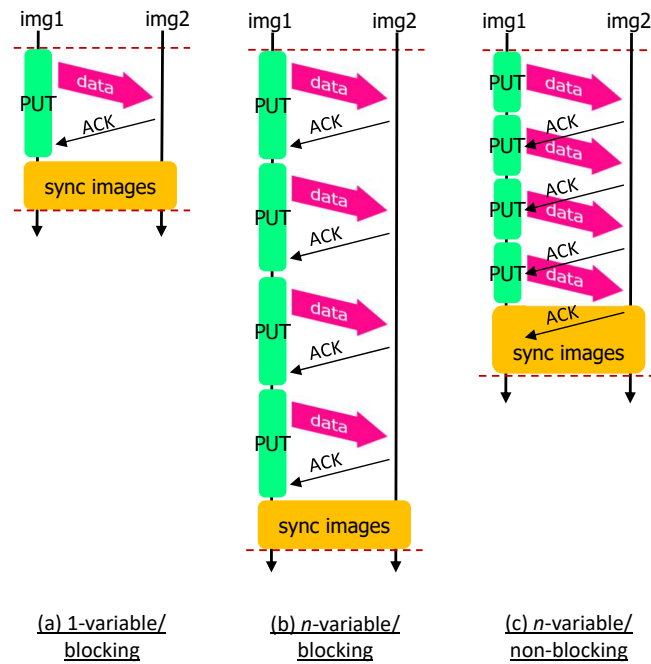


Fig. 10 nonblock-fig.pdf

その結果の throughput (Figure 11)。

4.2 Himeno Benchmark

説明はどこかにある。Figure 12

マシン名要確認。ころころ変えていないか。

5 Related Work

The University of Rice has implemented coarray features with their own extension called CAF 2.0. It is a source-to-source compiler based on the ROSE compiler. GASNet is used as its communication layer. Houston University developed UH-CAF

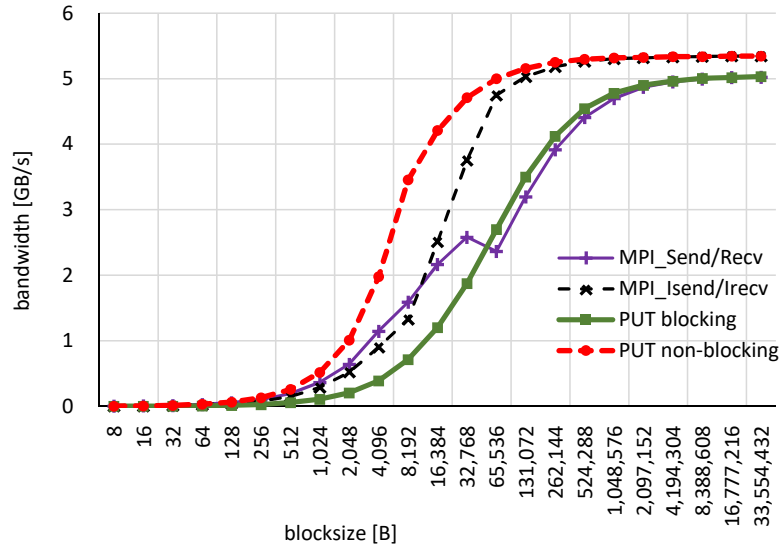


Fig. 11 8var-pipo-bw.pdf

onto the Open64-base OpenUH compiler. It supports coarray features defined in the Fortran 2008 standard. As the communication layer, GASNet and ARMCI can be used selectively. OpenCoarrays [9] is an open-source software project. It is a library which can be used with GNU Fortran (gfortran) V5.1 or later. It supports coarray features specified in Fortran 2008 and a part of Fortran 2018. As the communication layer, MPICH and GASNet can be used selectively. In the vendors, Cray and Intel fully and Fujitsu partially support the coarray features specified in Fortran 2008.


task 間は F2018 の coarray にある。違いは ...

get の nonblocking は難しい。書式上、獲得したあたいがすぐに使用されることになるため、nonblocking の range を大きく取れない。put では完了を遅延させるのにはたいし、開始を先行させる技術 (prefetching) が考えられる。Cray はそのための directive をもつ。


Rice も Cray ポインタを使っている。Cray ポインタは alias analysis で性能を落とす。

6 Future Works


Coarray C++ は Object oriented programming になれた人には自然な実装と感ずるかもしれない。我々の目指す Coarray C はこれとは違い、HPC プログラムを C で書いている人向けに修正を最小限にするものである。また、coarray を抽

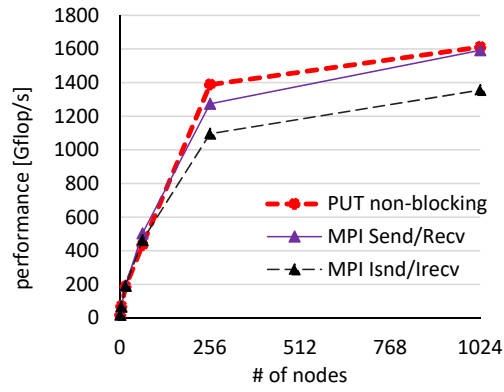

(a) Himeno Size-M (256x128x128)

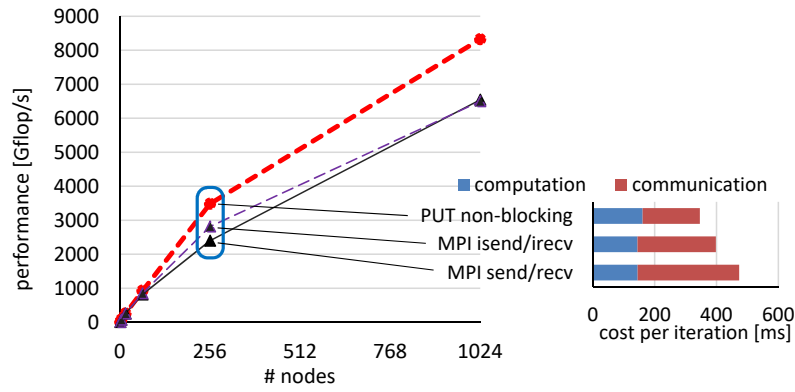

(b) Himeno Size-L (512x256x256)

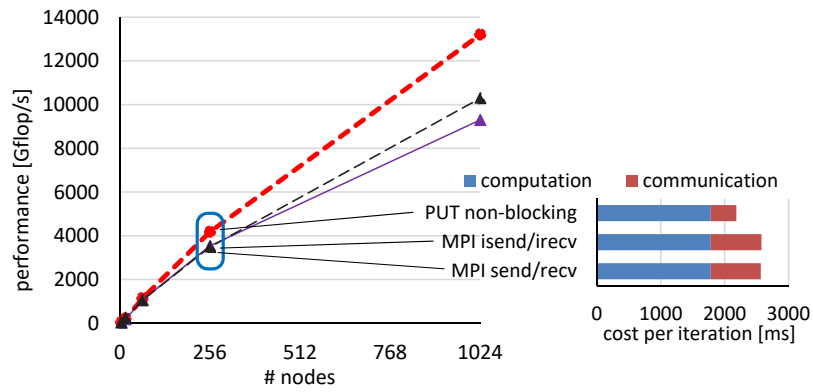

(c) Himeno Size-XL (1024x512x512)

Fig. 12 himeno-graph-r2.pdf

象性の高い概念で定義するのではなく、単にアドレスと長さで特定できるメモリの範囲と定義したい。これによって一般の C プログラムがキャストや引数渡しを使って同じ領域を目的によって連続配列や多次元配列や単に先頭アドレスへの void ポインタなどとして自由に使い回すように扱いたい。これは美しくはないが、C の大きなプログラムを抱えている利用者には必要である。仕様書の定義には曖昧さが残っているので、まだ修正が必要である。Fortran と同じような性能が出せるもので、かつ、Fortran の Coarray との互換性を持たせたい。

Non-blocking PUT communication 正確な実行時判定を行うためには、現在 non-blocking PUT 通信中の coarray のアドレスの range と相手の image 番号をハッシュテーブルに記憶し、GET 通信を行う前にその range と image 番号に重なりがないことをチェックし、重なりがあったらそこで PUT 通信を完了させる、という方法が考えられる。しかしこれでは、重なりが無い通常のケースでも重なりチェックのコストが大きい。コンパイラでの解析と動的なチェックを併用する、正確さが劣ってもより高速な方法が望ましい。

Other Static allocatable coarray がスタックを乱す。

7 Conclusion

8 MEMO

9 Fusen

synmetric memory

リモートのアドレスをローカルで計算できる
これがあるから、片側通信が。。

下位層：通信 lib の差異を吸収し、上位層にプリミティブを提供する。

XMP coarray 実装のプリミティブ i/f

put operation

get operation

- どちらも連続データのみ/nonblocking。

sync memory operation

- 発行した put をすべて remote に書き込み、get をすべて local に読み込むまで待つ。

put には nonblocking 技術：runtime で十分

get には prefetch 技術：コンパイラ技術

生産性の観点の評価

1. リンク時に `static` 配列を集めるところが対 MPI 片側通信で重要。言語仕様／言語処理系だからできる。単にライブラリ群／ライブラリ呼出しではできない。
2. F90 配列記述が `MPI_Type` の定義を不要にしている。

```
klogin7$ which xmpf90
~/Project/OMNI-clone/bin/xmpf90
klogin7$ xmpf90 --version
Version:1.3.1, Git Hash:4a5736e
klogin7$
```

`sync memory` がいつ必要か

- ユーザ記述
- `get` のとき、1 `subarray` 参照に対して `syncmemory` を 1 回にする。
- `get` の前に、同じ `remote` アドレスへの `put` があれば `syncmemory` で待つ

`alignment` の問題か

64 バイト未満で `put` の `latency` が高い。
`src5`, `RUN5` で改善 … しなかった
メモリ割付けの `alignment` の問題ではない。
残るは Tofu の `put` の単位の問題と推測
マスク付き書き込みになる？
この点では `RDMA` よりバッファリングが有利

A Source-to-Source Translation of Coarray Fortran with MPI for High Performance
<https://dl.acm.org/citation.cfm?id=3155888&dl=ACM&coll=DL>

Preliminary Implementation of
Coarray Fortran Translator Based on Omni XcalableMP
<https://ieeexplore.ieee.org/document/7306099>

References

1. XcalableMP Language Specification, <http://xcalablemp.org/specification.html>
2. MPI: A Message-Passing Interface Standard, <http://mpi-forum.org> (2015).
3. John Reid, JKR Associates, UK. Coarrays in the next Fortran Standard. ISO/IEC JTC1/SC22/WG5 N1824, April 21, 2010.
4. ISO/IEC TS 18508:2015, Information technology – Additional Parallel Features in Fortran, Technical Specification, December 1, 2015.

5. Fortran 2008
6. Fortran 2018
- 7.
- 8.
9. OpenCoarrays <http://www.opencoarrays.org/>
10. EPCC Fortran Coarray micro-benchmark suite. <https://www.epcc.ed.ac.uk/research/computing/performance-characterisation-and-benchmarking/epcc-co-array-fortran-micro>