


FIG P

Portfolio distribution as an electrical single-line schematic

VPP assets, household-disjoint portfolios, and A1/B1 training combinations are separated so evidence status stays explicit.

a — Electrical asset layer


The physical aggregation is drawn as a bus equation, not as a model architecture.

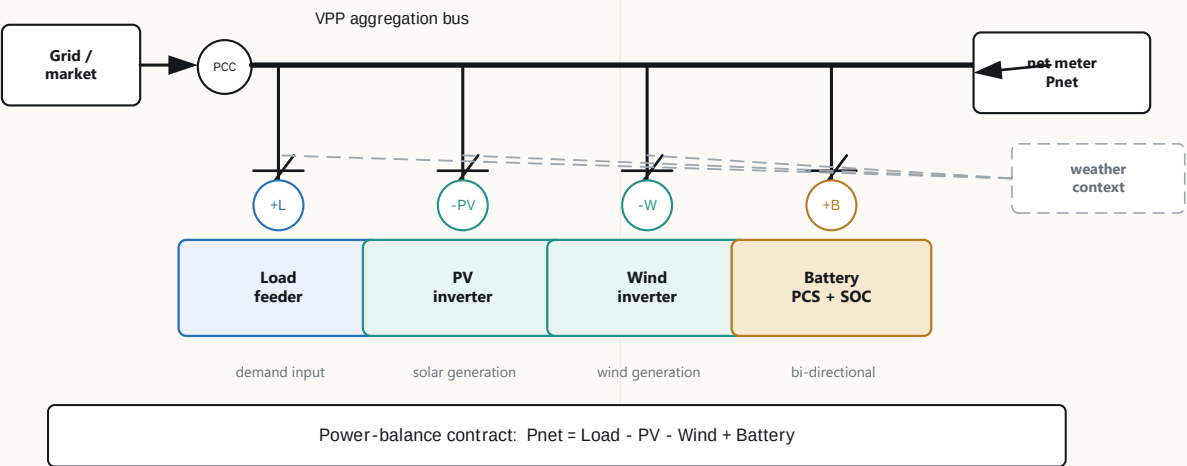

This is the electrical meaning behind both the model decoder and aggregate evaluation.

b — Portfolio split layer


Portfolio membership is the switchgear that prevents household leakage.

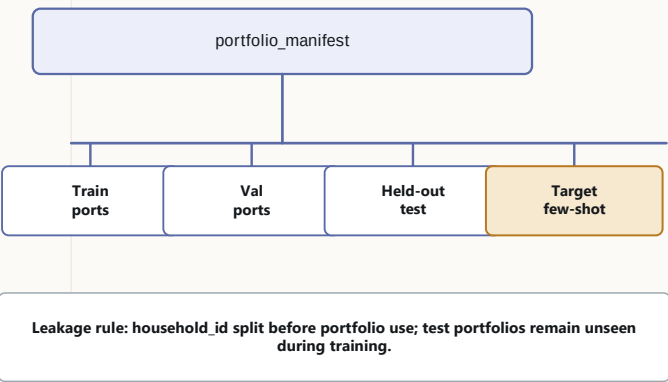


Scope: held-out composition under ACT/Canberra weather; no cross-climate claim.

c — Training-combination layer

The diagram keeps supported baseline evidence separate from open Phase-B rescue/adaptation gates.

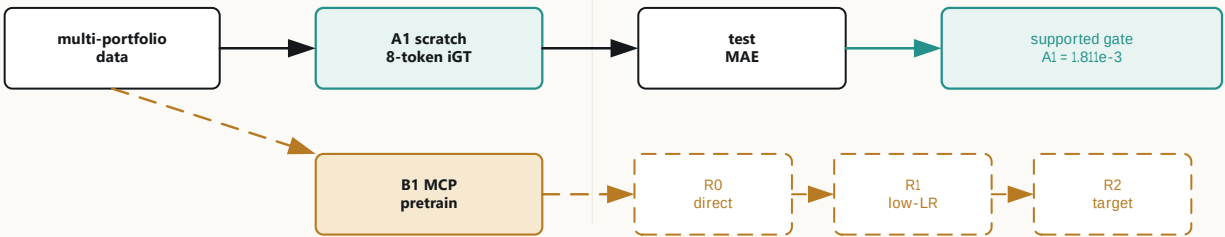

d — Evidence status

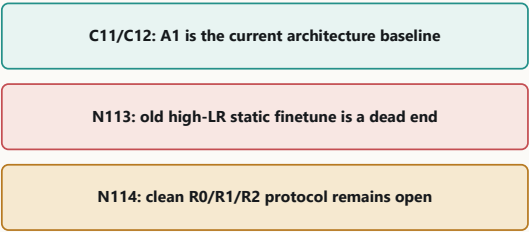

Solid lines denote supported data/power paths; amber dashed lines denote unresolved Phase-B branches. The figure is a communication schematic, not a protection-grade electrical drawing.