


Footfall camera placement guidelines

1. Where to Place the Camera


Put the camera a little distance from the door. Point it straight at the door, not from the side. This way, the camera can see everyone walking in clearly. If the camera is on the side, one person can hide behind another person. Then the camera may miss counting that person.

- Do not put anything in front of the camera. No mannequins, no clothing racks, no stands. Nothing should block the door or the walking path.
- The camera must see the door clearly. If something blocks part of the door, at least 90% of the door should still be visible.

Correct — camera set back, facing the entrance

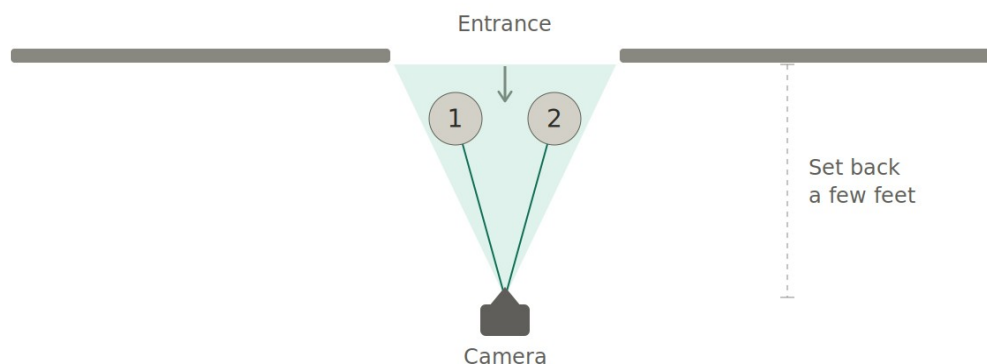

Incorrect — camera mounted to the side

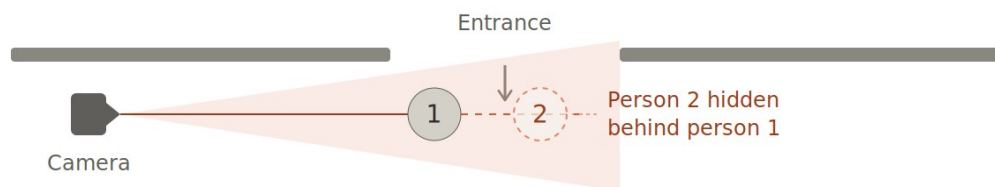


2. How Far the Camera Should Be From the Door

The best distance is where the camera can see the whole door, plus a little extra space on both sides. If the camera is too close, it cannot see the full door. If it is too far, people look too small and are hard to count correctly. The correct distance also depends on the camera lens.

- Too close (about 1 to 1.5 meters): The camera cannot see the full door. Some parts of the door are missing from the picture.
- Correct distance (about 2.5 to 3.5 meters): The full door, with a little extra space, fits nicely in the camera picture.
- Too far (6 meters or more): The door looks very small in the picture. The camera cannot see people clearly enough to count them correctly.
- Note: The correct distance depends on the camera lens. A narrow lens needs more distance. A wide lens needs less distance.

How far to set the camera back from the entrance

Same camera — moving it back widens what it sees at the doorway

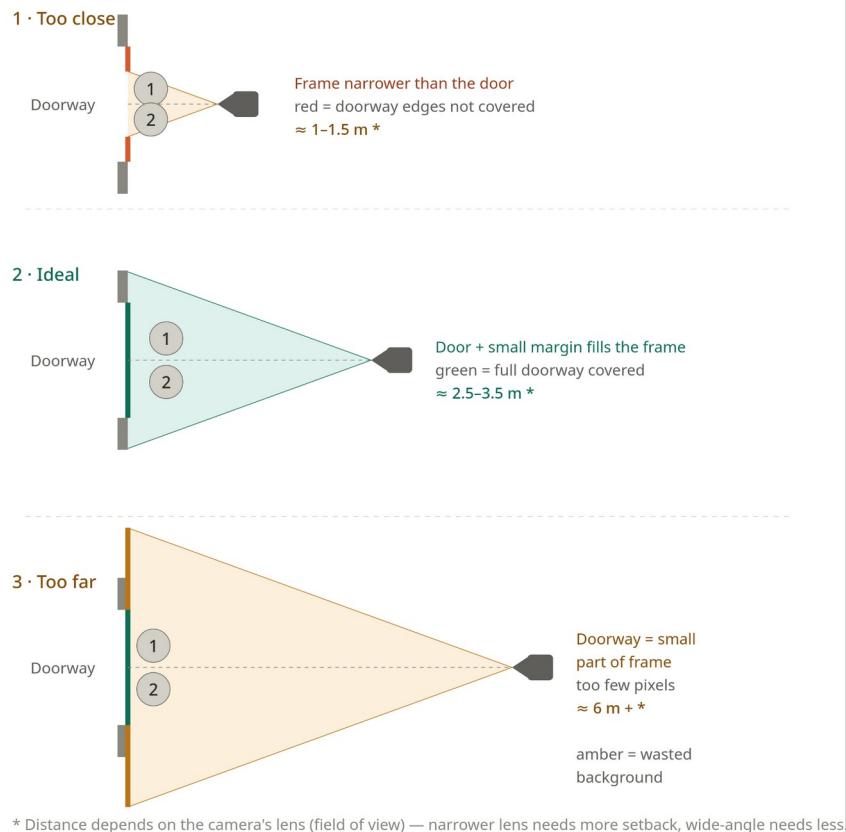


3. Camera Height and Angle

Camera angle: If the camera has a narrow view, place it further back and point it down slightly, about 10 to 20 degrees. If the camera has a wide view, place it closer and point it down more, about 20 to 30 degrees.

- Mount the camera at ceiling height.
- In both cases, point the camera at the same spot — the door entry point.

Downward tilt depends on the lens (side view)

Camera stays at ceiling height — setback and tilt change with the lens

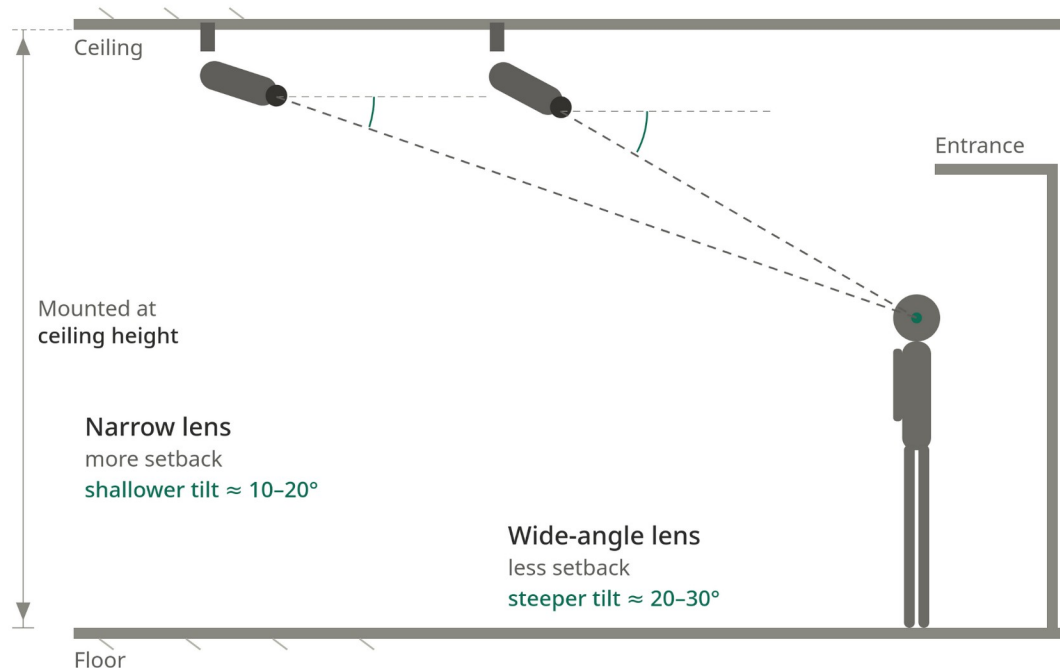

Tilt is measured below horizontal. Both cameras aim at the same entry point.

3.1 Mistakes Found in Real Stores

Sarath City Mall

In the pictures below, the person standing further away is hidden behind the person standing closer.

This happens because the camera is on the side. The camera being mounted too low makes this problem worse.



AS Rao Nagar

The camera is placed outside the store. It is not pointing at the store's door. Because of this, people walking into the shop next door also get counted by mistake.



Lakeshore Mall


The camera is placed on the side. Because of this, people block each other in the picture, as shown below.



There is another problem too. The camera does not see the whole door. Some people walk in through a part of the door the camera cannot see. You can see this in the bottom right corner of the picture below.

3.2 A Good Example From the Field Footfall Camera at a Store Entrance

The two pictures below, taken a few seconds apart, show a footfall camera set up the right way. The green and red boxes are the camera system detecting each person automatically.

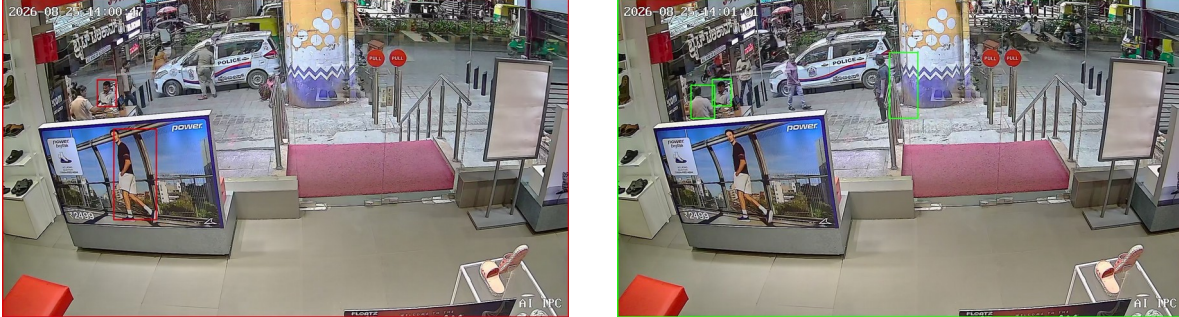


- The camera is mounted high and set back, giving a clear, wide view of the whole entrance and the walking path leading up to it.
- The camera faces the entrance directly, not from the side, so people are seen clearly as they walk in.
- Nothing blocks the view — there are no mannequins, stands, or displays in front of the entrance or the walking path.
- Each person is detected separately with their own box, showing that people are not hidden behind each other, even when walking close together.
- The full width of the entrance, including the steps and mat area, is covered inside the camera's view.
- The camera keeps detecting people correctly across different moments in time, showing that the setup works reliably throughout the day.

4. Where to Place the Billing Camera

Place the camera at one corner of the billing counter. From there, the camera should clearly see both sides — the customer side and the staff side.

Billing KPI — camera and zone placement (top view)

Ceiling camera at a back (employee-side) counter corner, angled across both zones

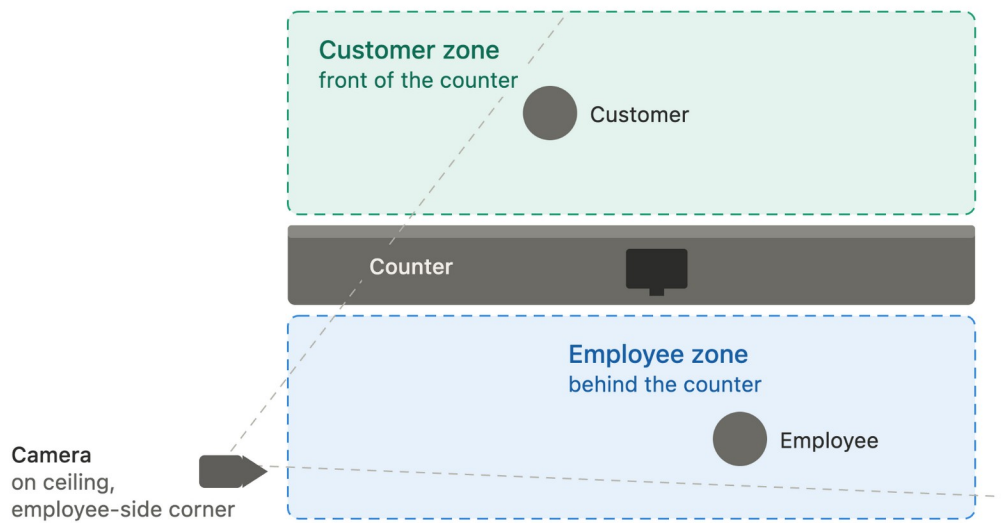

Good examples from our stores




5. Where to Place the Heatmap Camera

Place the camera at the back of the store. From there, it should be able to see most of the store floor clearly.

Heatmap KPI — camera and floor coverage (top view)

One wide-angle camera high on the back wall covers most of the floor

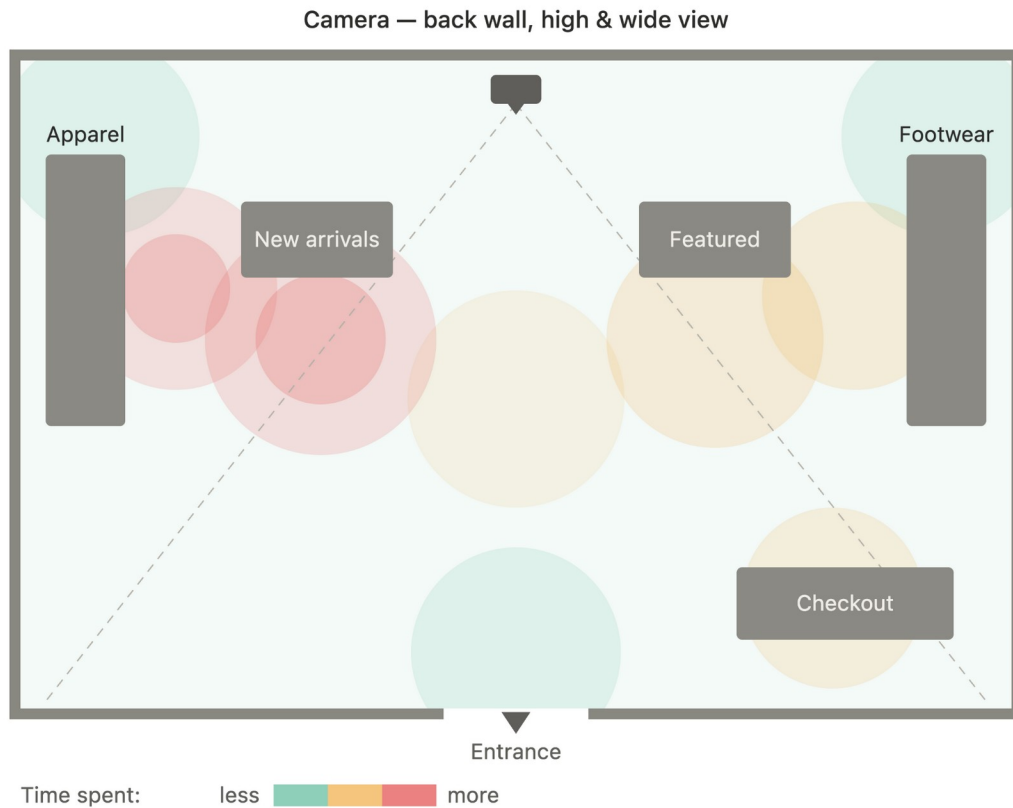

Good examples from our stores





6. Checklist Before You Leave

- The camera faces the door directly, not from the side.
- At least 90% of the door is visible in the camera picture.
- No object (mannequin, rack, stand) is blocking the camera's view.
- The camera is placed at the correct distance from the door — not too close, not too far.
- The camera is mounted at ceiling height with the correct tilt angle.
- The camera does not see into the shop next door.