

File ▼ Edit ▼ Generate Server ▼ Generate Client ▼

Management-Frame-Monitor-Tool 1.0.0

This tool is utilized for detecting deauthentication attacks and reogue access points

Terms of service

Contact the developer


Queue

```
POST
           /AddToQueue Add a new management frame to the monitor queue
                                                                                       Try it out
Parameters
                 Description
Name
body * required
                 The management frame to add to the queue
object
                 Example Value Model
(body)
                    "short_message": "beacon",
                    "time_stamp": "1653152913",
                    "antenna_signal": "55",
                    "essid": "MyWifiRouter",
                    "bssid": "13:bb:5e:cf:93:aa",
                    "beacon_interval": "1",
                    "current_channel": "7",
                    "country_code": "us",
                    "transmit_power": "78",
                    "is_private_network": false
                  }
                 Parameter content type
                    application/json
```

1 of 3 5/21/2022, 12:49 PM

| Responses | | sponse content type | application/json |
|-----------|--------------------|---------------------|------------------|
| Code | Description | | |
| 200 | Added to queue | | |
| 400 | Invalid request | | |
| 405 | Method not allowed | | |

Notifications

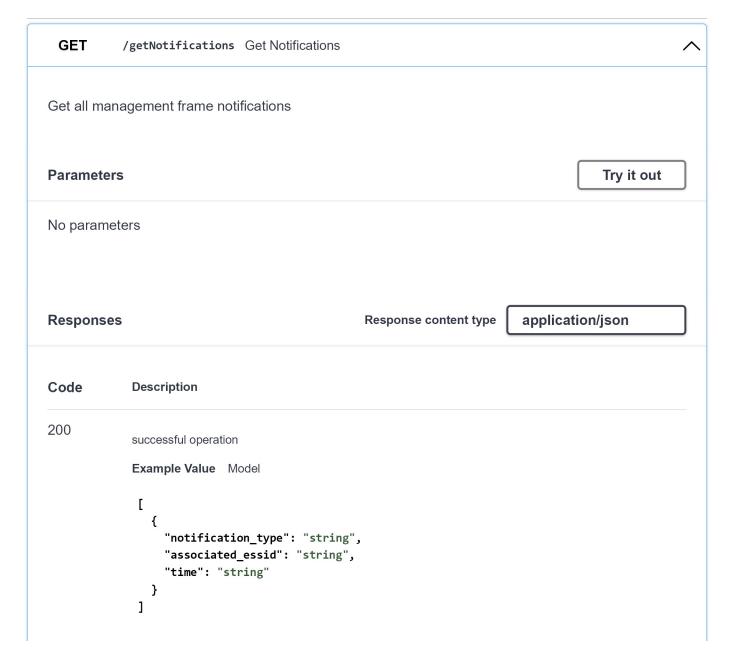

2 of 3 5/21/2022, 12:49 PM

```
Code
              Description
 405
              Method not allowed
 500
              Internal server error
Models
                                                                                                   \leftarrow
    management_frame
                                 {
        short_message
                                string($string)
                                example: beacon
        time_stamp
                                string
                                example: 1653152913
        antenna_signal
                                string
                                example: 55
        essid
                                string
                                example: MyWifiRouter
        bssid
                                string
                                example: 13:bb:5e:cf:93:aa
        beacon_interval
                                string
                                example: 1
        current_channel
                                string
                                example: 7
        country_code
                                string
                                example: us
        transmit_power
                                string
                                example: 78
        is_private_network
                                boolean
                                example: false
    }
                                                                                                   \leftarrow
    notification
                      {
        notification_type
                                string
        associated_essid
                                string
        time
                                string
    }
```

3 of 3 5/21/2022, 12:49 PM