

## PRODUCT SELECTION GUIDE

Global Leader in General Intelligent Robots

# JAKA

[www.jaka.com](http://www.jaka.com) | 🔍

### JAKA Robotics Co., Ltd.

📍 JAKA China: No. 18 Nangu Rd, Minhang District, Shanghai, China

📍 JAKA Germany: Siemensstr. 31, 90766 Fürth, Germany

📍 JAKA Japan: F Serebureito Aoi, 1-6-14 Aoi, Higashi-ku, Nagoya-shi, Aichi-ken, Japan

📍 JAKA Malaysia: 5-G, Jalan Borealis 3, Bandar Cassia, 14110 Simpang Ampat, Penang, Malaysia

✉ [marketing@jaka.com](mailto:marketing@jaka.com)


☎ **400-006-2665**

Copyright © 2026 JAKA. All rights reserved.

Disclaimers:

The copyright belongs to JAKA and cannot be copied or reproduced in any form without written permission.

The company reserves the right to interpret and update the contents of the materials without notice.

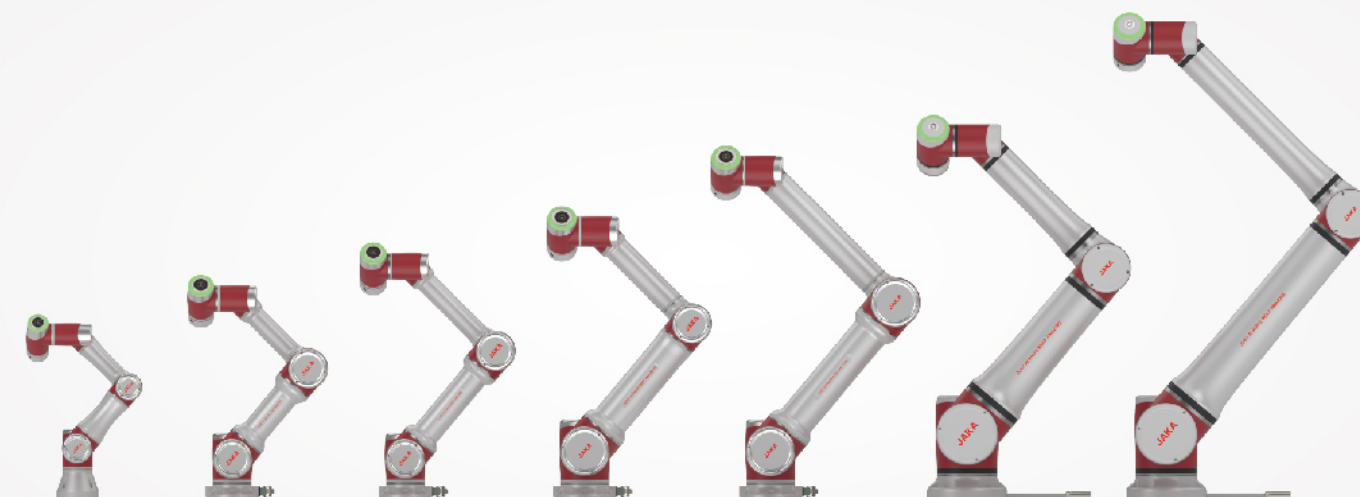

Product Matrix



Ease of Use



Safe



Reliability



Compatibility

Collaborative & Embodied AI Robots

Fulfills the requirements of all types of industrial solutions

JAKA A Series

JAKA Zu Series

JAKA Pro Series

JAKA S Series

JAKA Mini Series

JAKA Lens 2D

JAKA Lens VPS

JAKA CAB V3

JAKA Khan

JAKA Kargo

JAKA S<sup>3</sup> Mobile Robot

JAKA Lumi

JAKA K1

No Teaching Pendant

Programming JAKA collaborative robots is made easy with our JAKA APP, available for Android and Windows devices. Traditional teaching pendants are no longer necessary.

Wireless Connection

Say goodbye to messy wires! JAKA cobots can now communicate and receive task assignments via their own WiFi connection, leaving you with a clean and safe workspace.

Safe Human-robot Collaboration

JAKA cobots are designed to work safely alongside humans, without the need for a safety fence, thanks to their collision detection module. Even the slightest bump can be detected, allowing the cobot to react and avoid causing harm.

Graphical Programming

Our intuitive graphic programming software interface is designed for anyone to use, regardless of prior programming experience. Setting positions and tasks is a breeze with our user-friendly interface.

Drag Teaching

With our drag teaching function, users can deploy a cobot in just a few minutes. Simply move the cobot to any desired position, and it will instantly memorize it.

Plug-and-play

Install a JAKA cobot in just a few minutes, and mount it in any position or inclination. Our cobots are lightweight and are compatible with a wide range of grippers and end effectors. This makes them highly versatile and able to be deployed and re-deployed in any production environment.



# JAKA Zu Series



Easy to Install

Plug-and-play  
Simple deployment  
Small footprint




Easy to Use

In-built torque feedback module  
Drag teaching  
Graphic programming



Built for Every Task

Excellent repeatability  
Great precision  
MTBF 80,000 hours

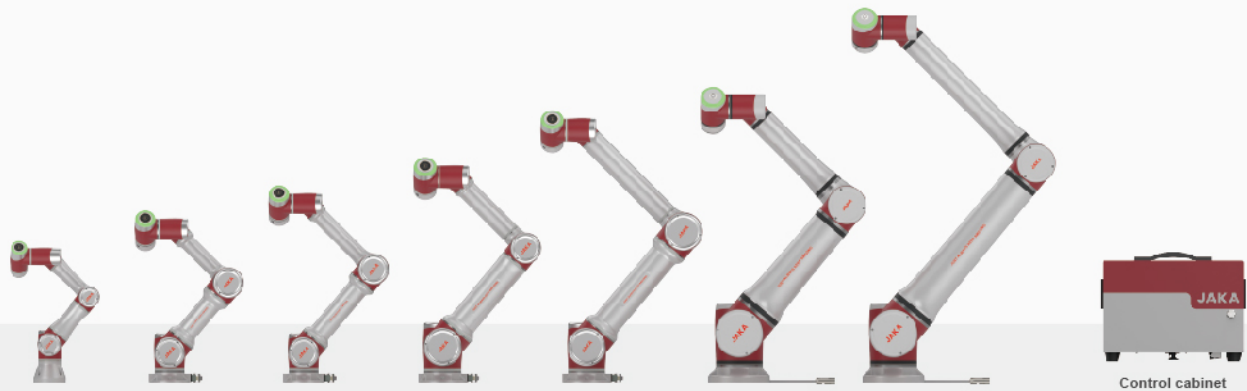

| Basic<br>Parameter                                                         | Parameter                                   | JAKA Zu3                                                          |                                             | JAKA Zu5                                         |                                             | JAKA Zu7                                         |                                             | JAKA Zu12                                                         |                                             | JAKA Zu18                                        |                                             | JAKA Zu20                                        |                                             | JAKA Zu30                                        |             |
|----------------------------------------------------------------------------|---------------------------------------------|-------------------------------------------------------------------|---------------------------------------------|--------------------------------------------------|---------------------------------------------|--------------------------------------------------|---------------------------------------------|-------------------------------------------------------------------|---------------------------------------------|--------------------------------------------------|---------------------------------------------|--------------------------------------------------|---------------------------------------------|--------------------------------------------------|-------------|
|                                                                            | Payload                                     | 3 kg (6.6 lb)                                                     |                                             | 5 kg (11 lb)                                     |                                             | 7 kg (15.4 lb)                                   |                                             | 12 kg (26.4 lb)                                                   |                                             | 18 kg (39.6 lb)                                  |                                             | 20 kg (44.1 lb)                                  |                                             | 30 kg (66.1 lb)                                  |             |
|                                                                            | Weight (including cables)                   | 12 kg (26.46 lb)                                                  |                                             | 23 kg (50.71 lb)                                 |                                             | 22 kg (48.50 lb)                                 |                                             | 41 kg (90.39 lb)                                                  |                                             | 35 kg (77.16 lb)                                 |                                             | 68 kg (149.9 lb)                                 |                                             | 65 kg (143.3 lb)                                 |             |
|                                                                            | Reach                                       | 626 mm (24.64 in)                                                 |                                             | 954 mm (37.5 in)                                 |                                             | 819 mm (32.2 in)                                 |                                             | 1327 mm (52.2 in)                                                 |                                             | 1073 mm (42.24 in)                               |                                             | 1780 mm (70.1 in)                                |                                             | 1350 mm (53.1 in)                                |             |
|                                                                            | Repeatability                               | ±0.02 mm (±0.00079 in)                                            |                                             | ±0.02 mm (±0.00079 in)                           |                                             | ±0.02 mm (±0.00079 in)                           |                                             | ±0.03 mm (±0.00118 in)                                            |                                             | ±0.03 mm (±0.00118 in)                           |                                             | ±0.05 mm (±0.00120 in)                           |                                             | ±0.05 mm (±0.00120 in)                           |             |
|                                                                            | Degree of freedom                           | 6                                                                 |                                             | 6                                                |                                             | 6                                                |                                             | 6                                                                 |                                             | 6                                                |                                             | 6                                                |                                             | 6                                                |             |
|                                                                            | Programming                                 | Graphical programming, and freedrive programming                  |                                             | Graphical programming, and freedrive programming |                                             | Graphical programming, and freedrive programming |                                             | Graphical programming, and freedrive programming                  |                                             | Graphical programming, and freedrive programming |                                             | Graphical programming, and freedrive programming |                                             | Graphical programming, and freedrive programming |             |
| Demonstrator type                                                          | Mobile terminal (computer/pad/mobile phone) |                                                                   | Mobile terminal (computer/pad/mobile phone) |                                                  | Mobile terminal (computer/pad/mobile phone) |                                                  | Mobile terminal (computer/pad/mobile phone) |                                                                   | Mobile terminal (computer/pad/mobile phone) |                                                  | Mobile terminal (computer/pad/mobile phone) |                                                  | Mobile terminal (computer/pad/mobile phone) |                                                  |             |
| Movement                                                                   | Joint                                       | Range of action                                                   | Joint speed                                 | Range of action                                  | Joint speed                                 | Range of action                                  | Joint speed                                 | Range of action                                                   | Joint speed                                 | Range of action                                  | Joint speed                                 | Range of action                                  | Joint speed                                 | Range of action                                  | Joint speed |
|                                                                            | Joint 1                                     | ±360°                                                             | 180°/s                                      | ±360°                                            | 180°/s                                      | ±360°                                            | 180°/s                                      | ±360°                                                             | 120°/s                                      | ±360°                                            | 120°/s                                      | ±360°                                            | 120°/s                                      | ±360°                                            | 120°/s      |
|                                                                            | Joint 2                                     | -85°~+265°                                                        | 180°/s                                      | -85°~+265°                                       | 180°/s                                      | -85°~+265°                                       | 180°/s                                      | -85°~+265°                                                        | 120°/s                                      | -85°~+265°                                       | 120°/s                                      | -85°~+265°                                       | 120°/s                                      | -85°~+265°                                       | 120°/s      |
|                                                                            | Joint 3                                     | ±175°                                                             | 180°/s                                      | ±175°                                            | 180°/s                                      | ±175°                                            | 180°/s                                      | ±175°                                                             | 120°/s                                      | ±175°                                            | 180°/s                                      | ±175°                                            | 120°/s                                      | ±175°                                            | 120°/s      |
|                                                                            | Joint 4                                     | -85°~+265°                                                        | 220°/s                                      | -85°~+265°                                       | 180°/s                                      | -85°~+265°                                       | 180°/s                                      | -85°~+265°                                                        | 180°/s                                      | -85°~+265°                                       | 180°/s                                      | -85°~+265°                                       | 220°/s                                      | -85°~+265°                                       | 220°/s      |
|                                                                            | Joint 5                                     | ±360°                                                             | 220°/s                                      | ±360°                                            | 180°/s                                      | ±360°                                            | 180°/s                                      | ±360°                                                             | 180°/s                                      | ±360°                                            | 180°/s                                      | ±360°                                            | 220°/s                                      | ±360°                                            | 220°/s      |
|                                                                            | Joint 6                                     | ±360°                                                             | 220°/s                                      | ±360°                                            | 180°/s                                      | ±360°                                            | 180°/s                                      | ±360°                                                             | 180°/s                                      | ±360°                                            | 180°/s                                      | ±360°                                            | 220°/s                                      | ±360°                                            | 220°/s      |
| Tool typical speed                                                         | /                                           | 1 m/s (3.281 ft/s)                                                | /                                           | 1 m/s (3.281 ft/s)                               | /                                           | 1 m/s (3.281 ft/s)                               | /                                           | 1 m/s (3.281 ft/s)                                                | /                                           | 1 m/s (3.281 ft/s)                               | /                                           | 1.5 m/s (4.921 ft/s)                             | /                                           | 1 m/s (3.281 ft/s)                               |             |
| Specifications                                                             | Typical consumption                         | 150W                                                              |                                             | 350W                                             |                                             | 350W                                             |                                             | 500W                                                              |                                             | 500W                                             |                                             | 750W                                             |                                             | 750W                                             |             |
|                                                                            | IP classification                           | IP54                                                              |                                             | IP54                                             |                                             | IP54                                             |                                             | IP54                                                              |                                             | IP54                                             |                                             | IP65                                             |                                             | IP65                                             |             |
|                                                                            | Tool I/O ports                              | 2 digital inputs                                                  |                                             | 2 digital inputs                                 |                                             | 2 digital inputs                                 |                                             | 2 digital inputs                                                  |                                             | 2 digital inputs                                 |                                             | 2 digital inputs                                 |                                             | 2 digital inputs                                 |             |
|                                                                            |                                             | 2 digital outputs                                                 |                                             | 2 digital outputs                                |                                             | 2 digital outputs                                |                                             | 2 digital outputs                                                 |                                             | 2 digital outputs                                |                                             | 2 digital outputs                                |                                             | 2 digital outputs                                |             |
|                                                                            |                                             | 2 analog inputs                                                   |                                             | 2 analog inputs                                  |                                             | 2 analog inputs                                  |                                             | 2 analog inputs                                                   |                                             | 2 analog inputs                                  |                                             | 2 analog inputs                                  |                                             | 2 analog inputs                                  |             |
| Footprint                                                                  | 129 mm (5.079 in)                           |                                                                   | 158 mm (6.220 in)                           |                                                  | 158 mm (6.220 in)                           |                                                  | 188 mm (7.402 in)                           |                                                                   | 188 mm (7.402 in)                           |                                                  | 246 mm (9.685 in)                           |                                                  | 246 mm (9.685 in)                           |                                                  |             |
| Control cabinet<br>JAKA CAB V2.1<br><small>(Optional: JAKA CAB V3)</small> | IP classification                           | IP44                                                              |                                             | IP44                                             |                                             | IP44                                             |                                             | IP44                                                              |                                             | IP44                                             |                                             | IP44                                             |                                             | IP44                                             |             |
|                                                                            | I/O ports                                   | 16 digital inputs, 16 digital outputs, 2 analog inputs or outputs |                                             |                                                  |                                             |                                                  |                                             | 16 digital inputs, 16 digital outputs, 2 analog inputs or outputs |                                             |                                                  |                                             |                                                  |                                             |                                                  |             |
|                                                                            | Communication mode                          | TCP/IP, Modbus TCP, Modbus RTU, Profinet, Ethernet/IP             |                                             |                                                  |                                             |                                                  |                                             | TCP/IP, Modbus TCP, Modbus RTU, Profinet, Ethernet/IP             |                                             |                                                  |                                             |                                                  |                                             |                                                  |             |
|                                                                            | Power supply                                | 100-240VAC, 50-60Hz                                               |                                             | 100-240VAC, 50-60Hz                              |                                             | 100-240VAC, 50-60Hz                              |                                             | 100-240VAC, 50-60Hz                                               |                                             | 100-240VAC, 50-60Hz                              |                                             | 100-240VAC, 50-60Hz                              |                                             | 100-240 VAC, 50-60Hz                             |             |
|                                                                            | Size                                        | 410*307*235 mm (16.14*12.09*9.25 in)                              |                                             | 410*307*235 mm (16.14*12.09*9.25 in)             |                                             | 410*307*235 mm (16.14*12.09*9.25 in)             |                                             | 410*307*235 mm (16.14*12.09*9.25 in)                              |                                             | 410*307*235 mm (16.14*12.09*9.25 in)             |                                             | 410*307*235 mm (16.14*12.09*9.25 in)             |                                             | 410*307*235 mm (16.14*12.09*9.25 in)             |             |
|                                                                            | Weight                                      | 13.5 kg (29.762 lb)                                               |                                             | 15.4 kg (33.95 lb)                               |                                             | 15.4 kg (33.95 lb)                               |                                             | 18 kg (39.68 lb)                                                  |                                             | 18 kg (39.68 lb)                                 |                                             | 18 kg (39.68 lb)                                 |                                             | 18 kg (39.68 lb)                                 |             |

# JAKA New-Gen Zu Series



### Easy to Install

Plug-and-play  
Simple deployment  
Small footprint



### Easy to Use

In-built torque feedback module  
Drag teaching  
Graphic programming



### Built for Every Task

High payload & Long reach  
Excellent repeatability  
Fast communication



| Basic Parameter      | Parameter            | JAKA Zu15                                                                                                                                                                  |            | JAKA Zu35                                                                                                                                                                  |            |
|----------------------|----------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|
|                      | Rated Payload        | 15 kg                                                                                                                                                                      |            | 35 kg                                                                                                                                                                      |            |
|                      | Weight               | 38 kg                                                                                                                                                                      |            | 115 kg                                                                                                                                                                     |            |
|                      | Reach                | 1400 mm                                                                                                                                                                    |            | 2000 mm                                                                                                                                                                    |            |
|                      | Repeatability        | ±0.03 mm                                                                                                                                                                   |            | ±0.05 mm                                                                                                                                                                   |            |
|                      | Degree of freedom    | 6                                                                                                                                                                          |            | 6                                                                                                                                                                          |            |
|                      | Programming          | Graphical Programming, Drag Teaching                                                                                                                                       |            | Graphical Programming, Drag Teaching                                                                                                                                       |            |
|                      | Teach Pendant Type   | Mobile Devices (PC, Tablet, Smartphone)*                                                                                                                                   |            | Mobile Devices (PC, Tablet, Smartphone)*                                                                                                                                   |            |
| Movement             | Robot Arm            | Range                                                                                                                                                                      | Max. Speed | Range                                                                                                                                                                      | Max. Speed |
|                      | Joint 1              | ±360°                                                                                                                                                                      | 190°/s     | ±360°                                                                                                                                                                      | 150°/s     |
|                      | Joint 2              | -85°~+265°                                                                                                                                                                 | 190°/s     | -85°~+265°                                                                                                                                                                 | 150°/s     |
|                      | Joint 3              | ±168°                                                                                                                                                                      | 210°/s     | ±165°                                                                                                                                                                      | 180°/s     |
|                      | Joint 4              | ±360°                                                                                                                                                                      | 210°/s     | ±360°                                                                                                                                                                      | 300°/s     |
|                      | Joint 5              | ±360°                                                                                                                                                                      | 210°/s     | ±360°                                                                                                                                                                      | 300°/s     |
|                      | Joint 6              | ±360°                                                                                                                                                                      | 210°/s     | ±360°                                                                                                                                                                      | 300°/s     |
|                      | Max. TCP Speed       | /                                                                                                                                                                          | 4 m/s      | /                                                                                                                                                                          | 5 m/s      |
| Physical Performance | Typical Power        | 500W                                                                                                                                                                       |            | 1500W                                                                                                                                                                      |            |
|                      | IP Degree            | IP65                                                                                                                                                                       |            | IP65                                                                                                                                                                       |            |
|                      | Tool I/O             | Digital I/O ×2, Analog Input ×2, End IO Module ×2, (24/12/48V), EtherCAT                                                                                                   |            | Digital I/O ×2, Analog Input ×2, End IO Module ×2, (24/12/48V), EtherCAT                                                                                                   |            |
|                      | Base Footprint       | Ø188mm, M8*4                                                                                                                                                               |            | □260mm, M16*4                                                                                                                                                              |            |
|                      | Robot Mounting       | Floor, Wall, Ceiling                                                                                                                                                       |            | Floor, Wall, Ceiling                                                                                                                                                       |            |
| Cobot Controller     | IP Degree            | IP54                                                                                                                                                                       |            | IP54                                                                                                                                                                       |            |
|                      | Communication        | 16 Digital Inputs, 16 Digital Outputs 16 Safety Digital Inputs, 16 Safety Digital Outputs HSI High-Speed Input Interface 2 Emergency Stop Inputs, 2 Protective Stop Inputs |            | 16 Digital Inputs, 16 Digital Outputs 16 Safety Digital Inputs, 16 Safety Digital Outputs HSI High-Speed Input Interface 2 Emergency Stop Inputs, 2 Protective Stop Inputs |            |
|                      | Industrial Protocols | Ethernet*2 (1000Mb)                                                                                                                                                        |            | Ethernet*2 (1000Mb)                                                                                                                                                        |            |
|                      | Extension Protocols  | PROFINET I/O Device, EtherCAT, EtherNet/IP Modbus RTU Master/Slave, Modbus TCP Server                                                                                      |            | PROFINET I/O Device, EtherCAT, EtherNet/IP Modbus RTU Master/Slave, Modbus TCP Server                                                                                      |            |
|                      | Power supply         | 100-240VAC, 50-60Hz                                                                                                                                                        |            | 100-240VAC, 50-60Hz                                                                                                                                                        |            |
|                      | Dimensions           | 421*379*255 mm (W×H×D)                                                                                                                                                     |            | 421*379*255 mm (W×H×D)                                                                                                                                                     |            |
|                      | Weight               | 14.3 kg                                                                                                                                                                    |            | 14.3 kg                                                                                                                                                                    |            |

\*Option: wired teach pendant Touch II

# JAKA Pro Series

**Resistant**

IP68 degree of protection against dust, and water. The highest in the market

**Reliable**

Repeatability of  $\pm 0.02$  mm  
Work without supervision 24/7

**Versatile**

Is able to perform in the most challenging environments



| Basic Parameter                                                            | Parameters                | JAKA Pro5                                                         |  | JAKA Pro12                                                        |  | JAKA Pro16                                                        |  |
|----------------------------------------------------------------------------|---------------------------|-------------------------------------------------------------------|--|-------------------------------------------------------------------|--|-------------------------------------------------------------------|--|
|                                                                            | Payload                   | 5 kg (11 lb)                                                      |  | 12 kg (26.4 lb)                                                   |  | 16 kg (35.27 lb)                                                  |  |
|                                                                            | Weight (including cables) | 23 kg (50.71 lb)                                                  |  | 41 kg (90.39 lb)                                                  |  | 79.7 kg (175.71lb)                                                |  |
|                                                                            | Reach                     | 954 mm (37.5 in)                                                  |  | 1327 mm (52.2 in)                                                 |  | 1713 mm (67.44 lb)                                                |  |
|                                                                            | Repeatability             | $\pm 0.02$ mm ( $\pm 0.00079$ in)                                 |  | $\pm 0.03$ mm ( $\pm 0.00118$ in)                                 |  | $\pm 0.03$ mm ( $\pm 0.00118$ in)                                 |  |
|                                                                            | Degree of freedom         | 6                                                                 |  | 6                                                                 |  | 6                                                                 |  |
|                                                                            | Programming               | Graphical programming, and freedrive programming                  |  | Graphical programming, and freedrive programming                  |  | Graphical programming, and freedrive programming                  |  |
|                                                                            | Demonstrator type         | Mobile terminal (computer/pad/mobile phone)                       |  | Mobile terminal (computer/pad/mobile phone)                       |  | Mobile terminal (computer/pad/mobile phone)                       |  |
| Movement                                                                   | Joint                     | Range of action                                                   |  | Range of action                                                   |  | Range of action                                                   |  |
|                                                                            | Joint 1                   | $\pm 360^{\circ}$                                                 |  | $\pm 360^{\circ}$                                                 |  | $\pm 360^{\circ}$                                                 |  |
|                                                                            | Joint 2                   | $-85^{\circ} \sim +265^{\circ}$                                   |  | $-85^{\circ} \sim +265^{\circ}$                                   |  | $-85^{\circ} \sim +265^{\circ}$                                   |  |
|                                                                            | Joint 3                   | $\pm 175^{\circ}$                                                 |  | $\pm 175^{\circ}$                                                 |  | $\pm 175^{\circ}$                                                 |  |
|                                                                            | Joint 4                   | $-85^{\circ} \sim +265^{\circ}$                                   |  | $-85^{\circ} \sim +265^{\circ}$                                   |  | $-85^{\circ} \sim +265^{\circ}$                                   |  |
|                                                                            | Joint 5                   | $\pm 360^{\circ}$                                                 |  | $\pm 360^{\circ}$                                                 |  | $\pm 360^{\circ}$                                                 |  |
|                                                                            | Joint 6                   | $\pm 360^{\circ}$                                                 |  | $\pm 360^{\circ}$                                                 |  | $\pm 360^{\circ}$                                                 |  |
|                                                                            | Tool typical speed        | /                                                                 |  | /                                                                 |  | /                                                                 |  |
| Specifications                                                             | Typical consumption       | 350W                                                              |  | 500W                                                              |  | 750W                                                              |  |
|                                                                            | IP classification         | IP68                                                              |  | IP68                                                              |  | IP68                                                              |  |
|                                                                            | Tool I/O ports            | 2 Digital inputs                                                  |  | 2 Digital inputs                                                  |  | 2 Digital inputs                                                  |  |
|                                                                            |                           | 2 Digital outputs                                                 |  | 2 Digital outputs                                                 |  | 2 Digital outputs                                                 |  |
|                                                                            |                           | 2 Analog input                                                    |  | 2 Analog input                                                    |  | 2 Analog input                                                    |  |
|                                                                            | Footprint                 | 158 mm (6.220 in)                                                 |  | 188 mm (7.402 in)                                                 |  | 246 mm (9.685 in)                                                 |  |
| Control cabinet<br>JAKA CAB V2.1<br><small>(Optional: JAKA CAB V3)</small> | IP classification         | IP44                                                              |  | IP44                                                              |  | IP44                                                              |  |
|                                                                            | I/O ports                 | 16 digital inputs, 16 digital outputs, 2 analog inputs or outputs |  | 16 digital inputs, 16 digital outputs, 2 analog inputs or outputs |  | 16 digital inputs, 16 digital outputs, 2 analog inputs or outputs |  |
|                                                                            | Communication mode        | TCP/IP, Modbus TCP, Modbus RTU, Profinet, Ethernet/IP             |  | TCP/IP, Modbus TCP, Modbus RTU, Profinet, Ethernet/IP             |  | TCP/IP, Modbus TCP, Modbus RTU, Profinet, Ethernet/IP             |  |
|                                                                            | Power supply              | 100-240VAC, 50-60Hz                                               |  | 100-240VAC, 50-60Hz                                               |  | 100-240VAC, 50-60Hz                                               |  |
|                                                                            | Size                      | 410×307×235 mm (W×H×D)                                            |  | 410×307×235 mm (W×H×D)                                            |  | 410×307×235 mm (W×H×D)                                            |  |
|                                                                            | Weight                    | 15.4 kg (33.95 lb)                                                |  | 18 kg (39.68 lb)                                                  |  | 18 kg (39.68 lb)                                                  |  |

JAKA S Series

**Safety Protection**  
IP65 rating

**Highly Sensitive**  
Integrated force control

**Quick Application**  
JKS Hub quick app platform

**Safety Compliance**  
Certified to Medical Safety Standards



|                 | Parameter                     | JAKA S5                          |  | JAKA S7                          |  | JAKA S12                         |  |
|-----------------|-------------------------------|----------------------------------|--|----------------------------------|--|----------------------------------|--|
|                 |                               |                                  |  |                                  |  |                                  |  |
| Basic Parameter | Payload                       | 5 kg (11 lb)                     |  | 7 kg (15.4 lb)                   |  | 12 kg (26.5 lb)                  |  |
|                 | Reach                         | 954 mm (37.5 in)                 |  | 819 mm (32.2 in)                 |  | 1327 mm (52.2 in)                |  |
|                 | Degrees of freedom            | 6                                |  | 6                                |  | 6                                |  |
|                 | Average power consumption     | 350w                             |  | 350 W (0.47 hp)                  |  | 500w                             |  |
|                 | Peak power                    | 2000W                            |  | 2000W                            |  | 3000W                            |  |
| Performance     | Force/torque sensor           | Force, x-y-z                     |  | Force, x-y-z                     |  | Force, x-y-z                     |  |
|                 | Range                         | 200N                             |  | 200 N (45 lbf)                   |  | 400N                             |  |
|                 | Max affordable force          | 3000N                            |  | 3000 N (674.4 lbf)               |  | 3000N                            |  |
|                 | Overall accuracy <sup>i</sup> | 1% F.S. <sup>ii</sup>            |  | 1% F.S. <sup>ii</sup>            |  | 1% F.S. <sup>ii</sup>            |  |
|                 | Distinguishability            | 0.1N                             |  | 0.1 N                            |  | 0.1N                             |  |
| Movement        | Tool typical speed            | 1 m/s (3.281ft/s)                |  | 1 m/s (3.281ft/s)                |  | 1 m/s (3.281ft/s)                |  |
|                 | Repeatability                 | ±0.02 mm (±0.00079 in)           |  | ±0.02 mm (±0.00079 in)           |  | ±0.03 mm (±0.00118 in)           |  |
|                 | Joint                         | Range of action                  |  | Working range                    |  | Range of action                  |  |
|                 | Joint 1                       | ±360°                            |  | ±360°                            |  | ±360°                            |  |
|                 | Joint 2                       | -85°~ +265°                      |  | -85°~ +265°                      |  | -85°~ +265°                      |  |
|                 | Joint 3                       | ±175°                            |  | ±175°                            |  | ±175°                            |  |
|                 | Joint 4                       | -85°~+265°                       |  | -85°~+265°                       |  | -85°~+265°                       |  |
|                 | Joint 5                       | ±360°                            |  | ±360°                            |  | ±360°                            |  |
|                 | Joint 6                       | ±360°                            |  | ±360°                            |  | ±360°                            |  |
| Physical        | IP classification             | IP 65                            |  | IP 65                            |  | IP 65                            |  |
|                 | Robot mounting                | Any orientation                  |  | Any orientation                  |  | Any orientation                  |  |
|                 | Base diameter                 | 158 mm (6.220 in)                |  | 158 mm (6.220 in)                |  | 188 mm (7.402 in)                |  |
|                 | Materials                     | Aluminium, PC                    |  | Aluminium, PC                    |  | Aluminium, PC                    |  |
|                 | Robot connection cable length | 6 m (236 in)                     |  | 6 m (236 in)                     |  | 6 m (236 in)                     |  |
|                 | Weight                        | 23 kg (50.71lb)                  |  | 22 kg (48.50 lb)                 |  | 41 kg (90.39lb)                  |  |
|                 | Temperature                   | 0~50°C (32~122°F) <sup>iii</sup> |  | 0~50°C (32~122°F) <sup>iii</sup> |  | 0~50°C (32~122°F) <sup>iii</sup> |  |

i: Overall accuracy: It represents the median typical value of the system error, including the measurement error of the sensor and the absolute positioning error of the robot, reflecting the overall accuracy of the robot system in measuring external forces applied to the robot's end under real operating conditions.

ii: 1% F.S.: 1% of the full scale.

iii: At low environmental temperature <10°C, a warm-up phase recommended to be run with the robot. Otherwise, there is a risk that the robot stops or run with lower performance.

# JAKA A12L Intelligent Visual Perception Robot

「Available in select markets」



**Integrated Design**

High positioning accuracy  
Fast response



**Auto-Focus Capability**

Advanced auto-focus  
& intelligent lighting



**Multiple Vision Functions**


Covering 90% of robotic  
vision applications




JAKA CAB V3

## JAKA A12L Camera Field of View Diagram

| Field of View (Typical)              | Working Distance (mm) | Horizontal Field of View (mm) | Vertical Field of View (mm) | Pixel Accuracy (mm/pixel) |
|--------------------------------------|-----------------------|-------------------------------|-----------------------------|---------------------------|
| Reading Range Characteristic Diagram | 80                    | 55                            | 41                          | 0.016                     |
|                                      | 150                   | 99                            | 75                          | 0.029                     |
|                                      | 230                   | 149                           | 113                         | 0.043                     |
|                                      | 300                   | 194                           | 146                         | 0.056                     |
|                                      | 400                   | 257                           | 194                         | 0.074                     |
|                                      | 600                   | 383                           | 290                         | 0.111                     |
|                                      | 1000                  | 635                           | 481                         | 0.184                     |
|                                      | 1500                  | 951                           | 720                         | 0.275                     |

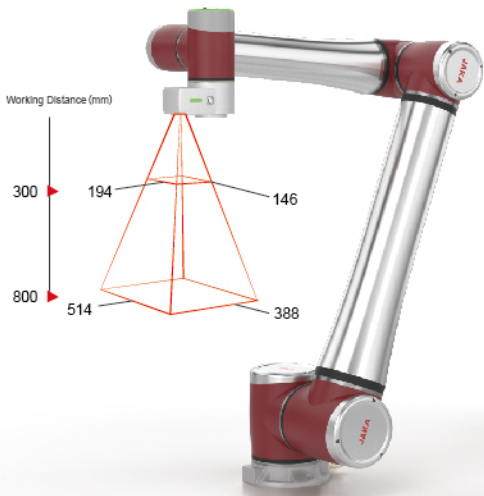

## JAKA A12L Dimension Diagram

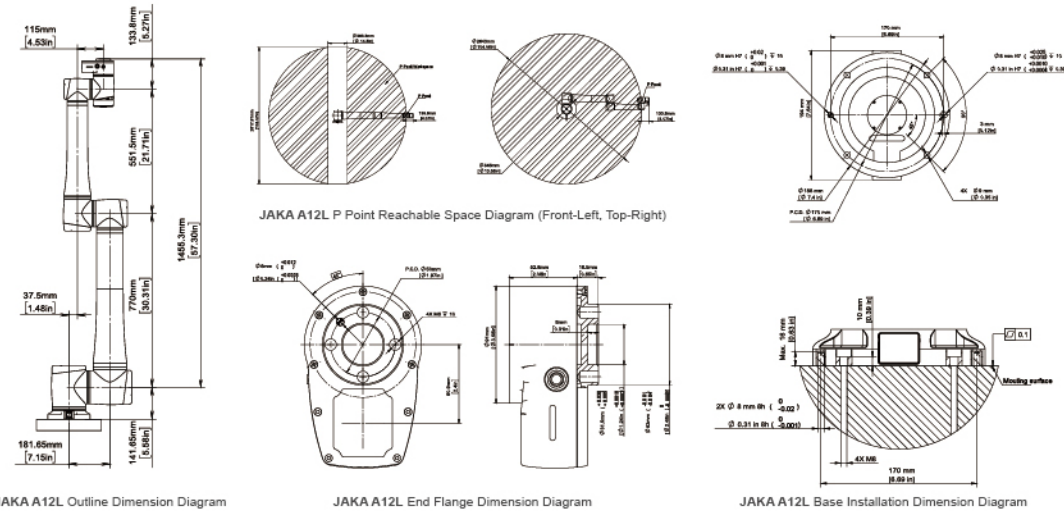

JAKA A12L Outline Dimension Diagram

JAKA A12L End Flange Dimension Diagram

JAKA A12L Base Installation Dimension Diagram

| Product Features                | Robot Model                     | JAKA A12L                                                       |                     |                                           |                     |
|---------------------------------|---------------------------------|-----------------------------------------------------------------|---------------------|-------------------------------------------|---------------------|
|                                 | Payload                         | 12 kg                                                           |                     |                                           |                     |
|                                 | Weight                          | 41 kg                                                           |                     |                                           |                     |
|                                 | Working Radius                  | 1425 mm                                                         |                     |                                           |                     |
|                                 | Repeat Positioning Accuracy     | ±0.03 mm                                                        |                     |                                           |                     |
|                                 | Degrees of Freedom (DoF)        | 6                                                               |                     |                                           |                     |
|                                 | Programming                     | Graphical Programming, Drag-and-Drop Programming                |                     |                                           |                     |
| Motion Range and Speed          | Teach Pendant Type              | Mobile Terminals (Computer, Tablet, Mobile Phone)               |                     |                                           |                     |
|                                 | Robot Arm                       | Motion Range                                                    |                     | Maximum Speed                             |                     |
|                                 | Joint 1                         | ±360°                                                           |                     | 150°/s                                    |                     |
|                                 | Joint 2                         | ±360°                                                           |                     | 150°/s                                    |                     |
|                                 | Joint 3                         | ±360°                                                           |                     | 210°/s                                    |                     |
|                                 | Joint 4                         | ±360°                                                           |                     | 210°/s                                    |                     |
|                                 | Joint 5                         | ±360°                                                           |                     | 210°/s                                    |                     |
| Physical Performance and Others | Joint 6                         | ±360°                                                           |                     | 210°/s                                    |                     |
|                                 | Maximum Tool Center Point Speed | /                                                               |                     | 4 m/s                                     |                     |
|                                 | Typical Consumption             | 500W                                                            |                     |                                           |                     |
|                                 | IP Rating                       | IP54 (Joint 5/6:IP67)                                           |                     |                                           |                     |
|                                 | Tool I/O Ports                  | 2 Digital Inputs, 2 Digital Outputs, 2 Analog Inputs            |                     |                                           |                     |
| Basic Parameters                | Base Diameter                   | Ø188mm, M8x4                                                    |                     |                                           |                     |
|                                 | Resolution                      | 3456*2880(switchable to 2400*2000)                              |                     |                                           |                     |
|                                 | Maximum Frame Rate              | 45fps                                                           |                     |                                           |                     |
|                                 | Shutter Mode                    | Global                                                          |                     |                                           |                     |
|                                 | Image Mode                      | Color, Monochrome                                               |                     |                                           |                     |
|                                 | Lens Interface                  | M12, Auto Focus                                                 |                     |                                           |                     |
|                                 | Lens Focal Length               | Standard 12mm, Optional 8mm/16mm                                |                     |                                           |                     |
|                                 | Light Source Type               | Standard White Light, Optional Red/Blue/Polarized/Non-polarized |                     |                                           |                     |
| Control cabinet JAKA CAB V3     | Name                            | CAB L                                                           | CAB H               | OEM-DC                                    | OEM-AC              |
|                                 | Dimensions                      | 422*350*236 (W*H*D)                                             | 422*350*236 (W*H*D) | 422*197*136 (W*H*D)                       | 422*197*136 (W*H*D) |
|                                 | Weight                          | 11.5 kg                                                         | 13 kg               | 3.4 kg                                    | 4.8 kg              |
|                                 | IP Rating                       | IP54                                                            | IP54                | IP20                                      | IP20                |
|                                 | Power Supply                    | 100-240VAC 50~60HZ                                              | 100-240VAC 50~60HZ  | 32~58V                                    | 100-240VAC 50~60HZ  |
|                                 | Operating Temperature           | 0~50℃                                                           | 0~50℃               | 0~50℃                                     | 0~50℃               |
|                                 | Installation Method             | Floor-standing, Wall-mounted                                    |                     | Rail-mounted, Floor-standing, Ear-mounted |                     |

Kind Reminder: This product has not yet obtained CE, Rohs, or other certifications, but its performance complies with our corporate internal quality standards.

# JAKA A Series

「Available in select markets」

### IP67-Rated Wrist

Sealed against cutting fluids and contaminants for worry-free operation.

### 20% Faster Cycle Times


Boosts throughput and accelerates ROI

### Axis 3 Pendulum Motion

Maximizes reach and flexibility with a minimal footprint (A12 only)

### ±0.02mm Repeatability

Industry-leading precision for consistent product quality

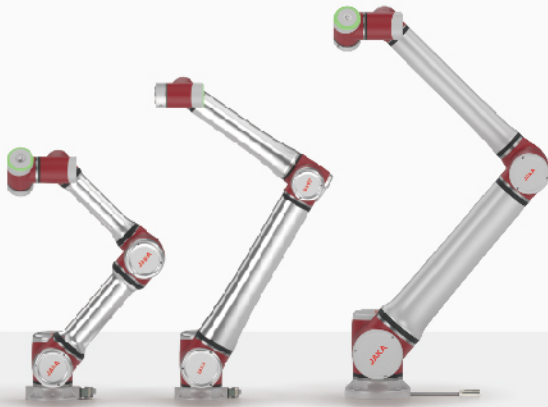

| Basic Parameters | Parameter                 | JAKA A5                                                           |             | JAKA A12                                                          |             | JAKA A20                                                          |             |
|------------------|---------------------------|-------------------------------------------------------------------|-------------|-------------------------------------------------------------------|-------------|-------------------------------------------------------------------|-------------|
|                  | Payload                   | 5 kg/ 7kg*                                                        |             | 12 kg                                                             |             | 20 kg                                                             |             |
|                  | Weight                    | 23 kg                                                             |             | 41 kg                                                             |             | 68 kg                                                             |             |
|                  | Reach                     | 954 mm                                                            |             | 1425 mm                                                           |             | 1780 mm                                                           |             |
|                  | Repeatability             | ±0.02 mm                                                          |             | ±0.03 mm                                                          |             | ±0.05 mm                                                          |             |
|                  | Degree of freedom         | 6                                                                 |             | 6                                                                 |             | 6                                                                 |             |
|                  | Programming               | Graphical programming, and freedrive programming                  |             | Graphical programming, and freedrive programming                  |             | Graphical programming, and freedrive programming                  |             |
|                  | Teach pendant type        | Mobile terminal (computer/pad/mobile phone)                       |             | Mobile terminal (computer/pad/mobile phone)                       |             | Mobile terminal (computer/pad/mobile phone)                       |             |
| Movement         | Joint                     | Range of action                                                   | Joint speed | Range of action                                                   | Joint speed | Range of action                                                   | Joint speed |
|                  | Joint 1                   | ±360°                                                             | 210°/s      | ±360°                                                             | 150°/s      | ±360°                                                             | 120°/s      |
|                  | Joint 2                   | ±360°                                                             | 210°/s      | ±360°                                                             | 150°/s      | -85°-+265°                                                        | 120°/s      |
|                  | Joint 3                   | ±360°                                                             | 210°/s      | ±360°                                                             | 210°/s      | ±175°                                                             | 120°/s      |
|                  | Joint 4                   | ±360°                                                             | 265°/s*     | ±360°                                                             | 210°/s      | -85°-+265°                                                        | 265°/s*     |
|                  | Joint 5                   | ±360°                                                             | 265°/s*     | ±360°                                                             | 265°/s*     | ±360°                                                             | 265°/s*     |
|                  | Joint 6                   | ±360°                                                             | 265°/s*     | ±360°                                                             | 265°/s*     | ±360°                                                             | 265°/s*     |
|                  | Tool max speed            | /                                                                 | 3.5 m/s     | /                                                                 | 4 m/s       | /                                                                 | 5 m/s       |
| Physical         | Average power consumption | 350W                                                              |             | 500W                                                              |             | 750W                                                              |             |
|                  | IP                        | IP54(Joint 4/5/6:IP67)                                            |             | IP54(Joint 5/6:IP67)                                              |             | IP54(Joint 4/5/6:IP67)                                            |             |
|                  | Tool I/O port             | 2 digital inputs, 2 digital outputs, 2 analog inputs              |             | 2 digital inputs, 2 digital outputs, 2 analog inputs              |             | 2 digital inputs, 2 digital outputs, 2 analog inputs              |             |
|                  | Base diameter             | Ø158mm, M8x4                                                      |             | Ø188mm, M8x4                                                      |             | Ø246mm, M12x4                                                     |             |
| Control Cabinet  | IP                        | IP44                                                              |             | IP44                                                              |             | IP44                                                              |             |
|                  | Control cabinet I/O port  | 16 digital inputs, 16 digital outputs, 2 analog inputs or outputs |             | 16 digital inputs, 16 digital outputs, 2 analog inputs or outputs |             | 16 digital inputs, 16 digital outputs, 2 analog inputs or outputs |             |
|                  | Communication             | TCP/IP, Modbus TCP, Modbus RTU, Profinet(Slave), Ethernet/IP      |             | TCP/IP, Modbus TCP, Modbus RTU, Profinet(Slave), Ethernet/IP      |             | TCP/IP, Modbus TCP, Modbus RTU, Profinet(Slave), Ethernet/IP      |             |
|                  | Power supply              | 100-240VAC, 50-60Hz                                               |             | 100-240VAC, 50-60Hz                                               |             | 100-240VAC, 50-60Hz                                               |             |
|                  | Outline dimension         | 410×307×235 (mm) (W×H×D)                                          |             | 410×307×235 (mm) (W×H×D)                                          |             | 410×307×235 (mm) (W×H×D)                                          |             |
|                  | Weight                    | 15.4 kg                                                           |             | 15.4 kg                                                           |             | 18 kg                                                             |             |

\*This performance can be achieved through a software upgrade.

# JAKA Mini Series

## Product introduction

Lightweight and easy to set up, the JAKA Mini Series supports payloads of 1-2 kg. It features a built-in communication port, requiring no external cables and making it easy to connect with compatible tools. With intelligent control algorithms, it delivers superior performance and operates quietly. Both models seamlessly fit into a wide range of work environments, offering an excellent price-performance ratio and cost-efficient installation. They are widely used in hospitality, education, life sciences, retail, and services.



Cost-effective



Lightweight



Intelligent interconnection





Weigh



Payload



Reach



Repeatability

|               |        |      |        |         |
|---------------|--------|------|--------|---------|
| JAKA MiniCobo | 9.4 kg | 1 kg | 580 mm | ±0.1 mm |
| JAKA Mini2    | 9.9 kg | 2 kg | 580 mm | ±0.1 mm |



## Application cases



| Product features        | Parameter                     | JAKA MiniCobo                                         | JAKA Mini2             |
|-------------------------|-------------------------------|-------------------------------------------------------|------------------------|
|                         | Payload                       | 1 kg (2.21 lb)                                        | 2 kg (4.41 lb)         |
|                         | Weight (including cables)     | 9.4 kg (20.73 lb)                                     | 9.9 kg (21.83 lb)      |
|                         | Reach                         | 580 mm (22.83 in)                                     | 580 mm (22.83 in)      |
|                         | Repeatability                 | ±0.1 mm (±0.003937 in)                                | ±0.1 mm (±0.003937 in) |
|                         | Degree of freedom             | 6                                                     |                        |
|                         | Programming                   | Graphical programming, free-drive                     |                        |
|                         | Demonstrator type             | Mobile terminal (computer/pad/mobile phone)           |                        |
|                         | Collaborative operation       | Collaborative operation as ISO 10218-1: 2011          |                        |
| Working range and speed | Joint                         | Range of action                                       |                        |
|                         | Joint 1                       | ±360°                                                 |                        |
|                         | Joint 2                       | ±125°                                                 |                        |
|                         | Joint 3                       | ±130°                                                 |                        |
|                         | Joint 4                       | ±360°                                                 |                        |
|                         | Joint 5                       | ±120°                                                 |                        |
|                         | Joint 6                       | ±360°                                                 |                        |
|                         | Tool typical speed            | 1 m/s (3.28 ft/s)                                     |                        |
| Specifications          | Typical consumption           | 150W                                                  | 180W                   |
|                         | Rated voltage                 | 24VDC                                                 | 48VDC                  |
|                         | Temperature range             | 0-50°C                                                | 0-50°C                 |
|                         | IP classification             | IP40                                                  | IP40                   |
|                         | Installation                  | At any angle                                          |                        |
|                         | Tool I/O                      | 2 Digital inputs                                      |                        |
|                         |                               | 2 Digital outputs                                     |                        |
|                         |                               | 2 Analog input                                        |                        |
|                         | Tool I/O power                | 24VDC                                                 |                        |
|                         | Tool I/O size                 | M8                                                    |                        |
|                         | Materials                     | Aluminum, PC                                          |                        |
|                         | Footprint                     | 124 mm (4.88 in)                                      |                        |
|                         | Robot connection cable length | 6 m (236 in)                                          |                        |
| MiniCab cabinet         | Power input                   | 20-60VDC                                              |                        |
|                         | Current                       | ≤40A                                                  |                        |
|                         | Size                          | 180×128×47 mm (L×W×H)                                 |                        |
|                         | IP classification             | IP20                                                  |                        |
|                         | I/O                           | 7 Digital input: I/O configurable                     |                        |
|                         | I/O Power                     | 24VDC                                                 |                        |
|                         | Installation                  | Panel/Guide Rail                                      |                        |
|                         | Communication mode            | TCP/IP, Modbus TCP, Modbus RTU, Profinet, Ethernet/IP |                        |
|                         | Weight                        | 1.1 kg (2.43 lb)                                      |                        |
|                         | Material                      | Alumminum, Steel                                      |                        |

## JAKA Lens 2D

### JAKA Lens 2D

#### Product description

The JAKA Lens 2D camera is equipped with a high-resolution industrial camera, a light source module, and an optional camera lens to provide our collaborative robots with machine vision capabilities. Despite its small and delicate appearance, this camera is highly effective. It can be installed either in a fixed position or at the end of the cobot.

**Convenient**

Compatible with any JAKA cobot

**Customizable**

Optional camera lens  
Various functions are available

**Practical**

The camera uses JAKA software,  
no need for additional licenses



#### Product Features

**Integrated design**

The 2D camera consists of three key components: a camera, a lens, and a light source. It is able to communicate with a JAKA robot control cabinet through the web, making it an easy-to-use and highly effective addition to our cobots.

**Easy operation**

Our control cabinet is embedded with intelligent vision algorithms. Additionally, it features flexible communication interfaces that are able to adapt to the robot body, ensuring that it is a highly versatile and adaptable tool.

**Scenario-adaptable**

Our 2D camera also supports third-party camera extensions and custom external light sources, making it highly versatile and adaptable to a wide range of application scenarios.

#### Technical aspects

| Parameters        | Lens 2D HR-CGC500-F08                                                  | Lens 2D HR-CGC500-F16   |
|-------------------|------------------------------------------------------------------------|-------------------------|
| Resolution        | 2592×1944                                                              | 2592×1944               |
| Max frame rate    | 24 fps                                                                 | 24 fps                  |
| Data interface    | Gige                                                                   | Gige                    |
| Color mode        | Black and white / color                                                | Black and white / color |
| Lens focal length | 8 mm                                                                   | 16 mm                   |
| Object distance   | 100 mm-1000 mm                                                         | 100 mm-1000 mm          |
| Vision            | >70×50 mm                                                              | >35×25 mm               |
| Pixel accuracy    | >0.08mm                                                                | >0.04 mm                |
| System accuracy   | ≥ ±0.2 mm                                                              | ≥ ±0.2 mm               |
| Image processing  | Soft-trigger image acquisition, single frame processing time within 1s |                         |

## JAKA Lens VPS

#### Product description

JAKA Lens VPS 2.0 is a cutting-edge technology that utilizes a high-performance AI-SoC chip, along with high-speed and large-capacity memory and storage. It is equipped with a high-performance acceleration engine, which can perform target detection, object recognition, human pose point extraction, and behavior understanding. The VPS is designed to be installed at the top of the cobot's working area, allowing the camera to monitor the behavior of inspected objects (both people and objects) in real time, ensuring the safety of both people and equipment. The camera also features a Gigabit Ethernet port, which supports data extraction and video visualization.

**High reliability**

Isolate external factors  
The protection effect is stable and reliable

**High performance**

High speed combined with  
high storage capacity

**Convenient**

No complicated software installation required  
Simple to install




#### Product Features

Built-in neural network accelerator for AI recognition and analysis of video

Event recording function, which can record key video segments, eliminate redundant information, trace back, and analyze more conveniently

Plug and play, no need to install software, access settings via browser

It can perform AI detection functions such as helmet wearing, personnel target tracking, personnel labor intensity, and video scoring calculation

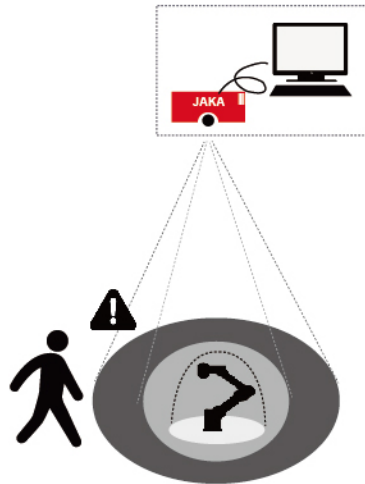

Visual protection system working diagram

#### Basic parameters

|                         |                                                                |
|-------------------------|----------------------------------------------------------------|
| Hardware platform       | CMOS camera, embedded system, DSP, AI engine, etc.             |
| Dimensions              | 81×50×64mm                                                     |
| Installation method     | Directly above, sideways (suggested install at 45°)            |
| Communication interface | Ethernet interface, RS485, PNP optocoupler isolation DI and DO |

#### Visual parameters

|                     |                          |
|---------------------|--------------------------|
| Resolution          | 8.3 MP                   |
| Response time       | ≤100 ms                  |
| Installation height | ≥3m (suggested)          |
| Coverage surface    | 4 m x 2.1 m (adjustable) |

## JAKA Robot Control Cabinet

### JAKA CAB V3



#### Product Features

- Flexible Deployment
- High Performance
- Seamless Connectivity & Scalability
- Efficient Maintenance

#### Technical Specification

| Applicable Models       |                                     | CAB L                                                                                       | CAB H                                    | CAB LiteAC                                                       | CAB LiteDC                               |
|-------------------------|-------------------------------------|---------------------------------------------------------------------------------------------|------------------------------------------|------------------------------------------------------------------|------------------------------------------|
|                         |                                     | JAKA Zu3/5/7/12/18<br>JAKA S5/7/12<br>JAKA Pro5/12<br>JAKA A12L                             | JAKA Zu20/30<br>JAKA Pro16               | All JAKA cobots (excluding JAKA Mini Series and JAKA MAX Series) |                                          |
| Physical Specifications | Dimensions (W×H×D)                  | 421 × 379 × 255 mm (16.6 × 14.9 × 10.0 in)                                                  | 425 × 196 × 136 mm (16.7 × 7.7 × 5.4 in) | 425 × 196 × 136 mm (16.7 × 7.7 × 5.4 in)                         | 425 × 208 × 136 mm (16.7 × 8.2 × 5.4 in) |
|                         | Weight                              | 12.8 kg (28.2 lb)                                                                           | 14.3 kg (31.5 lb)                        | 4.8 kg (10.6 lb)                                                 | 3.5 kg (7.7 lb)                          |
|                         | IP Rating                           | IP54                                                                                        | IP54                                     | IP20                                                             | IP20                                     |
|                         | Operating Temperature               | 0~50°C (32~122°F)                                                                           |                                          |                                                                  |                                          |
|                         | Humidity                            | 10~90% RH (non-condensing)                                                                  |                                          |                                                                  |                                          |
|                         | Materials                           | Aluminum alloy, Steel                                                                       |                                          |                                                                  |                                          |
|                         | Altitude                            | ≤ 2000 m (78740 in)                                                                         |                                          |                                                                  |                                          |
|                         | Noise Level                         | 45 dB (typical)                                                                             |                                          |                                                                  |                                          |
|                         | Mounting Options                    | Floor, Suspended, Rear                                                                      |                                          | Rail, Bracket                                                    |                                          |
| Electrical              | Power Type                          | AC                                                                                          | AC                                       | AC                                                               | DC                                       |
|                         | Power Input                         | 100~240 VAC, 50/60 Hz                                                                       | 100~240 VAC, 50/60 Hz                    | 100~240 VAC, 50/60 Hz                                            | 48 VDC                                   |
|                         | Typical Power Consumption (w/robot) | 500 W                                                                                       | 750 W                                    | 500 W                                                            | 500 W                                    |
| I/O & Interfaces        | Digital I/O                         | 16× DI (NPN/PNP configurable), 16× DO (NPN/PNP configurable)                                |                                          |                                                                  |                                          |
|                         | Safety I/O                          | 16× Safety DI (PNP), 16× Safety DO (PNP), 2× Emergency Stop Input, 2× Protective Stop Input |                                          |                                                                  |                                          |
|                         | High-Speed Input                    | HSI (supports 5V/24V encoders, differential)                                                |                                          |                                                                  |                                          |
|                         | I/O Power Supply                    | 24V~3A (Internal), 24V~5A (External)                                                        |                                          |                                                                  |                                          |
| Communication           | Ethernet                            | 2× Gigabit Ethernet                                                                         |                                          |                                                                  |                                          |
|                         | Industrial Protocols                | PROFINET IO Device                                                                          |                                          |                                                                  |                                          |
|                         |                                     | EtherCAT Master                                                                             |                                          |                                                                  |                                          |
|                         |                                     | EtherNet/IP Adapter                                                                         |                                          |                                                                  |                                          |
|                         |                                     | Modbus RTU Master/Slave                                                                     |                                          |                                                                  |                                          |
|                         |                                     | Modbus TCP Client/Server                                                                    |                                          |                                                                  |                                          |
|                         | Expansion                           | Supports PROFINET Controller, CC-Link Slave, etc.                                           |                                          |                                                                  |                                          |
| Teach Pendant           | Teach Pendant                       | JAKA Touch I (standard), JAKA Touch II (optional)                                           |                                          |                                                                  |                                          |
| Power Cable Length      | Power Cable Length                  | 3 m (118 in)                                                                                |                                          | 3 m (118 in)                                                     | -                                        |

## JAKA Touch Series Pendant

### JAKA Touch I



#### Product Features

- Safety Function**  
Equipped with a three-stage enable switch, comprehensive safety upgrade.
- Network Connections**  
100Mbps wired network connection to cope with complex on-site conditions.
- Range Charging**  
10W fast charging, no burden for long-term teaching.

#### Technical Specification

|                     |                                                  |                   |               |
|---------------------|--------------------------------------------------|-------------------|---------------|
| Charging Power      | 10W                                              | Enclosure Type    | IP44          |
| Network Rate        | 100 Mbps                                         | Humidity          | 10~90%RH      |
| External Interface  | USB 3.0                                          | Compatible Tablet | Redmi Pad Pro |
| Ambient Temperature | 0~50°C(32~122°F)                                 |                   |               |
| Material            | ABS+PC, rubber, aluminium                        |                   |               |
| Weight              | 1.21 kg / 2.67 lbs                               |                   |               |
| Cable Length        | 6 m / 236 inches                                 |                   |               |
| Size                | 280 mm x 160 mm x 60 mm / 11 in x 6.3 in x 2.4in |                   |               |
| Harness Length      | 400 mm / 15.7 inches                             |                   |               |

### JAKA Touch II



#### Product Features

- Larger screen**  
12.1-inch LCD screen.
- Reliable**  
Three-Position Enabling Switch / IP65 / 1.2m Drop Resistance.
- Joystick teaching**  
Simple to learn, quick to master.

#### Technical Specification

|                       |                                                                             |                        |                        |
|-----------------------|-----------------------------------------------------------------------------|------------------------|------------------------|
| Screen                | 12.1 inches                                                                 | Enclosure type         | IP65                   |
| User Interface        | USB                                                                         | Environmental Humidity | 10~90%RH               |
| Touchscreen Type      | Capacitive, multi-touch                                                     | Reliability            | Drop protection ≤ 1.2m |
| Physical Buttons      | Emergency Stop Button / Three Position Enable Button / Teach Pendant Switch |                        |                        |
| Operating Temperature | -20~60°C (-4~140°F)                                                         |                        |                        |
| Material              | ABS+PC, Aluminum                                                            |                        |                        |
| Net Weight            | 1.2kg/ 2.64 lbs                                                             |                        |                        |
| Cable Length          | 6 m / 236 inches                                                            |                        |                        |
| Dimensions            | 358 mm x 200 mm x 86.5 mm / 14.1 in x 7.9 in x 3.4 in                       |                        |                        |