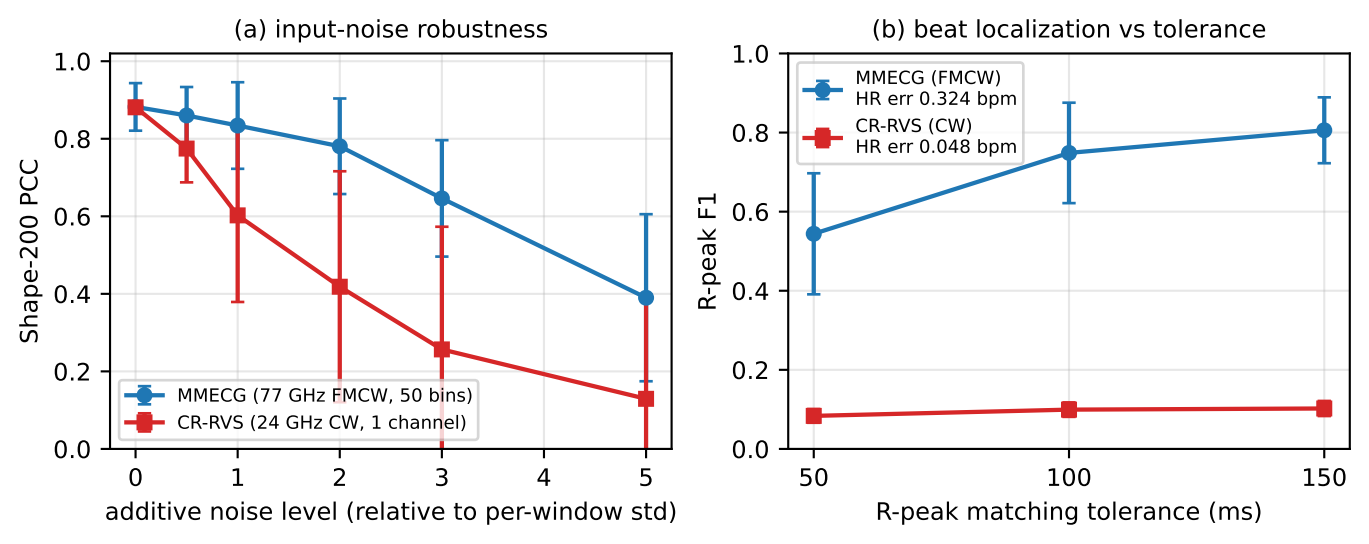
(a) input-noise robustness
Shape-200 PCC
1.0
0.8
0.6
0.4
0.2
0.0
0
1
2
3
4
5
additive noise level (relative to per-window std)
MMECG (77 GHz FMCW, 50 bins)
CR-RVS (24 GHz CW, 1 channel)
(b) beat localization vs tolerance
R-peak F1
MMECG (FMCW)
HR err 0.324 bpm
CR-RVS (CW)
HR err 0.048 bpm
50
100
150
R-peak matching tolerance (ms)