
a

Locus architecture: AF GWAS lead and atrial cis-eQTL lead are physically distinct across all anchors

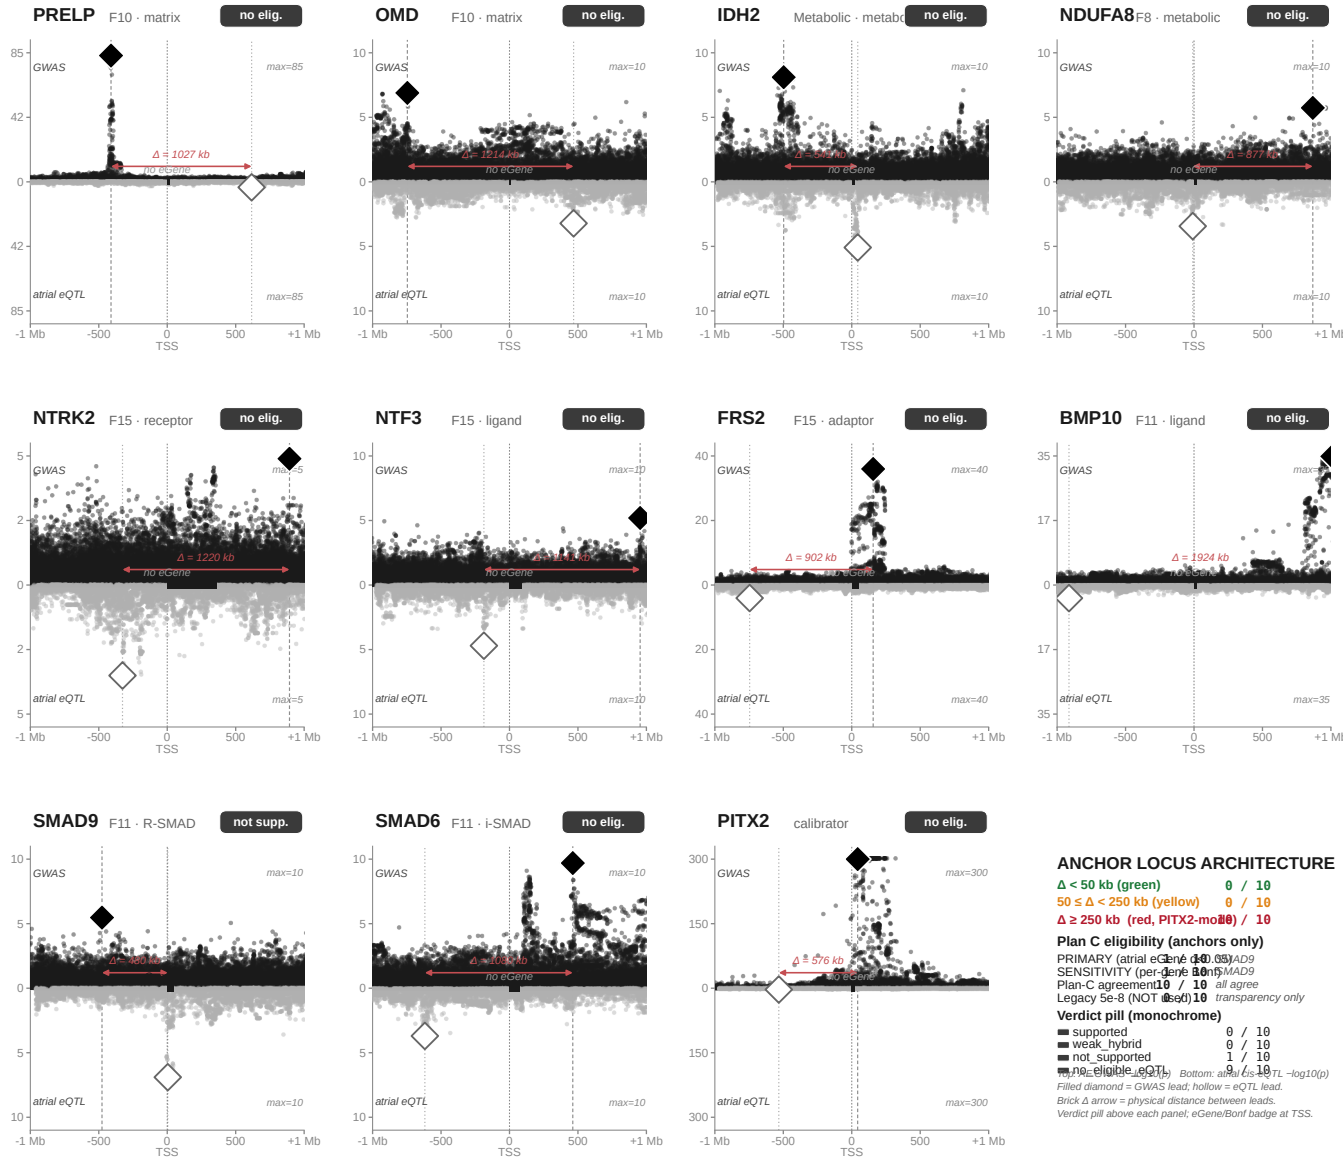

ANCHOR LOCUS ARCHITECTURE

Δ < 50 kb (green)	0 / 10
50 ≤ Δ < 250 kb (yellow)	0 / 10
Δ ≥ 250 kb (red, PITX2-model)	10 / 10

Plan C eligibility (anchors only)

PRIMARY (atrial eGene FDR 0.05)	1 / 10	*SMAD9*
SENSITIVITY (per-gene Bonf)	1 / 10	*SMAD9*
Plan-C agreement	10 / 10	*all agree*
Legacy 5e-8 (NOT used)	0 / 10	*transparency only*

Verdict pill (monochrome)

supported	0 / 10
weak_hybrid	0 / 10
not_supported	1 / 10
no_eligible_eQTL	9 / 10

Top: AF GWAS −log10(p). Bottom: atrial cis-eQTL −log10(p).
Filled diamond = GWAS lead; hollow = eQTL lead.
Brick Δ arrow = physical distance between leads.
Verdict pill above each panel; eGene/Bonf badge at TSS.