LINE N

The handle-less kitchen

LINE N



The Product Range

- Handle-less LINE N kitchens are available in 14 ranges and 66 front designs.
  A detailed description of fronts can be found in chapter 1 fronts.
  Available fronts are identified with the LINE N logo.
- LINE N kitchens are available in all carcase colours.
  The entire range of surrounds with all 62 worktop décors and 118 upright colours is available.
- LINE N recessed handles are available in 11 colours. For a respective overview, please refer to page M 8.2.
- The L profiles for horizontal recessed handles can be equipped with LED lighting for a surcharge (refer to base unit chapter, reverse side of chapter index).
- The vertical recessed handles at the ends and between units can also be fitted with LED lighting at a surcharge (see chapter 2 Surcharges and equipment options).
- Line ONE and Curve are planning variants of the Line N range.
- The extensive product range is comprised of:

4 base unit heights:	standard height 720 mm	N U*
	special height 360 mm	N U*-36
	special height 432 mm	N U*-43
	XL-height 792 mm	N U*-X
8 tall unit heights with horizontal recessed handle:	highboard height 1512 mm	N H* / N G*
	XL-highboard height 1584 mm	N H*-X / N G*-X
	2016 mm (height 1)	N H*-1 / N G*-1
	2088 mm (height 1 XL)	N H*-1X / N G*-1X
	2088 mm (height 2)	N H*-2 / N G*-2
	2160 mm (height 2 XL)	N H*-2X / N G*-2X
	2160 mm (height 3)	N H*-3 / N G*-3
	2232 mm (height 3 XL)	N H*-3X / N G*-3X
8 tall unit heights with vertical recessed handle:	highboard height 1512 mm	N HS* / N GS*
	XL-highboard height 1584 mm	N HS*-X / N GS*-X
	2016 mm (height 1)	N HS*-1 / N GS*-1
	2088 mm (height 1 XL)	N HS*-1X / N GS*-1X
	2088 mm (height 2)	N HS*-2 / N GS*-2
	2160 mm (height 2 XL)	N HS*-2X / N GS*-2X
	2160 mm (height 3)	N HS*-3 / N GS*-3
	2232 mm (height 3 XL)	N HS*-3X / N GS*-3X
5 wall unit heights:	360 mm	N W*-36
	576 mm	N W*-58
	720 mm (height 1)	N W*-1
	792 mm (height 2)	N W*-2
	864 mm (height 3)	N W*-3

Block pricing

- For comparable LINE N units, an N is simply added in front of the abbreviation from the standard product range.
- The 2026 kitchen block pricing method also applies to LINE N kitchens, see page M 0.4.
- The LINE N range of units belongs to the gross furniture pricing group and can be offset with all furniture pieces from the standard product range.
- LINE N kitchens can be combined with all accessories and electrical appliances as well as furniture pieces from the standard product range.

LINE N

The handle profile

- The handle profile is made of anodised aluminium and is available in eleven colours: Brushed stainless steel finish, Alpine white, White, Satin grey, Sand, Macchiato, Taupe grey, Slate grey, Black, Bronze metallic coloured and Yellow gold coloured.
- End caps as well as inner and outer corners are made of plastic in a matching colour.
- The maximum profile length for horizontal recessed handles is 4000 mm.
- Vertical recessed handles are supplied in suitable lengths for highboards (-XL) and tall units in heights 1, 1 XL, 2, 2 XL, 3 and 3 XL.
- The horizontal handle profile as well as the required mounting materials, 90° corners and end caps are included in the unit price. Vertical recessed handles are individually planned and invoiced (s. page M 8.9).
- Carcase side panels are milled and thus ready for mounting the recessed handles.
- Handle profiles are cut to size and ready for mounting, with straight cuts and mitre cuts for inner and outer corners.



Handle profile colours

- The handle profile is available in the colours listed below.
- Please quote the colour number in your order.
- Only one handle colour can be selected per order.



no. 002 Stainless steel finish



no. 016 Alpine white



no. 004 White



no. 006 Satin grey



no. 007 Sand



Nr. 008 Macchiato NEW



no. 011 Slate grey



no. 012 Bronze metallic coloured



no. 024 Yellow gold coloured



no. 025 Taupe grey



no. 027 Black

LINE N one

Line N recessed handle
Push-to-open PTOSA
Push-to-open PTOSA





Line ONE combines Line N's design versatility with the nBOX drawer system's practical push-to-open technology. As a variant of the LINE N range, LINE ONE enables a reduction to a continuous, horizontal line management – without sacrificing the convenience of drawers and pull-outs.
Base unit doors and top pull-outs and drawers are conveniently opened using the recessed handle, while the bottom pull-outs and drawers are fitted with "push-to-open" PTOSA at the factory and can be opened by lightly pressing the front. These options are also continued in the highboard and tall unit areas. In addition, doors (e.g. above the appliance alcoves) are equipped with the "push-to-open" PTO mechanical opening support mechanism as standard.

The product range

- Line ONE types are available in the same full design range as Line N:
  All fronts, carcase colours, recessed handles, upright panels, etc. are available for Line ONE.
- Base unit heights: 720 and 792 mm as well as in the highboard and all tall unit heights
- The defined range of types can be combined with items from the familiar LINE N range.
  LINE N types with only one recessed handle, such as hinge-door units or types with internal drawers and pull-outs, can also be designed in combination with LINE ONE types.
- The Curve end fronts are also available for Line ONE.
- The Line ONE types are listed within the respective Line N chapters and follow the familiar structure of the Line N types.
  The first letter of the abbreviations differ:
  N = LINE N (e.g. NU2SA)
  L = LINE ONE (e.g. LU2SA)
- The front elements of the Line ONE types that are equipped with mechanical opening support are labelled "PTOSA" / "PTO" in the sketches and are also marked with the following symbol.

LINE ONE

Block pricing

- The 2026 kitchen block pricing method also applies to Line ONE kitchens, see page M 0.4.
- The Line ONE range of units belongs to the gross furniture pricing group and can be offset with all furniture pieces from the standard product range.
- Line ONE kitchens can be combined with all accessories and electrical appliances as well as furniture pieces from the standard product range.

LINE N

Line N Curve end unit

- In the Senso 357 and Easytouch 945 programs, the Curve end units stand for a new image and design language. Through their curving frontal look, they offer the perfect transition to the joint dimension of tall units with a vertical Line N profile.
- The end units open up harmonic planning possibilities for end and island planning.
- The end units are available in widths of 450, 600 and 900 mm and in the heights: 360, 432, 720 and 792 mm.
- For a surcharge, MP-NGML / MP-NGMLC, the units are available with LED lighting in the L and C profiles.
- The stop must absolutely be indicated in the order (stop side = closed front end).
- The height and width cannot be adjusted.
- The Curve type range has been extended for Line ONE:
  Here too, the front elements that are equipped with mechanical opening support are labelled "PTOSA" in the sketches and are also marked with the following symbol.

LINE ONE

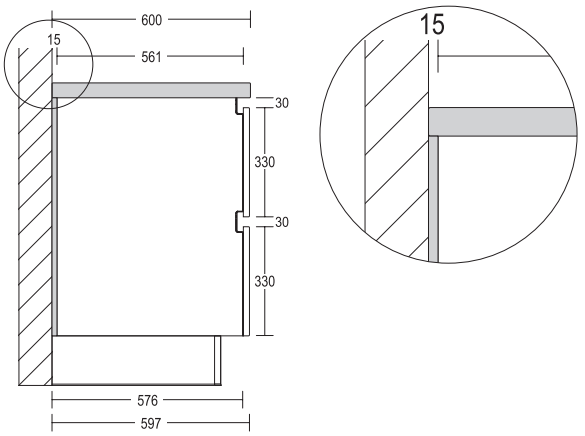




LINE N

Recommended worktop depth and overhang

- Base units and tall units must generally be protruded by 15 mm to accommodate various built-in appliances.
- The worktop overhang for LINE N kitchens amounts to 3 mm at the front and 1.5 mm at the side. On quartz and ceramic worktops, the overhang amounts to 2 mm at the side.
- Spacers for mounting are supplied with the units.
- In conjunction with the standard worktop depth of 600 mm, hobs, built-in sinks and dishwashers can be planned without complications - even when combined with niche cladding.
- The visible carcase side can be finished in three different ways: with end uprights (598 mm deep), front uprights (597 mm deep) or a cover profile with a stainless steel appearance.



Planned end of run

Visible carcase sides as well as the planning distance to the wall can be faced in three ways:

- End uprights in all décor groups with a depth of 598 mm are available for ends (see chapter 5 Upright panels).
- Due to front end uprights NUWF / NHWF with L profile, the recessed handle can appear to be the end of run if visually traced back along the carcase. Front uprights are available with grain/motif direction on both faces for island solutions. Front uprights are available in all LINE N front designs.
- For a more cost effective solution, a stainless steel finish cover profile, NADP* (for 15 mm depth compensation) is available.





Handle profile for wall units

- LINE N wall units are available in the heights 360 mm, 576 mm, 720 mm (height 1), 792 mm (heigth 2) and 864 mm (height 3).
- Wall units are supplied as standard with a profile strip, which is attached to the wall unit bottom shelf, stainless steel finish anodised, brushed.
- Optionally, a profile strip with LED lighting (MP-LLIN) or a lighted bottom shelf are available for use as wall unit bottom shelf (MP-LAN), for a surcharge.
- LINE N wall units are the same as wall units from the standard product range, when they are equipped with the surcharge, MP-WOG.
- For a surcharge, the integrated lighting designs NOVA PLUS, LUCIA and MANILA PLUS can also be built into the top or bottom shelf.
- LINE N wall units cannot be planned as sideboards.
- LINE N base units can be shortened to wall unit depth for surcharge TK (9310).

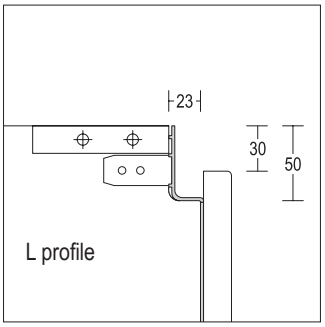


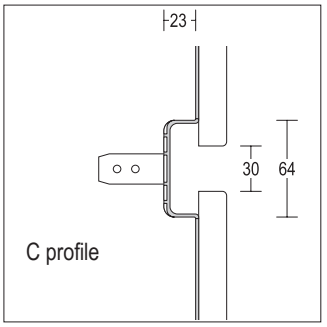


LINE N

Horizontal recessed handle C and L profiles

- L profiles are generally used beneath the worktop on base units and beneath the top shelf on highboards.
- The recessed handle with C profile is used between the fronts on base and tall units.







Transition between base units and tall units with horizontal recessed handles

- When base units are planned adjacent to tall units and the aim is to create a continuous visual line of recessed handles, a hairline gap is formed in the profile at the transition between the L profile of the base unit and the C profile of the tall unit. If this is considered bothersome, an upright should be planned at the end of the base unit.



Blank cuts, Milled holes / pockets

- For visible carcase sides on base and tall units, both profile versions are provided with a milled pocket.
- Adjacent base units are milled through to achieve a continuous profile line.
- If the end of run is planned with a front upright or end upright, the last carcase side is milled through and the recessed handle ends at the upright.
- L profiles beneath induction hobs can be milled in three lengths: 550 / 750 / 850 mm. The milled depth is 5 mm. The necessary width will be determined based on the hob ordered. It is absolutely necessary that the appliance information is included in the order.
- Milling is not necessary for appliances from the BSH (Bosch, Siemens, Neff, Junker) and Electrolux group (AEG, Electrolux, Progress) or for hot plates of the brands Miele, Bora, Beko and Elica.







Optional lighting of the vertical recessed handle

- Vertical recessed handles at the ends and between units on highboards and tall units can be equipped with LED light design MP-NGMS at a surcharge.
- A surcharge is calculated per recessed handle.
- The following special features must be taken into account when planning housings for ovens, microwaves, steam ovens and compact appliances:
  - The lighting can only be installed opposite the fixing strip.
  - Not possible with end recessed handle NGMA*.
  - Not possible between two housings.
- It is not possible to retrofit LED lighting (MP-NGMS).

LINE N

Optional lighting of the horizontal recessed handle

- Horizontal recessed handle on base units, highboards, and tall units can be optionally equipped with an LED light design for a surcharge. Depending on the profile contour – L or C profile – various surcharges are necessary (MP-NGML / MP-NGMC), see base unit / tall unit register, reverse side of the register sheet .
- For the surcharge MP-NGML, the L profile on base units and highboards will be equipped with LED lighting. This aims to light the course of the profile directly under the worktop or the top shelf (see Fig. 1).
- To continue the lighting at the height of the worktop line, the surcharge for the C profile MP-NGMC must be included in the combination (see Fig. 2).
- As an additional option, the recessed handle lighting of the C profile (MP-NGMC) can also be planned above or below the front pull-out height (see Fig. 3). This will illuminate both horizontal profile tracks.
- Dishwasher designs with door fronts in a divided look (NG(G)SBT) cannot be planned with adjacent base units with a lighted C-profile. In this case, dishwasher designs with a full length look (NG(G)SB) are required.
- Light designs can be selected individually for connected planning units. In this way, e.g. a single run out of multiple kitchen runs can be ordered with a lighted design.
- With both surcharges, the price per 100 mm or part thereof will be charged.



Sample lighting curves

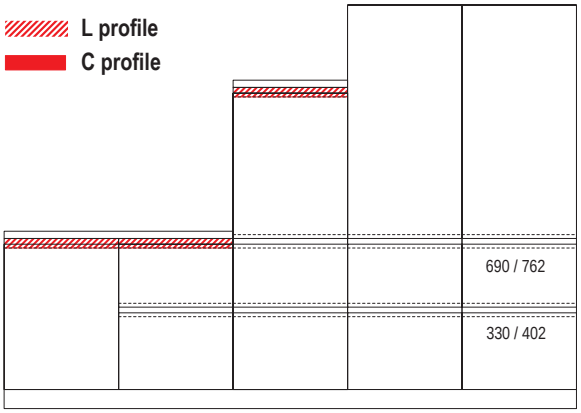


Fig. 1
Lighting of the recessed handle L profile below the worktop or ADB line (MP-NGML)

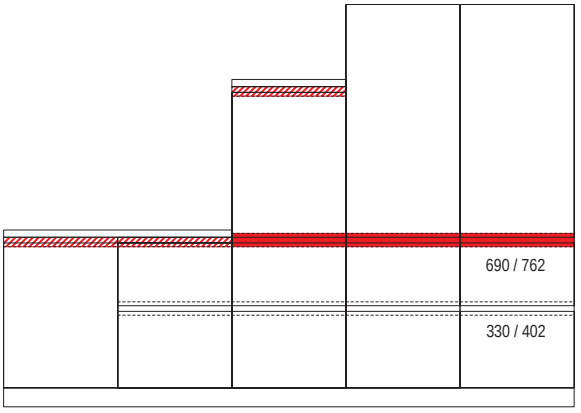


Fig. 2
Lighting the recessed handle L profile and C profile to continue the course below the worktop line (MP-NGML + MP-NGMC)

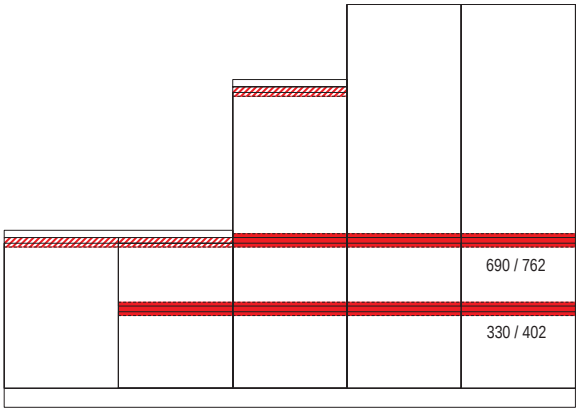


Fig. 3
Lighting both recessed handles (MP-NGML + MP-NGMC)

Ordering Information

- Please specify the height at which the light profile can be inserted: In the course of the L profile for highboards and tall units with a height of 690/762 mm and/or a pull-out height of 330/402 mm.

Planning information

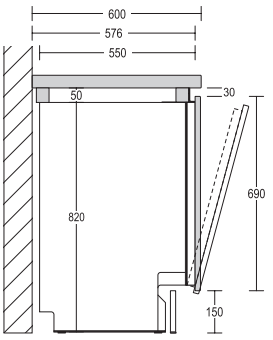
- The lighting of the C profile (NGMC) can not be retrofitted.

LINE N

Planning with dishwashers

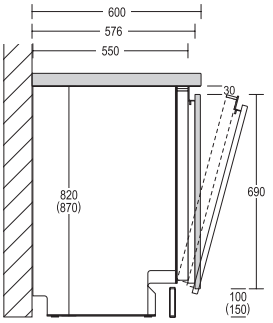
- Only fully integrated dishwashers can be planned.
- A minimum plinth height of 150 mm is required for planning dishwashers with continuous recessed handle (NGSB*).
- A minimum plinth height of 100 mm is required for planning dishwashers with discontinuous recessed handle (NGGSB*).
- Dishwashers with continuous recessed handle (L profile) are installed beneath the recessed handle. The useable size of the recess is thus reduced by 50 mm. This enables a continuous LED light design for the recessed handle (MP-NGML).
- Dishwashers with discontinuous recessed handle (L profile) are installed directly beneath the worktop. The recess is totally useable. A continuous LED light design for the recessed handle (MP-NGML) is not possible in this case, and must be interrupted in the area of the dishwasher.
- For appliance fronts NGGSB* with discontinuous recessed handles (L or C profile), the recessed handles of the adjacent base or tall units will be provided with end caps.
- Include an end upright when planning a dishwasher at the end of run.
- A special front upright is available in addition to the end upright when planning a continuous recessed handle.





NGSB* for appliance heights
805 - 820 mm

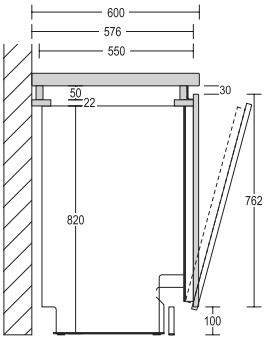




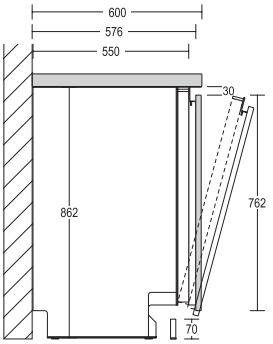
NGGSB* 820 mm (870 mm)
in connection with 100 mm (150 mm)
plinth for appliance height
805-820 mm (845-865 mm)

Planning with dishwashers LINE N in XL height

- Only fully integrated dishwashers can be planned.
- A minimum plinth height of 70 mm is required for planning dishwashers with continuous recessed handle (NGSB*- X) and discontinuous recessed handle (NGGSB*-X).
- For appliance fronts NGSB45/60-X is planned with an additional 22 mm spacer strip, which is installed beneath the recessed handle. The recess is thus 72 mm smaller. This enables a continuous LED light design for the recessed handle (MP-NGML).
- Dishwashers with discontinuous recessed handle (L profile) are installed directly beneath the worktop. The recess is totally useable. A continuous LED light design for the recessed handle (MP-NGML) is not possible in this case, and must be interrupted in the area of the dishwasher.
- For appliance fronts NGGSB* with discontinuous recessed handles (L or C profile), the recessed handles of the adjacent base or tall units will be provided with end caps.
- Include an end upright when planning a dishwasher at the end of run.
- A special front upright is available in addition to the end upright when planning a continuous recessed handle.



NGSB*-X for appliance heights
805 - 820 mm



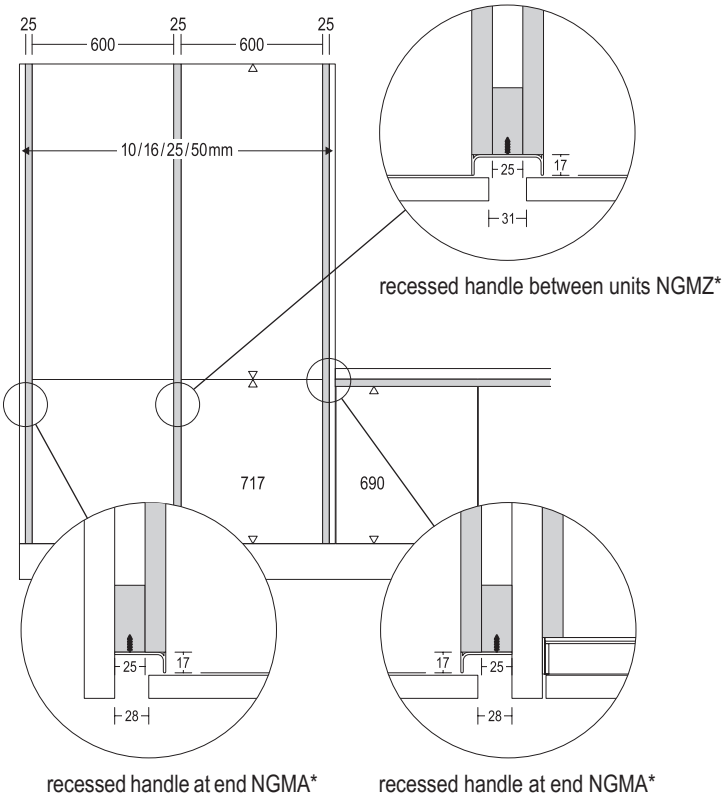
NGGSB*-X for appliance heights
845 - 865 mm

LINE N

Base units | Fillers

Tall units for vertical recessed handles

- Tall units for vertical recessed handles can be used specially for built-in fridge-freezer combinations with high appliance apertures, but also for larder units. For this, there are highboards and tall units NHS* available in heights 1, 1 XL, 2, 2 XL, 3 and 3 XL.
- The carcase side panels on these tall units will be reduced by the profile thickness of 17 mm.
- The carcase reduction will be made automatically and, depending on the version planned, will be performed on the right, left or both sides.
- Vertical recessed handles are individually planned and invoiced. These are not included in the unit prices.
- The vertical recessed handle is available as intermediate and end profile. The planning width is 25 mm.
- A single tall unit with vertical recessed handle can only be planned with end uprights. The planning width of the handle profile is 25 mm (including end upright).
- For aesthetic reasons, vertical recessed handles can also be planned at the end of a tall unit run. An upright panel is necessary when planning at end of run.
- An end upright is necessary when planning adjacent base units. A continuous visual line is not possible with adjacent base units.
- Combinations between tall units with both horizontal and vertical recessed handles are not possible.
- Dishwashers, raised dishwashers, built-under fridge and freezer housing units, automatic washer-dryers are not possible with vertical recessed handles.



recessed handle between units NGMZ*

recessed handle at end NGMA*

recessed handle at end NGMA*

Fastening strips for ovens , microwaves, steam ovens, compact appliances

The fastening strips included in the scope of delivery for installing ovens, microwaves, steam ovens and compact appliances are available in the colours 014 Stainless steel appearance and 010 Black.
Please indicate the desired colour when placing your order. If no colour is specified in the order, the fastening strips in 014 Stainless steel appearance will be supplied.

Ceiling-height designs with continuous recessed handle

Designs with a vertical recessed handle now also permit ceiling-height designs. Suitable dresser units – such as a height of 360 here – are placed on the tall units and connected with a continuous recessed handle (NGMA300 & NGMZ300).



Dresser units NAHS*

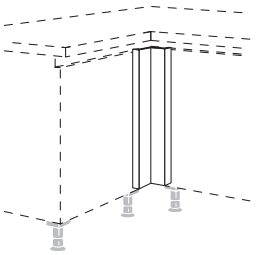
- for mounting on tall units with vertical recessed handle, 1 door
- Available widths: 300, 400, 500, 600 mm
- Available heights: 288, 360, 432, 504, 576, 648, 720 mm
- Recessed handle length of NGMA300 / NGMZ300: 2232 - 3000 mm



LINE N

Base units | Fillers

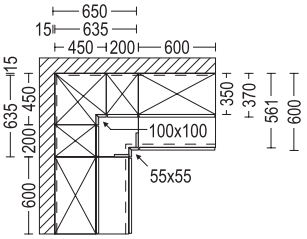
NUPE



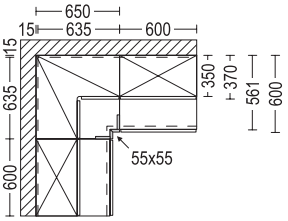
Base unit angle filler

- The required space of the filler is 635 x 635 mm. LINE N kitchens are planned to protrude 15 mm toward the front, which is why the planning dimensions of the non-grooved corner are 650 x 650 mm.
- Angle fillers are cut and bolted at the factory.
  The space requirement must be specified with the order. Adjustments on site are not possible.
- Planning dimension changes from minus 20 mm to plus 100 mm are possible at the factory.
- Angle changes above or below 90° are not permitted.
- A shortened carcase face for affixing to adjacent units is included with the units.
- When planning a dishwasher adjacent to an angle filler, a 561 mm deep side panel (surcharge MP-GS) is required.

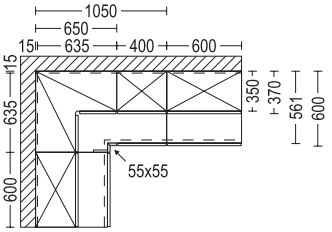
Corner solution 650 x 650 mm



Corner solution 650 x 650 mm

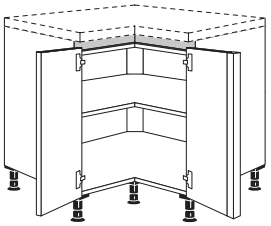


Corner solution 1050 x 650 mm



Base units | Corner solutions

NUET92(-X) | NUETK92(-X)



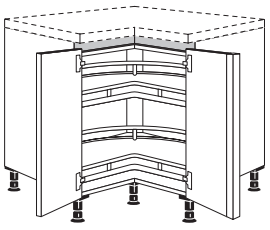
NUET92(-X)

Corner base unit

- Required floor space = 900 x 900 mm
- LINE N kitchens are planned to protrude by 15 mm. Therefore, the planning dimensions are = 915 x 915 mm.
- Side depth = 561 mm
- The corner unit can be dismantled on site.
- For designs in the room, back panel cladding is only available in carcase material.
  Depending on plinth height, order continuous to the floor.
- The shelves cannot be changed subsequently (element NUET92(-X)).

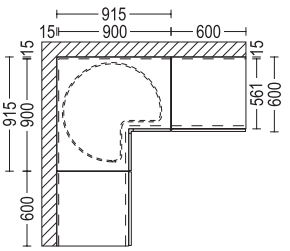
Attention:

- Do not plan protruded solutions or Mini heights at the end of corner unit NUET92(-X) / NUETK92(-X).




NUETK92(-X)

Corner solution 915 x 915 mm




Corner solution 915 x 915 mm




LINE N

Base units | Corner solutions

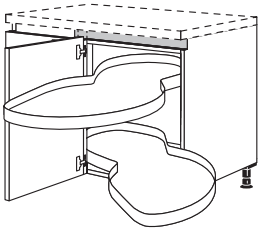


NUE... / NUE...-X

- All corner units are equipped with an angle filler, which is cut and bolted at the factory. The planning dimensions must be quoted with the order. Adjustments on site are not possible.
- Angle changes above or below 90° are not permitted.
- Planning dimension changes from minus 20 mm to plus 100 mm are possible at the factory.
- A shortened carcase face for affixing to adjacent units is included with the units.
- Door hinge side is also the face side.
- Specify right or left, to ensure that the corner base unit is delivered with the correct hinge side.
- Planning a dishwasher adjacent to a corner unit requires the angle filler with a side depth of 561 mm (surcharge MP-GS).



NUEBD... / NUEBD...-X

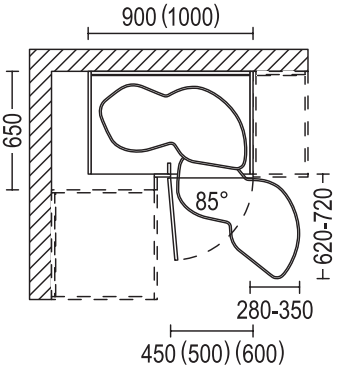


NUESA... / NUESA...-X

Dimensions table for half corner units in mm:

Planning dimensions	= 650 x	1050	1100	1150	1250
Required floor space	= 635 x	1035	1085	1135	1235
Carcase width	=	900	900	1000	1000
Door width	=	394	444	494	594
Variable (planning dimension)	= 650 - 750 x	1050 - 1150	1100 - 1200	1150 - 1250	1250 - 1350
Variable (required floor space)	= 635 - 735 x	1035 - 1135	1085 - 1185	1135 - 1235	1235 - 1335
Cannot be used	=	150	200	150	250
Required floor space for corner wall unit	=	650 x 650	650 x 650	650 x 650	650 x 650
Additional wall unit width	=	400	450	500	600

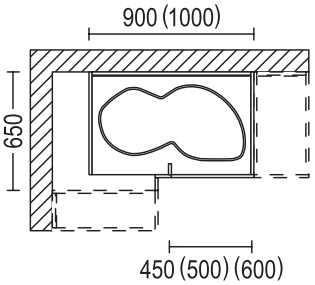
Planning information for corner units with swivel pull-out



Attention:

- Corner units with swivel pull-out NUESA* cannot be planned adjacent to protruded units.
- Depending upon unit size the tablars swivel out upon opening, with sizes 280 mm to 350 mm to the right / left and with sizes 620 mm to 750 mm toward the front.

Unit width	Swivel depth	Swivel width
900 mm	620 mm	280 mm
1000 mm	720 mm	350 mm
1000 mm	750 mm	350 mm



LINE N

Wall units | Corner solutions

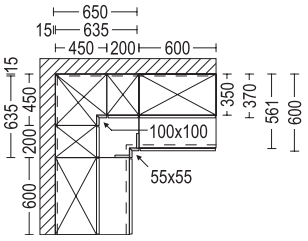
Planning possibilities for island solutions

- Corner wall units in wall unit heights 576, 720, 792 and 864 mm can be variably planned with all corner base units.
- The vertical line formed by the base units should always line up or at the very least be achieved by the next unit.

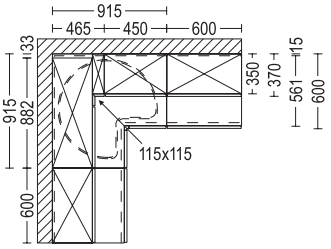
Attention with cooker hoods adjacent to the corner wall unit 650 x 650 mm:

- The first opening door cannot be directly adjacent to the cooker hood, since the depth of the cooker hood would prevent it from opening! In this case a design with a 1-door wall corner unit is recommended.

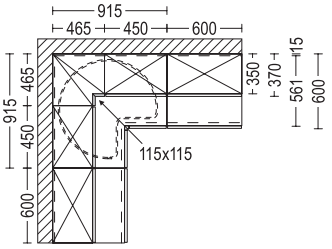
Corner solution 650 x 650 mm



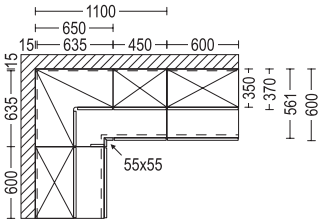
Corner solution 915 x 915 mm



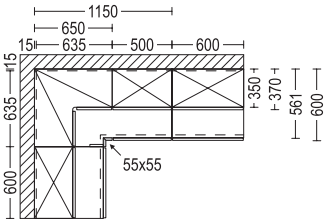
Corner solution 915 x 915 mm



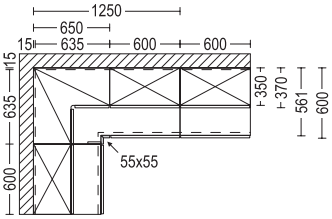
Corner solution 1100 x 650 mm



Corner solution 1150 x 650 mm



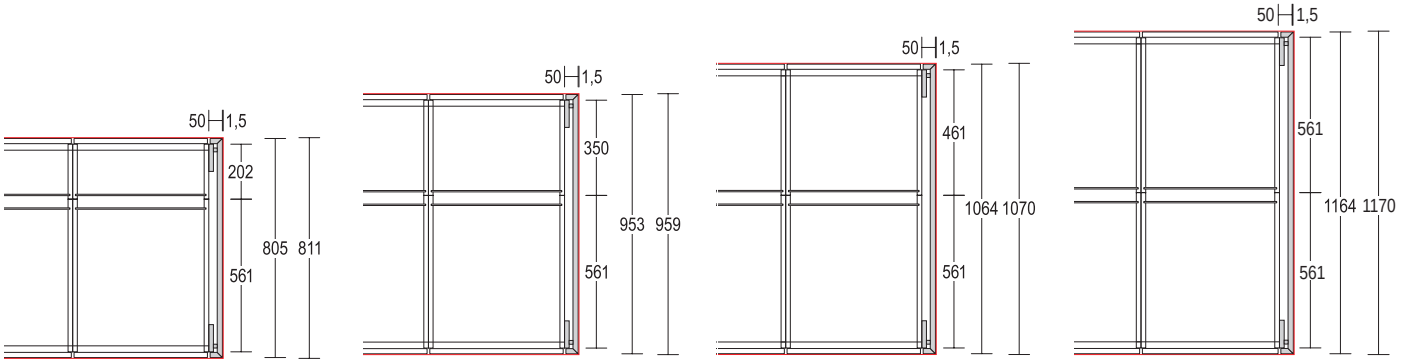
Corner solution 1250 x 650 mm



Island Solutions

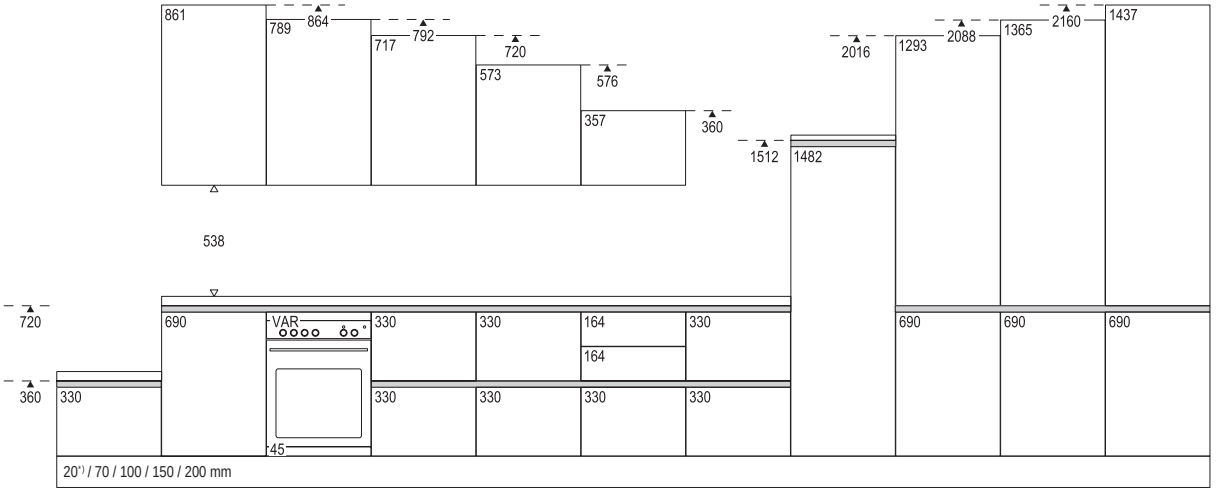
Planning possibilities for island solutions

- Island solutions can be planned in four standard depths:
  1. In combination with base unit depth of 561 mm carcase depths of 202 mm, 350 mm, 461 mm and 561 mm can be planned.
  2. As side end of run we recommend end uprights for room designs in planning depths 807 mm, 955 mm, 1066 mm and 1166 mm.
  3. Additional front end uprights can be planned for all-round recessed handles. The planning dimension of the front uprights is 50 mm. The front uprights are available in four fixed depths (see Ill.).
- The worktop overhang at the side amounts to 1.5 mm for all versions. On quartz and ceramic worktops, the overhang amounts to 2 mm at the side.
- Free-standing island solutions generally require a safety bracket for free-standing base units (see chapter index).
- For dishwasher fronts with spacer frames, the carcase sides of the rear units may need to be shortened. Attention, no built-under appliances can be planned at the rear!

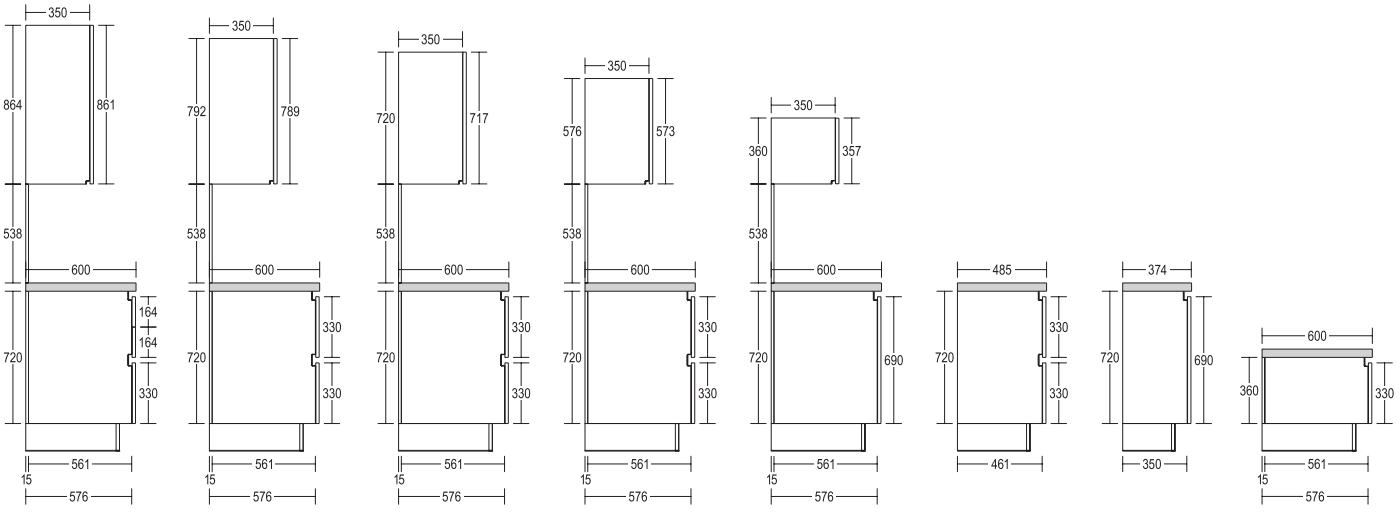


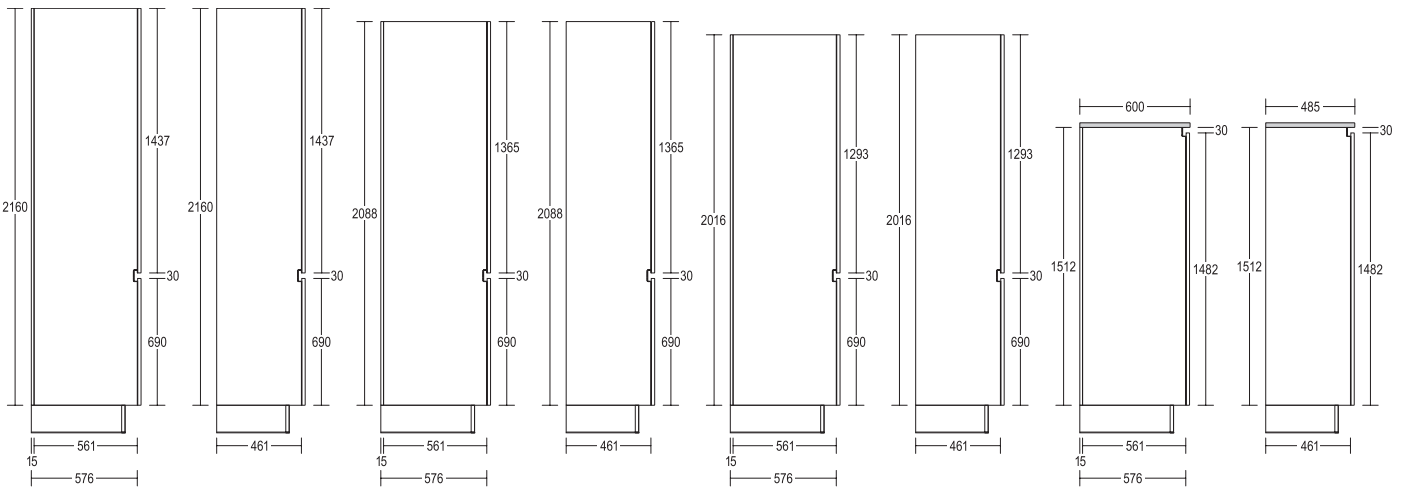
LINE N

Front Dimensions for Standard Doors



Side Views

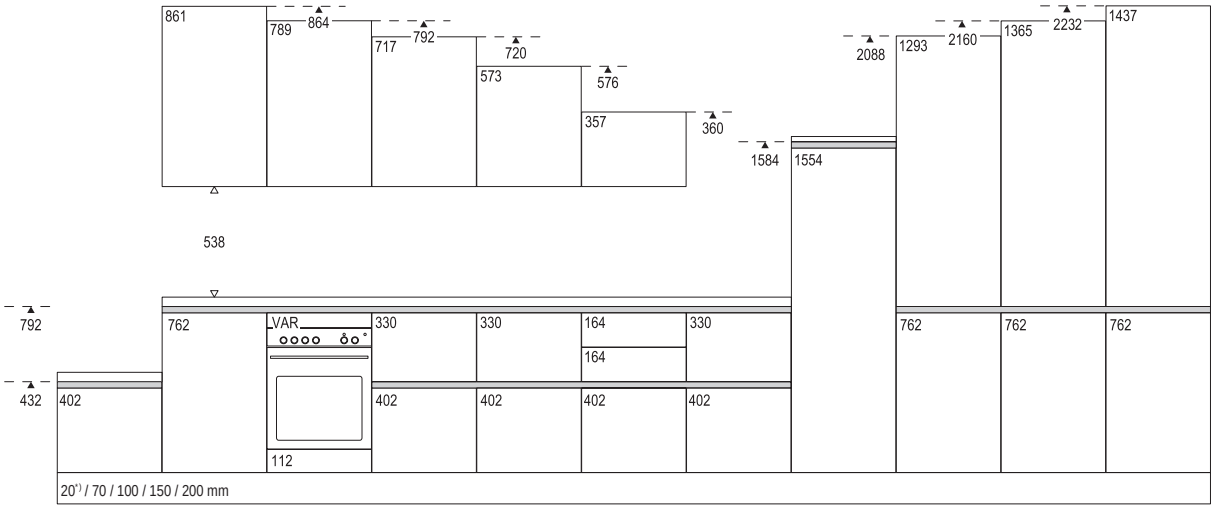




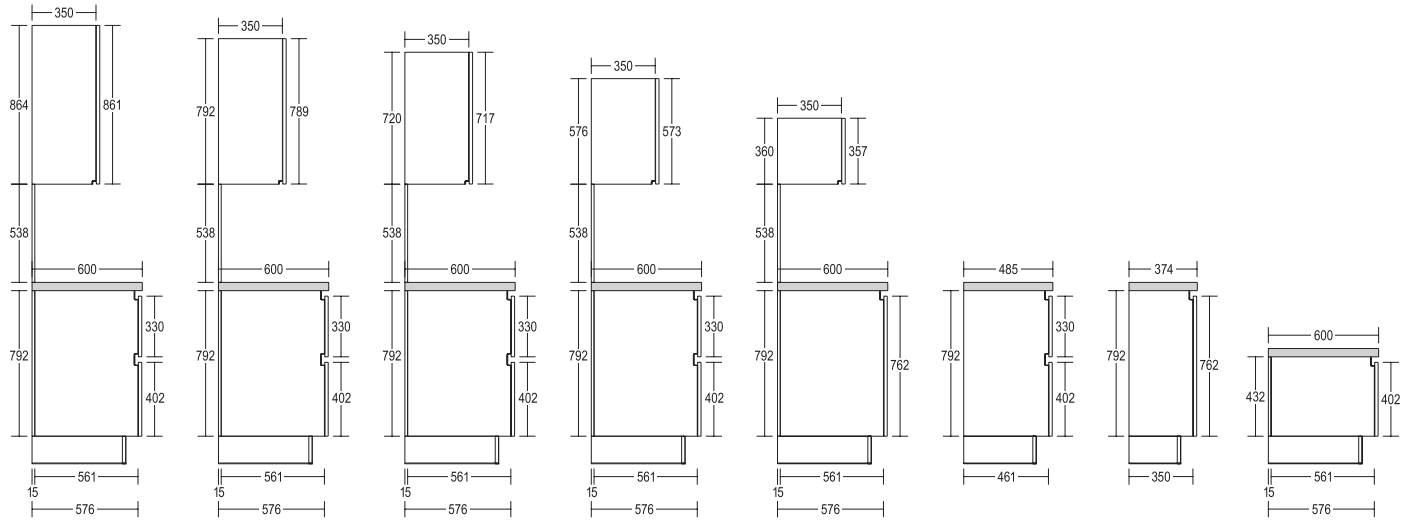
*) For ergonomic reasons, the 20 mm plinth height must not be used in the active areas of the kitchen (cooking, washing, refrigeration).

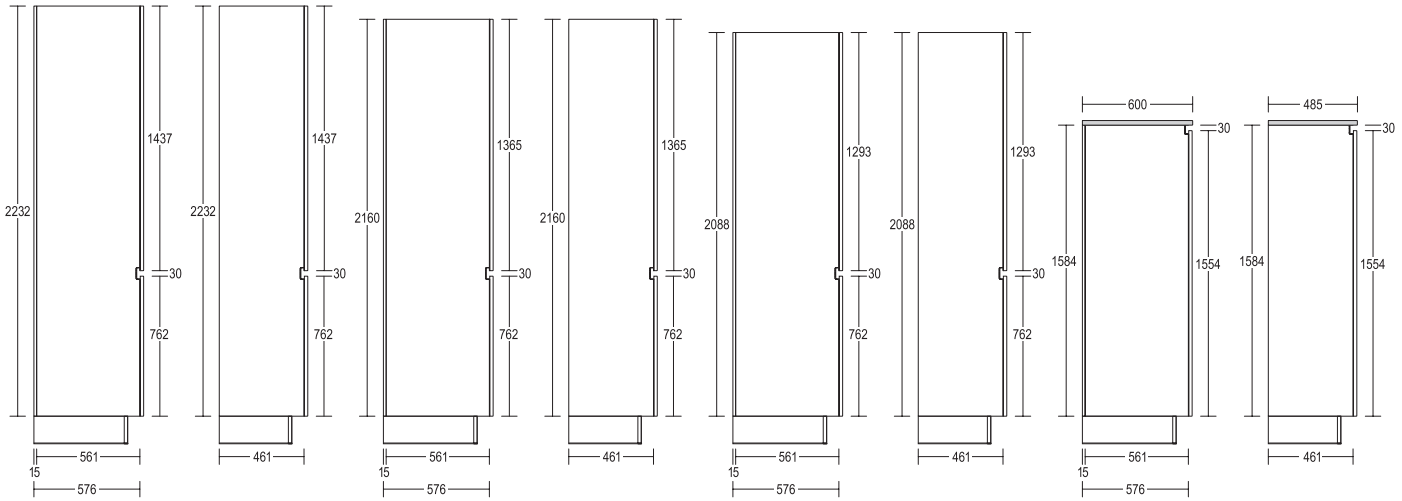
LINE N

Front Dimensions for Standard Doors XL



Side Views XL

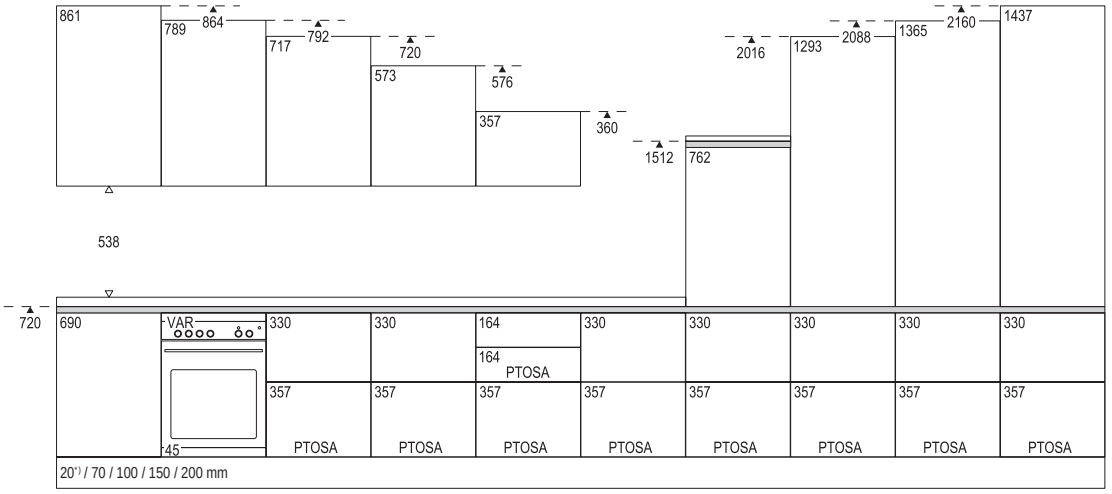




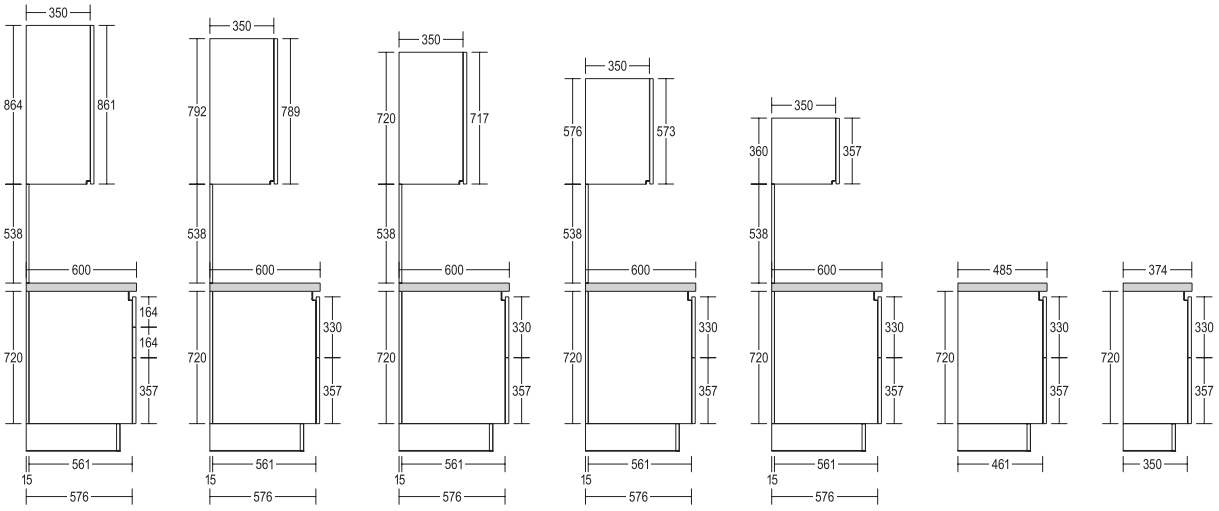
*) For ergonomic reasons, the 20 mm plinth height must not be used in the active areas of the kitchen (cooking, washing, refrigeration).

LINE N one

Front Dimensions for Standard Doors

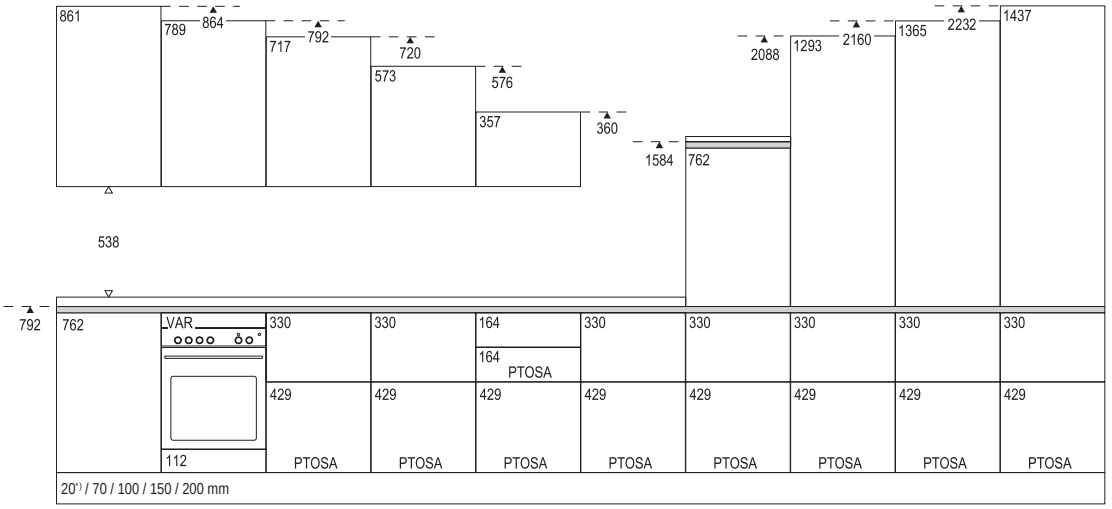


Side Views

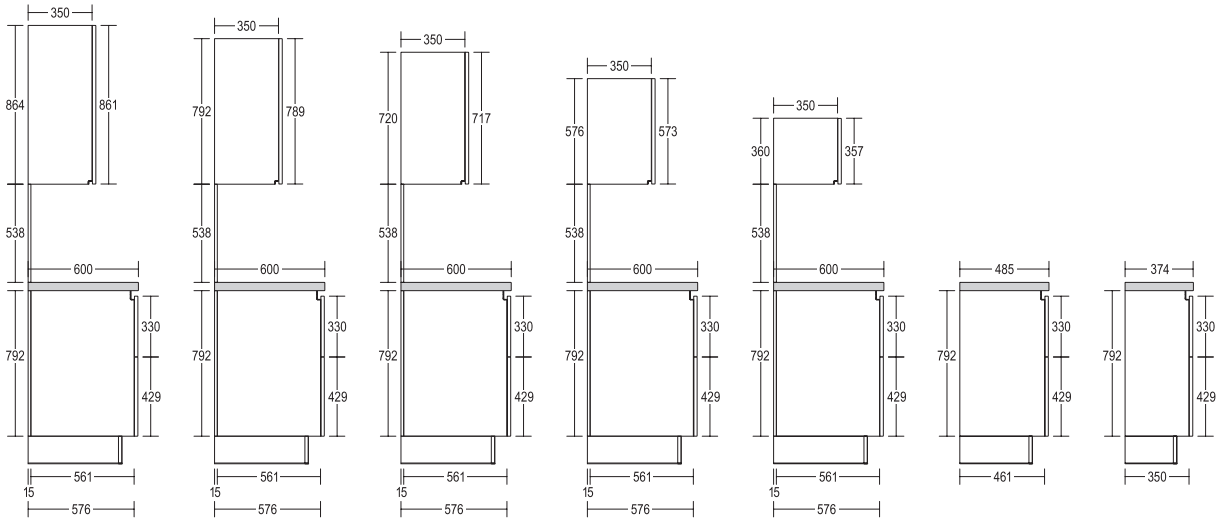


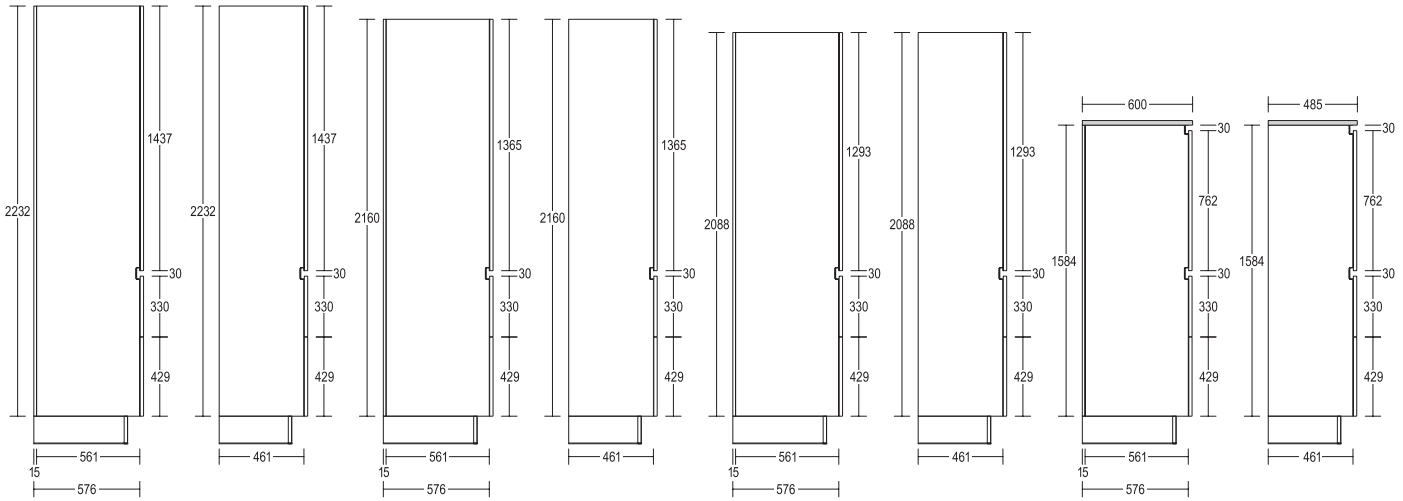
*) For ergonomic reasons, the 20 mm plinth height must not be used in the active areas of the kitchen (cooking, washing, refrigeration).

Front Dimensions for Standard Doors XL



Side Views XL





*) For ergonomic reasons, the 20 mm plinth height must not be used in the active areas of the kitchen (cooking, washing, refrigeration).

LINE N

Base units
Cooker housing units / Sink units
Base units in special heights

Key

Available Line ONE items.

Not possible with 20 mm plinth height.

Please specify appliance.

Planning information, s. chapter 10.

This unit is available with a side depth of 461 mm for the same price.

Item available in special sizes, s. chapter 2.

For available colours s. swatch, Design Overview page M 2.1.

Not available in: USA and Canada.

Quick reference for equipment options for LINE N base units

Here you can find a quick reference for the most important equipment options and surcharges for this chapter.
For detailed descriptions and planning notes as well as additional options and special productions please refer to chapter 2.2 “Equipment options, special productions”.

	Abbreviation	Order no.	Points
Surcharge for carcase interior décor in Slate grey	MP-KID	7947	96

Surcharges nBOX









Surcharge for glass sides on (internal) pull-outs with rectangular railing	MP-GLAS	7915	127
Surcharge for pull-out box on (internal) pull-outs	MP-BOX	7905	98
Surcharge for design profile for (internal) drawers and (internal) pull-outs	MP-DPRO	7918	23
Surcharge for design covers for (internal) drawers and (internal) pull-outs	MP-DCOV	7923	55
Surcharge for design glass panel for internal pull-outs	MP-DGBLEN	7925	101
Surcharge for design panel for internal drawers and internal pull-outs with pull-out box (MP-BOX)	MP-DBLEN	7935	72

Internal tablar shelves with locking slides for retrofitting in tall and base units	ITAB-UH 60	39496	644
Surcharge for LED light design for recessed handle (L profile) for base units and highboards with horizontal recessed handle	MP-NGML	7983	31
Surcharge for LED light design **for lighting the centre / bottom recessed handle (C profile)**	MP-NGMC	59709	32,9
Surcharge for recessed handle milling for induction hot plates	MP-NAUSI	59855	32
Cover profile for depth compensation on base units	NADP-72 NADP-79	59018 59028	8,6 9,3
Safety bracket for freestanding base units	KIPPS	9943	86
Construction shelf for heat insulation, 16 mm thick, for handle-less LINE N base units	NDBKI 30 NDBKI 40 NDBKI 45 NDBKI 50 NDBKI 60 NDBKI 80 NDBKI 90 NDBKI 100 NDBKI 120	10351 10352 10353 10354 10355 10356 10357 10358 10359	58 60 61 64 66 72 73 74 82
Surcharge for full-height back panel on sink base units	MP-SPUR	9292	19
Surcharge for waterproof base for sink units	MP-WPB	4745	131

Please note: The mechanical opening support mechanism for drawers and pull-outs (MP-PTOSA) is not available for items in the Line N range.
Exception: opening support mechanism included with Line ONE items.










Base units for handle-less kitchen
LINE N / LINE ONE

Side depth: 561 mm
Carcase height: 720 mm
Plinth height 20, 70, 100, 150 or 200 mm

		Abbreviation	Width in cm	Order-no.	Points	Price groups LINE N								
					1	2	3	4	5	6	7	8	9	10
Base units														
S 46	 690 Base unit 1 door, 1 shelf	NU	30	50003	377	397	428	456	467	480	—	—	—	—
		NU	40	50004	434	453	482	520	537	556	—	—	—	—
		NU	45	50065	451	477	511	555	572	588	—	—	—	—
		NU	50	50010	489	508	531	591	612	631	—	—	—	—
		NU	60	50030	534	553	591	656	682	708	—	—	—	—
S 46	 690 Base unit 2 doors, 1 shelf	NU	80	51063	733	777	838	915	946	978	—	—	—	—
		NU	90	51076	800	832	892	991	1.025	1.059	—	—	—	—
		NU	100	51070	842	885	948	1.057	1.095	1.133	—	—	—	—
		NU	120	51074	950	988	1.063	1.188	1.238	1.286	—	—	—	—
S 46	 717 End of run base unit Curve 1 door, 1 shelf, stop side = closed front end	NUAC	45	52030	—	—	804[1]	891[2]	—	—	—	—	—	—
		NUAC	60	52031	—	—	923[1]	975[2]	—	—	—	—	—	—
					1) Only Senso 357 2) Only Easytouch 945									
					Please indicate LH or RH hinge!									
					Height and width reductions are not permitted!									
46	 164 164 330 Pull-out unit 2 drawers, 1 pull-out	NU2SA	30	52581	1.091	1.150	1.156	1.184	1.215	1.245	—	—	—	—
		NU2SA	40	52582	1.155	1.215	1.228	1.270	1.298	1.327	—	—	—	—
		NU2SA	45	52583	1.186	1.247	1.270	1.310	1.339	1.367	—	—	—	—
		NU2SA	50	52585	1.212	1.279	1.295	1.349	1.365	1.383	—	—	—	—
		NU2SA	60	52586	1.275	1.346	1.375	1.434	1.457	1.483	—	—	—	—
		NU2SA	80	52588	1.549	1.641	1.691	1.775	1.796	1.815	—	—	—	—
		NU2SA	90	52589	1.638	1.724	1.770	1.898	1.917	1.937	—	—	—	—
		NU2SA	100	52590	1.734	1.829	1.883	2.005	2.038	2.073	—	—	—	—
		NU2SA	120	52592	1.917	2.013	2.072	2.221	2.260	2.298	—	—	—	—
NEW LINE ONE 46	 164 164 357 Pull-out unit 1 drawer, 1 drawer with opening support mechanism, 1 pull-out with opening support mechanism,	LU2SA	30	52500	1.372	1.432	1.440	1.467	1.499	1.530	—	—	—	—
		LU2SA	40	52501	1.426	1.486	1.499	1.543	1.571	1.600	—	—	—	—
		LU2SA	45	52502	1.450	1.513	1.536	1.578	1.607	1.637	—	—	—	—
		LU2SA	50	52503	1.472	1.537	1.556	1.612	1.629	1.645	—	—	—	—
		LU2SA	60	52504	1.521	1.594	1.625	1.685	1.710	1.736	—	—	—	—
		LU2SA	80	52505	1.774	1.866	1.918	2.006	2.026	2.047	—	—	—	—
		LU2SA	90	52506	1.851	1.939	1.987	2.117	2.137	2.161	—	—	—	—
		LU2SA	100	52507	1.937	2.032	2.091	2.212	2.248	2.286	—	—	—	—
		LU2SA	120	52508	2.095	2.193	2.257	2.408	2.450	2.491	—	—	—	—
46	 191 164 357 End of run pull-out unit Curve 2 drawers, 1 pull-out stop side = closed front end	NU2SAAC	45	52027	—	—	1.724[1]	1.775[2]	—	—	—	—	—	—
		NU2SAAC	60	52028	—	—	1.907[1]	1.935[2]	—	—	—	—	—	—
		NU2SAAC	90	52029	—	—	2.342[1]	2.491[2]	—	—	—	—	—	—
					1) Only Senso 357 2) Only Easytouch 945									
					Please indicate LH or RH hinge!									
					Height and width reductions are not permitted!									
NEW LINE ONE 46	 191 164 357 End of run pull-out unit Curve 1 drawer, 1 drawer with opening support mechanism, 1 pull-out with opening support mechanism, stop side = closed front end	LU2SAAC	45	52525	—	—	1.691[1]	1.733[2]	—	—	—	—	—	—
		LU2SAAC	60	52526	—	—	1.832[1]	1.876[2]	—	—	—	—	—	—
		LU2SAAC	90	52527	—	—	2.212[1]	2.336[2]	—	—	—	—	—	—
					1) Only Senso 357 2) Only Easytouch 945									
					Please indicate LH or RH hinge!									
					Height and width reductions are not permitted!									
46	 330 330 Pull-out unit 2 pull-outs	NU2A	30	52511	885	943	964	987	997	1.009	—	—	—	—
		NU2A	40	52512	949	1.009	1.029	1.069	1.083	1.099	—	—	—	—
		NU2A	45	52513	984	1.045	1.072	1.113	1.130	1.148	—	—	—	—
		NU2A	50	52515	1.013	1.077	1.102	1.152	1.172	1.193	—	—	—	—
		NU2A	60	52516	1.075	1.143	1.172	1.237	1.260	1.285	—	—	—	—
		NU2A	80	52518	1.367	1.453	1.513	1.603	1.626	1.650	—	—	—	—
		NU2A	90	52519	1.438	1.530	1.596	1.697	1.721	1.749	—	—	—	—
		NU2A	100	52520	1.548	1.645	1.721	1.818	1.859	1.899	—	—	—	—
		NU2A	120	52524	1.733	1.829	1.910	2.032	2.078	2.124	—	—	—	—











Base units for handle-less kitchen
LINE N / LINE ONE

Side depth: 561 mm
Carcase height: 720 mm
Plinth height 20, 70, 100, 150 or 200 mm

		Abbreviation	Width in cm	Order-no.	Points 1	2	3	4	5	6	7	8	9	10
					Price groups LINE N									
NEW LINE ONE 46	 330 357 PTOSA **Pull-out unit** 1 pull-out, 1 pull-out with opening support mechanism	LU2A	30	52530	1.009	1.067	1.088	1.113	1.124	1.136	—	—	—	—
		LU2A	40	52531	1.063	1.123	1.143	1.184	1.199	1.216	—	—	—	—
		LU2A	45	52532	1.091	1.153	1.180	1.223	1.240	1.259	—	—	—	—
		LU2A	50	52533	1.114	1.178	1.206	1.257	1.278	1.299	—	—	—	—
		LU2A	60	52534	1.164	1.234	1.264	1.330	1.355	1.380	—	—	—	—
		LU2A	80	52535	1.434	1.520	1.584	1.675	1.701	1.724	—	—	—	—
		LU2A	90	52536	1.494	1.586	1.656	1.758	1.784	1.813	—	—	—	—
		LU2A	100	52537	1.591	1.689	1.771	1.869	1.911	1.953	—	—	—	—
		LU2A	120	52538	1.755	1.851	1.937	2.062	2.110	2.158	—	—	—	—
46	 330 330 **Pull-out unit** 1 drawer with pull-out panel, 1 internal drawer, 1 pull-out	NUI2A	30	52541	1.156	1.222	1.237	1.248	1.259	1.267	—	—	—	—
		NUI2A	40	52542	1.225	1.291	1.317	1.346	1.358	1.369	—	—	—	—
		NUI2A	45	52543	1.259	1.329	1.355	1.388	1.405	1.422	—	—	—	—
		NUI2A	50	52545	1.289	1.361	1.388	1.438	1.456	1.473	—	—	—	—
		NUI2A	60	52546	1.365	1.437	1.463	1.532	1.556	1.584	—	—	—	—
		NUI2A	80	52548	1.713	1.799	1.857	1.952	1.972	1.993	—	—	—	—
		NUI2A	90	52549	1.794	1.883	1.951	2.057	2.078	2.101	—	—	—	—
		NUI2A	100	52550	1.929	2.024	2.086	2.180	2.224	2.267	—	—	—	—
		NUI2A	120	52563	2.135	2.227	2.302	2.419	2.467	2.516	—	—	—	—
NEW LINE ONE 46	 330 357 PTOSA **Pull-out unit** 1 drawer with pull-out panel, 1 internal drawer, 1 pull-out with opening support mechanism	LUI2A	30	52564	1.280	1.346	1.362	1.375	1.386	1.394	—	—	—	—
		LUI2A	40	52565	1.337	1.403	1.432	1.461	1.473	1.486	—	—	—	—
		LUI2A	45	52566	1.367	1.435	1.464	1.498	1.515	1.534	—	—	—	—
		LUI2A	50	52567	1.390	1.463	1.491	1.542	1.561	1.580	—	—	—	—
		LUI2A	60	52568	1.456	1.527	1.555	1.625	1.651	1.679	—	—	—	—
		LUI2A	80	52569	1.780	1.866	1.927	2.024	2.047	2.069	—	—	—	—
		LUI2A	90	52570	1.850	1.940	2.010	2.118	2.140	2.165	—	—	—	—
		LUI2A	100	52571	1.972	2.069	2.136	2.231	2.276	2.321	—	—	—	—
		LUI2A	120	52572	2.156	2.248	2.330	2.447	2.498	2.549	—	—	—	—
46	 357 357 **End of run pull-out unit Curve** 2 pull-outs, stop side = closed front end	NU2AAC	45	52016	—	—	1.584[1]	1.644[2]	—	—	—	—	—	—
		NU2AAC	60	52017	—	—	1.726[1]	1.758[2]	—	—	—	—	—	—
		NU2AAC	90	52018	—	—	2.191[1]	2.332[2]	—	—	—	—	—	—
					1) Only Senso 357 2) Only Easytouch 945									
					Please indicate LH or RH hinge!									
					Height and width reductions are not permitted!									
NEW LINE ONE 46	 357 357 PTOSA **End of run pull-out unit Curve** 1 pull-out, 1 pull-out with opening support mechanism, stop side = closed front end	LU2AAC	45	52560	—	—	1.391[1]	1.444[2]	—	—	—	—	—	—
		LU2AAC	60	52561	—	—	1.494[1]	1.542[2]	—	—	—	—	—	—
		LU2AAC	90	52562	—	—	1.904[1]	2.019[2]	—	—	—	—	—	—
					1) Only Senso 357 2) Only Easytouch 945									
					Please indicate LH or RH hinge!									
					Height and width reductions are not permitted!									
46	 690 **Pull-out unit** 1 pull-out, 1 internal drawer, 1 internal pull-out	NUAIAI	30	54264	1.241	1.257	1.285	1.295	1.313	1.330	—	—	—	—
		NUAIAI	40	51016	1.314	1.337	1.356	1.394	1.418	1.441	—	—	—	—
		NUAIAI	45	51265	1.345	1.375	1.402	1.438	1.460	1.485	—	—	—	—
		NUAIAI	50	51026	1.387	1.410	1.441	1.486	1.511	1.539	—	—	—	—
		NUAIAI	60	51061	1.444	1.478	1.513	1.567	1.600	1.631	—	—	—	—
46	 690 **Base unit** 1 door, 2 internal drawers, 1 internal pull-out	NU2IA	40	52012	1.424	1.450	1.473	1.523	1.537	1.551	—	—	—	—
		NU2IA	45	52013	1.472	1.499	1.534	1.571	1.591	1.610	—	—	—	—
		NU2IA	50	52032	1.513	1.539	1.568	1.624	1.645	1.666	—	—	—	—
		NU2IA	60	52048	1.599	1.628	1.661	1.730	1.753	1.775	—	—	—	—
	 690  **Base unit with waste separation system Euro-Cargo** 1 front, waste separation system Euro-Cargo, with cushioned self-closing mechanism, system lid made of metal, 450 / 500 mm width: 2 x 35 litres, 600 mm width: 2 x 35 / 2 x 10 litres, container height: 526 / 351 mm	NUASL-EC	45	51471	1.718	1.742	1.781	1.821	1.837	1.856	—	—	—	—
		NUASL-EC	50	51472	1.768	1.803	1.835	1.895	1.911	1.927	—	—	—	—
		NUASL-EC	60	51473	1.917	1.951	1.981	2.044	2.072	2.099	—	—	—	—
					Detail illustration refer to pg. M 0.28 pp.									
					Built-in sinks are not possible.									


Base units for handle-less kitchen
LINE N / LINE ONE

Side depth: 561 mm
Carcase height: 720 mm
Plinth height 20, 70, 100, 150 or 200 mm

		Abbreviation	Width in cm	Order-no.	Points / Price groups LINE N									
					1	2	3	4	5	6	7	8	9	10
	 690	NUHT	30	51005	505	542	568	594	607	619	—	—	—	—
	Base unit 1 door, 3 telescopic aluminium towel rails													
	 690	NUAWS	30	51138	1.669	1.695	1.717	1.755	1.764	1.772	—	—	—	—
	Pull-out unit with recyclable materials collector 1 pull-out, 1 recycling bin with system lid made of metal, 44 litres, container height: 550 mm													
	 690	NUAM	20	50020	999	1.022	1.050	1.059	1.064	1.070	—	—	—	—
	Pull-out unit 1 pull-out, 2 metal boxes with non-slip mats	NUAM	30	51139	1.057	1.082	1.102	1.139	1.152	1.164	—	—	—	—
					Please specify hinge side for runners!									
	 690	NUIAF	30	51023	978	1.004	1.022	1.042	1.057	1.075	—	—	—	—
	Pull-out unit 1 pull-out, 1 internal drawer, 1 metal bottle basket, removable													
	 690	NUABT	30	51008	1.050	1.072	1.095	1.130	1.140	1.150	—	—	—	—
	Pull-out unit 1 pull-out with fixed division for 1 linen baguette bag and 4 bottles, 1 fixed metal storage shelf													
	 690	NUAJ	30	51129	1.285	1.313	1.336	1.365	1.378	1.391	—	—	—	—
	Base unit with larder pull-out Junior 1 pull-out, 2 metal boxes with non-slip mats, adjustable													
	 690	NUAJO	30	51140	1.822	1.848	1.872	1.901	1.913	1.924	—	—	—	—
	Base unit with larder pull-out Junior 1 pull-out, 1 organising system UBOXX with division for knives and cutting board holder, adjustable													
	 690	NUA	15	51270	647	660	694	698	702	705	—	—	—	—
	Pull-out unit 1 pull-out, 2 metal boxes with non-slip mats													
	 690	NUABH	15	51111	676	707	726	742	742	743	—	—	—	—
	Pull-out unit 1 pull-out, 1 baking tray holder, incl. metal box with non-slip mat													
	 690	NUAHT	15	51128	696	712	749	756	758	759	—	—	—	—
	Pull-out unit 1 pull-out, 2-part towel rail, incl. metal box with non-slip mat													

Base units for handle-less kitchen
LINE N / LINE ONE



Side depth: 561 mm
Carcase height: 720 mm
Plinth height 20, 70, 100, 150 or 200 mm

		Abbreviation	Width in cm	Order-no.	Points / Price groups LINE N 1	2	3	4	5	6	7	8	9	10
46	 164 Drawer carcase height: 194 mm high, side depth: 561 mm	NSKU	30	50381	418	439	444	445	447	448	—	—	—	—
		NSKU	40	50382	438	457	458	464	470	476	—	—	—	—
		NSKU	45	50383	447	461	464	479	483	488	—	—	—	—
		NSKU	50	50385	461	477	479	489	496	501	—	—	—	—
		NSKU	60	50386	483	505	510	518	524	530	—	—	—	—
		NSKU	80	50388	548	562	572	591	603	612	—	—	—	—
		NSKU	90	50389	569	587	604	621	629	638	—	—	—	—
		NSKU	100	50390	585	618	628	647	660	672	—	—	—	—
		NSKU	120	50392	647	663	683	707	718	731	—	—	—	—

Fitting beneath worktop, e.g. as a radiator bridging!

Cannot be planned together with unit interior light LSID.*

Corner base units

	 690 Corner base unit 2 doors, opening angle 165°, 1 shelf, required floor space: 900 x 900 mm, planning dimensions: 915 x 915 mm	NUET	92	51293	1.524	1.526	1.596	1.629	1.666	1.702	—	—	—	—
					The corner unit can be disassembled on site!									
					Planning dimensions = floor space required + 15 mm distance to wall for protruding units.									
	 690 Corner base unit 2 doors, opening angle 165°, 1 revolving carousel with 2 wood base and metal railing, rotates 360°, height adjustable, required floor space: 900 x 900 mm, planning dimensions: 915 x 915 mm	NUETK	92	51089	2.378	2.380	2.448	2.504	2.529	2.554	—	—	—	—
					Corner unit can be dismantled on site!									
					Planning dimensions = floor space required + 15 mm distance to wall for protruding units.									

Base units for handle-less kitchen
LINE N / LINE ONE

Side depth: 561 mm
Carcase height: 720 mm
Plinth height 20, 70, 100, 150 or 200 mm

Abbreviation	Width in cm	Order-no.	Points	Price groups LINE N									
			1	2	3	4	5	6	7	8	9	10

Half-corner units

S · 46



Corner base unit
1 door,
1 shelf,
1 angle filler
Carcase widths: 900 and 1000 mm
Required floor spaces (variable):
635 (615 - 735) x ...
*90-40: ...1035 (1015 - 1135) mm
*90-45: ...1085 (1065 - 1185) mm
*100-50: ...1135 (1115 - 1235) mm
*100-60: ...1235 (1215 - 1335) mm


Planning dimensions (variable):
650 (630 - 750) x ...
*90-40: ...1050 (1030 - 1150) mm
*90-45: ...1100 (1080 - 1200) mm
*100-50: ...1150 (1130 - 1250) mm
*100-60: ...1250 (1230 - 1350) mm

Abbreviation	Width in cm	Order-no.	Points 1	2	3	4	5	6	7	8	9	10
NUE	90-40	51098	755	785	835	914	937	961	—	—	—	—
NUE	90-45	51087	764	796	847	931	952	972	—	—	—	—
NUE	100-50	51096	809	838	896	987	1.016	1.045	—	—	—	—
NUE	100-60	51082	823	850	914	1.018	1.045	1.073	—	—	—	—

Planning dimensions = floor space required + 15 mm distance to wall for protruding units.

The space requirement must be specified with the order. Adjustments on site are not possible.

Bracket changes are not permitted.



Corner base unit
1 door,
2 wooden carousel shelves with metal railing,
1 angle filler
Carcase widths: 900 and 1000 mm
Required floor spaces (variable):
635 (615 - 735) x ...
*90-40: ...1035 (1015 - 1135) mm
*90-45: ...1085 (1065 - 1185) mm
*100-50: ...1135 (1115 - 1235) mm
*100-60: ...1235 (1215 - 1335) mm


Planning dimensions (variable):
650 (630 - 750) x ...
*90-40: ...1050 (1030 - 1150) mm
*90-45: ...1100 (1080 - 1200) mm
*100-50: ...1150 (1130 - 1250) mm
*100-60: ...1250 (1230 - 1350) mm

Abbreviation	Width in cm	Order-no.	Points 1	2	3	4	5	6	7	8	9	10
NUEBD	90-40	51095	1.288	1.339	1.383	1.463	1.483	1.502	—	—	—	—
NUEBD	90-45	51086	1.298	1.349	1.399	1.479	1.499	1.520	—	—	—	—
NUEBD	100-50	51094	1.387	1.424	1.478	1.568	1.593	1.616	—	—	—	—
NUEBD	100-60	51088	1.406	1.442	1.510	1.603	1.628	1.654	—	—	—	—

Planning dimensions = required floor space + 15 mm distance to wall for protruding units.

The space requirement must be specified with the order. Adjustments on site are not possible.

Bracket changes are not permitted.



Corner unit with swivel pull-out
1 door,
2 wooden swivel tablars with metal railing,
1 angle filler
Carcase widths: 900 and 1000 mm
Required floor spaces (variable):
635 (615 - 735) x ...
*90-45: ...1085 (1065 - 1185) mm
*100-50: ...1135 (1115 - 1235) mm
*100-60: ...1235 (1215 - 1335) mm

Planning dimensions (variable):
650 (630 - 750) x ...
*90-45: ...1100 (1080 - 1200) mm
*100-50: ...1150 (1130 - 1250) mm
*100-60: ...1250 (1230 - 1350) mm


Abbreviation	Width in cm	Order-no.	Points 1	2	3	4	5	6	7	8	9	10
NUESA	90-45	53190	2.529	2.575	2.627	2.710	2.730	2.749	—	—	—	—
NUESA	100-50	53191	2.548	2.590	2.650	2.735	2.759	2.784	—	—	—	—
NUESA	100-60	53192	2.562	2.609	2.676	2.767	2.793	2.819	—	—	—	—

Planning dimensions = floor space required + 15 mm distance to wall for protruding units.

Do not plan protruded designs directly adjacent.

The space requirement must be specified with the order. Adjustments on site are not possible.

Bracket changes are not permitted.







Surcharge for recessed fillers
on fillers and half corner units,
side panel made of carcase material,
in carcase height incl. 2 plinth feet for on-site assembly,
carcase depth: 561 mm

Abbreviation	Width in cm	Order-no.	Points 1	2	3	4	5	6	7	8	9	10
MP-GS		9300	36,5	36,5	36,5	36,5	36,5	36,5	36,5	36,5	36,5	36,5






Cooker housing / Hot plate units for handle-less kitchen LINE N / LINE ONE

Side depth: 561 mm
Carcase height: 720 mm
Plinth height 70, 100, 150 or 200 mm

		Abbreviation	Width in cm	Order-no.	Points	Price groups LINE N								
					1	2	3	4	5	6	7	8	9	10
Cooker housings / Hot plate units														
E 20	VAR / 45 	Cooker housing 2 fixed compensation panels, aperture dimension: 590 mm	NHU	60	52309	568	571	572	577	580	583	—	—	—	—
					If planned at end of run, a support panel is required! *Not available for plinth heights 20 and 70 mm.*										
E 20	VAR / VAR 	Cooker housing unit for microwaves, steam ovens or compact ovens 1 fixed compensation panel, aperture dimensions: variable, 1 pull-out or drawer, according to aperture dimensions	NHUM	60	52323	771	775	783	822	837	850	—	—	—	—
E 46 20	690 	Hot plate unit 1 door, 1 shelf, 1 construction shelf for heat insulation	NK	60	52066	606	610	639	702	736	769	—	—	—	—
E 46 20	164 / 164 / 330 	Hot plate unit 1 fixed panel, 1 drawer, 1 pull-out, 1 construction shelf for heat insulation	NKSA	60	51316	1.101	1.175	1.197	1.266	1.289	1.313	—	—	—	—
			NKSA	80	51318	1.381	1.469	1.514	1.609	1.631	1.653	—	—	—	—
			NKSA	90	51319	1.460	1.551	1.603	1.724	1.751	1.774	—	—	—	—
			NKSA	100	51321	1.537	1.635	1.686	1.809	1.847	1.883	—	—	—	—
			NKSA	120	51322	1.718	1.815	1.870	2.018	2.066	2.114	—	—	—	—
					Suitable for built-in hobs with installation depth > 66 mm in conjunction with Slim Line worktops.										
NEW LINE ONE E 46 20	164 / 164 / 357 	Hot plate unit 1 fixed panel, 1 drawer with mechanical opening support mechanism, 1 pull-out with mechanical opening support mechanism, 1 construction shelf for heat insulation	LKSA	60	51303	1.349	1.424	1.447	1.518	1.542	1.567	—	—	—	—
			LKSA	80	51304	1.605	1.695	1.743	1.838	1.863	1.885	—	—	—	—
			LKSA	90	51305	1.673	1.764	1.821	1.943	1.971	1.997	—	—	—	—
			LKSA	100	51306	1.739	1.837	1.892	2.016	2.057	2.097	—	—	—	—
			LKSA	120	51308	1.898	1.994	2.056	2.205	2.256	2.305	—	—	—	—
					Suitable for built-in hobs with installation depth > 66 mm in conjunction with Slim Line worktops.										
E 46 20	164 / 164 / 330 	Hot plate unit 2 drawers, 1 pull-out, 1 construction shelf for heat insulation	NK2SA	60	52346	1.304	1.377	1.400	1.463	1.489	1.514	—	—	—	—
			NK2SA	80	52348	1.612	1.701	1.742	1.834	1.856	1.875	—	—	—	—
			NK2SA	90	52349	1.689	1.783	1.835	1.964	1.984	2.006	—	—	—	—
			NK2SA	100	52351	1.777	1.872	1.920	2.044	2.083	2.121	—	—	—	—
			NK2SA	120	52352	1.968	2.064	2.120	2.272	2.314	2.355	—	—	—	—
NEW LINE ONE E 46 20	164 / 164 / 357 	Hot plate unit 1 drawer, 1 drawer with opening support mechanism, 1 pull-out with opening support mechanism, 1 construction shelf for heat insulation	LK2SA	60	51313	1.552	1.624	1.650	1.714	1.742	1.768	—	—	—	—
			LK2SA	80	51314	1.837	1.926	1.970	2.064	2.086	2.108	—	—	—	—
			LK2SA	90	51315	1.902	1.997	2.054	2.183	2.206	2.228	—	—	—	—
			LK2SA	100	51317	1.978	2.075	2.127	2.253	2.294	2.333	—	—	—	—
			LK2SA	120	51320	2.146	2.244	2.305	2.459	2.504	2.548	—	—	—	—
E 46 20	330 / 330 	Hot plate unit 2 pull-outs, 1 construction shelf for heat insulation	NK2A	60	52350	1.126	1.196	1.225	1.285	1.311	1.339	—	—	—	—
			NK2A	80	52354	1.440	1.530	1.588	1.682	1.701	1.718	—	—	—	—
			NK2A	90	52357	1.526	1.616	1.678	1.783	1.809	1.834	—	—	—	—
			NK2A	100	52360	1.613	1.716	1.789	1.883	1.923	1.962	—	—	—	—
			NK2A	120	52362	1.803	1.901	1.975	2.094	2.140	2.186	—	—	—	—
NEW LINE ONE E 46 20	330 / 357 	Hot plate unit 1 pull-out, 1 pull-out with opening support mechanism, 1 construction shelf for heat insulation	LK2A	60	51324	1.215	1.286	1.317	1.378	1.406	1.434	—	—	—	—
			LK2A	80	51325	1.507	1.597	1.659	1.755	1.774	1.794	—	—	—	—
			LK2A	90	51326	1.581	1.672	1.737	1.844	1.872	1.899	—	—	—	—
			LK2A	100	51327	1.657	1.761	1.837	1.935	1.975	2.016	—	—	—	—
			LK2A	120	51328	1.824	1.923	2.003	2.123	2.172	2.221	—	—	—	—

Cooker housing / Hot plate units for handle-less kitchen LINE N / LINE ONE

Side depth: 561 mm
Carcase height: 720 mm
Plinth height 70, 100, 150 or 200 mm

		Abbreviation	Width in cm		Order-no.	Points / Price groups LINE N 1	2	3	4	5	6	7	8	9	10
E 46	 330 330	**Hot plate unit for Slim Line worktops** 1 internal panel, 2 pull-outs, 1 construction shelf for heat insulation	NK2A	60	-SL	51336	1.132	1.203	1.228	1.288	1.317	1.346	—	—	—	—
			NK2A	80	-SL	51338	1.444	1.534	1.591	1.688	1.720	1.753	—	—	—	—
			NK2A	90	-SL	51339	1.530	1.619	1.685	1.789	1.824	1.862	—	—	—	—
			NK2A	100	-SL	51341	1.619	1.720	1.791	1.889	1.937	1.984	—	—	—	—
			NK2A	120	-SL	51342	1.809	1.905	1.981	2.097	2.156	2.216	—	—	—	—
		Suitable for hot plates with installation depth > 66 mm in conjunction with Slim Line, Quartz and Xtra Ceramic worktops.													
NEW LINE ONE E 46	 330 357	**Hot plate unit for Slim Line worktops** 1 internal panel, 1 pull-out, 1 pull-out with opening support mechanism, 1 construction shelf for heat insulation	LK2A	60	-SL	51345	1.221	1.294	1.320	1.381	1.412	1.442	—	—	—	—
			LK2A	80	-SL	51346	1.511	1.602	1.661	1.759	1.794	1.828	—	—	—	—
			LK2A	90	-SL	51347	1.584	1.676	1.745	1.848	1.886	1.926	—	—	—	—
			LK2A	100	-SL	51348	1.663	1.765	1.840	1.940	1.990	2.040	—	—	—	—
			LK2A	120	-SL	51349	1.829	1.927	2.009	2.126	2.187	2.250	—	—	—	—
		Suitable for hot plates with installation depth > 66 mm in conjunction with Slim Line, Quartz and Xtra Ceramic worktops.													
E 46	 330 330	**Hot plate unit** 1 drawer with pull-out panel, 1 internal drawer, 1 pull-out, 1 construction shelf for heat insulation	NKI2A	60		52361	1.406	1.479	1.513	1.568	1.599	1.628	—	—	—	—
			NKI2A	80		52363	1.759	1.850	1.913	2.008	2.040	2.073	—	—	—	—
			NKI2A	90		52364	1.853	1.942	2.012	2.116	2.152	2.189	—	—	—	—
			NKI2A	100		52365	1.959	2.060	2.129	2.222	2.270	2.320	—	—	—	—
			NKI2A	120		52367	2.161	2.257	2.336	2.453	2.511	2.571	—	—	—	—
		Latch for internal drawers MITIS cannot be used.													
NEW LINE ONE E 46	 330 357	**Hot plate unit** 1 drawer with pull-out panel, 1 internal drawer, 1 pull-out with mechanical opening support mechanism, 1 construction shelf for heat insulation	LKI2A	60		51368	1.497	1.568	1.605	1.661	1.694	1.724	—	—	—	—
			LKI2A	80		51369	1.826	1.917	1.983	2.079	2.114	2.148	—	—	—	—
			LKI2A	90		51370	1.908	1.999	2.072	2.177	2.215	2.254	—	—	—	—
			LKI2A	100		51371	2.003	2.104	2.178	2.272	2.323	2.374	—	—	—	—
			LKI2A	120		51372	2.181	2.278	2.364	2.482	2.543	2.605	—	—	—	—
		Latch for internal drawers MITIS cannot be used.													
E		**Surcharge for recessed handle milling for induction hot plates** beneath the worktop for ventilation	MP-NAUSI			59855	32	32	32	32	32	32	—	—	—	—
		Please also sketch in graphically any existing or third-party appliances. *Not required for hot plates from BSH and Miele.* *Not required for hot plates from Leonard, Progress, AEG, BORA and ELICA.*													
	No image	**Slim Line installation set for handle-less LINE N hot plate units NK*(-X)** 600 mm wide, as well as cooker housing units NHU60(-X), NHUS60(-X) and NHUM60(-X) comprised of: 1 fastening set, 1 set of installation instructions	NSL-SET60	60		59356	199	199	199	199	199	199	—	—	—	—
		as above, however for handleless LINE N sink units in all widths as well as hot plate units upwards of 800 mm width	NSL-SET80	80		59358	276	276	276	276	276	276	—	—	—	—

Hot plate units for handleless LINE N / LINE ONE kitchen

Side depth: 561 mm
Carcase height: 720 mm
Plinth height 70, 100, 150 or 200 mm

Abbreviation	Width in cm	Order-no.	Points / Price groups LINE N 1	2	3	4	5	6	7	8	9	10

Hot plate units for downdraft extractor fans



Hot plate unit for downdraft extractor fan
1 fixed panel,
1 drawer,
1 pull-out

Abbreviation	Width in cm	Order-no.	1	2	3	4	5	6	7	8	9	10
NKMSA	60	54308	1.162	1.234	1.257	1.323	1.351	1.380	—	—	—	—
NKMSA	80	54318	1.510	1.600	1.659	1.778	1.809	1.837	—	—	—	—
NKMSA	90	54319	1.570	1.660	1.711	1.835	1.869	1.901	—	—	—	—
NKMSA	100	54321	1.612	1.714	1.765	1.889	1.933	1.975	—	—	—	—
NKMSA	120	54322	1.797	1.895	1.953	2.095	2.149	2.205	—	—	—	—

It is absolutely necessary that the appliance information is included in the order, since drawer and pull-out depths are dependent upon the appliance used and the empty space planned and are configured accordingly at the factory. Refer to planning information on page M 10.48 f.


Suitable for downdraft extractor fans with and without plinth motors.



Hot plate unit for Panorama downdraft extractor fan with vertical motor
2 drawers,
1 pull-out

Abbreviation	Width in cm	Order-no.	1	2	3	4	5	6	7	8	9	10
NKMP2SA	90	54326	1.800	1.891	1.942	2.066	2.099	2.132	—	—	—	—
NKMP2SA	100	54327	1.844	1.946	1.997	2.123	2.165	2.208	—	—	—	—
NKMP2SA	120	54328	2.032	2.130	2.189	2.332	2.386	2.440	—	—	—	—

It is absolutely necessary that the appliance information is included in the order, since drawer and pull-out depths are dependent upon the appliance used and the empty space planned and are configured accordingly at the factory. Refer to planning information on page M 10.48 f.




Hot plate unit for downdraft extractor fan
1 fixed panel,
1 drawer with opening support mechanism,
1 pull-out with opening support mechanism

Abbreviation	Width in cm	Order-no.	1	2	3	4	5	6	7	8	9	10
LKMSA	60	54303	1.410	1.482	1.507	1.574	1.603	1.632	—	—	—	—
LKMSA	80	54304	1.734	1.825	1.888	2.009	2.041	2.070	—	—	—	—
LKMSA	90	54305	1.783	1.873	1.929	2.054	2.089	2.123	—	—	—	—
LKMSA	100	54306	1.813	1.917	1.972	2.098	2.143	2.189	—	—	—	—
LKMSA	120	54307	1.975	2.075	2.137	2.282	2.339	2.396	—	—	—	—

It is absolutely necessary that the appliance information is included in the order, since drawer and pull-out depths are dependent upon the appliance used and the empty space planned and are configured accordingly at the factory. Refer to planning information on page M 10.48 f.

Suitable for downdraft extractor fans with and without plinth motors.



Hot plate unit for Panorama downdraft extractor fan with vertical motor
1 drawer,
1 drawer with mechanical opening support mechanism,
1 pull-out with mechanical opening support mechanism

Abbreviation	Width in cm	Order-no.	1	2	3	4	5	6	7	8	9	10
LKMP2SA	90	54315	2.013	2.104	2.159	2.285	2.320	2.354	—	—	—	—
LKMP2SA	100	54316	2.045	2.149	2.205	2.330	2.377	2.421	—	—	—	—
LKMP2SA	120	54317	2.212	2.310	2.374	2.519	2.575	2.632	—	—	—	—

It is absolutely necessary that the appliance information is included in the order, since drawer and pull-out depths are dependent upon the appliance used and the empty space planned and are configured accordingly at the factory. Refer to planning information on page M 10.48 f.



Hot plate unit for downdraft extractor fan
1 internal panel,
1 drawer with pull-out panel,
1 pull-out

Abbreviation	Width in cm	Order-no.	1	2	3	4	5	6	7	8	9	10
NKM2A	60	54335	1.216	1.285	1.308	1.369	1.399	1.429	—	—	—	—
NKM2A	80	54338	1.540	1.624	1.685	1.796	1.821	1.848	—	—	—	—
NKM2A	90	54339	1.591	1.675	1.742	1.844	1.867	1.889	—	—	—	—
NKM2A	100	54341	1.622	1.721	1.794	1.892	1.930	1.970	—	—	—	—
NKM2A	120	54342	1.797	1.892	1.970	2.086	2.133	2.178	—	—	—	—

It is absolutely necessary that the appliance information is included in the order, since drawer and pull-out depths are dependent upon the appliance used and the empty space planned and are configured accordingly at the factory. Refer to planning information on page M 10.48 f.

Suitable for downdraft extractor fans with and without plinth motors.




Hot plate unit for Panorama downdraft extractor fan with vertical motor
2 pull-outs

Abbreviation	Width in cm	Order-no.	1	2	3	4	5	6	7	8	9	10
NKMP2A	90	54329	1.717	1.802	1.867	1.970	1.993	2.016	—	—	—	—
NKMP2A	100	54330	1.751	1.850	1.921	2.019	2.059	2.097	—	—	—	—
NKMP2A	120	54331	1.927	2.022	2.101	2.218	2.264	2.310	—	—	—	—

It is absolutely necessary that the appliance information is included in the order, since drawer and pull-out depths are dependent upon the appliance used and the empty space planned and are configured accordingly at the factory. Refer to planning information on page M 10.48 f.


Hot plate units for handleless LINE N / LINE ONE kitchen

Side depth: 561 mm
Carcase height: 720 mm
Plinth height 70, 100, 150 or 200 mm

	Abbreviation	Width in cm	Order-no.	Points / Price groups LINE N 1	2	3	4	5	6	7	8	9	10
 **Hot plate unit for downdraft extractor fan** 1 internal panel, 1 drawer with pull-out panel, 1 pull-out with mechanical opening support mechanism	LKM2A	60	54309	1.307	1.375	1.400	1.464	1.494	1.524	—	—	—	—
	LKM2A	80	54310	1.607	1.691	1.755	1.867	1.895	1.923	—	—	—	—
	LKM2A	90	54311	1.647	1.732	1.802	1.905	1.930	1.955	—	—	—	—
	LKM2A	100	54312	1.666	1.767	1.843	1.942	1.983	2.024	—	—	—	—
	LKM2A	120	54313	1.818	1.913	1.997	2.116	2.165	2.212	—	—	—	—

It is absolutely necessary that the appliance information is included in the order, since drawer and pull-out depths are dependent upon the appliance used and the empty space planned and are configured accordingly at the factory. Refer to planning information on page M 10.48 f.







Suitable for downdraft extractor fans with and without plinth motors.

 **Hot plate unit for Panorama downdraft extractor fan with vertical motor** 1 pull-out, 1 pull-out with mechanical opening support mechanism	LKMP2A	90	54320	1.772	1.857	1.927	2.031	2.057	2.081	—	—	—	—
	LKMP2A	100	54323	1.794	1.894	1.971	2.069	2.111	2.152	—	—	—	—
	LKMP2A	120	54324	1.949	2.044	2.129	2.247	2.297	2.343	—	—	—	—

It is absolutely necessary that the appliance information is included in the order, since drawer and pull-out depths are dependent upon the appliance used and the empty space planned and are configured accordingly at the factory. Refer to planning information on page M 10.48 f.




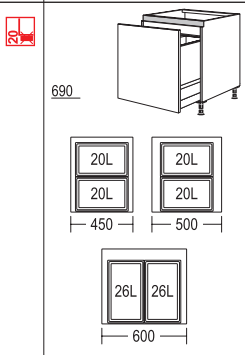

Sink units for handle-less kitchen
LINE N / LINE ONE

Side depth: 561 mm
Carcase height: 720 mm
Plinth height 70, 100, 150 or 200 mm

		Abbreviation	Width in cm	Order-no.	Points	Price groups LINE N									
						1	2	3	4	5	6	7	8	9	10
Sink units															
	Surcharge for Waterproof shelf Waterproof shelf in grey metallic for sink base units and vanity units	MP-WPB		4745		131	131	131	131	131	131	131	131	131	131
						There is no centre post for two-door sink base units. Exception: Sink base unit SPUS90/100/120.									
						Divided panels are replaced with a continuous panel.									
S 46 20	 690 Sink base unit 1 internal panel, 1 door	NSPU	40	51204		431	450	480	520	537	555	—	—	—	—
		NSPU	45	51205		445	470	508	552	568	584	—	—	—	—
		NSPU	50	51200		482	502	530	590	609	628	—	—	—	—
		NSPU	60	51206		526	543	588	647	672	694	—	—	—	—
NEW S 46 20	 717 End of run sink base unit Curve 1 internal panel, 1 door, stop side = closed front end	NSPUAC	45	51207		—	—	800[1]	888[2]	—	—	—	—	—	—
		NSPUAC	60	51208		—	—	920[1]	968[2]	—	—	—	—	—	—
						1) Only Senso 357 2) Only Easytouch 945									
						Height and width reductions are not permitted!									
						For waste collector, observe door opening width and door hinge side!									
S 46 20	 690 Sink base unit 2 internal panels, 2 doors	NSPU	80	51148		730	775	835	915	946	978	—	—	—	—
		NSPU	90	51161		791	823	885	977	1.013	1.048	—	—	—	—
		NSPU	100	51160		835	880	943	1.053	1.092	1.132	—	—	—	—
		NSPU	120	51165		921	975	1.050	1.183	1.231	1.279	—	—	—	—
						For waste collector, observe door opening width and door hinge side!									
20	 164 164 330 Sink pull-out unit 1 fixed panel, 1 drawer, 400 mm deep, with wooden back panel for on-site adaptation of odour trap recess, 1 pull-out, 500 mm deep, with metal back panel	NSPUSA	60	52243		1.402	1.453	1.479	1.548	1.574	1.600	—	—	—	—
		NSPUSA	80	52244		1.588	1.661	1.707	1.799	1.822	1.847	—	—	—	—
		NSPUSA	90	52245		1.666	1.734	1.790	1.911	1.935	1.959	—	—	—	—
		NSPUSA	100	52246		1.778	1.853	1.911	2.013	2.054	2.094	—	—	—	—
		NSPUSA	120	52248		1.955	2.024	2.089	2.212	2.264	2.317	—	—	—	—
						Please use space-saving odour trap 19601!									
						Not available with moisture protection shelf or waterproof mat.									
NEW LINE ONE 20	 164 164 357 Sink pull-out unit 1 fixed panel, 1 drawer, 400 mm deep, with wooden back panel for on-site cutting of odour trap recess and mechanical opening support mechanism, 1 pull-out, 500 mm deep, with metal back panel and mechanical opening support mechanism	LSPUSA	60	52239		1.650	1.701	1.729	1.799	1.826	1.854	—	—	—	—
		LSPUSA	80	52240		1.812	1.886	1.935	2.028	2.054	2.079	—	—	—	—
		LSPUSA	90	52242		1.879	1.949	2.008	2.130	2.156	2.181	—	—	—	—
		LSPUSA	100	52249		1.980	2.054	2.118	2.221	2.264	2.307	—	—	—	—
		LSPUSA	120	52250		2.133	2.203	2.275	2.397	2.454	2.508	—	—	—	—
						Please use space-saving odour trap 19601!									
						Not available with moisture protection shelf or waterproof mat.									
20	 330 330 Sink pull-out unit 1 internal panel, 1 drawer with pull-out panel, 400 mm deep, with wooden back panel for on-site adaptation of odour trap recess, 1 pull-out, 500 mm deep, with metal back panel	NSPUASA	60	51226		1.396	1.447	1.475	1.543	1.568	1.594	—	—	—	—
		NSPUASA	80	51228		1.571	1.645	1.705	1.797	1.816	1.835	—	—	—	—
		NSPUASA	90	51229		1.654	1.721	1.789	1.898	1.920	1.940	—	—	—	—
		NSPUASA	100	51230		1.770	1.841	1.913	1.999	2.043	2.086	—	—	—	—
		NSPUASA	120	51242		1.949	2.016	2.097	2.180	2.235	2.292	—	—	—	—
						Please use space-saving odour trap 19601!									
						Not available with moisture protection shelf or waterproof mat.									
NEW LINE ONE 20	 330 357 Sink pull-out unit 1 internal panel, 1 drawer with pull-out panel, 400 mm deep, with wooden back panel for on-site cutting of odour trap recess, 1 pull-out, 500 mm deep, with metal back panel and mechanical opening support mechanism	LSPUASA	60	51211		1.485	1.537	1.568	1.637	1.663	1.689	—	—	—	—
		LSPUASA	80	51212		1.638	1.713	1.775	1.869	1.891	1.911	—	—	—	—
		LSPUASA	90	51213		1.710	1.778	1.848	1.959	1.983	2.006	—	—	—	—
		LSPUASA	100	51214		1.813	1.885	1.962	2.048	2.095	2.142	—	—	—	—
		LSPUASA	120	51215		1.970	2.038	2.124	2.209	2.267	2.327	—	—	—	—
						Please use space-saving odour trap 19601!									
						Not available with moisture protection shelf or waterproof mat.									

Sink units for handle-less kitchen
LINE N / LINE ONE

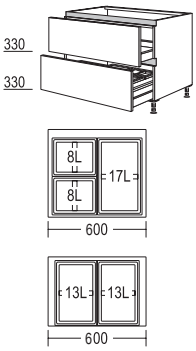
Side depth: 561 mm
Carcase height: 720 mm
Plinth height 70, 100, 150 or 200 mm

	Abbreviation	Width in cm	Order-no.	Points 1	2	3	4	5	6	7	8	9	10
				Price groups LINE N									
 690	**Sink base unit** 1 internal panel, 1 front, without pull-out rails and drill holes	NSPUAL	40	51193	416	438	467	511	526	540	—	—	—	—
		NSPUAL	45	51197	434	458	489	536	555	574	—	—	—	—
		NSPUAL	50	51198	458	488	520	580	600	619	—	—	—	—
		NSPUAL	60	51199	514	533	572	632	663	692	—	—	—	—
	For installation of Syncro or existing waste system, refer to accessory list, chapter 1.													
 690	**Sink unit for customer-provided recycling container systems** 1 internal panel, 1 pull-out, 500 mm deep	NSPUA-BW	45	50294	683	710	745	778	800	822	—	—	—	—
		NSPUA-BW	50	50295	714	742	777	818	840	861	—	—	—	—
		NSPUA-BW	60	50296	769	796	838	886	913	937	—	—	—	—
	as above, however, 1 pull-out, 400 mm deep	NSPUAK-BW	45	40294	683	710	745	778	800	822	—	—	—	—
		NSPUAK-BW	50	40295	714	742	777	818	840	861	—	—	—	—
		NSPUAK-BW	60	40296	769	796	838	886	913	937	—	—	—	—
NEW  690	**Sink base unit for water treatment systems and on-site recyclables container systems** 2 internal panels, 1 pull-out, 500 mm deep, 1 door, right-hand hinge = pull-out on right, left-hand hinge = pull-out on left	NSPUAWA-BW	90	51209	1.007	1.059	1.133	1.209	1.248	1.286	—	—	—	—
		NSPUAWA-BW	100	51210	1.076	1.124	1.187	1.288	1.329	1.368	—	—	—	—
	Not available with waterproof shelf, moisture protection sheet or waterproof mat. *Height, width and depth reductions are not permitted!* *The back panel must not be cut out completely for the water connection during installation, as this would interfere with fastening the spacer rails.* *For installation of Separato-K (AS10498) or existing waste system.*													
 690	**Sink unit Separato-K** 1 internal panel, 1 pull-out, 500 mm deep, with waste separation system Separato-K with pull-out lid: 450 mm: 1 x 18 / 2 x 8 litres, 1 bio lid 500 mm: 1 x 18 / 2 x 8 litres, 1 side organisers, 1 bio lid 600 mm: 1 x 18 / 2 x 8 litres, 2 side organisers, 1 bio lid	NSPUA-AK	45	54254	1.251	1.275	1.308	1.348	1.371	1.396	—	—	—	—
		NSPUA-AK	50	54255	1.282	1.313	1.346	1.394	1.419	1.444	—	—	—	—
		NSPUA-AK	60	54256	1.384	1.413	1.450	1.510	1.543	1.577	—	—	—	—
	Please use space-saving odour trap 19601! *Not available with moisture protection shelf or waterproof mat.* *Detail illustration refer to pg. M 0.28 pp.*													
 690	**Sink unit Flex 33** 1 internal panel, 1 pull-out, 500 mm deep, with waste separation system Flex 33 with system lid made of metal 450 mm width: 2 x 20 litres 500 mm width: 2 x 20 litres 600 mm width: 2 x 26 litres container height: 330 mm	NSPUA-AF	45	51277	1.635	1.656	1.694	1.730	1.756	1.781	—	—	—	—
		NSPUA-AF	50	51278	1.716	1.749	1.777	1.829	1.854	1.876	—	—	—	—
		NSPUA-AF	60	51279	1.889	1.920	1.961	2.015	2.050	2.083	—	—	—	—
	Please use space-saving odour trap 19601! *Not available with moisture protection shelf or waterproof mat.* *Detail illustration refer to pg. M 0.30 pp.*													
 690	**Sink unit Frame** 1 internal panel, 1 pull-out, 400 mm deep, with waste separation system Frame 450 mm width: 2 x 13 litres, container height 310 mm 500 mm width: 2 x 16 litres, container height 330 mm, 600 mm width: 1 x 17 / 2 x 8 litres, container height: 310 mm	NSPUA-A	45	52294	1.734	1.758	1.794	1.831	1.851	1.870	—	—	—	—
		NSPUA-A	50	52295	1.790	1.812	1.837	1.901	1.921	1.940	—	—	—	—
		NSPUA-A	60	52296	1.898	1.923	1.964	2.028	2.051	2.075	—	—	—	—
	Please use space-saving odour trap 19601! *Not available with moisture protection shelf or waterproof mat.* *Detail illustration refer to pg. M 0.28 pp.*													

Sink units for handle-less kitchen
LINE N / LINE ONE

Side depth: 561 mm
Carcase height: 720 mm
Plinth height 70, 100, 150 or 200 mm

Abbreviation	Width in cm	Order-no.	Points	Price groups LINE N									
				1	2	3	4	5	6	7	8	9	10



Sink pull-out unit Flex 21
1 internal panel,
1 drawer with pull-out panel, 400 mm deep, with wooden back panel for on-site adaptation of odour trap recess,
1 pull-out, 500 mm deep,with metal back panel and
waste separation system Flex 21
600 mm: 1 x 17 / 2 x 8 litres,
bucket high 210 mm,
3 container lids

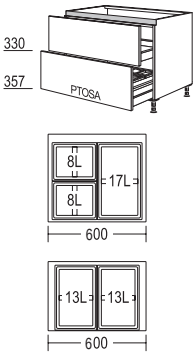
Abbreviation	Order-no.	1	2	3	4	5	6	7	8	9	10
NSPU2A-AF 60	51231	2.321	2.371	2.403	2.463	2.492	2.521	—	—	—	—
NSPU2A-AF 80	51232	2.497	2.570	2.634	2.716	2.740	2.764	—	—	—	—
NSPU2A-AF 90	51234	2.578	2.647	2.716	2.816	2.843	2.869	—	—	—	—
NSPU2A-AF 100	51235	2.695	2.764	2.841	2.919	2.967	3.015	—	—	—	—
NSPU2A-AF 120	51236	2.872	2.940	3.027	3.100	3.159	3.219	—	—	—	—

Please use space-saving odour trap 19601!
Not available with moisture protection shelf or waterproof mat.
Detail illustration refer to pg. M 0.29 pp.

as above, but
bottom pull-out, 400 mm deep, with metal back panel and
waste separation system Flex 21
2 x 13 litres,
container height: 210 mm,
2 container lids

Abbreviation	Order-no.	1	2	3	4	5	6	7	8	9	10
NSPU2AK-AF 60	54231	2.321	2.371	2.403	2.463	2.492	2.521	—	—	—	—
NSPU2AK-AF 80	54232	2.719	2.790	2.844	2.938	2.959	2.983	—	—	—	—
NSPU2AK-AF 90	54234	2.920	2.994	3.060	3.161	3.184	3.208	—	—	—	—
NSPU2AK-AF 100	54235	2.986	3.054	3.129	3.213	3.259	3.304	—	—	—	—
NSPU2AK-AF 120	54236	3.513	3.583	3.673	3.757	3.814	3.870	—	—	—	—

Please use space-saving odour trap 19601!
Not available with moisture protection shelf and waterproof mat.
Detail illustration refer to pg. M 0.29 pp.



Sink pull-out unit Flex 21
1 internal panel,
1 drawer with pull-out panel,
400 mm deep, with wooden back panel
for on-site adaptation of odour trap recess,
1 pull-out, 500 mm deep, with metal back panel, mechanical opening support mechanism and
waste separation system Flex 21
1 x 17 / 2 x 8 litres,
container height 210 mm,
3 container lids

Abbreviation	Order-no.	1	2	3	4	5	6	7	8	9	10
LSPU2A-AF 60	51218	2.410	2.462	2.495	2.556	2.587	2.616	—	—	—	—
LSPU2A-AF 80	51219	2.564	2.637	2.704	2.789	2.813	2.840	—	—	—	—
LSPU2A-AF 90	51220	2.634	2.702	2.775	2.878	2.905	2.935	—	—	—	—
LSPU2A-AF 100	51221	2.739	2.809	2.889	2.970	3.019	3.070	—	—	—	—
LSPU2A-AF 120	51222	2.894	2.962	3.054	3.129	3.192	3.253	—	—	—	—

Please use space-saving odour trap 19601!
Not available with moisture protection shelf or waterproof mat.
Detail illustration refer to pg. M 0.29 pp.

as above, but
bottom pull-out, 400 mm deep, with metal back panel, mechanical opening support mechanism and
waste separation system Flex 21
2 x 13 litres, container height: 210 mm, 2 container lids

Abbreviation	Order-no.	1	2	3	4	5	6	7	8	9	10
LSPU2AK-AF 60	54218	2.410	2.462	2.495	2.556	2.587	2.616	—	—	—	—
LSPU2AK-AF 80	54219	2.786	2.857	2.914	3.009	3.034	3.057	—	—	—	—
LSPU2AK-AF 90	54220	2.975	3.050	3.120	3.222	3.249	3.272	—	—	—	—
LSPU2AK-AF 100	54221	3.030	3.098	3.178	3.265	3.311	3.358	—	—	—	—
LSPU2AK-AF 120	54222	3.533	3.605	3.701	3.784	3.844	3.904	—	—	—	—

Please use space-saving odour trap 19601!
Not available with moisture protection shelf and waterproof mat.
Detail illustration refer to pg. M 0.29 pp.



Corner sink base unit
1 internal panel,
1 door,
1 angle filler
Carcase widths: 900 and 1000 mm
Required floor spaces (variable):
635 (615 - 735) x ...
*90-40: ...1035 (1015 - 1135) mm
*90-45: ...1085 (1065 - 1185) mm
*100-50: ...1135 (1115 - 1235) mm
*100-60: ...1235 (1215 - 1335) mm








Planning dimensions (variable):
650 (630 - 750) x ...
*90-40: ...1050 (1030 - 1150) mm
*90-45: ...1100 (1080 - 1200) mm
*100-50: ...1150 (1130 - 1250) mm
*100-60: ...1250 (1230 - 1350) mm

Abbreviation	Width in cm	Order-no.	1	2	3	4	5	6	7	8	9	10
NSPUE	90-40	53153	736	777	823	904	927	949	—	—	—	—
NSPUE	90-45	53159	737	785	835	923	946	969	—	—	—	—
NSPUE	100-50	53156	783	828	886	969	993	1.018	—	—	—	—
NSPUE	100-60	53164	802	841	899	1.006	1.034	1.063	—	—	—	—

Planning dimensions = floor space required + 15 mm distance to wall for protruding units.
Bracket changes are not permitted.
The space requirement must be specified with the order. Adjustments on site are not possible.








Sink units for handle-less kitchen
LINE N / LINE ONE

Side depth: 561 mm
Carcase height: 720 mm
Plinth height 70, 100, 150 or 200 mm

	Abbreviation	Width in cm	Order-no.	Points / Price groups LINE N									
				1	2	3	4	5	6	7	8	9	10
 690 **Corner sink base unit** 1 internal panel, 2 doors, 1 angle filler Carcase width: 1200 mm Required floor spaces (variable): 635 (615 - 735) x ... *120-40: ...1435 (1415 - 1535) mm *120-45: ...1535 (1515 - 1635) mm *120-50: ...1635 (1615 - 1735) mm Planning dimensions (variable): 650 (630 - 750) x ... *120-40: ...1450 (1430 - 1550) mm *120-45: ...1550 (1530 - 1650) mm *120-50: ...1650 (1630 - 1750) mm	NSPUE	120-40	51171	972	1.025	1.086	1.229	1.266	1.304	—	—	—	—
	NSPUE	120-45	51174	983	1.042	1.102	1.267	1.310	1.351	—	—	—	—
	NSPUE	120-50	51175	999	1.063	1.123	1.302	1.348	1.393	—	—	—	—
				Planning dimensions = floor space required + 15 mm distance to wall for protruding units. *Bracket changes are not permitted.* *The space requirement must be specified with the order. Adjustments on site are not possible.*										
 560 **Surcharge for recessed fillers** on fillers and half corner units, side panel made of carcase material, in carcase height incl. 2 plinth feet for on-site assembly, carcase depth: 561 mm	MP-GS		9300	36,5	36,5	36,5	36,5	36,5	36,5	36,5	36,5	36,5	36,5
 690 **Door front for fully integrated dishwashers, built-under fridge and freezer units with pull-outs** for appliance height: 805 to 820 mm, includes spacer strips, stainless steel colour	NGSB	45	51820	180	201	237	280	299	317	—	—	—	—
	NGSB	60	51866	207	235	258	327	349	369	—	—	—	—
				An upright panel is necessary when planning at end of run. *You can find matching dishwashers in our extranet or use the QR code shown here.*									
 717 **End of run door front Curve for fully integrated dishwasher, built-under fridge and freezer units with pull-outs** for appliance height: 805 to 820 mm, includes spacer strips, stainless steel colour stop side = closed front end	NGSBAC	45	51859	—	—	529[1]	618[2]	—	—	—	—	—	—
	NGSBAC	60	51862	—	—	588[1]	647[2]	—	—	—	—	—	—
				1) Only Senso 357 2) Only Easytouch 945									
				An upright panel is necessary when planning at end of run. Front uprights are not possible. *Please indicate LH or RH hinge!* *You can find matching dishwashers in our extranet or use the QR code shown here.*									
 690 **Door front for fully integrated dishwasher** for appliance height: 805 to 865 mm, includes spacer frame, stainless steel finish (bolted to the front) with integrated recessed handle	NGGSB	60	51878	564	588	621	688	717	746	—	—	—	—
				The kitchen run must be planned to protrude by 15 mm! *An upright panel is necessary when planning at end of run. Front uprights are not possible.* *You can find matching dishwashers in our extranet or use the QR code shown here.*										
 717 **End of run door front Curve for fully integrated dishwasher** for appliance height: 805 to 865 mm, includes spacer frame, stainless steel finish (bolted to the front) with integrated recessed handle stop side = closed front end	NGGSBAC	60	51863	—	—	950[1]	1.007[2]	—	—	—	—	—	—
				1) Only Senso 357 2) Only Easytouch 945									
				The kitchen run must be planned to protrude by 15 mm! *An upright panel is necessary when planning at end of run. Front uprights are not possible.* *Please indicate LH or RH hinge!* *You can find matching dishwashers in our extranet or use the QR code shown here.*										
 330 330 **Door front in divided appearance for fully integrated dishwashers, built-under fridge and freezer units with pull-outs** for appliance height: 805 to 820 mm, including spacer frame and spacer rails, stainless steel appearance (bolted to the front) with integrated recessed handle (C profile only)	NGSBT	60	51869	1.054	1.073	1.099	1.172	1.199	1.226	—	—	—	—
				The kitchen run must be planned to protrude by 15 mm! *An upright panel is necessary when planning at end of run. Front uprights are not possible.* *You can find matching dishwashers in our extranet or use the QR code shown here.*										



Sink units for handle-less kitchen
LINE N / LINE ONE

Side depth: 561 mm
Carcase height: 720 mm
Plinth height 70, 100, 150 or 200 mm

		Abbreviation	Width in cm	Order-no.	Points / Price groups LINE N									
					1	2	3	4	5	6	7	8	9	10
NEW LINE ONE E 20		LGSBT	60	51870	244	263	295	364	396	418	—	—	—	—
	Door in divided appearance for fully integrated dishwashers, built-under fridges and freezers with pull-outs for appliance height: 805 to 820 mm, includes spacer strips, stainless steel colour				*An upright panel is necessary when planning at end of run.* *You can find matching dishwashers in our extranet or use the QR code shown here.*									
NEW E 20		NGSBTAC	60	51864	—	—	1.654[1]	1.694[2]	—	—	—	—	—	—
	End of run door front Curve in divided appearance for fully integrated dishwashers, built-under fridge and freezer units with pull-outs for appliance height: 805 to 820 mm, including spacer frame and spacer rails, stainless steel appearance (bolted to the front) with integrated recessed handle (C profile only) stop side = closed front end				1) Only Senso 357 2) Only Easytouch 945 *The kitchen run must be planned to protrude by 15 mm!* *An upright panel is necessary when planning at end of run. Front uprights are not possible.* *Please indicate LH or RH hinge!* *You can find matching dishwashers in our extranet or use the QR code shown here.*									
NEW LINE ONE E 20		LGSBTAC	60	51871	—	—	625[1]	683[2]	—	—	—	—	—	—
	End of run door front Curve in divided appearance for fully integrated dishwashers, built-under fridge and freezer units with pull-outs for appliance height: 805 to 820 mm, includes spacer strips, stainless steel colour stop side = closed front end				1) Only Senso 357 2) Only Easytouch 945 *An upright panel is necessary when planning at end of run. Front uprights are not possible.* *Please indicate LH or RH hinge!* *You can find matching dishwashers in our extranet or use the QR code shown here.*									
E 20		NGGSBT	60	55869	1.110	1.129	1.155	1.226	1.253	1.280	—	—	—	—
	Door in divided appearance for fully integrated dishwashers for appliance height: 805 to 865 mm, includes spacer frame, stainless steel colour (bolted to the front) with integrated recessed handle				*The kitchen run must be planned to protrude by 15 mm!* *An upright panel is necessary when planning at end of run. Front uprights are not possible.* *You can find matching dishwashers in our extranet or use the QR code shown here.*									
NEW LINE ONE E 20		LGGSBT	60	55867	600	618	657	724	764	794	—	—	—	—
	Door in divided appearance for fully integrated dishwashers for appliance height: 805 to 865 mm, includes spacer frame, stainless steel colour (bolted to the front) with integrated recessed handle				*The kitchen run must be planned to protrude by 15 mm!* *An upright panel is necessary when planning at end of run. Front uprights are not possible.* *You can find matching dishwashers in our extranet or use the QR code shown here.*									
NEW E 20		NGGSBTAC	60	55870	—	—	1.710[1]	1.748[2]	—	—	—	—	—	—
	End of run door front Curve in divided appearance for fully integrated dishwashers for appliance height: 805 to 865 mm, includes spacer frame, stainless steel colour (bolted to the front) with integrated recessed handle stop side = closed front end				1) Only Senso 357 2) Only Easytouch 945 *The kitchen run must be planned to protrude by 15 mm!* *An upright panel is necessary when planning at end of run. Front uprights are not possible.* *Please indicate LH or RH hinge!* *You can find matching dishwashers in our extranet or use the QR code shown here.*									
NEW LINE ONE E 20		LGGSBTAC	60	55868	—	—	987[1]	1.044[2]	—	—	—	—	—	—
	End of run door front Curve in divided appearance for fully integrated dishwashers for appliance height: 805 to 865 mm, includes spacer frame, stainless steel colour (bolted to the front) with integrated recessed handle stop side = closed front end				1) Only Senso 357 2) Only Easytouch 945 *The kitchen run must be planned to protrude by 15 mm!* *An upright panel is necessary when planning at end of run. Front uprights are not possible.* *Please indicate LH or RH hinge!* *You can find matching dishwashers in our extranet or use the QR code shown here.*									










Sink units for handle-less kitchen
LINE N / LINE ONE

Side depth: 561 mm
Carcase height: 720 mm
Plinth height 70, 100, 150 or 200 mm

		Abbreviation	Width in cm	Order-no.	Points	Price groups LINE N								
					1	2	3	4	5	6	7	8	9	10
	For an up-to-date overview of approved appliances for each dishwasher front, visit our extranet. https://www.nobilia.de/gsp-en													
E	690  Door front for fully integrated fridge / freezers and washing machines for appliance height: 805 to 820 mm, includes spacer strips, stainless steel colour	NKWSB	60	51865	209	235	258	327	349	369	—	—	—	—
	An upright panel is necessary when planning at end of run. *Can only be planned with 150 mm or 200 mm plinth height!*													
NEW E	717  End of run door front Curve for fully integrated fridge / freezers and washing machines for appliance height: 805 to 820 mm, includes spacer strips, stainless steel colour stop side = closed front end	NKWSBAC	60	51867	—	—	588[1]	647[2]	—	—	—	—	—	—
	1) Only Senso 357 2) Only Easytouch 945													
	An upright panel is necessary when planning at end of run. Front uprights are not possible. *Can only be planned with 150 mm or 200 mm plinth height!* *Please indicate LH or RH hinge!*													


Base units for handle-less kitchen
LINE N / LINE ONE

Side depth: 561 mm
Carcase height: 720 mm
Plinth height 20, 70, 100, 150 or 200 mm

		Abbreviation	Width in cm	Order-no.	Points / Price groups LINE N 1	2	3	4	5	6	7	8	9	10
Fillers / Panelling														
	 690	**Angle filler** front material, 55 x 55 mm, required floor space: 635 x 635 mm, planning dimensions: 650 x 650 mm	NUPE		51143	193	199	229	242	261	280	—	—	—	—
		Planning dimensions = required floor space + 15 mm distance to wall for protruding units.													
		as above, however **variable** from 35 to 155 mm, required floor space: 615 - 735 mm, planning dimensions: 630 - 750 mm, 1st dimension = left / 2nd dimension = right	NUPE-V		51144	229	235	261	277	301	321	—	—	—	—
		Bracket changes are not permitted.													
	 330 330	**Angle filler in divided appearance** front material, **variable** from 35 to 155 mm, required floor space: 615 - 735 mm, planning dimensions: 630 - 750 mm, 1st dimensions = left / 2nd dimensions = right	NUPET-V		53144	434	461	529	558	631	705	—	—	—	—
		Planning dimensions = required floor space + 15 mm distance to wall for protruding units.													
		Bracket changes are not permitted.													
		Can only be planned in conjunction with 330 mm high pull-outs.													
NEW LINE ONE	 330 357	**Angle filler in divided appearance** front material, **variable** from 35 to 155 mm, required floor space: 615 - 735 mm, planning dimensions: 630 - 750 mm, 1st dimensions = left / 2nd dimensions = right	LUPET-V		52178	238	253	301	333	355	369	—	—	—	—
		Planning dimensions = required floor space + 15 mm distance to wall for protruding units.													
		Bracket changes are not permitted.													
	 560	**Surcharge for recessed fillers** on fillers and half corner units, side panel made of carcase material, in carcase height incl. 2 plinth feet for on-site assembly, carcase depth: 561 mm	MP-GS		9300	36,5	36,5	36,5	36,5	36,5	36,5	36,5	36,5	36,5	36,5
		**Surcharge for use as centre filler** 3 edges profiled on front fillers, 1 cut edge, minimum width: 65 mm	MP-MP		4743	44	44	44	44	44	44	44	44	44	44
	 690	**Front filler** front material, width: 200 mm	NUPD	20	51116	147	149	172	188	197	206	—	—	—	—
		Possible to adapt on site to minimum size of 30 mm.													
		Please indicate LH or RH hinge!													
	 330 330	**Front filler in divided appearance** front material, width: 200 mm	NUPDT	20	52116	280	301	339	380	397	415	—	—	—	—
		Possible to adapt on site to minimum size of 30 mm.													
		Please indicate LH or RH hinge!													
		Can only be planned in conjunction with 330 mm high pull-outs.													
NEW LINE ONE	 330 357	**Front filler in divided appearance** front material, width: 200 mm	LUPDT	20	52117	210	238	261	299	305	343	—	—	—	—
		Possible to adapt on site to minimum size of 30 mm.													
		Please indicate LH or RH hinge!													
		Can only be planned in conjunction with 357 mm high pull-outs (with PTOSA).													
	 690	**Frame element for island designs** 1 door, 1 shelf, 1 back panel, depth: 202 mm	NURTI	30	51593	318	342	365	391	403	415	—	—	—	—
			NURTI	40	51594	334	368	393	437	454	470	—	—	—	—
			NURTI	45	51597	353	377	412	456	472	488	—	—	—	—
			NURTI	50	51595	366	391	432	467	495	521	—	—	—	—
			NURTI	60	51596	390	419	456	517	539	562	—	—	—	—

Base units for handle-less kitchen
LINE N / LINE ONE

Side depth: 561 mm
Carcase height: 720 mm
Plinth height 20, 70, 100, 150 or 200 mm






		Abbreviation	Width in cm	Order-no.	Points	Price groups LINE N								
					1	2	3	4	5	6	7	8	9	10
NEW	 717 Frame element for island designs 1 door, 1 shelf, 1 back panel, depth: 202 mm stop side = closed front end	NURTIAC	45	51598	—	—	705[1]	791[2]	—	—	—	—	—	—
		NURTIAC	60	51599	—	—	785[1]	837[2]	—	—	—	—	—	—

1) Only Senso 357 2) Only Easytouch 945

Height, width and depth reductions are not permitted!



Front uprights for handle-less base units
LINE N / LINE ONE

End uprights, s. chapter 5 upright panels

		Abbreviation	Width in cm		Order-no.	Points 1	2	3	4	5	6	7	8	9	10
						Price groups LINE N									
Front upright panels for base units															
S	 690	Front at end of run upright front material, mitre cut, with recessed handle, width: 50 mm NUWF50-60: 597 mm deep NUWF50-78: 780 mm deep	NUWF	50	-60	55951	686	695	761	809	829	850	—	—	—	—
			NUWF	50	-78	55952	730	742	823	892	917	940	—	—	—	—
							Please indicate LH or RH hinge!									
S	 330 330	Front at end of run upright in divided appearance front material, mitre cut, with recessed handles, width: 50 mm NUWFT50-60: 597 mm deep NUWFT50-78: 780 mm deep	NUWFT	50	-60	55971	1.050	1.059	1.124	1.184	1.206	1.228	—	—	—	—
			NUWFT	50	-78	55972	1.136	1.149	1.248	1.276	1.311	1.348	—	—	—	—
							Please indicate LH or RH hinge! *Can only be planned in conjunction with 330 mm high pull-outs.*									
	 690	Front end upright for fully integrated dishwasher at end of run for appliance heights 805 to 820 mm front material, mitre cut, with recessed handle, incl. mounting materials for plinth return, width: 50 mm, depth: 597 mm	NUWFG	50	-60	55953	791	802	869	914	937	962	—	—	—	—
			NUWFG	50	-78	55960	873	886	967	1.029	1.056	1.083	—	—	—	—
							Please indicate LH or RH hinge!									
	 690	Front upright for room designs front material, mitre cut, with recessed handle, width: 50 mm NUWFR50-81: 805 mm deep for two-sided islands with units of 561 mm side depth and frame of 202 mm side depth NUWFR50-95: 953 mm deep for two-sided islands with units of 561 and 350 mm side depth NUWFR50-106: 1064 mm deep for two-sided islands with units of 561 and 461 mm side depth NUWFR50-116: 1164 mm deep for two-sided islands with two units of 561 mm side depth	NUWFR	50	-81	55982	816	829	921	977	1.015	1.050	—	—	—	—
			NUWFR	50	-95	55962	850	866	975	1.073	1.104	1.136	—	—	—	—
			NUWFR	50	-106	55959	883	899	1.009	1.120	1.159	1.200	—	—	—	—
			NUWFR	50	-116	55968	910	927	1.051	1.162	1.221	1.278	—	—	—	—
							Please indicate LH or RH hinge! *Dimensional changes are not possible.*									
	 330 330	Front upright for room designs in divided appearance front material, mitre cut, with recessed handles, width: 50 mm NUWFRT50-95: 953 mm deep for two-sided islands with units of 561 and 350 mm side depth NUWFRT50-106: 1064 mm deep for two-sided islands with units of 561 and 461 mm side depth NUWFRT50-116: 1164 mm deep for two-sided islands with two units of 561 mm side depth	NUWFRT	50	-95	55970	1.263	1.279	1.394	1.514	1.574	1.635	—	—	—	—
			NUWFRT	50	-106	55974	1.299	1.317	1.431	1.549	1.621	1.695	—	—	—	—
			NUWFRT	50	-116	55975	1.340	1.356	1.473	1.607	1.695	1.780	—	—	—	—
							Please indicate LH or RH hinge! *Dimensional changes are not possible.* *Can only be planned in conjunction with 330 mm high pull-outs.*									





Front uprights for handle-less base units
LINE N / LINE ONE

End uprights, s. chapter 5 upright panels

		Abbreviation	Width in cm		Order-no.	Points / Price groups LINE N									
						1	2	3	4	5	6	7	8	9	10
	 690 Front upright for room designs with fully integrated dishwasher at end of run for appliance heights 805 to 820 mm front material, mitre cut, with recessed handle, incl. plinth return and mounting materials, width: 50 mm NUWFRG50-81: 805 mm deep for two-sided islands with units of 561 mm side depth and frame of 202 mm side depth NUWFRG50-95: 953 mm deep for two-sided islands with units of 561 and 350 mm side depth NUWFRG50-106: 1064 mm deep for two-sided islands with units of 561 and 461 mm side depth NUWFRG50-116: 1164 mm deep for two-sided islands with two units of 561 mm side depth	NUWFRG	50	-81	55983	1.032	1.045	1.139	1.196	1.232	1.266	—	—	—	—
		NUWFRG	50	-95	55979	1.085	1.099	1.212	1.311	1.343	1.375	—	—	—	—
		NUWFRG	50	-106	55956	1.145	1.162	1.275	1.380	1.416	1.454	—	—	—	—
		NUWFRG	50	-116	55969	1.184	1.203	1.318	1.435	1.486	1.539	—	—	—	—
						Please indicate LH or RH hinge!									
						Dimensional changes are not possible.									
	 Cover profile for depth compensation on base units Plastic profile, stainless steel colour, 15 mm deep, for mounting on the rear carcase edge. For protruded designs without end or front upright panels.	NADP-72			59018	8,6	8,6	8,6	8,6	8,6	8,6	—	—	—	—





Base units in special height for handle-less kitchen LINE N / LINE ONE

Side depth: 561 mm
Carcase height: 360 mm
Plinth height 20, 70, 100, 150 or 200 mm

		Abbreviation	Width in cm		Order-no.	Points	Price groups LINE N									
							1	2	3	4	5	6	7	8	9	10
Base units 360 mm high																
NEW S 46	 330	Base unit 1 door	NU	30	-36	51533	305	329	334	356	375	384	—	—	—	—
			NU	40	-36	51534	359	369	390	406	409	413	—	—	—	—
			NU	45	-36	51537	377	393	407	432	439	439	—	—	—	—
			NU	50	-36	51535	394	415	425	458	464	469	—	—	—	—
			NU	60	-36	51536	429	458	460	511	515	530	—	—	—	—
S 46	 330	Pull-out unit 1 pull-out	NUA	30	-36	50521	477	482	501	512	521	531	—	—	—	—
			NUA	40	-36	50522	536	542	555	571	583	594	—	—	—	—
			NUA	45	-36	50523	565	572	588	606	619	631	—	—	—	—
			NUA	50	-36	51551	600	606	618	632	644	656	—	—	—	—
			NUA	60	-36	51552	658	663	685	695	711	727	—	—	—	—
			NUA	80	-36	51553	775	783	810	834	851	870	—	—	—	—
			NUA	90	-36	51554	813	823	850	880	901	923	—	—	—	—
			NUA	100	-36	51555	876	889	915	948	975	1.002	—	—	—	—
			NUA	120	-36	51556	974	987	1.019	1.064	1.096	1.129	—	—	—	—
							Requires an additional spacer shelf or construction shelf NDBKI to be used as a hot plate unit.*									
S 46	 357	End of run pull-out unit Curve 1 pull-out, stop side = closed front end	NUAAC	45	-36	50511	—	—	847[1]	872[2]	—	—	—	—	—	—
			NUAAC	60	-36	50512	—	—	939[1]	959[2]	—	—	—	—	—	—
			NUAAC	90	-36	50513	—	—	1.150[1]	1.200[2]	—	—	—	—	—	—
							1) Only Senso 357 2) Only Easytouch 945									
							Please indicate LH or RH hinge!									
							Requires an additional spacer shelf or construction shelf NDBKI to be used as a hot plate unit.*									
							Height and width reductions are not permitted!									
NEW 46	 330	Open shelf base unit 1 flap with opening support mechanism	NUKB	45	-36	50504	597	609	625	642	656	669	—	—	—	—
			NUKB	50	-36	50505	631	635	644	657	672	686	—	—	—	—
			NUKB	60	-36	50506	682	686	712	721	736	753	—	—	—	—
			NUKB	80	-36	50508	752	759	778	810	829	847	—	—	—	—
			NUKB	90	-36	50509	777	788	821	842	866	889	—	—	—	—
			NUKB	100	-36	50510	802	819	863	876	901	931	—	—	—	—
			NUKB	120	-36	50514	872	891	929	965	994	1.026	—	—	—	—
							Height reductions are not permitted!									
NEW 46	 357	End of run base unit Curve with bar flap 1 flap with opening support mechanism, stop side = closed front end	NUKBAC	45	-36	50527	—	—	883[1]	910[2]	—	—	—	—	—	—
			NUKBAC	60	-36	50528	—	—	967[1]	984[2]	—	—	—	—	—	—
			NUKBAC	90	-36	50529	—	—	1.121[1]	1.162[2]	—	—	—	—	—	—
							1) Only Senso 357 2) Only Easytouch 945									
							Please indicate LH or RH hinge!									
							Height and width reductions are not permitted!									
20	 330	Sink pull-out unit 1 internal panel, 1 pull-out, 400 mm deep, with wooden back panel for on-site adaptation of odour trap recess	NSPUA	60	-36	51223	832	841	863	873	888	901	—	—	—	—
			NSPUA	80	-36	51224	943	949	978	1.000	1.021	1.041	—	—	—	—
			NSPUA	90	-36	51225	987	999	1.026	1.050	1.076	1.101	—	—	—	—
			NSPUA	100	-36	51227	1.032	1.050	1.086	1.107	1.133	1.159	—	—	—	—
			NSPUA	120	-36	51249	1.127	1.139	1.183	1.215	1.248	1.283	—	—	—	—
							Please use space-saving odour-trap 19601!									
							Not available with moisture protection shelf or waterproof mat.									
		Surcharge for Waterproof shelf Waterproof shelf in grey metallic for sink base units and vanity units	MP-WPB			4745	131	131	131	131	131	131	131	131	131	131
							There is no centre post for two-door sink base units. Exception: Sink base unit SPUS90/100/120.									
							Divided panels are replaced with a continuous panel.									

Base units in special height for handle-less kitchen
LINE N / LINE ONE

Side depth: 561 mm
Carcase height: 360 mm
Plinth height 20, 70, 100, 150 or 200 mm

		Abbreviation	Width in cm		Order-no.	Points / Price groups LINE N									
						1	2	3	4	5	6	7	8	9	10
	 330 **Angle filler** front material, 55 x 55 mm, required floor space: 635 x 635 mm, planning dimensions: 650 x 650 mm	NUPE		-36	53176	191	197	229	242	258	274	—	—	—	—
						Planning dimensions = required floor space + 15 mm distance to wall for protruding units.									
						Bracket changes are not permitted.									
	as above, however **variable** from 35 to 155 mm, required floor space: 615 - 735 mm, planning dimensions: 630 - 750 mm, 1st dimension = left / 2nd dimension = right	NUPE-V		-36	53177	226	231	261	276	299	321	—	—	—	—
	 330 **Front filler** front material, width: 200 mm	NUPD	20	-36	53236	145	147	172	185	193	200	—	—	—	—
						Possible to adapt on site to minimum size of 30 mm.									
						Please indicate LH or RH hinge!									
S	 330 **Front at end of run upright** front material, mitre cut, with recessed handle, width: 50 mm depth: 597 mm	NUWF36	50		55961	555	564	593	621	632	644	—	—	—	—
						Please indicate LH or RH hinge!									
	 330 **Front upright for room designs** front material, mitre cut, with recessed handle, width: 50 mm	NUWFR36	50	-95	55934	677	692	740	781	809	835	—	—	—	—
		NUWFR36	50	-106	55964	691	708	767	828	856	883	—	—	—	—
		NUWFR36	50	-116	55967	715	734	788	860	892	924	—	—	—	—
						Please indicate LH or RH hinge!									
						Dimensional changes are not possible.									
	NUWFR36 50-95: 953 mm deep for two-sided islands with units of 561 and 350 mm side depth														
	NUWFR36 50-106: 1064 mm deep for two-sided islands with units of 561 and 461 mm side depth														
	NUWFR36 50-116: 1164 mm deep for two-sided islands with two units of 561 mm side depth														

LINE N

XL Base units
Cooker housing units / Sink units

Available Line ONE items.

Not possible with 20 mm plinth height.

Please specify appliance.

Planning information, s. chapter 10.

This unit is available with a side depth of 461 mm for the same price.

Item available in special sizes, s. chapter 2.

For available colours s. swatch, Design Overview page M 2.1.

Not available in: USA and Canada.

Quick reference for equipment options for LINE N base units in XL height

Here you can find a quick reference for the most important equipment options and surcharges for this chapter.
For detailed descriptions and planning notes as well as additional options and special productions please refer to chapter 2.2 “Equipment options, special productions”.

	Abbreviation	Order no.	Points
Surcharge for carcase interior décor in Slate grey	MP-KID	7947	96

Surcharges nBOX

Surcharge for glass sides on (internal) pull-outs with rectangular railing	MP-GLAS	7915	127
Surcharge for pull-out box on (internal) pull-outs	MP-BOX	7905	98
Surcharge for design profile for (internal) drawers and (internal) pull-outs	MP-DPRO	7918	23
Surcharge for design covers for (internal) drawers and (internal) pull-outs	MP-DCOV	7923	55
Surcharge for design glass panel for internal pull-outs	MP-DGBLEN	7925	101
Surcharge for design panel for internal drawers and internal pull-outs with pull-out box (MP-BOX)	MP-DBLEN	7935	72

Internal tablar shelves with locking slides for retrofitting in tall and base units	ITAB-UH 60	39496	644
Surcharge for LED light design for recessed handle (L profile) for base units and highboards with horizontal recessed handle	MP-NGML	7983	31
Surcharge for LED light design **for lighting the centre / bottom recessed handle (C profile)**	MP-NGMC	59709	32,9
Surcharge for recessed handle milling for induction hot plates	MP-NAUSI	59855	32
Cover profile for depth compensation on base units	NADP-72 NADP-79	59018 59028	8,6 9,3
Safety bracket for freestanding base units	KIPPS	9943	86
Construction shelf for heat insulation, 16 mm thick, for handle-less LINE N base units	NDBKI 30 NDBKI 40 NDBKI 45 NDBKI 50 NDBKI 60 NDBKI 80 NDBKI 90 NDBKI 100 NDBKI 120	10351 10352 10353 10354 10355 10356 10357 10358 10359	58 60 61 64 66 72 73 74 82
Surcharge for full-height back panel on sink base units	MP-SPUR	9292	19
Surcharge for waterproof base for sink units	MP-WPB	4745	131









Please note: The mechanical opening support mechanism for drawers and pull-outs (MP-PTOSA) is not available for items in the Line N range.
Exception: opening support mechanism included with Line ONE items.

Base units in XL height
for handle-less LINE N / LINE ONE kitchen

Side depth: 561 mm
Carcase height: 792 mm
Plinth height 20, 70, 100, 150 or 200 mm









		Abbreviation	Width in cm		Order-no.	Points 1	2	3	4	5	6	7	8	9	10
						Price groups LINE N									

Base units in XL height

S 46	 762	XL Base unit 1 door, 2 shelves	NU	30	-X	58003	426	432	464	486	501	515	—	—	—	—
			NU	40	-X	58004	466	488	526	568	585	604	—	—	—	—
			NU	45	-X	56065	501	517	555	609	626	644	—	—	—	—
			NU	50	-X	58010	526	549	583	645	669	689	—	—	—	—
			NU	60	-X	58030	587	604	645	712	742	771	—	—	—	—
S 46	 762	XL Base unit 2 doors, 2 shelves	NU	80	-X	58063	799	841	908	996	1.031	1.066	—	—	—	—
			NU	90	-X	58076	867	899	969	1.076	1.115	1.153	—	—	—	—
			NU	100	-X	58070	914	955	1.028	1.143	1.187	1.229	—	—	—	—
			NU	120	-X	58074	1.029	1.072	1.150	1.291	1.345	1.397	—	—	—	—
S 46	 789	XL End of run base unit Curve 1 door, 2 shelves, stop side = closed front end	NUAC	45	-X	55501	—	—	847[1]	940[2]	—	—	—	—	—	—
			NUAC	60	-X	55502	—	—	974[1]	1.026[2]	—	—	—	—	—	—
							1) Only Senso 357 2) Only Easytouch 945									
							Please indicate LH or RH hinge!									
							Height and width reductions are not permitted!									
46	 164 164 402	XL Pull-out unit 2 drawers, 1 pull-out	NU2SA	30	-X	56581	1.113	1.169	1.181	1.197	1.234	1.267	—	—	—	—
			NU2SA	40	-X	56582	1.169	1.229	1.248	1.296	1.329	1.358	—	—	—	—
			NU2SA	45	-X	56583	1.207	1.270	1.294	1.337	1.368	1.399	—	—	—	—
			NU2SA	50	-X	56585	1.244	1.310	1.329	1.388	1.405	1.422	—	—	—	—
			NU2SA	60	-X	56586	1.302	1.375	1.409	1.473	1.502	1.532	—	—	—	—
			NU2SA	80	-X	56588	1.591	1.686	1.745	1.837	1.860	1.880	—	—	—	—
			NU2SA	90	-X	56589	1.682	1.770	1.828	1.965	1.987	2.012	—	—	—	—
			NU2SA	100	-X	56590	1.778	1.879	1.940	2.070	2.110	2.146	—	—	—	—
			NU2SA	120	-X	56592	1.970	2.064	2.133	2.295	2.340	2.386	—	—	—	—
NEW LINE ONE 46	 164 164 429	XL Pull-out unit 1 drawer, 1 drawer with opening support mechanism, 1 pull-out with opening support mechanism,	LU2SA	30	-X	55600	1.396	1.451	1.464	1.482	1.517	1.552	—	—	—	—
			LU2SA	40	-X	55601	1.440	1.499	1.520	1.570	1.602	1.632	—	—	—	—
			LU2SA	45	-X	55602	1.473	1.534	1.559	1.605	1.637	1.667	—	—	—	—
			LU2SA	50	-X	55603	1.502	1.570	1.588	1.650	1.667	1.686	—	—	—	—
			LU2SA	60	-X	55604	1.551	1.622	1.659	1.726	1.755	1.784	—	—	—	—
			LU2SA	80	-X	55605	1.815	1.911	1.972	2.067	2.094	2.114	—	—	—	—
			LU2SA	90	-X	55606	1.895	1.983	2.045	2.184	2.212	2.234	—	—	—	—
			LU2SA	100	-X	55607	1.980	2.082	2.148	2.279	2.323	2.359	—	—	—	—
			LU2SA	120	-X	55608	2.148	2.244	2.318	2.482	2.535	2.577	—	—	—	—
46	 191 164 429	XL End of run pull-out unit Curve 2 drawers, 1 pull-out, stop side = closed front end	NU2SAAC	45	-X	55503	—	—	1.821[1]	1.853[2]	—	—	—	—	—	—
			NU2SAAC	60	-X	55504	—	—	1.937[1]	1.980[2]	—	—	—	—	—	—
			NU2SAAC	90	-X	55505	—	—	2.457[1]	2.571[2]	—	—	—	—	—	—
							1) Only Senso 357 2) Only Easytouch 945									
							Please indicate LH or RH hinge!									
							Height and width reductions are not permitted!									
NEW LINE ONE 46	 191 164 429	XL End of run pull-out unit Curve 1 drawer, 1 drawer with opening support mechanism, 1 pull-out with opening support mechanism, stop side = closed front end	LU2SAAC	45	-X	55645	—	—	1.736[1]	1.803[2]	—	—	—	—	—	—
			LU2SAAC	60	-X	55646	—	—	1.813[1]	1.914[2]	—	—	—	—	—	—
			LU2SAAC	90	-X	55647	—	—	2.262[1]	2.400[2]	—	—	—	—	—	—
							1) Only Senso 357 2) Only Easytouch 945									
							Please indicate LH or RH hinge!									
							Height and width reductions are not permitted!									
46	 330 402	XL Pull-out unit 2 pull-outs	NU2A	30	-X	55511	908	965	983	997	1.016	1.032	—	—	—	—
			NU2A	40	-X	55512	965	1.025	1.053	1.095	1.111	1.130	—	—	—	—
			NU2A	45	-X	55513	1.002	1.064	1.095	1.140	1.161	1.183	—	—	—	—
			NU2A	50	-X	55515	1.045	1.110	1.139	1.194	1.216	1.238	—	—	—	—
			NU2A	60	-X	55516	1.105	1.172	1.209	1.280	1.307	1.334	—	—	—	—
			NU2A	80	-X	55518	1.407	1.499	1.565	1.664	1.691	1.714	—	—	—	—
			NU2A	90	-X	55519	1.491	1.578	1.653	1.765	1.794	1.821	—	—	—	—
			NU2A	100	-X	55520	1.596	1.695	1.778	1.883	1.929	1.974	—	—	—	—
			NU2A	120	-X	55524	1.784	1.879	1.970	2.110	2.159	2.209	—	—	—	—








Base units in XL height
for handle-less LINE N / LINE ONE kitchen

Side depth: 561 mm
Carcase height: 792 mm
Plinth height 20, 70, 100, 150 or 200 mm

		Abbreviation	Width in cm		Order-no.	Points / Price groups LINE N									
						1	2	3	4	5	6	7	8	9	10
NEW 46	 330 429 XL Pull-out unit 1 pull-out, 1 pull-out with opening support mechanism	LU2A	30	-X	55630	1.032	1.089	1.108	1.124	1.142	1.159	—	—	—	—
		LU2A	40	-X	55631	1.077	1.137	1.168	1.210	1.228	1.247	—	—	—	—
		LU2A	45	-X	55632	1.110	1.171	1.205	1.250	1.272	1.294	—	—	—	—
		LU2A	50	-X	55633	1.148	1.212	1.242	1.299	1.323	1.345	—	—	—	—
		LU2A	60	-X	55634	1.196	1.261	1.301	1.374	1.402	1.429	—	—	—	—
		LU2A	80	-X	55635	1.475	1.567	1.637	1.736	1.767	1.790	—	—	—	—
		LU2A	90	-X	55636	1.546	1.635	1.713	1.826	1.860	1.886	—	—	—	—
		LU2A	100	-X	55637	1.640	1.739	1.828	1.935	1.986	2.028	—	—	—	—
		LU2A	120	-X	55638	1.806	1.901	1.997	2.137	2.194	2.243	—	—	—	—
46	 330 402 XL Pull-out unit 1 drawer with pull-out panel, 1 internal drawer, 1 pull-out	NUI2A	30	-X	56541	1.178	1.240	1.259	1.263	1.278	1.292	—	—	—	—
		NUI2A	40	-X	56542	1.241	1.308	1.337	1.375	1.387	1.399	—	—	—	—
		NUI2A	45	-X	56543	1.282	1.349	1.381	1.415	1.435	1.454	—	—	—	—
		NUI2A	50	-X	56545	1.326	1.393	1.424	1.478	1.498	1.517	—	—	—	—
		NUI2A	60	-X	56546	1.394	1.463	1.504	1.577	1.606	1.635	—	—	—	—
		NUI2A	80	-X	56548	1.755	1.844	1.911	2.013	2.035	2.059	—	—	—	—
		NUI2A	90	-X	56549	1.844	1.929	2.005	2.124	2.148	2.172	—	—	—	—
		NUI2A	100	-X	56550	1.972	2.072	2.143	2.245	2.294	2.340	—	—	—	—
		NUI2A	120	-X	56563	2.186	2.278	2.365	2.495	2.548	2.602	—	—	—	—
NEW LINE ONE 46	 330 429 XL Pull-out unit 1 drawer with pull-out panel, 1 internal drawer, 1 pull-out with opening support mechanism	LUI2A	30	-X	55664	1.302	1.364	1.384	1.390	1.403	1.419	—	—	—	—
		LUI2A	40	-X	55665	1.353	1.422	1.451	1.491	1.502	1.515	—	—	—	—
		LUI2A	45	-X	55666	1.388	1.456	1.489	1.526	1.545	1.565	—	—	—	—
		LUI2A	50	-X	55667	1.426	1.494	1.527	1.581	1.603	1.624	—	—	—	—
		LUI2A	60	-X	55668	1.483	1.553	1.596	1.672	1.701	1.730	—	—	—	—
		LUI2A	80	-X	55669	1.821	1.911	1.981	2.085	2.113	2.133	—	—	—	—
		LUI2A	90	-X	55670	1.898	1.986	2.064	2.186	2.215	2.237	—	—	—	—
		LUI2A	100	-X	55671	2.016	2.116	2.193	2.297	2.351	2.396	—	—	—	—
		LUI2A	120	-X	55672	2.208	2.300	2.391	2.524	2.584	2.635	—	—	—	—
46	 357 429 XL End of run pull-out unit Curve 2 pull-outs, stop side = closed front end	NU2AAC	45	-X	55506	—	—	1.638[1]	1.678[2]	—	—	—	—	—	—
		NU2AAC	60	-X	55507	—	—	1.759[1]	1.806[2]	—	—	—	—	—	—
		NU2AAC	90	-X	55508	—	—	2.307[1]	2.413[2]	—	—	—	—	—	—
						1) Only Senso 357 2) Only Easytouch 945									
						Please indicate LH or RH hinge!									
						Height and width reductions are not permitted!									
NEW LINE ONE 46	 357 429 XL End of run pull-out unit Curve 1 pull-out, 1 pull-out with opening support mechanism, stop side = closed front end	LU2AAC	45	-X	55641	—	—	1.394[1]	1.472[2]	—	—	—	—	—	—
		LU2AAC	60	-X	55642	—	—	1.476[1]	1.583[2]	—	—	—	—	—	—
		LU2AAC	90	-X	55643	—	—	1.952[1]	2.085[2]	—	—	—	—	—	—
						1) Only Senso 357 2) Only Easytouch 945									
						Please indicate LH or RH hinge!									
						Height and width reductions are not permitted!									
46	 762 XL Pull-out unit 1 pull-out, 1 internal drawer, 1 internal pull-out	NUAIAI	30	-X	55013	1.264	1.276	1.307	1.313	1.334	1.355	—	—	—	—
		NUAIAI	40	-X	55016	1.333	1.356	1.381	1.426	1.448	1.470	—	—	—	—
		NUAIAI	45	-X	55017	1.374	1.394	1.432	1.464	1.492	1.517	—	—	—	—
		NUAIAI	50	-X	55026	1.407	1.435	1.463	1.517	1.548	1.577	—	—	—	—
		NUAIAI	60	-X	55061	1.473	1.505	1.540	1.602	1.637	1.670	—	—	—	—
46	 762 XL Base unit 1 door, 1 internal drawer, 2 internal pull-outs	NUI2AI	40	-X	57011	1.440	1.463	1.497	1.549	1.564	1.581	—	—	—	—
		NUI2AI	45	-X	57015	1.497	1.517	1.558	1.602	1.624	1.647	—	—	—	—
		NUI2AI	50	-X	57033	1.532	1.561	1.596	1.659	1.680	1.702	—	—	—	—
		NUI2AI	60	-X	57049	1.624	1.653	1.692	1.764	1.791	1.816	—	—	—	—
	 762  XL Base unit with waste separation system Euro-Cargo 1 front, waste separation system Euro-Cargo, with cushioned self-closing mechanism, system lid made of metal, 450 / 500 mm width: 2 x 35 litres, 600 mm width: 2 x 35 / 2 x 10 litres, container height: 526 / 351 mm	NUASL-EC	45	-X	56471	1.740	1.759	1.810	1.850	1.870	1.892	—	—	—	—
		NUASL-EC	50	-X	56472	1.791	1.821	1.860	1.924	1.945	1.965	—	—	—	—
		NUASL-EC	60	-X	56473	1.945	1.972	2.012	2.078	2.110	2.140	—	—	—	—
						Built-in sinks are not possible.									
						Detail illustration refer to pg. M 0.28 pp.									


Base units in XL height
for handle-less LINE N / LINE ONE kitchen

Side depth: 561 mm
Carcase height: 792 mm
Plinth height 20, 70, 100, 150 or 200 mm

		Abbreviation	Width in cm		Order-no.	Points / Price groups LINE N									
						1	2	3	4	5	6	7	8	9	10
	 762	NUHT	30	-X	58005	537	559	593	616	628	641	—	—	—	—
	XL Base unit 1 door, 3 telescopic aluminium towel rails														
	 762	NUAWS	30	-X	57138	1.718	1.733	1.758	1.784	1.799	1.810	—	—	—	—
	XL Pull-out unit with recyclable materials collector 1 pull-out, 1 recycling bin with system lid made of metal, 44 litres, container height: 550 mm														
	 762	NUAM	20	-X	58020	1.029	1.051	1.082	1.085	1.094	1.102	—	—	—	—
	XL Pull-out unit 1 pull-out, 2 metal boxes with non-slip mats	NUAM	30	-X	56139	1.101	1.123	1.142	1.171	1.186	1.202	—	—	—	—
						Please specify hinge side for runners!									
	 762	NUIAF	30	-X	57023	1.022	1.042	1.064	1.076	1.098	1.121	—	—	—	—
	XL Pull-out unit 1 pull-out, 1 internal drawer, 1 metal bottle basket, removable														
	 762	NUABT	30	-X	58008	1.086	1.107	1.134	1.162	1.178	1.191	—	—	—	—
	XL Pull-out unit with baguette bag 1 pull-out with fixed division for 1 linen baguette bag and 4 bottles, 1 fixed metal storage shelf														
	 762	NUAJ	30	-X	56129	1.332	1.351	1.375	1.399	1.416	1.434	—	—	—	—
	XL Base unit with larder pull-out Junior 1 pull-out, 2 metal boxes with non-slip mats, adjustable														
	 762	NUAJO	30	-X	57140	1.866	1.886	1.911	1.932	1.951	1.967	—	—	—	—
	XL Base unit with larder pull-out Junior 1 pull-out, 1 organising system UBOXX with division for knives and cutting board holder, adjustable														
	 762	NUA	15	-X	56270	657	669	702	710	714	718	—	—	—	—
	XL Pull-out unit 1 pull-out, 2 metal boxes with non-slip mats														
	 762	NUABH	15	-X	57111	686	714	739	746	755	762	—	—	—	—
	XL Pull-out unit 1 pull-out, 1 baking tray holder, incl. metal box with non-slip mat														
	 762	NUAHT	15	-X	56128	707	718	759	762	767	771	—	—	—	—
	XL Pull-out unit 1 pull-out, 2-part towel rail, incl. metal box with non-slip mat														

Base units in XL height
for handle-less LINE N / LINE ONE kitchen


Side depth: 561 mm
Carcase height: 792 mm
Plinth height 20, 70, 100, 150 or 200 mm

		Abbreviation	Width in cm		Order-no.	Points / Price groups LINE N 1	2	3	4	5	6	7	8	9	10
46	164  Drawer carcase height: 194 mm high, side depth: 561 mm	NSKU	30		50381	418	439	444	445	447	448	—	—	—	—
		NSKU	40		50382	438	457	458	464	470	476	—	—	—	—
		NSKU	45		50383	447	461	464	479	483	488	—	—	—	—
		NSKU	50		50385	461	477	479	489	496	501	—	—	—	—
		NSKU	60		50386	483	505	510	518	524	530	—	—	—	—
		NSKU	80		50388	548	562	572	591	603	612	—	—	—	—
		NSKU	90		50389	569	587	604	621	629	638	—	—	—	—
		NSKU	100		50390	585	618	628	647	660	672	—	—	—	—
		NSKU	120		50392	647	663	683	707	718	731	—	—	—	—

Fitting beneath worktop, e.g. as a radiator bridging!


Cannot be planned together with unit interior light LSID.*

Corner base units in XL height

	762  XL Corner base unit 2 doors, opening angle: 165°, 2 shelves required floor space: 900 x 900 mm, planning dimensions: 915 x 915 mm	NUET	92	-X	55293	1.692	1.695	1.767	1.809	1.862	1.916	—	—	—	—

The corner unit can be disassembled on site!

Planning dimensions = floor space required + 15 mm distance to wall for protruding units.




	762  XL Corner base unit 2 doors, opening angle 165°, 1 revolving carousel with 2 wood base and metal railing, rotates 360°, height adjustable, required floor space: 900 x 900 mm, planning dimensions: 915 x 915 mm	NUETK	92	-X	55089	2.421	2.422	2.492	2.554	2.597	2.643	—	—	—	—

Corner unit can be dismantled on site!

Planning dimensions = floor space required + 15 mm distance to wall for protruding units.

Base units in XL height
for handle-less LINE N / LINE ONE kitchen




Side depth: 561 mm
Carcase height: 792 mm
Plinth height 20, 70, 100, 150 or 200 mm

		Abbreviation	Width in cm	Order-no.	Points	Price groups LINE N									
						1	2	3	4	5	6	7	8	9	10
Half-corner units in XL height															
S 46	 762	XL Corner base unit 1 door, 2 shelves, 1 angle filler Carcase widths: 900 and 1000 mm Required floor spaces (variable): 635 (615 - 735) x ... *90-40: ...1035 (1015 - 1135) mm *90-45: ...1085 (1065 - 1185) mm *100-50: ...1135 (1115 - 1235) mm *100-60: ...1235 (1215 - 1335) mm Planning dimensions (variable): 650 (630 - 750) x ... *90-40: ...1050 (1030 - 1150) mm *90-45: ...1100 (1080 - 1200) mm *100-50: ...1150 (1130 - 1250) mm *100-60: ...1250 (1230 - 1350) mm	NUE	90-40	-X	56083	813	851	929	1.015	1.045	1.076	—	—	—	—
			NUE	90-45	-X	56087	825	866	943	1.038	1.067	1.095	—	—	—	—
			NUE	100-50	-X	56096	877	914	997	1.089	1.127	1.162	—	—	—	—
			NUE	100-60	-X	56099	896	926	1.015	1.124	1.161	1.197	—	—	—	—
							Planning dimensions = floor space required + 15 mm distance to wall for protruding units. *The space requirement must be specified with the order. Adjustments on site are not possible.* *Bracket changes are not permitted.*									
	 762	XL Corner base unit 1 door, 2 wooden carousel shelves with metal railing, 1 angle filler Carcase widths: 900 and 1000 mm Required floor spaces (variable): 635 (615 - 735) x ... *90-40: ...1035 (1015 - 1135) mm *90-45: ...1085 (1065 - 1185) mm *100-50: ...1135 (1115 - 1235) mm *100-60: ...1235 (1215 - 1335) mm Planning dimensions (variable): 650 (630 - 750) x ... *90-40: ...1050 (1030 - 1150) mm *90-45: ...1100 (1080 - 1200) mm *100-50: ...1150 (1130 - 1250) mm *100-60: ...1250 (1230 - 1350) mm	NUEBD	90-40	-X	55095	1.323	1.374	1.441	1.532	1.558	1.587	—	—	—	—
			NUEBD	90-45	-X	55086	1.329	1.381	1.456	1.548	1.575	1.603	—	—	—	—
			NUEBD	100-50	-X	55094	1.407	1.451	1.534	1.634	1.666	1.699	—	—	—	—
			NUEBD	100-60	-X	55088	1.431	1.472	1.565	1.669	1.702	1.737	—	—	—	—
							Planning dimensions = required floor space + 15 mm distance to wall for protruding units. *The space requirement must be specified with the order. Adjustments on site are not possible.* *Bracket changes are not permitted.*									
	 762	XL Corner unit with swivel pull-out 1 door, 2 wooden swivel tablars with metal railing, 1 angle filler Carcase widths: 900 and 1000 mm Required floor spaces (variable): 635 (615 - 735) x ... *90-45: ...1085 (1065 - 1185) mm *100-50: ...1135 (1115 - 1235) mm *100-60: ...1235 (1215 - 1335) mm Planning dimensions (variable): 650 (630 - 750) x ... *90-45: ...1100 (1080 - 1200) mm *100-50: ...1150 (1130 - 1250) mm *100-60: ...1250 (1230 - 1350) mm	NUESA	90-45	-X	57190	2.555	2.608	2.686	2.761	2.794	2.829	—	—	—	—
			NUESA	100-50	-X	57191	2.573	2.613	2.698	2.790	2.821	2.853	—	—	—	—
			NUESA	100-60	-X	57192	2.594	2.640	2.729	2.816	2.854	2.891	—	—	—	—
							Planning dimensions = floor space required + 15 mm distance to wall for protruding units. *Do not plan protruded designs directly adjacent.* *The space requirement must be specified with the order. Adjustments on site are not possible.* *Bracket changes are not permitted.*									
	 560	Surcharge for recessed fillers on fillers and half corner units, side panel made of carcase material, in carcase height incl. 2 plinth feet for on-site assembly, carcase depth: 561 mm	MP-GS			9300	36,5	36,5	36,5	36,5	36,5	36,5	36,5	36,5	36,5	36,5

Cooker housing units / Hot plate units in XL height for handle-less LINE N / LINE ONE kitchen







Side depth: 561 mm
Carcase height: 792 mm
Plinth height 70, 100, 150 or 200 mm

Cooker housings / Hot plate units in XL height

		Abbreviation	Width in cm		Order-no.	Points / Price groups LINE N									
						1	2	3	4	5	6	7	8	9	10
E 20	 VAR 112	XL Cooker housing 2 fixed compensation panels, aperture dimension: 590 mm	NHU	60	-X	56309	587	593	606	615	616	618	—	—	—	—
E 20	 VAR 112	XL Cooker housing 1 fixed compensation panel, 1 drawer aperture dimension: 600 mm	NHUS	60	-X	56312	797	799	813	819	829	838	—	—	—	—
E 20	 VAR 205	XL Cooker housing unit for microwaves, steam ovens or compact ovens 1 fixed compensation panel, aperture dimensions: variable, 1 pull-out or drawer, according to aperture dimensions	NHUM	60	-X	56323	822	829	844	886	898	913	—	—	—	—
E 46 20	 762	XL Hot plate unit 1 door, 2 shelves, 1 construction shelf for heat insulation	NK	60	-X	56066	647	660	695	762	800	840	—	—	—	—
E 46 20	 164 164 402	XL Hot plate unit 1 fixed panel, 1 drawer, 1 pull-out, 1 construction shelf for heat insulation	NKSA	60	-X	56316	1.134	1.206	1.234	1.310	1.337	1.364	—	—	—	—
			NKSA	80	-X	56318	1.421	1.513	1.565	1.664	1.689	1.713	—	—	—	—
			NKSA	90	-X	56319	1.508	1.596	1.659	1.777	1.807	1.837	—	—	—	—
			NKSA	100	-X	56321	1.562	1.663	1.716	1.819	1.872	1.923	—	—	—	—
			NKSA	120	-X	56322	1.748	1.841	1.902	2.028	2.092	2.158	—	—	—	—
			Suitable for built-in hobs with installation depth > 66 mm in conjunction with Slim Line worktops.													
NEW LINE ONE E 46 20	 164 164 429	XL Hot plate unit 1 fixed panel, 1 drawer with opening support mechanism, 1 pull-out with opening support mechanism, 1 construction shelf for heat insulation	LKSA	60	-X	56303	1.381	1.454	1.483	1.562	1.590	1.618	—	—	—	—
			LKSA	80	-X	56304	1.645	1.737	1.794	1.894	1.923	1.946	—	—	—	—
			LKSA	90	-X	56305	1.721	1.809	1.876	1.996	2.031	2.060	—	—	—	—
			LKSA	100	-X	56306	1.764	1.866	1.923	2.028	2.086	2.136	—	—	—	—
			LKSA	120	-X	56308	1.926	2.019	2.086	2.215	2.286	2.349	—	—	—	—
			Suitable for built-in hobs with installation depth > 66 mm in conjunction with Slim Line worktops.													
E 46 20	 164 164 402	XL Hot plate unit 2 drawers, 1 pull-out, 1 construction shelf for heat insulation	NK2SA	60	-X	58346	1.332	1.403	1.441	1.510	1.536	1.559	—	—	—	—
			NK2SA	80	-X	58348	1.654	1.745	1.791	1.889	1.917	1.942	—	—	—	—
			NK2SA	90	-X	58349	1.742	1.828	1.889	2.013	2.035	2.059	—	—	—	—
			NK2SA	100	-X	58351	1.805	1.902	1.953	2.059	2.105	2.154	—	—	—	—
			NK2SA	120	-X	58352	1.999	2.088	2.148	2.279	2.337	2.397	—	—	—	—
NEW LINE ONE E 46 20	 164 164 429	XL Hot plate unit 1 drawer, 1 drawer with opening support mechanism, 1 pull-out with opening support mechanism, 1 construction shelf for heat insulation	LK2SA	60	-X	56313	1.578	1.651	1.691	1.761	1.787	1.813	—	—	—	—
			LK2SA	80	-X	56314	1.879	1.970	2.019	2.120	2.151	2.175	—	—	—	—
			LK2SA	90	-X	56315	1.955	2.043	2.108	2.232	2.260	2.281	—	—	—	—
			LK2SA	100	-X	56317	2.006	2.104	2.159	2.266	2.318	2.365	—	—	—	—
			LK2SA	120	-X	56320	2.177	2.267	2.333	2.466	2.532	2.590	—	—	—	—
E 46 20	 330 402	XL Hot plate unit 2 pull-outs, 1 construction shelf for heat insulation	NK2A	60	-X	55350	1.155	1.225	1.263	1.329	1.358	1.388	—	—	—	—
			NK2A	80	-X	55354	1.479	1.571	1.640	1.737	1.758	1.780	—	—	—	—
			NK2A	90	-X	55357	1.571	1.660	1.733	1.835	1.867	1.898	—	—	—	—
			NK2A	100	-X	55360	1.643	1.748	1.821	1.898	1.951	2.003	—	—	—	—
			NK2A	120	-X	55362	1.831	1.924	2.008	2.105	2.170	2.232	—	—	—	—

Cooker housing units / Hot plate units in XL height for handle-less LINE N / LINE ONE kitchen

Side depth: 561 mm
Carcase height: 792 mm
Plinth height 70, 100, 150 or 200 mm


		Abbreviation	Width in cm		Order-no.	Points / Price groups LINE N									
						1	2	3	4	5	6	7	8	9	10
NEW LINE ONE E 46	330 / 429  XL Hot plate unit 1 pull-out, 1 pull-out with opening support mechanism, 1 construction shelf for heat insulation	LK2A	60	-X	56324	1.245	1.314	1.355	1.422	1.453	1.483	—	—	—	—
		LK2A	80	-X	56325	1.545	1.638	1.710	1.809	1.834	1.856	—	—	—	—
		LK2A	90	-X	56326	1.626	1.716	1.793	1.897	1.933	1.962	—	—	—	—
		LK2A	100	-X	56327	1.686	1.791	1.870	1.948	2.006	2.057	—	—	—	—
		LK2A	120	-X	56328	1.853	1.946	2.034	2.133	2.205	2.266	—	—	—	—
E 46	330 / 402  XL Hot plate unit for Slim Line worktops 1 internal panel, 2 pull-outs, 1 construction shelf for heat insulation	NK2A	60-SL	-X	55336	1.159	1.229	1.270	1.333	1.365	1.397	—	—	—	—
		NK2A	80-SL	-X	55338	1.485	1.578	1.643	1.745	1.781	1.819	—	—	—	—
		NK2A	90-SL	-X	55339	1.575	1.663	1.737	1.841	1.882	1.924	—	—	—	—
		NK2A	100-SL	-X	55341	1.648	1.753	1.825	1.902	1.962	2.022	—	—	—	—
		NK2A	120-SL	-X	55342	1.837	1.930	2.012	2.113	2.186	2.260	—	—	—	—
						Suitable for built-in hobs with installation depth > 66 mm in conjunction with Slim Line worktops.									
NEW LINE ONE E 46	330 / 429  XL Hot plate unit for Slim Line worktops 1 internal panel, 1 pull-out, 1 pull-out with opening support mechanism, 1 construction shelf for heat insulation	LK2A	60-SL	-X	55345	1.250	1.318	1.362	1.426	1.460	1.494	—	—	—	—
		LK2A	80-SL	-X	55346	1.551	1.645	1.713	1.816	1.859	1.895	—	—	—	—
		LK2A	90-SL	-X	55347	1.631	1.718	1.797	1.901	1.949	1.990	—	—	—	—
		LK2A	100-SL	-X	55348	1.692	1.797	1.875	1.952	2.018	2.076	—	—	—	—
		LK2A	120-SL	-X	55349	1.859	1.952	2.040	2.140	2.222	2.294	—	—	—	—
						Suitable for hot plates with installation depth > 66 mm in conjunction with Slim Line, Quartz and Xtra Ceramic worktops.									
E 46	330 / 402  XL Hot plate unit 1 drawer with pull-out panel, 1 internal drawer, 1 pull-out, 1 construction shelf for heat insulation	NKI2A	60	-X	56361	1.441	1.510	1.549	1.612	1.645	1.676	—	—	—	—
		NKI2A	80	-X	56363	1.800	1.895	1.965	2.064	2.102	2.139	—	—	—	—
		NKI2A	90	-X	56364	1.899	1.986	2.066	2.164	2.206	2.247	—	—	—	—
		NKI2A	100	-X	56365	1.981	2.086	2.161	2.232	2.294	2.354	—	—	—	—
		NKI2A	120	-X	56367	2.193	2.286	2.367	2.463	2.537	2.610	—	—	—	—
						Latch for internal drawers MITIS cannot be used.									
NEW LINE ONE E 46	330 / 429  XL Hot plate unit 1 drawer with pull-out panel, 1 internal drawer, 1 pull-out with mechanical opening support mechanism, 1 construction shelf for heat insulation	LKI2A	60	-X	56368	1.530	1.600	1.641	1.705	1.740	1.772	—	—	—	—
		LKI2A	80	-X	56369	1.866	1.962	2.035	2.136	2.178	2.215	—	—	—	—
		LKI2A	90	-X	56370	1.955	2.043	2.126	2.225	2.272	2.313	—	—	—	—
		LKI2A	100	-X	56371	2.025	2.132	2.209	2.283	2.351	2.409	—	—	—	—
		LKI2A	120	-X	56372	2.215	2.308	2.393	2.491	2.573	2.646	—	—	—	—
						Latch for internal drawers MITIS cannot be used.									
E	 Surcharge for recessed handle milling for induction hot plates beneath the worktop for ventilation	MP-NAUSI			59855	32	32	32	32	32	32	—	—	—	—
						Please also sketch in graphically any existing or third-party appliances. *Not required for hot plates from BSH and Miele.* *Not required for hot plates from Leonard, Progress, AEG, BORA and ELICA.*									
	No image Slim Line installation set for handle-less LINE N hot plate units NK*(-X) 600 mm wide, as well as cooker housing units NHU60(-X), NHUS60(-X) and NHUM60(-X) comprised of: 1 fastening set, 1 set of installation instructions	NSL-SET60	60		59356	199	199	199	199	199	199	—	—	—	—
	as above, however for handleless LINE N sink units in all widths as well as hot plate units upwards of 800 mm width	NSL-SET80	80		59358	276	276	276	276	276	276	—	—	—	—

Hot plate units in XL height for handleless LINE N / LINE ONE kitchen

Side depth: 561 mm
Carcase height: 792 mm
Plinth height 70, 100, 150 or 200 mm

Abbreviation	Width in cm	Order-no.	Points / Price groups LINE N									
			1	2	3	4	5	6	7	8	9	10

Hot plate units for downdraft extractor fans in XL height




XL Hot plate unit for downdraft extractor fan
1 fixed panel,
1 drawer,
1 pull-out

NKMSA	60	-X	57308	1.193	1.263	1.295	1.364	1.396	1.429	—	—	—	—
NKMSA	80	-X	58318	1.548	1.643	1.707	1.835	1.862	1.886	—	—	—	—
NKMSA	90	-X	58319	1.612	1.702	1.765	1.888	1.926	1.962	—	—	—	—
NKMSA	100	-X	58321	1.641	1.746	1.797	1.902	1.958	2.015	—	—	—	—
NKMSA	120	-X	58322	1.826	1.920	1.983	2.110	2.177	2.245	—	—	—	—

It is absolutely necessary that the appliance information is included in the order, since drawer and pull-out depths are dependent upon the appliance used and the empty space planned and are configured accordingly at the factory. Refer to planning information on page M 10.48 f.


Suitable for downdraft extractor fans with and without plinth motors.



XL Hot plate unit for Panorama downdraft extractor fan with vertical motor
2 drawers,
1 pull-out

NKMP2SA	90	-X	58326	1.843	1.933	1.996	2.118	2.156	2.193	—	—	—	—
NKMP2SA	100	-X	58327	1.873	1.978	2.029	2.135	2.190	2.247	—	—	—	—
NKMP2SA	120	-X	58328	2.063	2.156	2.219	2.345	2.413	2.482	—	—	—	—

It is absolutely necessary that the appliance information is included in the order, since drawer and pull-out depths are dependent upon the appliance used and the empty space planned and are configured accordingly at the factory. Refer to planning information on page M 10.48 f.




XL Hot plate unit for downdraft extractor fan
1 fixed panel,
1 drawer with opening support mechanism,
1 pull-out with opening support mechanism

LKMSA	60	-X	58303	1.441	1.511	1.545	1.616	1.648	1.682	—	—	—	—
LKMSA	80	-X	58304	1.772	1.867	1.935	2.066	2.095	2.120	—	—	—	—
LKMSA	90	-X	58305	1.825	1.916	1.983	2.107	2.149	2.184	—	—	—	—
LKMSA	100	-X	58306	1.843	1.948	2.003	2.110	2.171	2.227	—	—	—	—
LKMSA	120	-X	58307	2.006	2.099	2.168	2.295	2.371	2.438	—	—	—	—

It is absolutely necessary that the appliance information is included in the order, since drawer and pull-out depths are dependent upon the appliance used and the empty space planned and are configured accordingly at the factory. Refer to planning information on page M 10.46 f.


Suitable for downdraft extractor fans with and without plinth motors.



XL Hot plate unit for Panorama downdraft extractor fan with vertical motor
1 drawer,
1 drawer with opening support mechanism,
1 pull-out with opening support mechanism,

LKMP2SA	90	-X	58315	2.056	2.146	2.213	2.337	2.380	2.415	—	—	—	—
LKMP2SA	100	-X	58316	2.075	2.180	2.235	2.342	2.403	2.459	—	—	—	—
LKMP2SA	120	-X	58317	2.241	2.336	2.405	2.532	2.606	2.673	—	—	—	—

It is absolutely necessary that the appliance information is included in the order, since drawer and pull-out depths are dependent upon the appliance used and the empty space planned and are configured accordingly at the factory. Refer to planning information on page M 10.48 f.




XL Hot plate unit for downdraft extractor fan
1 internal panel,
1 drawer with pull-out panel,
1 pull-out

NKM2A	60	-X	58335	1.245	1.313	1.346	1.409	1.444	1.478	—	—	—	—
NKM2A	80	-X	58338	1.581	1.667	1.734	1.850	1.872	1.895	—	—	—	—
NKM2A	90	-X	58339	1.635	1.717	1.794	1.898	1.926	1.956	—	—	—	—
NKM2A	100	-X	58341	1.650	1.755	1.828	1.905	1.956	2.009	—	—	—	—
NKM2A	120	-X	58342	1.825	1.918	1.997	2.097	2.161	2.224	—	—	—	—

It is absolutely necessary that the appliance information is included in the order, since drawer and pull-out depths are dependent upon the appliance used and the empty space planned and are configured accordingly at the factory. Refer to planning information on page M 10.48 f.

Suitable for downdraft extractor fans with and without plinth motors.





XL Hot plate unit for Panorama downdraft extractor fan with vertical motor
2 pull-outs

NKMP2A	90	-X	58329	1.761	1.843	1.920	2.024	2.053	2.082	—	—	—	—
NKMP2A	100	-X	58330	1.777	1.882	1.956	2.032	2.083	2.136	—	—	—	—
NKMP2A	120	-X	58331	1.956	2.050	2.127	2.228	2.291	2.355	—	—	—	—

It is absolutely necessary that the appliance information is included in the order, since drawer and pull-out depths are dependent upon the appliance used and the empty space planned and are configured accordingly at the factory. Refer to planning information on page M 10.48 f.

Hot plate units in XL height for handleless LINE N / LINE ONE kitchen

Side depth: 561 mm
Carcase height: 792 mm
Plinth height 70, 100, 150 or 200 mm

		Abbreviation	Width in cm		Order-no.	Points / Price groups LINE N 1	2	3	4	5	6	7	8	9	10
NEW LINE ONE E	 XL Hot plate unit for downdraft extractor fan 1 internal panel, 1 drawer with pull-out panel, 1 pull-out with opening support mechanism	LKM2A	60	-X	58309	1.336	1.403	1.438	1.502	1.539	1.572	—	—	—	—
		LKM2A	80	-X	58310	1.647	1.734	1.806	1.921	1.949	1.970	—	—	—	—
		LKM2A	90	-X	58311	1.689	1.772	1.854	1.959	1.991	2.021	—	—	—	—
		LKM2A	100	-X	58312	1.694	1.799	1.878	2.000	2.012	2.063	—	—	—	—
		LKM2A	120	-X	58313	1.847	1.940	2.024	2.126	2.196	2.257	—	—	—	—
		It is absolutely necessary that the appliance information is included in the order, since drawer and pull-out depths are dependent upon the appliance used and the empty space planned and are configured accordingly at the factory. Refer to planning information on page M 10.48 f.													
		Suitable for downdraft extractor fans with and without plinth motors.													
NEW LINE ONE E	 XL Hot plate unit for Panorama downdraft extractor fan with vertical motor 1 pull-out, 1 pull-out with mechanical opening support mechanism	LKMP2A	90	-X	58320	1.816	1.899	1.980	2.075	2.118	2.148	—	—	—	—
		LKMP2A	100	-X	58323	1.821	1.927	2.005	2.094	2.140	2.191	—	—	—	—
		LKMP2A	120	-X	58324	1.977	2.072	2.155	2.257	2.327	2.389	—	—	—	—
		It is absolutely necessary that the appliance information is included in the order, since drawer and pull-out depths are dependent upon the appliance used and the empty space planned and are configured accordingly at the factory. Refer to planning information on page M 10.48 f.													

Sink units in XL height for handle-less LINE N / LINE ONE kitchen

Side depth: 561 mm
Carcase height: 792 mm
Plinth height 70, 100, 150 or 200 mm

		Abbreviation	Width in cm		Order-no.	Points	Price groups LINE N								
						1	2	3	4	5	6	7	8	9	10
Sink base units in XL height															
	Surcharge for Waterproof shelf Waterproof shelf in grey metallic for sink base units and vanity units	MP-WPB			4745	131	131	131	131	131	131	131	131	131	131
						There is no centre post for two-door sink base units. Exception: Sink base unit SPUS90/100/120.									
						Divided panels are replaced with a continuous panel.									
S 46 20	762 XL Sink base unit 1 internal panel, 1 door	NSPU	40	-X	56204	453	466	502	548	565	583	—	—	—	—
		NSPU	45	-X	56205	461	488	529	578	597	616	—	—	—	—
		NSPU	50	-X	56200	501	521	555	623	641	658	—	—	—	—
		NSPU	60	-X	56206	552	565	616	686	712	737	—	—	—	—
NEW S 46 20	789 XL End of run sink base unit Curve 1 internal panel, 1 door, stop side = closed front end	NSPUAC	45	-X	56207	—	—	822[1]	911[2]	—	—	—	—	—	—
		NSPUAC	60	-X	56208	—	—	943[1]	1.000[2]	—	—	—	—	—	—
						1) Only Senso 357 2) Only Easytouch 945									
						Height and width reductions are not permitted!									
						For waste collector, observe door opening width and door hinge side!									
S 46 20	762 XL Sink base unit 1 internal panel, 2 doors	NSPU	80	-X	56148	769	809	875	965	1.000	1.037	—	—	—	—
		NSPU	90	-X	56161	819	861	924	1.029	1.069	1.107	—	—	—	—
		NSPU	100	-X	56160	876	915	988	1.104	1.148	1.191	—	—	—	—
		NSPU	120	-X	56165	961	1.018	1.098	1.247	1.301	1.353	—	—	—	—
						For waste collector, observe door opening width and door hinge side!									
20	164 164 402 XL Sink pull-out unit 1 fixed panel, 1 drawer, 400 mm deep, with wooden rear panel for on-site adaptation of odour trap recess, 1 pull-out, 500 mm deep, with metal rear panel	NSPUSA	60	-X	56243	1.434	1.482	1.517	1.593	1.621	1.650	—	—	—	—
		NSPUSA	80	-X	56244	1.626	1.705	1.759	1.857	1.882	1.908	—	—	—	—
		NSPUSA	90	-X	56245	1.713	1.777	1.844	1.964	1.991	2.021	—	—	—	—
		NSPUSA	100	-X	56246	1.806	1.882	1.942	2.025	2.081	2.135	—	—	—	—
		NSPUSA	120	-X	56248	1.984	2.054	2.121	2.222	2.291	2.362	—	—	—	—
						Please use space-saving odour trap 19601!									
						Not available with moisture protection shelf or waterproof mat.									
NEW LINE ONE 20	164 164 429 PTOSA PTOSA XL Sink pull-out unit 1 fixed panel, 1 drawer, 400 mm deep, with wooden back panel for on-site cutting of odour trap recess and mechanical opening support mechanism, 1 pull-out, 500 mm deep, with metal back panel and mechanical opening support mechanism	LSPUSA	60	-X	56239	1.680	1.729	1.767	1.844	1.873	1.902	—	—	—	—
		LSPUSA	80	-X	56240	1.851	1.930	1.987	2.086	2.117	2.140	—	—	—	—
		LSPUSA	90	-X	56242	1.926	1.991	2.062	2.183	2.216	2.244	—	—	—	—
		LSPUSA	100	-X	56249	2.008	2.085	2.149	2.234	2.295	2.348	—	—	—	—
		LSPUSA	120	-X	56250	2.164	2.234	2.307	2.409	2.485	2.554	—	—	—	—
						Please use space-saving odour trap 19601!									
						Not available with moisture protection shelf or waterproof mat.									
20	330 402 XL Sink pull-out unit 1 internal panel, 1 drawer with pull-out panel, 400 mm deep, with wooden back panel for on-site adaptation of odour trap recess, 1 pull-out, 500 mm deep, with metal back panel	NSPUASA	60	-X	55226	1.426	1.475	1.514	1.590	1.616	1.645	—	—	—	—
		NSPUASA	80	-X	55228	1.613	1.692	1.758	1.856	1.878	1.901	—	—	—	—
		NSPUASA	90	-X	55229	1.702	1.767	1.843	1.951	1.977	2.006	—	—	—	—
		NSPUASA	100	-X	55230	1.796	1.867	1.945	2.013	2.070	2.129	—	—	—	—
		NSPUASA	120	-X	55242	1.977	2.044	2.130	2.194	2.269	2.342	—	—	—	—
						Please use space-saving odour trap 19601!									
						Not available with moisture protection shelf or waterproof mat.									
NEW LINE ONE 20	330 429 PTOSA XL Sink pull-out unit 1 internal panel, 1 drawer with pull-out panel, 400 mm deep, with wooden back panel for on-site cutting of odour trap recess, 1 pull-out, 500 mm deep, with metal back panel and mechanical opening support mechanism	LSPUASA	60	-X	55211	1.515	1.565	1.606	1.683	1.711	1.740	—	—	—	—
		LSPUASA	80	-X	55212	1.680	1.759	1.828	1.927	1.955	1.975	—	—	—	—
		LSPUASA	90	-X	55213	1.758	1.822	1.902	2.012	2.043	2.070	—	—	—	—
		LSPUASA	100	-X	55214	1.840	1.913	1.993	2.063	2.126	2.183	—	—	—	—
		LSPUASA	120	-X	55215	1.997	2.066	2.158	2.224	2.304	2.375	—	—	—	—
						Please use space-saving odour trap 19601!									
						Not available with moisture protection shelf or waterproof mat.									

Sink units in XL height
for handle-less LINE N / LINE ONE kitchen

Side depth: 561 mm
Carcase height: 792 mm
Plinth height 70, 100, 150 or 200 mm

Abbreviation	Width in cm		Order-no.	Points / Price groups LINE N									
				1	2	3	4	5	6	7	8	9	10
XL Sink base unit 1 internal panel, 1 front, without pull-out rails and drill holes													
NSPUAL	40	-X	55193	432	457	488	540	556	571	—	—	—	—
NSPUAL	45	-X	55197	450	480	517	564	584	607	—	—	—	—
NSPUAL	50	-X	55198	488	511	543	612	632	653	—	—	—	—
NSPUAL	60	-X	55199	536	562	603	669	701	731	—	—	—	—
For mounting in an existing waste system or Syncro, also see Accessories list, chapter 1.													
XL Sink base unit for on site recycling container systems 1 internal panel, 1 pull-out, 500 mm deep													
NSPUA-BW	45	-X	55294	702	731	765	809	831	851	—	—	—	—
NSPUA-BW	50	-X	55295	734	758	802	841	867	894	—	—	—	—
NSPUA-BW	60	-X	55296	791	821	853	913	945	977	—	—	—	—
as above, however, 1 pull-out, 400 mm deep													
NSPUAK-BW	45	-X	47294	702	731	765	809	831	851	—	—	—	—
NSPUAK-BW	50	-X	47295	734	758	802	841	867	894	—	—	—	—
NSPUAK-BW	60	-X	47296	791	821	853	913	945	977	—	—	—	—
NEW **XL Sink base unit for water treatment systems and on-site recyclables container systems** 2 internal panels, 1 pull-out, 500 mm deep, 1 door, right-hand hinge = pull-out on right, left-hand hinge = pull-out on left													
NSPUAWA-BW	90	-X	55209	1.042	1.099	1.174	1.266	1.307	1.348	—	—	—	—
NSPUAWA-BW	100	-X	55210	1.115	1.158	1.237	1.345	1.388	1.432	—	—	—	—
Not available with waterproof shelf, moisture protection sheet or waterproof mat. *Height, width and depth reductions are not permitted!* *The back panel must not be cut out completely for the water connection during installation, as this would interfere with fastening the spacer rails.* *For installation of Separato-K (AS10498) or existing waste system.*													
XL Sink unit Separato-K 1 internal panel, 1 pull-out, 500 mm deep, with waste separation system Separato-K with pull-out lid: 450 mm: 1 x 18 / 2 x 8 litres, 1 bio lid 500 mm: 1 x 18 / 2 x 8 litres, 1 side organisers, 1 bio lid 600 mm: 1 x 18 / 2 x 8 litres, 2 side organisers, 1 bio lid													
NSPUA-AK	45	-X	58254	1.263	1.286	1.332	1.371	1.397	1.424	—	—	—	—
NSPUA-AK	50	-X	58255	1.295	1.332	1.371	1.424	1.450	1.478	—	—	—	—
NSPUA-AK	60	-X	58256	1.407	1.437	1.469	1.539	1.577	1.616	—	—	—	—
Please use space-saving odour trap 19601! *Not available with moisture protection shelf or waterproof mat.* *Detail illustration refer to pg. M 0.28 pp.*													
XL Sink unit Flex 33 1 internal panel, 1 pull-out, 500 mm deep, with waste separation system Flex 33 with system lid made of metal 450 mm width: 2 x 20 litres 500 mm width: 2 x 20 litres 600 mm width: 2 x 26 litres container height: 330 mm													
NSPUA-AF	45	-X	55277	1.648	1.670	1.716	1.753	1.780	1.809	—	—	—	—
NSPUA-AF	50	-X	55278	1.729	1.764	1.806	1.857	1.883	1.911	—	—	—	—
NSPUA-AF	60	-X	55279	1.914	1.942	1.975	2.044	2.083	2.121	—	—	—	—
Please use space-saving odour trap 19601! *Not available with moisture protection shelf or waterproof mat.* *Detail illustration refer to pg. M 0.30 pp.*													
XL Sink unit Frame 1 internal panel, 1 pull-out, 400 mm deep, with waste separation system Frame 450 mm width: 2 x 13 litres, container height 310 mm 500 mm width: 2 x 16 litres, container height 330 mm, 600 mm width: 1 x 17 / 2 x 8 litres, container height: 310 mm													
NSPUA-A	45	-X	55287	1.749	1.772	1.818	1.853	1.876	1.902	—	—	—	—
NSPUA-A	50	-X	55288	1.805	1.825	1.863	1.924	1.949	1.972	—	—	—	—
NSPUA-A	60	-X	55291	1.918	1.948	1.983	2.060	2.086	2.116	—	—	—	—
Please use space-saving odour trap 19601! *Not available with moisture protection shelf or waterproof mat.* *Detail illustration refer to pg. M 0.28 pp.*													








Sink units in XL height
for handle-less LINE N / LINE ONE kitchen

Side depth: 561 mm
Carcase height: 792 mm
Plinth height 70, 100, 150 or 200 mm

	Abbreviation	Order-no.	Points / Price groups LINE N									
	Width in cm		1	2	3	4	5	6	7	8	9	10
XL Sink pull-out unit Flex 21 1 internal panel, 1 drawer with pull-out panel, 400 mm deep, with wooden back panel for on-site adaptation of odour trap recess, 1 pull-out, 500 mm deep, with metal back panel and **waste separation system Flex 21** 1 x 17 / 2 x 8 litres, container height 210 mm, 3 container lids	NSPU2A-AF 60 -X	56231	2.351	2.402	2.446	2.510	2.543	2.575	—	—	—	—
	NSPU2A-AF 80 -X	56232	2.540	2.619	2.688	2.777	2.803	2.831	—	—	—	—
	NSPU2A-AF 90 -X	56234	2.628	2.695	2.773	2.870	2.902	2.936	—	—	—	—
	NSPU2A-AF 100 -X	56235	2.721	2.794	2.876	2.935	2.997	3.059	—	—	—	—
	NSPU2A-AF 120 -X	56236	2.902	2.973	3.060	3.116	3.194	3.272	—	—	—	—
			Please use space-saving odour trap 19601!									
			Not available with moisture protection shelf or waterproof mat.									
			Detail illustration refer to pg. M 0.29 pp.									
as above, but bottom pull-out, 400 mm deep, with metal back panel and **waste separation system Flex 21** 2 x 13 litres, container height: 210 mm, 2 container lids	NSPU2AK-AF 60 -X	47231	2.351	2.402	2.446	2.510	2.543	2.575	—	—	—	—
	NSPU2AK-AF 80 -X	47232	2.761	2.835	2.897	2.993	3.018	3.044	—	—	—	—
	NSPU2AK-AF 90 -X	47234	2.968	3.041	3.114	3.213	3.243	3.270	—	—	—	—
	NSPU2AK-AF 100 -X	47235	3.011	3.085	3.161	3.227	3.284	3.343	—	—	—	—
	NSPU2AK-AF 120 -X	47236	3.538	3.609	3.700	3.770	3.843	3.916	—	—	—	—
			Please use space-saving odour trap 19601!									
			Not available with moisture protection shelf and waterproof mat.									
			Detail illustration refer to pg. M 0.29 pp.									
XL Sink pull-out unit Flex 21 1 internal panel, 1 drawer with pull-out panel, 400 mm deep, with wooden back panel for on-site adaptation of odour trap recess, 1 pull-out, 500 mm deep, with metal back panel, mechanical opening support mechanism and **waste separation system Flex 21** 1 x 17 / 2 x 8 litres, container height 210 mm, 3 container lids	LSPU2A-AF 60 -X	56218	2.441	2.492	2.537	2.605	2.638	2.670	—	—	—	—
	LSPU2A-AF 80 -X	56219	2.608	2.685	2.758	2.848	2.881	2.905	—	—	—	—
	LSPU2A-AF 90 -X	56220	2.683	2.751	2.832	2.932	2.968	3.000	—	—	—	—
	LSPU2A-AF 100 -X	56221	2.765	2.838	2.924	2.984	3.053	3.113	—	—	—	—
	LSPU2A-AF 120 -X	56222	2.923	2.994	3.088	3.145	3.230	3.305	—	—	—	—
			Please use space-saving odour trap 19601!									
			Not available with moisture protection shelf or waterproof mat.									
			Detail illustration refer to pg. M 0.29 pp.									
as above, but bottom pull-out, 400 mm deep, with metal back panel, mechanical opening support mechanism and **waste separation system Flex 21** 2 x 13 litres, container height: 210 mm, 2 container lids	LSPU2AK-AF 60 -X	47218	2.441	2.492	2.537	2.605	2.638	2.670	—	—	—	—
	LSPU2AK-AF 80 -X	47219	2.828	2.902	2.967	3.065	3.095	3.119	—	—	—	—
	LSPU2AK-AF 90 -X	47220	3.024	3.097	3.174	3.275	3.308	3.336	—	—	—	—
	LSPU2AK-AF 100 -X	47221	3.054	3.129	3.211	3.278	3.340	3.397	—	—	—	—
	LSPU2AK-AF 120 -X	47222	3.559	3.630	3.727	3.797	3.879	3.949	—	—	—	—
			Please use space-saving odour trap 19601!									
			Not available with moisture protection shelf and waterproof mat.									
			Detail illustration refer to pg. M 0.29 pp.									
XL Corner sink base unit 1 internal panel, 1 door, 1 angle filler Carcase widths: 900 and 1000 mm Required floor spaces (variable): 635 (615 - 735) x ... *90-40: ...1035 (1015 - 1135) mm *90-45: ...1085 (1065 - 1185) mm *100-50: ...1135 (1115 - 1235) mm *100-60: ...1235 (1215 - 1335) mm Planning dimensions (variable): 650 (630 - 750) x ... *90-40: ...1050 (1030 - 1150) mm *90-45: ...1100 (1080 - 1200) mm *100-50: ...1150 (1130 - 1250) mm *100-60: ...1250 (1230 - 1350) mm	NSPUE 90-40 -X	57153	761	815	885	974	1.002	1.031	—	—	—	—
	NSPUE 90-45 -X	57159	765	821	895	991	1.023	1.056	—	—	—	—
	NSPUE 100-50 -X	57156	813	861	942	1.041	1.072	1.102	—	—	—	—
	NSPUE 100-60 -X	57164	829	875	962	1.073	1.110	1.148	—	—	—	—
			Planning dimensions = floor space required + 15 mm distance to wall for protruding units.									
			The space requirement must be specified with the order. Adjustments on site are not possible.									
Surcharge for recessed fillers on fillers and half corner units, side panel made of carcase material, in carcase height incl. 2 plinth feet for on-site assembly, carcase depth: 561 mm	MP-GS	9300	36,5	36,5	36,5	36,5	36,5	36,5	36,5	36,5	36,5	36,5








Sink units in XL height for handle-less LINE N / LINE ONE kitchen

Side depth: 561 mm
Carcase height: 792 mm
Plinth height 70, 100, 150 or 200 mm

		Abbreviation	Width in cm		Order-no.	Points 1	2	3	4	5	6	7	8	9	10
						Price groups LINE N									
E	 762 805-865 XL Door front for fully integrated dishwashers, built-under fridge and freezer units with pull-outs for appliance height: 805 to 865 mm, includes spacer strips, stainless steel colour	NGSB	45	-X	54820	282	311	355	404	422	442	—	—	—	—
		NGSB	60	-X	54866	330	365	391	467	489	512	—	—	—	—
						An upright panel is necessary when planning at end of run.									
						You can find matching dishwashers in our extranet or use the QR code shown here.									
NEW E	 789 805-865 XL End of run door front Curve for fully integrated dishwasher, built-under fridge and freezer units with pull-outs for appliance height: 805 to 865 mm, includes spacer strips, stainless steel colour stop side = closed front end	NGSBAC	45	-X	54859	—	—	647[1]	736[2]	—	—	—	—	—	—
		NGSBAC	60	-X	54862	—	—	718[1]	781[2]	—	—	—	—	—	—
						1) Only Senso 357 2) Only Easytouch 945									
						An upright panel is necessary when planning at end of run. Front uprights are not possible.									
						Please indicate LH or RH hinge!									
						You can find matching dishwashers in our extranet or use the QR code shown here.									
E	 762 845-865 XL Door front for fully integrated dishwasher for appliance height: 845 to 865 mm, includes spacer frame, stainless steel colour (bolted to the front) with integrated recessed handle	NGGSB	60	-X	54878	683	715	752	829	860	889	—	—	—	—
						The kitchen run must be planned to protrude by 15 mm!									
						An upright panel is necessary when planning at end of run. Front uprights are not possible.									
						You can find matching dishwashers in our extranet or use the QR code shown here.									
NEW E	 789 845-865 XL End of run door front Curve for fully integrated dishwasher for appliance height: 845 to 865 mm, includes spacer frame, stainless steel finish (bolted to the front) with integrated recessed handle stop side = closed front end	NGGSBAC	60	-X	54863	—	—	1.079[1]	1.143[2]	—	—	—	—	—	—
						1) Only Senso 357 2) Only Easytouch 945									
						The kitchen run must be planned to protrude by 15 mm!									
						An upright panel is necessary when planning at end of run. Front uprights are not possible.									
						Please indicate LH or RH hinge!									
						You can find matching dishwashers in our extranet or use the QR code shown here.									
E	 330 402 805-865 XL Door front in divided appearance for fully integrated dishwashers, built-under fridge and freezer units with pull-outs for appliance height: 805 to 865 mm, including spacer frame and spacer rails, stainless steel appearance (bolted to the front) with integrated recessed handle (C profile only)	NGSBT	60	-X	54869	1.183	1.205	1.232	1.313	1.336	1.358	—	—	—	—
						The kitchen run must be planned to protrude by 15 mm!									
						An upright panel is necessary when planning at end of run. Front uprights are not possible.									
						You can find matching dishwashers in our extranet or use the QR code shown here.									
NEW LINE ONE E	 330 429 805-865 XL Door in divided appearance for fully integrated dishwashers, built-under fridges and freezers with pull-outs, for appliance height: 805 to 865 mm, includes spacer strips, stainless steel colour	LGSBT	60	-X	54870	366	387	431	508	548	561	—	—	—	—
						An upright panel is necessary when planning at end of run.									
						You can find matching dishwashers in our extranet or use the QR code shown here.									
NEW E	 357 429 805-865 XL End of run door front Curve in divided appearance for fully integrated dishwashers, built-under fridge and freezer units with pull-outs for appliance height: 805 to 865 mm, including spacer frame and spacer rails, stainless steel appearance (bolted to the front) with integrated recessed handle (C profile only) stop side = closed front end	NGSBTAC	60	-X	54864	—	—	1.660[1]	1.711[2]	—	—	—	—	—	—
						1) Only Senso 357 2) Only Easytouch 945									
						The kitchen run must be planned to protrude by 15 mm!									
						An upright panel is necessary when planning at end of run. Front uprights are not possible.									
						Please indicate LH or RH hinge!									
						You can find matching dishwashers in our extranet or use the QR code shown here.									









Sink units in XL height
for handle-less LINE N / LINE ONE kitchen

Side depth: 561 mm
Carcase height: 792 mm
Plinth height 70, 100, 150 or 200 mm

		Abbreviation	Width in cm		Order-no.	Points / Price groups LINE N									
						1	2	3	4	5	6	7	8	9	10
NEW LINE ONE E 20	 XL **E**nd of run door front Curve in divided appearance for fully integrated dishwashers, built-under fridge and freezer units with pull-outs for appliance height: 805 to 865 mm, includes spacer strips, stainless steel colour stop side = closed front end	LGSBTAC	60	-X	54871	—	—	759[1]	822[2]	—	—	—	—	—	—
						1) Only Senso 357 2) Only Easytouch 945									
						An upright panel is necessary when planning at end of run. Front uprights are not possible. *Please indicate LH or RH hinge!* *You can find matching dishwashers in our extranet or use the QR code shown here.*									
E 20	 XL Door in divided appearance for fully integrated dishwashers for appliance height: 845 to 865 mm, includes spacer frame, stainless steel colour (bolted to the front) with integrated recessed handle	NGGSBT	60	-X	58869	1.234	1.257	1.288	1.369	1.397	1.424	—	—	—	—
						The kitchen run must be planned to protrude by 15 mm! *An upright panel is necessary when planning at end of run. Front uprights are not possible.* *You can find matching dishwashers in our extranet or use the QR code shown here.*									
NEW LINE ONE E 20	 XL Door in divided appearance for fully integrated dishwashers for appliance height: 845 to 865 mm, includes spacer frame, stainless steel colour (bolted to the front) with integrated recessed handle	LGGSBT	60	-X	58867	720	737	791	870	917	937	—	—	—	—
						The kitchen run must be planned to protrude by 15 mm! *An upright panel is necessary when planning at end of run. Front uprights are not possible.* *You can find matching dishwashers in our extranet or use the QR code shown here.*									
NEW E 20	 XL **E**nd of run door front Curve in divided appearance for fully integrated dishwasher for appliance height: 845 to 865 mm, includes spacer frame, stainless steel colour (bolted to the front) with integrated recessed handle stop side = closed front end	NGGSBTAC	60	-X	58870	—	—	1.837[1]	1.897[2]	—	—	—	—	—	—
						1) Only Senso 357 2) Only Easytouch 945									
						The kitchen run must be planned to protrude by 15 mm! *An upright panel is necessary when planning at end of run. Front uprights are not possible.* *Please indicate LH or RH hinge!* *You can find matching dishwashers in our extranet or use the QR code shown here.*									
NEW LINE ONE E 20	 XL **E**nd of run door front Curve in divided appearance for fully integrated dishwasher for appliance height: 845 to 865 mm, includes spacer frame, stainless steel colour (bolted to the front) with integrated recessed handle stop side = closed front end	LGGSBTAC	60	-X	58868	—	—	1.120[1]	1.184[2]	—	—	—	—	—	—
						1) Only Senso 357 2) Only Easytouch 945									
						The kitchen run must be planned to protrude by 15 mm! *An upright panel is necessary when planning at end of run. Front uprights are not possible.* *Please indicate LH or RH hinge!* *You can find matching dishwashers in our extranet or use the QR code shown here.*									
	EN For an up-to-date overview of approved appliances for each dishwasher front, visit our extranet. https://www.nobilia.de/gsp-en														
E 20	 XL Door front for fully integrated fridge / freezers and washing machines for appliance height: 805 to 820 mm, includes spacer strips, stainless steel colour	NKWSB	60	-X	54865	330	365	391	467	489	512	—	—	—	—
						An upright panel is necessary when planning at end of run.									
NEW E 20	 XL **E**nd of run door front Curve for fully integrated fridge / freezers and washing machines for appliance height: 805 to 820 mm, includes spacer strips, stainless steel colour stop side = closed front end	NKWSBAC	60	-X	54867	—	—	718[1]	781[2]	—	—	—	—	—	—
						1) Only Senso 357 2) Only Easytouch 945									
						An upright panel is necessary when planning at end of run. Front uprights are not possible. *Please indicate LH or RH hinge!*									



Base units in XL height
for handle-less LINE N / LINE ONE kitchen

Side depth: 561 mm
Carcase height: 792 mm
Plinth height 20, 70, 100, 150 or 200 mm

		Abbreviation	Width in cm		Order-no.	Points / Price groups LINE N 1	2	3	4	5	6	7	8	9	10
Fillers / Panelling in XL height															
	 762	XL Angle filler front material, 55 x 55 mm, required floor space: 635 x 635 mm, planning dimensions: 650 x 650 mm	NUPE		-X	57143	203	206	242	254	279	307	—	—	—	—
		Planning dimensions = required floor space + 15 mm distance to wall for protruding units.														
		as above, however **variable** from 35 to 155 mm, required floor space: 615 - 735 mm, planning dimensions: 630 - 750 mm, 1st dimension = left / 2nd dimension = right	NUPE-V		-X	57151	237	242	273	291	323	356	—	—	—	—
	 330 402	XL Angle filler in **divided appearance, variable** front material, **variable** from 35 to 155 mm, required floor space: 615 - 735 mm, planning dimensions: 630 - 750 mm, 1st dimensions = left / 2nd dimensions = right	NUPET-V		-X	57177	444	466	536	578	654	730	—	—	—	—
		Planning dimensions = required floor space + 15 mm distance to wall for protruding units. *Bracket changes are not permitted.* *Use only in conjunction with 402 mm high bottom pull-outs.*														
NEW LINE ONE	 330 429	XL Angle filler in **divided appearance, variable** front material, **variable** from 35 to 155 mm, required floor space: 615 - 735 mm, planning dimensions: 630 - 750 mm, 1st dimensions = left / 2nd dimensions = right	LUPET-V-X			57178	248	261	315	362	368	391	—	—	—	—
		Planning dimensions = required floor space + 15 mm distance to wall for protruding units. *Bracket changes are not permitted.*														
	 560	Surcharge for recessed fillers on fillers and half corner units, side panel made of carcase material, in carcase height incl. 2 plinth feet for on-site assembly, carcase depth: 561 mm	MP-GS			9300	36,5	36,5	36,5	36,5	36,5	36,5	36,5	36,5	36,5	36,5
		Surcharge for use as centre filler 3 edges profiled on front fillers, 1 cut edge, minimum width: 65 mm	MP-MP			4743	44	44	44	44	44	44	44	44	44	44
	 762	XL Front filler front material, width: 200 mm	NUPD	20	-X	57116	150	158	199	209	222	237	—	—	—	—
		Possible to adapt on site to minimum size of 30 mm. *Please indicate LH or RH hinge!*														
	 330 402	XL Front filler **in divided appearance** front material, width: 200 mm	NUPDT	20	-X	57230	296	310	362	403	419	435	—	—	—	—
		Possible to adapt on site to minimum size of 30 mm. *Please indicate LH or RH hinge!* *Use only in conjunction with 402 mm high bottom pull-outs.*														
NEW LINE ONE	 330 429	XL Front filler **in divided appearance** front material, width: 200 mm	LUPDT	20	-X	57117	235	257	273	305	318	358	—	—	—	—
		Possible to adapt on site to minimum size of 30 mm. *Please indicate LH or RH hinge!* *Use only in conjunction with 429 mm high bottom pull-outs.*														

Base units in XL height
for handle-less LINE N / LINE ONE kitchen

Side depth: 561 mm
Carcase height: 792 mm
Plinth height 20, 70, 100, 150 or 200 mm






		Abbreviation	Width in cm		Order-no.	Points 1	2	3	4	5	6	7	8	9	10
	 762 XL Frame element for island designs 1 door, 2 shelves, 1 back panel, depth: 202 mm	NURTI	30	-X	58593	323	346	366	397	409	419	—	—	—	—
		NURTI	40	-X	58594	342	374	397	444	463	482	—	—	—	—
		NURTI	45	-X	58597	359	384	415	464	483	502	—	—	—	—
		NURTI	50	-X	58595	374	399	435	477	504	530	—	—	—	—
		NURTI	60	-X	58596	396	425	458	527	553	580	—	—	—	—
NEW	 789 XL End of run frame Curve for island designs 1 door, 2 shelves, 1 back panel, depth: 202 mm stop side = closed front end	NURTIAC	45	-X	58598	—	—	708[1]	796[2]	—	—	—	—	—	—
		NURTIAC	60	-X	58599	—	—	785[1]	841[2]	—	—	—	—	—	—

1) Only Senso 357 2) Only Easytouch 945

Height, width and depth reductions are not permitted!



Front upright panels in XL height for handle-less LINE N / LINE ONE base units

End uprights, s. chapter 5 upright panels

		Abbreviation	Width in cm		Order-no.	Points 1	2	3	4	5	6	7	8	9	10
						Price groups LINE N									
Front upright panels for base units in XL height															
S	 762	XL Front at end of run upright front material, mitre cut, with recessed handle, width: 50 mm NUWF50-60-X: 597 mm deep NUWF50-78-X: 780 mm deep	NUWF	50-60	-X	57951	730	739	790	861	886	911	—	—	—	—
			NUWF	50-78	-X	57952	768	781	850	926	959	993	—	—	—	—
							Please indicate LH or RH hinge!									
S	 330 402	XL Front at end of run upright in divided appearance front material, mitre cut, with recessed handles, width: 50 mm NUWFT50-60-X: 597 mm deep NUWFT50-78-X: 780 mm deep	NUWFT	50-60	-X	57971	1.132	1.140	1.205	1.295	1.315	1.337	—	—	—	—
			NUWFT	50-78	-X	57972	1.216	1.229	1.329	1.384	1.422	1.460	—	—	—	—
							Please indicate LH or RH hinge! *Can only be planned in conjunction with 330 / 402 mm high pull-outs.*									
	 762	XL Front end upright for fully integrated dishwasher at end of run for appliance heights 805 to 820 mm Front material, mitre cut, with recessed handle, incl. mounting materials for plinth return, NUWFG50-60-X: 597 mm deep NUWFG50-78-X: 780 mm deep	NUWFG	50-60	-X	57953	834	842	901	968	994	1.022	—	—	—	—
			NUWFG	50-78	-X	57960	914	926	996	1.070	1.104	1.139	—	—	—	—
							Please indicate LH or RH hinge!									
	 762	XL Front upright for room designs front material, mitre cut, with recessed handle, width: 50 mm NUWFR50-81-X: 805 mm deep for two-sided islands with units of 561 side depth and frame of 202 mm side depth NUWFR50-95-X: 953 mm deep for two-sided islands with units of 561 and 350 mm side depth NUWFR50-106-X: 1064 mm deep for two-sided islands with units of 561 and 461 mm side depth NUWFR50-116-X: 1164 mm deep for two-sided islands with two units of 561 mm side depth	NUWFR	50-81	-X	57982	864	876	964	1.025	1.072	1.117	—	—	—	—
			NUWFR	50-95	-X	57962	901	915	1.015	1.134	1.175	1.213	—	—	—	—
			NUWFR	50-106	-X	57959	930	948	1.041	1.186	1.235	1.285	—	—	—	—
			NUWFR	50-116	-X	57968	987	1.004	1.121	1.266	1.329	1.391	—	—	—	—
							Please indicate LH or RH hinge! *Dimensional changes are not possible.*									
	 330 402	XL Front upright for room designs in divided appearance front material, mitre cut, with recessed handles, width: 50 mm NUWFRT50-95-X: 953 mm deep for two-sided islands with units of 561 and 350 mm side depth NUWFRT50-106-X: 1064 mm deep for two-sided islands with units of 561 and 461 mm side depth NUWFRT50-116-X: 1164 mm deep for two-sided islands with two units of 561 mm side depth	NUWFRT	50-95	-X	57970	1.356	1.374	1.488	1.656	1.717	1.778	—	—	—	—
			NUWFRT	50-106	-X	57974	1.393	1.409	1.517	1.694	1.768	1.845	—	—	—	—
			NUWFRT	50-116	-X	57975	1.438	1.456	1.567	1.753	1.845	1.936	—	—	—	—
							Please indicate LH or RH hinge! *Dimensional changes are not possible.* *Can only be planned in conjunction with 330 / 402 mm high pull-outs.*									







Front upright panels in XL height for handle-less LINE N / LINE ONE base units

End uprights, s. chapter 5 upright panels

	Abbreviation	Width in cm		Order-no.	Points / Price groups LINE N 1	2	3	4	5	6	7	8	9	10
 762 XL Front upright for room designs with fully integrated dishwasher at end of run for appliance heights 805 to 820 mm front material, mitre cut, with recessed handle, incl. plinth return and mounting materials, width: 50 mm	NUWFRG	50-81	-X	57983	1.089	1.102	1.188	1.254	1.296	1.339	—	—	—	—
	NUWFRG	50-95	-X	57979	1.145	1.159	1.260	1.384	1.422	1.461	—	—	—	—
	NUWFRG	50-106	-X	57956	1.206	1.223	1.313	1.457	1.505	1.552	—	—	—	—
	NUWFRG	50-116	-X	57969	1.270	1.288	1.399	1.546	1.605	1.663	—	—	—	—
					Please indicate LH or RH hinge!									
					Dimensional changes are not possible.									
NUWFRG50-81-X: 805 mm deep for two-sided islands with units of 561 mm side depth and frame of 202 mm side depth														
NUWFRG50-95-X: 953 mm deep for two-sided islands with units of 561 and 350 mm side depth														
NUWFRG50-106-X: 1064 mm deep for two-sided islands with units of 561 and 461 mm side depth														
NUWFRG50-116-X: 1164 mm deep for two-sided islands with two units of 561 mm side depth														
 Cover profile for depth compensation on XL base units Plastic profile, stainless steel colour, 15 mm deep, for mounting on the rear carcase edge. For protruded designs without end or front upright panels.	NADP-79			59028	9,3	9,3	9,3	9,3	9,3	9,3	—	—	—	—

Base units in special height for handle-less kitchen LINE N / LINE ONE

Side depth: 561 mm
Carcase heights: 360 / 432 mm
Plinth height 20, 70, 100, 150 or 200 mm

		Abbreviation	Width in cm		Order-no.	Points 1	2	3	4	5	6	7	8	9	10
						Price groups LINE N									
		Base units, 432 mm high													
NEW S 46	 402 **XL Base unit** 1 door	NU	30	-43	54633	310	336	343	365	388	393	—	—	—	—
		NU	40	-43	54634	366	381	400	423	432	441	—	—	—	—
		NU	45	-43	54637	387	403	420	451	458	472	—	—	—	—
		NU	50	-43	54635	406	426	441	479	485	501	—	—	—	—
		NU	60	-43	54636	445	470	482	534	539	562	—	—	—	—
S 46	 402 **XL Pull-out unit** 1 pull-out	NUA	30	-43	54651	549	552	571	581	599	615	—	—	—	—
		NUA	40	-43	54652	607	612	631	639	653	664	—	—	—	—
		NUA	45	-43	54653	632	639	661	675	691	710	—	—	—	—
		NUA	50	-43	54654	664	670	689	702	714	727	—	—	—	—
		NUA	60	-43	54655	727	731	749	765	784	802	—	—	—	—
		NUA	80	-43	54656	777	787	813	840	861	882	—	—	—	—
		NUA	90	-43	54657	819	829	853	891	915	939	—	—	—	—
		NUA	100	-43	54658	894	911	939	978	1.012	1.045	—	—	—	—
		NUA	120	-43	54659	978	990	1.031	1.089	1.129	1.167	—	—	—	—
S 46	 429 **XL End of run pull-out unit Curve** 1 pull-out, stop side = closed front end	NUAAC	45	-43	54661	—	—	934[1]	948[2]	—	—	—	—	—	—
		NUAAC	60	-43	54662	—	—	1.023[1]	1.032[2]	—	—	—	—	—	—
		NUAAC	90	-43	54663	—	—	1.210[1]	1.222[2]	—	—	—	—	—	—
						1) Only Senso 357 2) Only Easytouch 945									
						Please indicate LH or RH hinge!									
						Height and width reductions are not permitted!									
	 402 **XL Angle filler** front material, 55 x 55 mm, required floor space: 635 x 635 mm, planning dimensions: 650 x 650 mm	NUPE		-43	54176	191	197	229	242	254	266	—	—	—	—
						Planning dimensions = required floor space + 15 mm distance to wall for protruding units.									
	as above, however **variable** from 35 to 155 mm, required floor space: 615 - 735 mm, planning dimensions: 630 - 750 mm, 1st dimension = left / 2nd dimension = right	NUPE-V		-43	54177	226	231	261	276	298	317	—	—	—	—
						Bracket changes are not permitted.									
	 402 **XL Front filler** front material, width: 200 mm	NUPD	20	-43	57236	145	147	172	185	193	200	—	—	—	—
						Possible to adapt on site to minimum size of 30 mm.									
						Please indicate LH or RH hinge!									
	 402 **XL Front upright for room designs** front material, mitre cut, with recessed handle, width: 50 mm NUWFR43 50-95: 953 mm deep for two-sided islands with units of 561 and 350 mm side depth NUWFR43 50-106: 1064 mm deep for two-sided islands with units of 561 and 461 mm side depth NUWFR43 50-116: 1164 mm deep for two-sided islands with two units of 561 mm side depth	NUWFR43	50	-95	55946	727	742	777	842	877	913	—	—	—	—
		NUWFR43	50	-106	57964	743	761	796	896	933	969	—	—	—	—
		NUWFR43	50	-116	57967	791	810	860	964	1.000	1.038	—	—	—	—
						Please indicate LH or RH hinge!									
						Dimensional changes are not possible.									
S	 402 **XL Front at end of run upright** front material, mitre cut, with recessed handle, width: 50 mm	NUWF	43	-50	57961	597	606	625	676	691	708	—	—	—	—
						Please indicate LH or RH hinge!									