Front panels / Individual components
Planning information

Front panels
Individual components

Information on ordering front panels

Symbols for front panels

In the column "For use as" six symbols identify the intended purpose of the respective front dimensions.

SK Identifies individual fronts, which can be used as a **drawer**.

A Identifies individual fronts, which can be used as a **pull-out**.

T Identifies individual fronts, which can be used as a **hinged door**.

K Identifies individual fronts, which can be used as a **flap and a swivel flap**.

L Identifies individual fronts, which can be used as a **lifting door**.

FL Identifies individual fronts, which can be used as a **folding-lifting door**.


B Identifies individual fronts, which can be used as a **front panel**.


Required information in your order

- For subsequent orders, is it imperative that the old nobilia **original OC number** be included. This allows our Sales Department to verify your subsequent order from a technical point of view.
- If no further details are provided with your order, you will receive the **individual fronts without drill holes and without handle**.
- Should you need **individual fronts that include drill holes**, please specify the precise intended use in your order, e.g., "as hinged door for unit US60(-X), hinge left." This ensures that you receive the front with all necessary drill holes. This additional processing does not change the price of the front.
- Should you need **individual fronts that include drill holes**, please specify the handle number, the drill pattern and, if applicable, the door hinge side in your order. This additional processing does not change the price of the front.
- Fittings and handles are not included in the price of the individual fronts.
- If no further details are provided with your order, you will receive the **glass doors with the standard glass of the respective product range**. Depending upon the range, glass variants are available for a surcharge (see chapter 1, fronts). Please quote the deviating type of glass in your order.
- Should you need **glass doors for 2-door Square wall units**, please specify the exact intended use in your order, e.g., as hinged door for element WSQ90-1 (order no. 37529 - 900 mm wide unit), hinge left. For pricing, take the door with the respective dimensions as a basis (e.g. order no. 39031, framed glass door in stainless steel appearance, 450 mm wide).


For an overview of the front dimensions in standard, maxi and XL height, refer to page M 10.8.


Front views Highboards:
Carcase height: 1512 mm

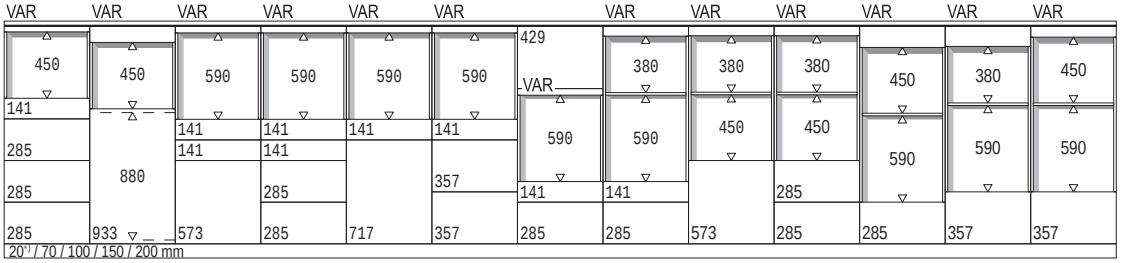

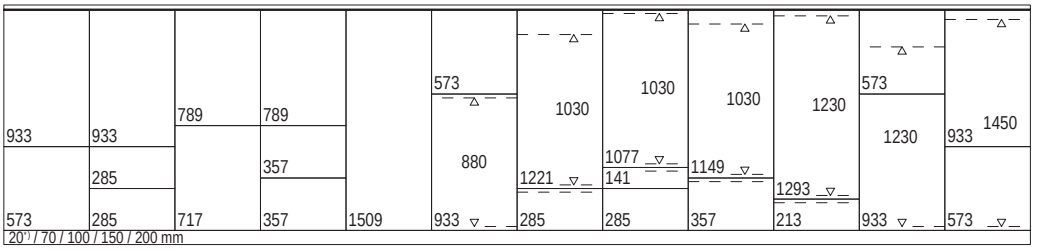


Front views XL Highboards:
Carcase height: 1584 mm

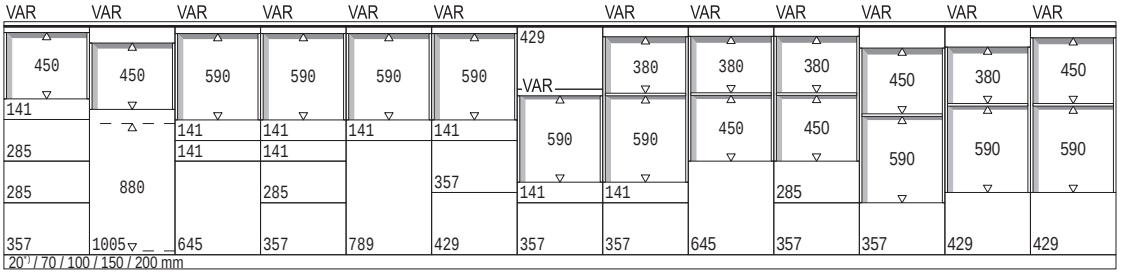


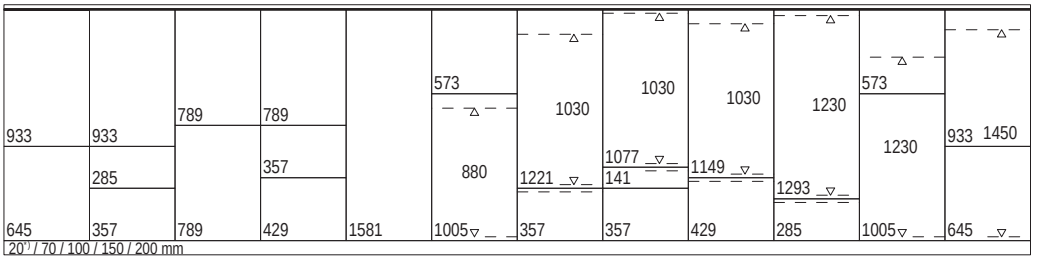


*) For ergonomic reasons, the 20 mm plinth height must not be used in the active areas of the kitchen (cooking, washing, refrigeration).

Front views Tall units, height 1
Carcase height: 2016 mm

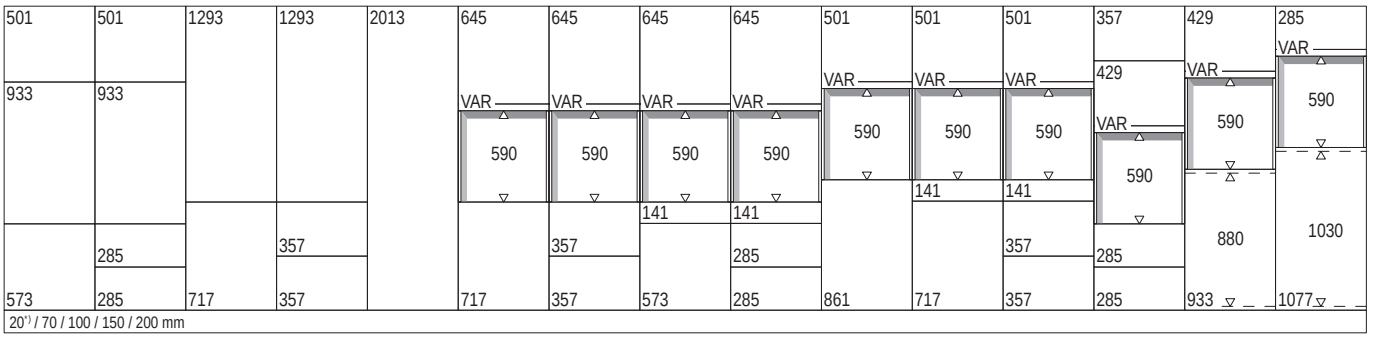


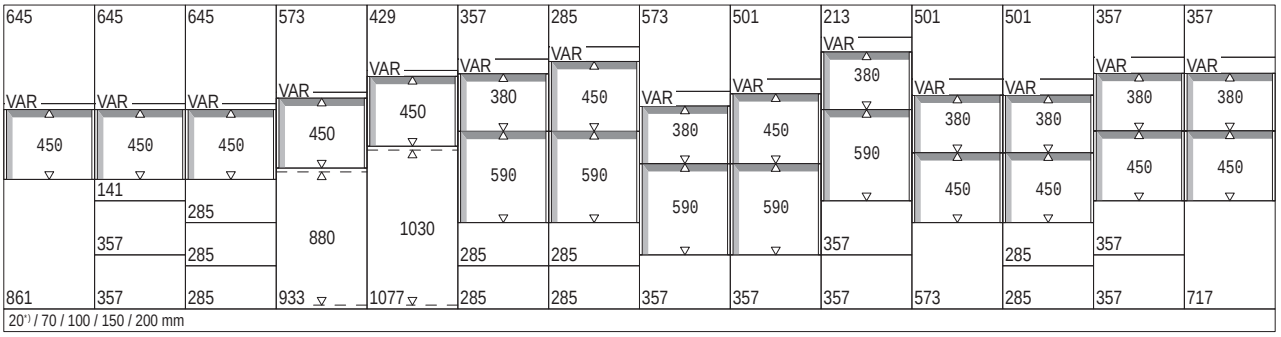


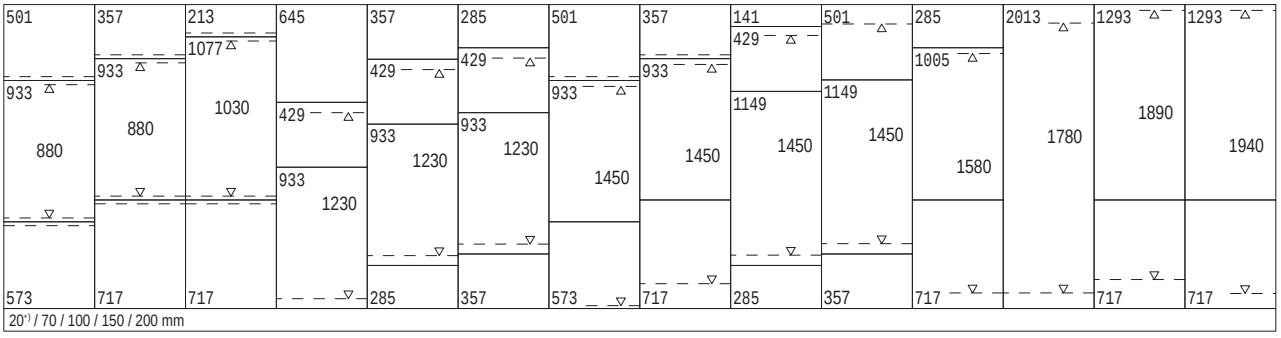


*) For ergonomic reasons, the 20 mm plinth height must not be used in the active areas of the kitchen (cooking, washing, refrigeration).

Front views Tall units, height 1 XL
Carcase height: 2088 mm

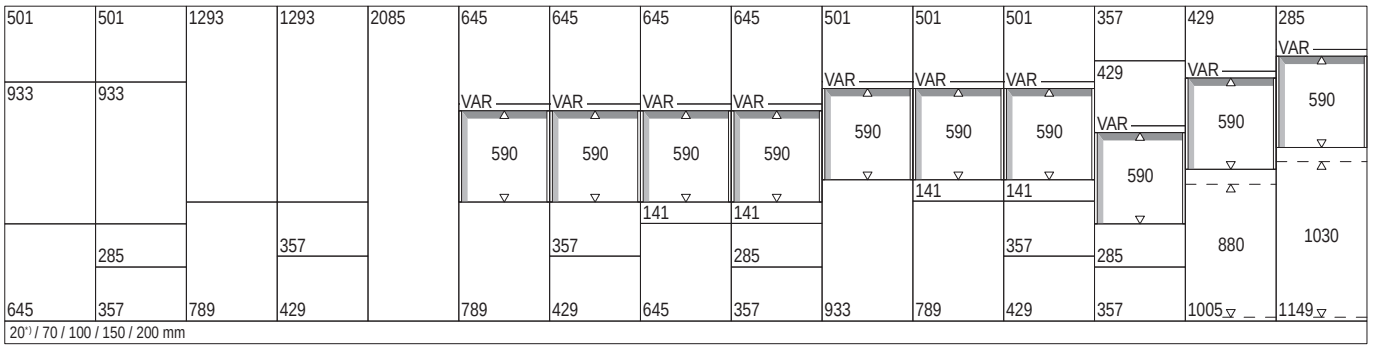


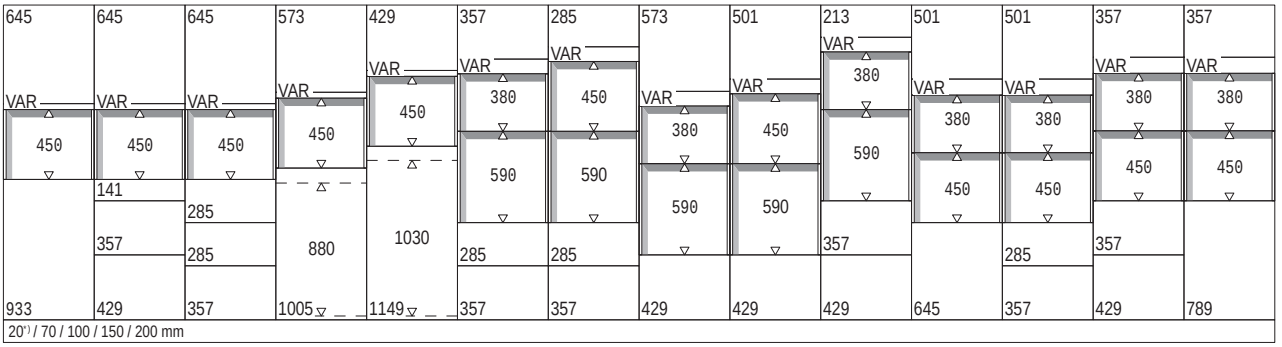


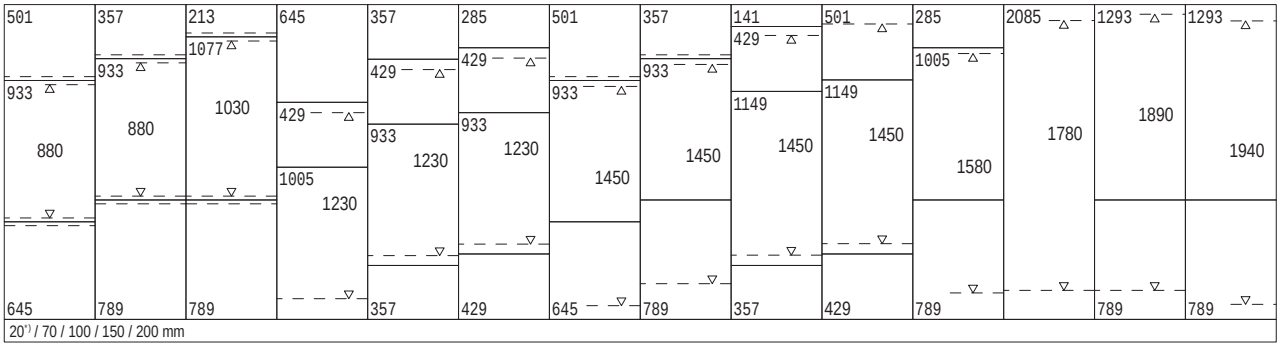


*) For ergonomic reasons, the 20 mm plinth height must not be used in the active areas of the kitchen (cooking, washing, refrigeration).

Front views Tall units, height 2
Carcase height: 2088 mm

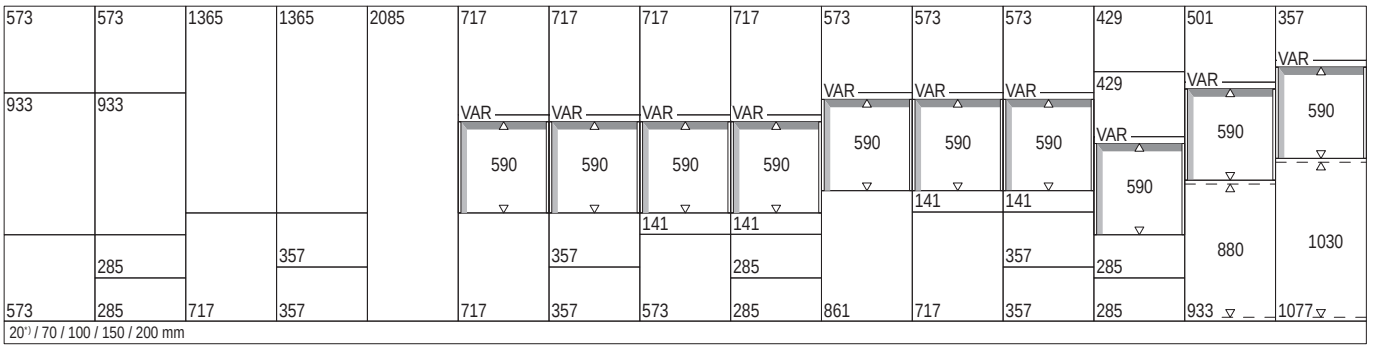


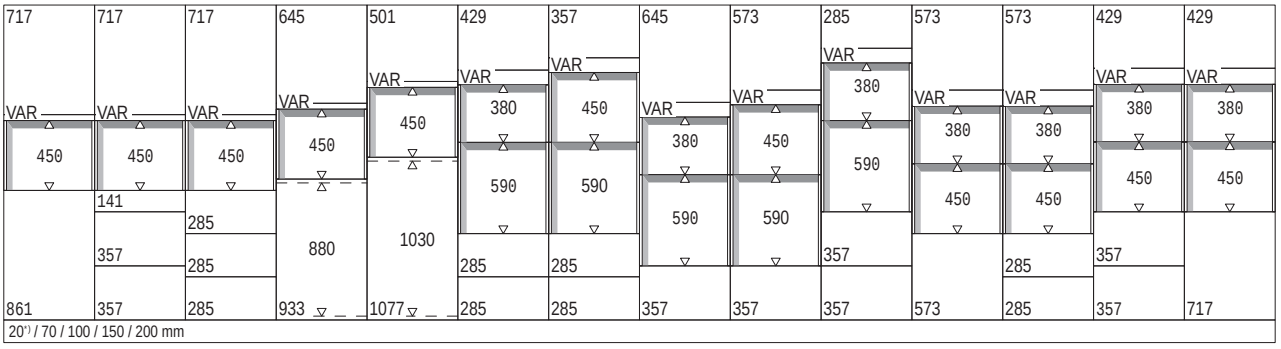


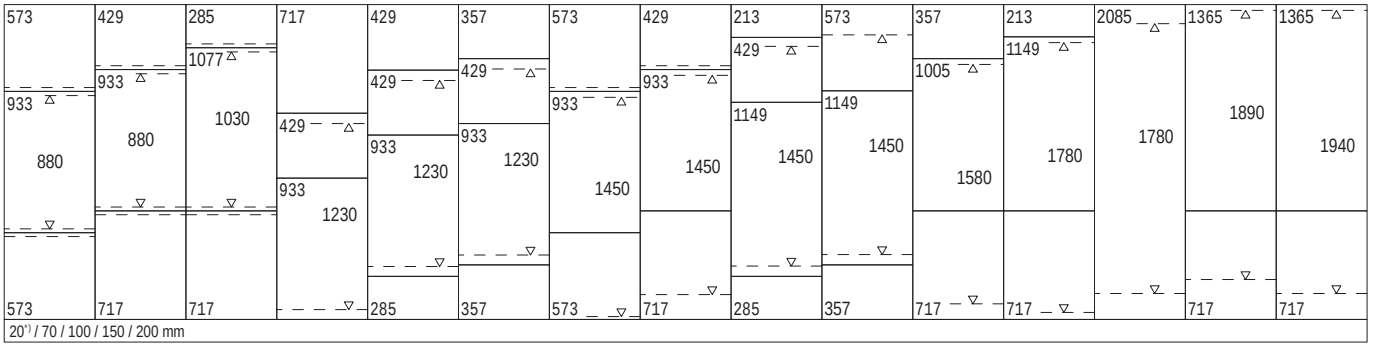


*) For ergonomic reasons, the 20 mm plinth height must not be used in the active areas of the kitchen (cooking, washing, refrigeration).

Front views Tall units, height 2 XL
Carcase height: 2160 mm

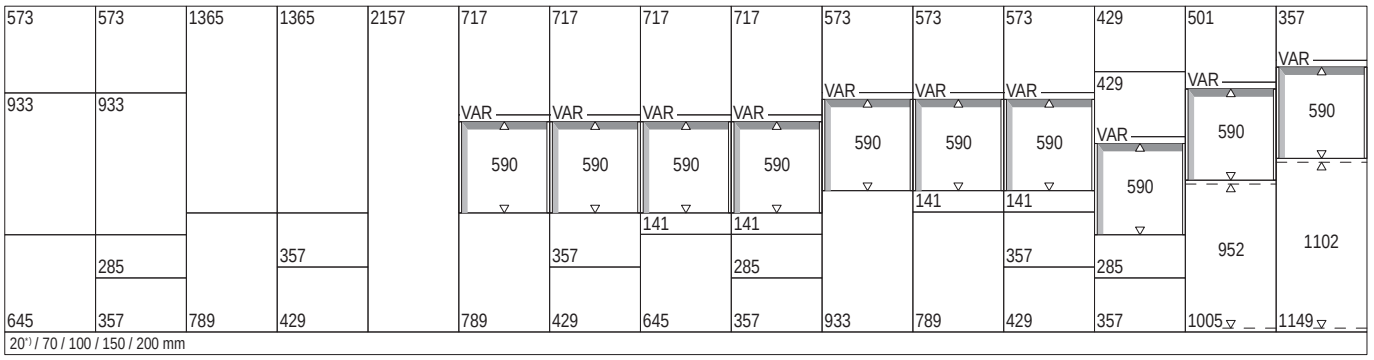


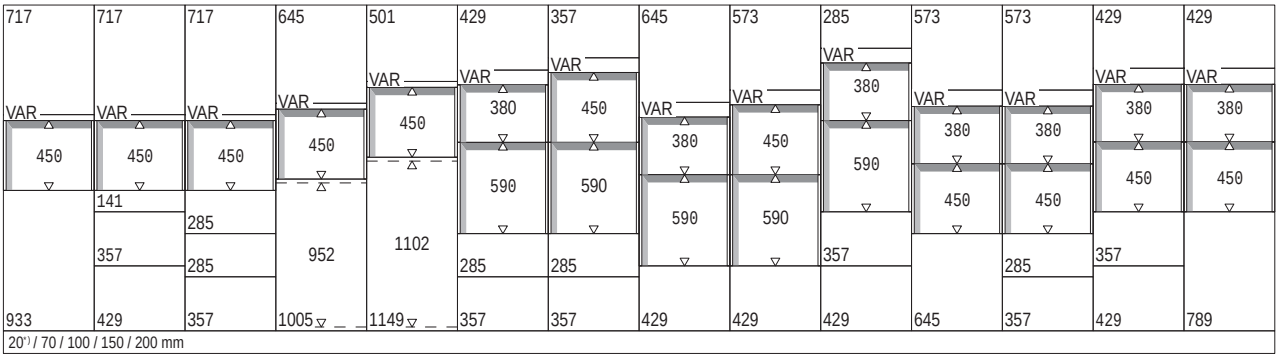


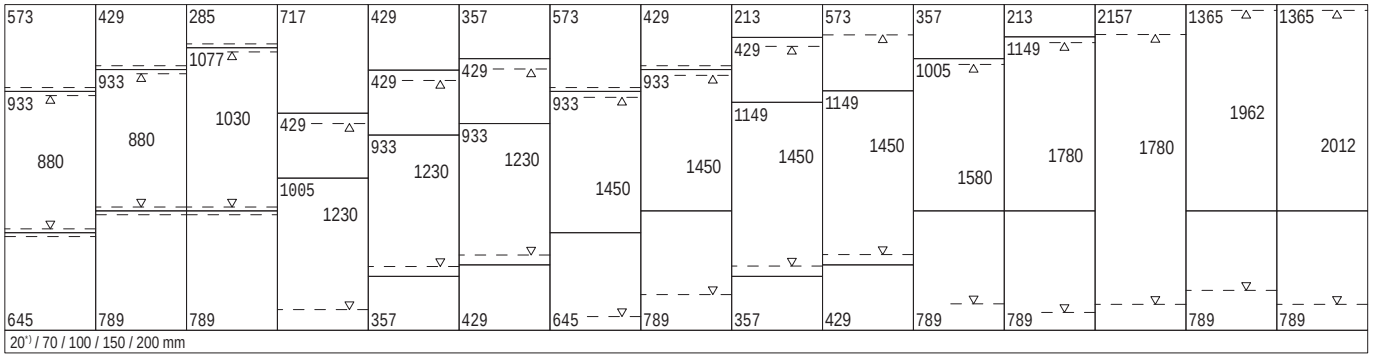


*) For ergonomic reasons, the 20 mm plinth height must not be used in the active areas of the kitchen (cooking, washing, refrigeration).

Front views Tall units, height 3
Carcase height: 2160 mm

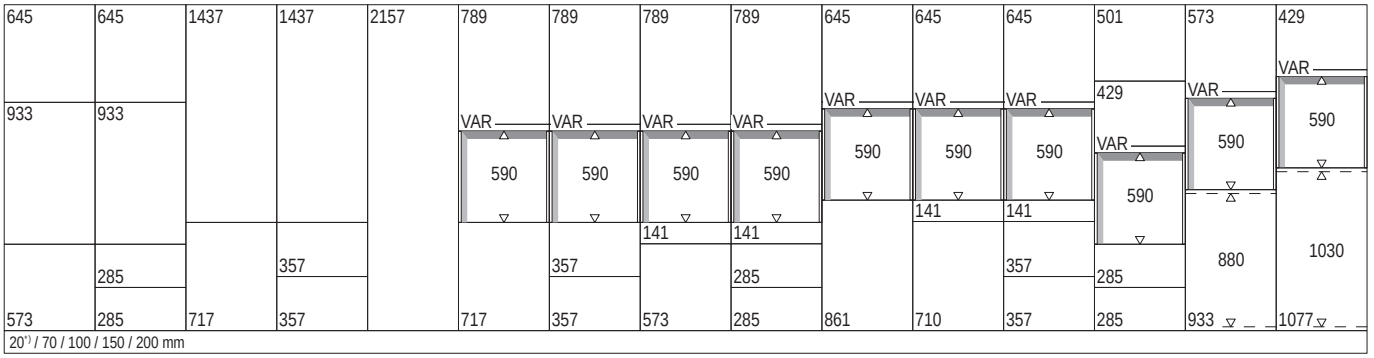


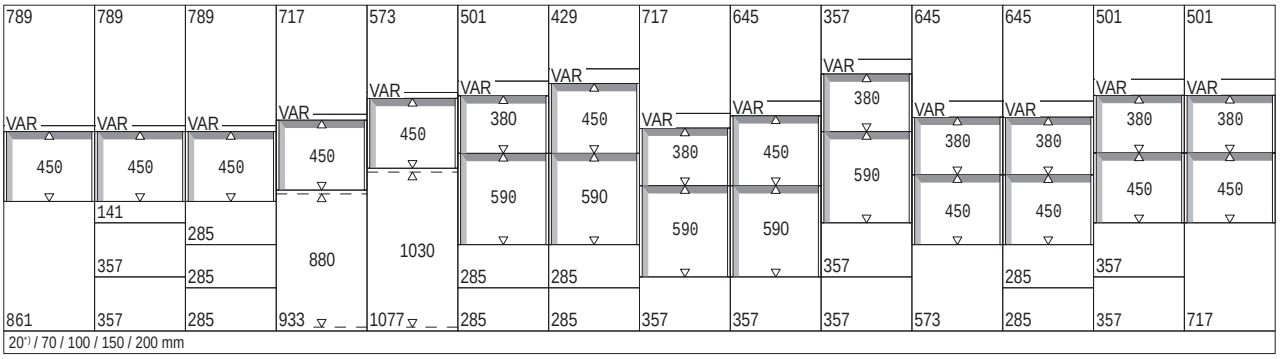


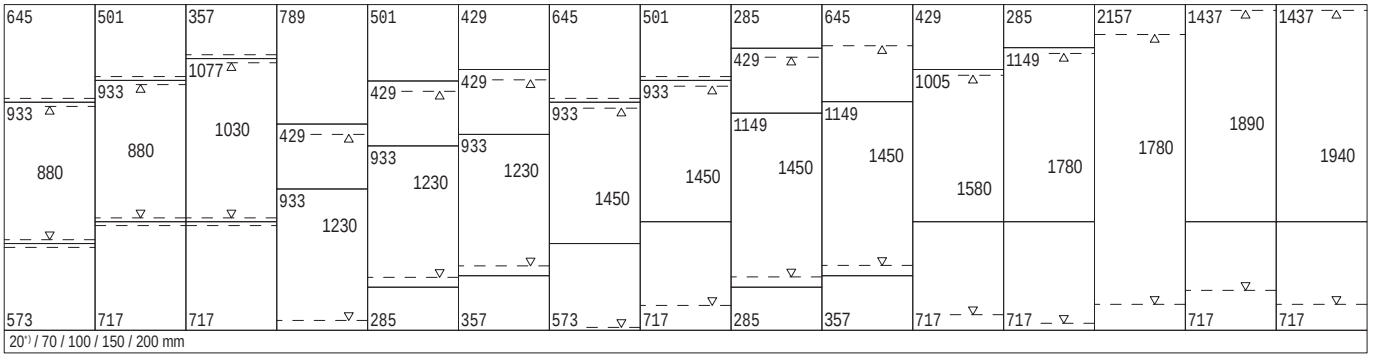


*) For ergonomic reasons, the 20 mm plinth height must not be used in the active areas of the kitchen (cooking, washing, refrigeration).

Front views Tall units, height 3 XL
Carcase height: 2232 mm

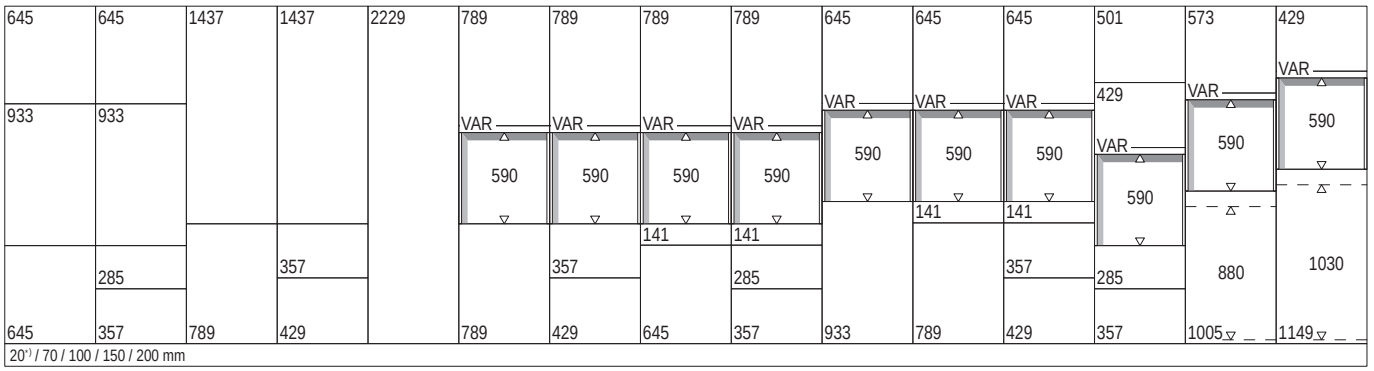


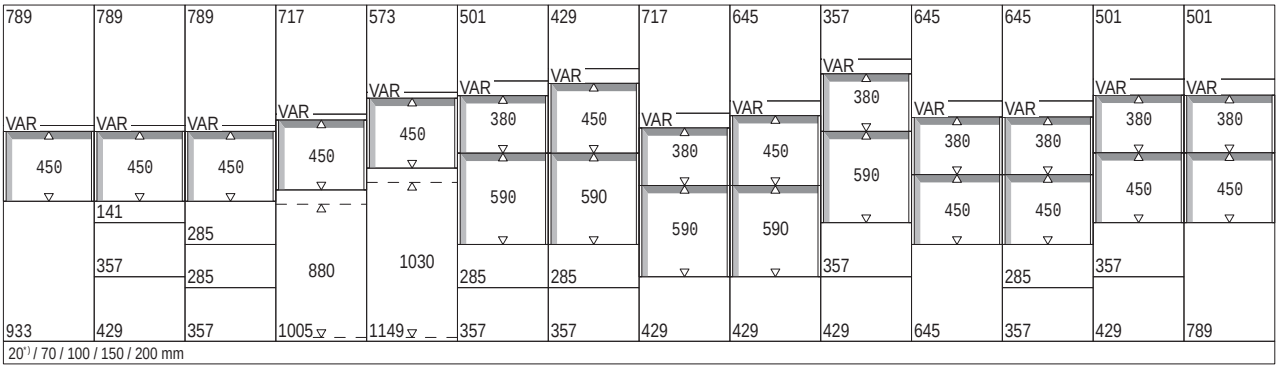

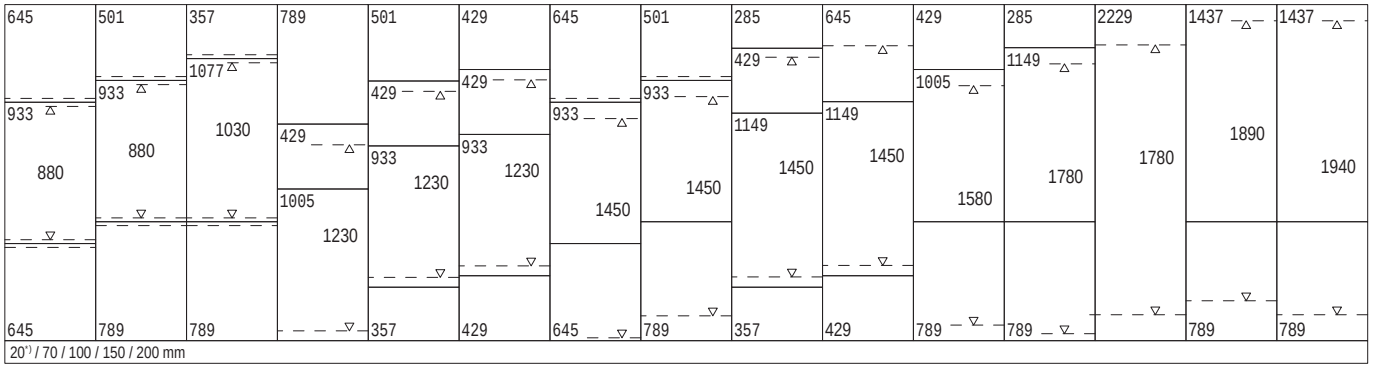



*) For ergonomic reasons, the 20 mm plinth height must not be used in the active areas of the kitchen (cooking, washing, refrigeration).

Front views of standard and maxi doors

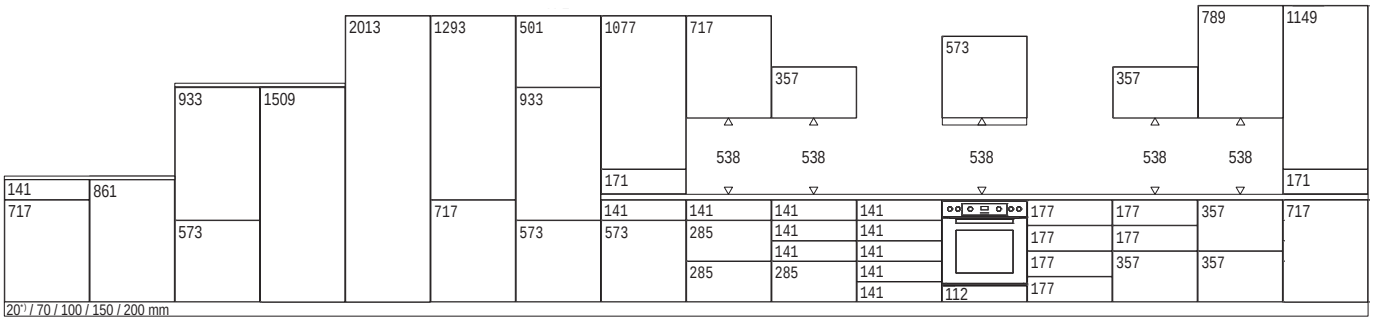


Front views of standard and maxi doors

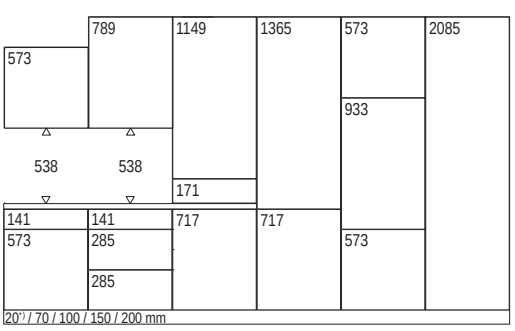


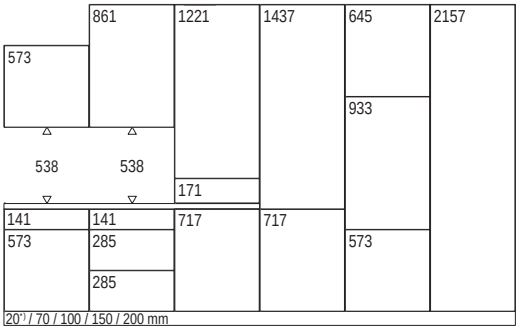


Front views of XL doors, height 1

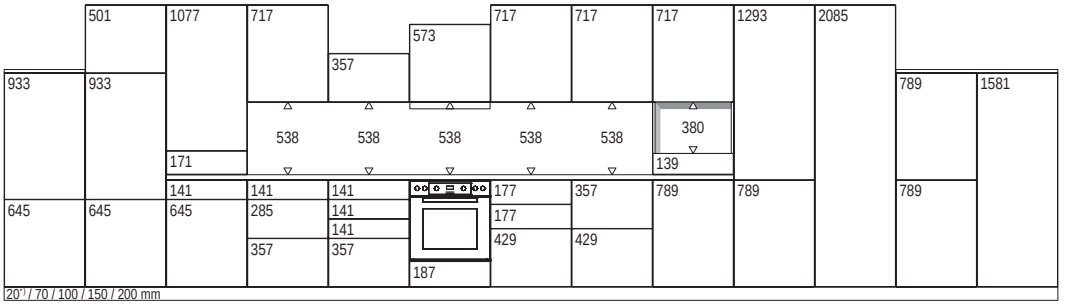

Front views of XL doors, height 2

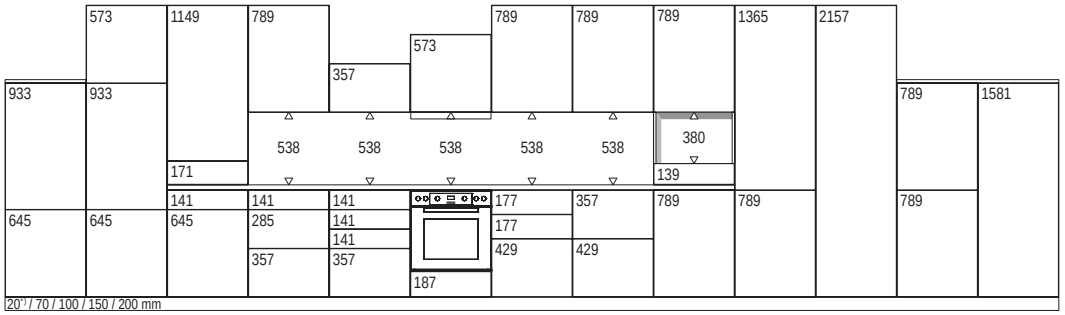


Front views of XL doors, height 3

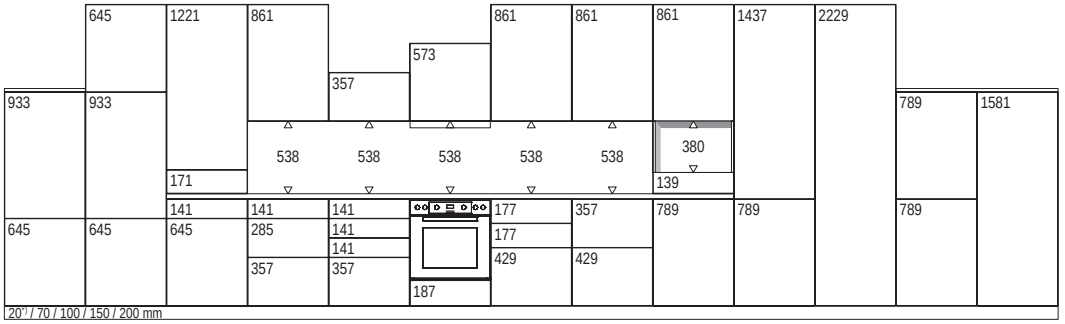


*) For ergonomic reasons, the 20 mm plinth height must not be used in the active areas of the kitchen (cooking, washing, refrigeration).

LINE N

Front views Highboards:
Carcase height: 1512 mm

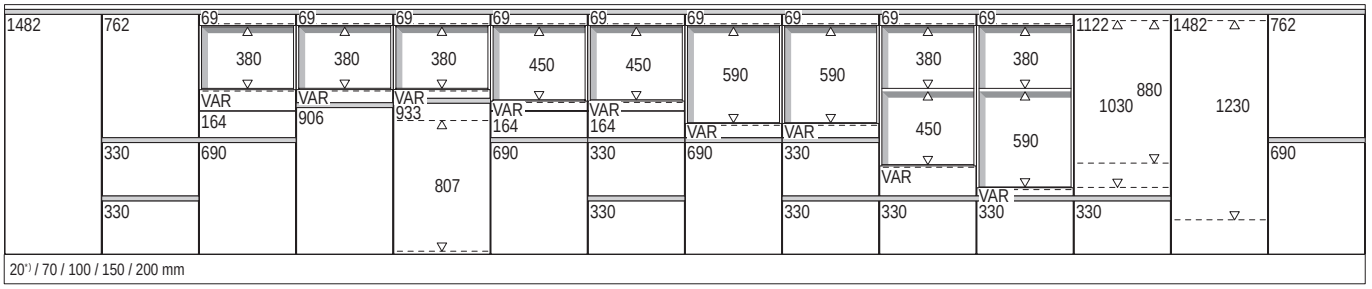


Front views XL Highboards:
Carcase height: 1584 mm

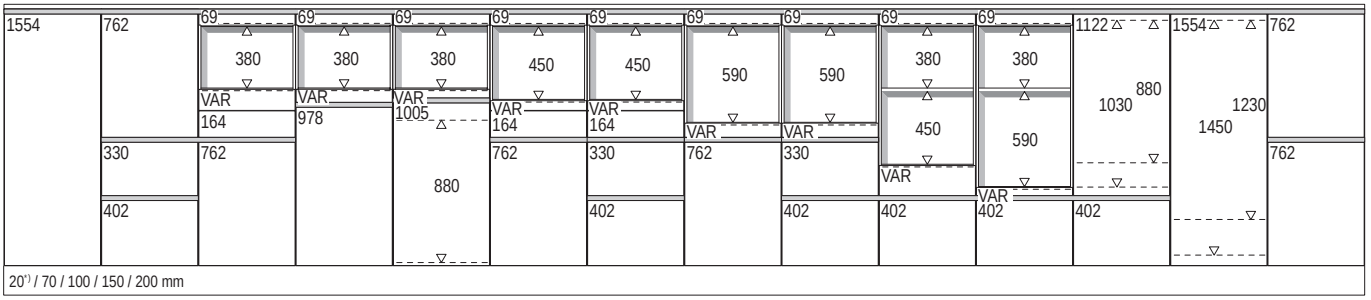


*) For ergonomic reasons, the 20 mm plinth height must not be used in the active areas of the kitchen (cooking, washing, refrigeration).

LINE N

Front views Tall units, height 1
Carcase height: 2016 mm

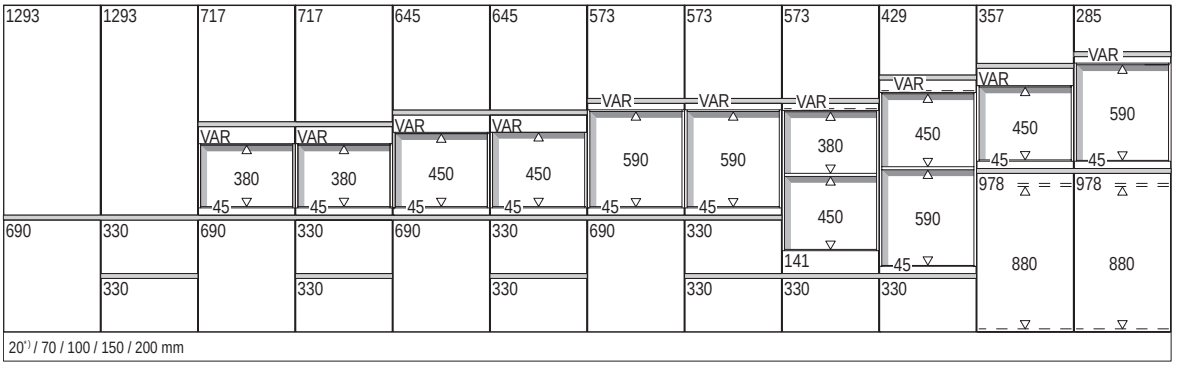


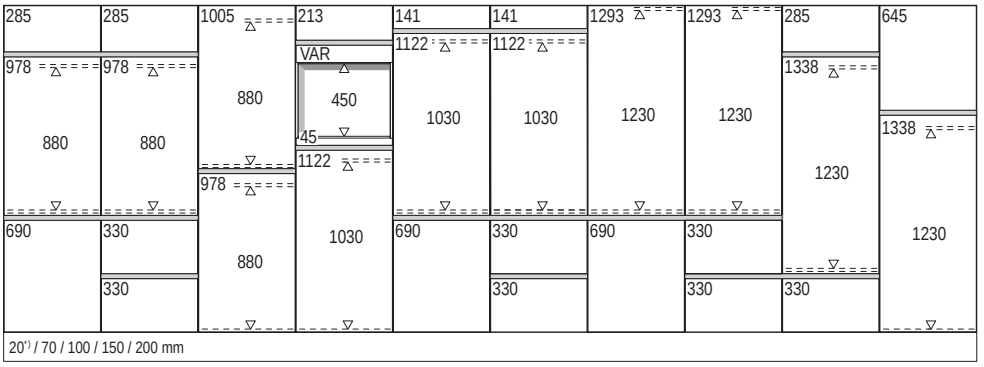


*) For ergonomic reasons, the 20 mm plinth height must not be used in the active areas of the kitchen (cooking, washing, refrigeration).

LINE N

Front views Tall units, height 1 XL
Carcase height: 2088 mm

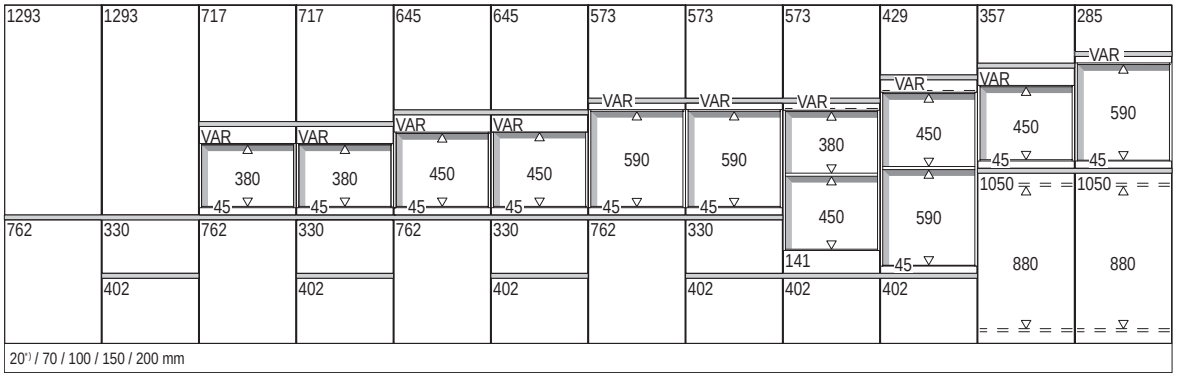


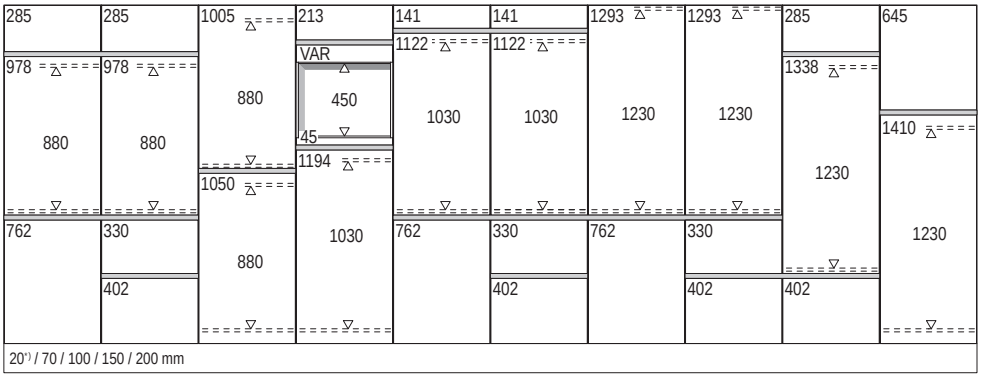


*) For ergonomic reasons, the 20 mm plinth height must not be used in the active areas of the kitchen (cooking, washing, refrigeration).

LINE N

Front views Tall units, height 2
Carcase height: 2088 mm

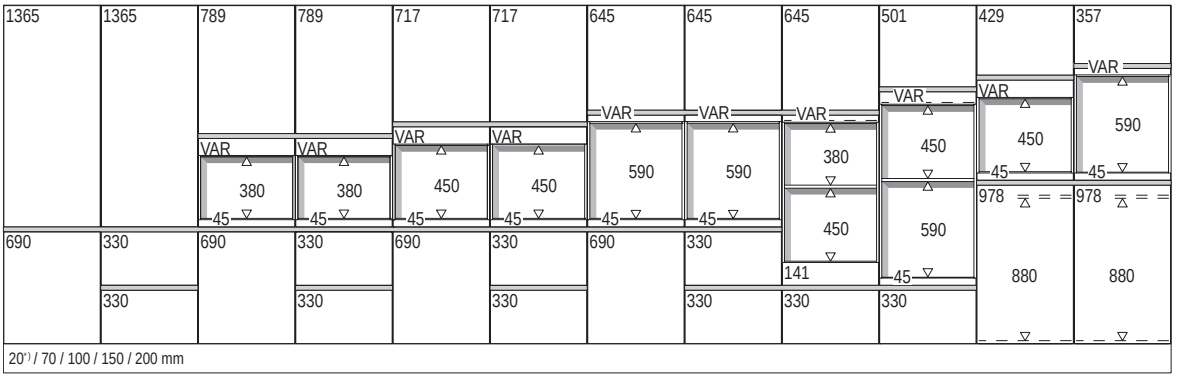


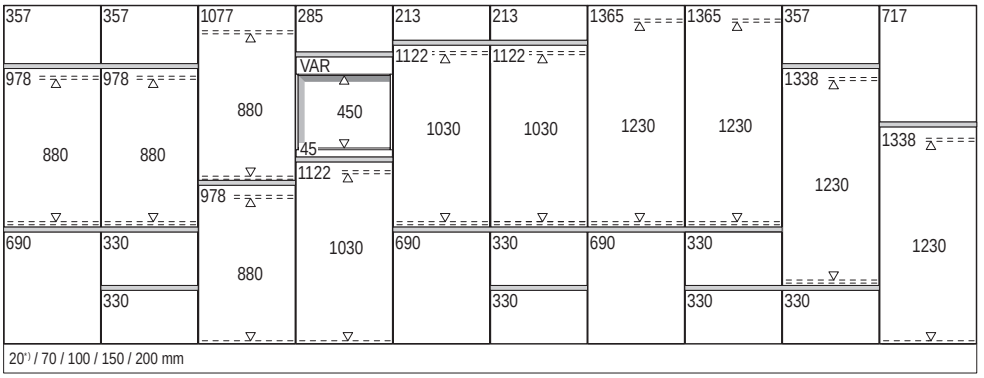


*) For ergonomic reasons, the 20 mm plinth height must not be used in the active areas of the kitchen (cooking, washing, refrigeration).

LINE N

Front views Tall units, height 2 XL
Carcase height: 2160 mm

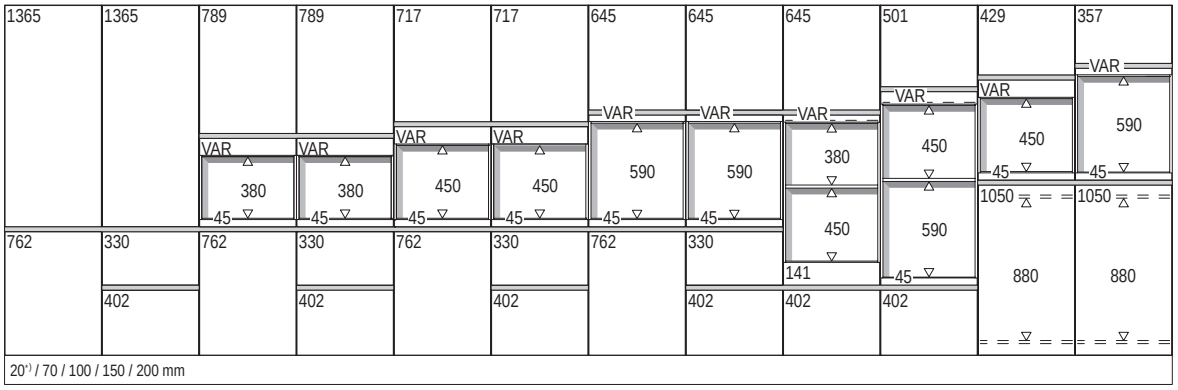


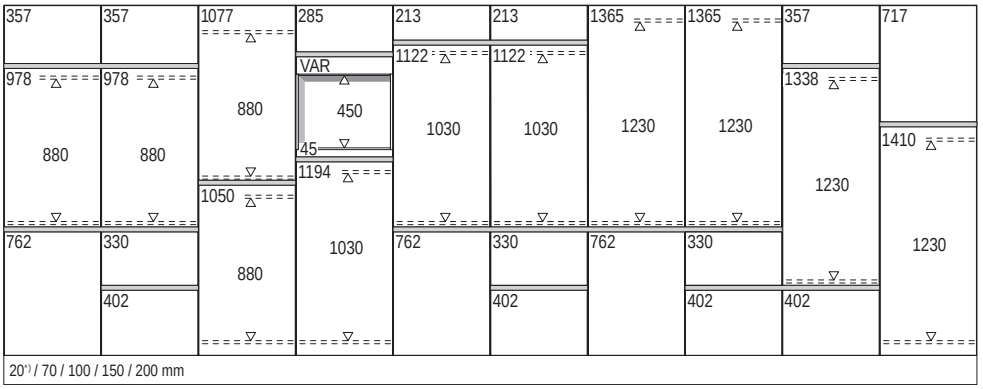


*) For ergonomic reasons, the 20 mm plinth height must not be used in the active areas of the kitchen (cooking, washing, refrigeration).

LINE N

Front views Tall units, height 3
Carcase height: 2160 mm

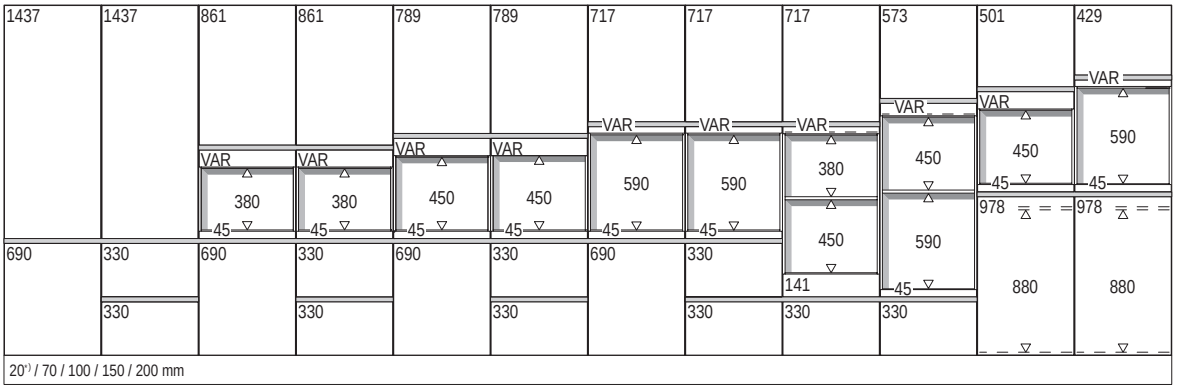


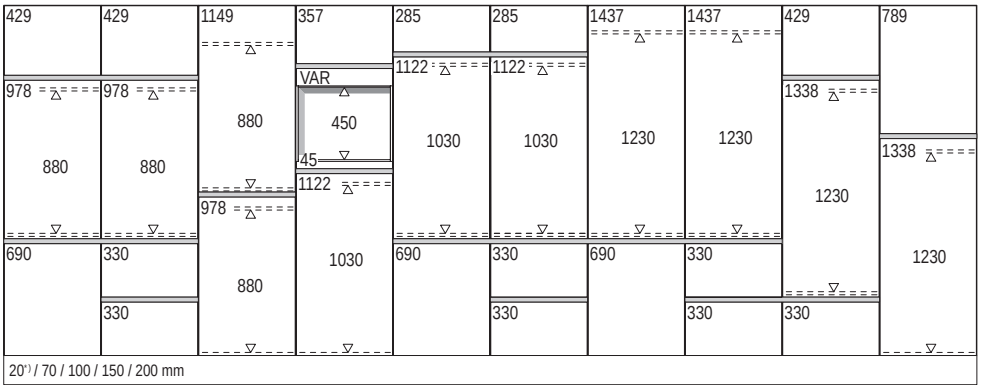


*) For ergonomic reasons, the 20 mm plinth height must not be used in the active areas of the kitchen (cooking, washing, refrigeration).

LINE N

Front views Tall units, height 3 XL
Carcase height: 2232 mm

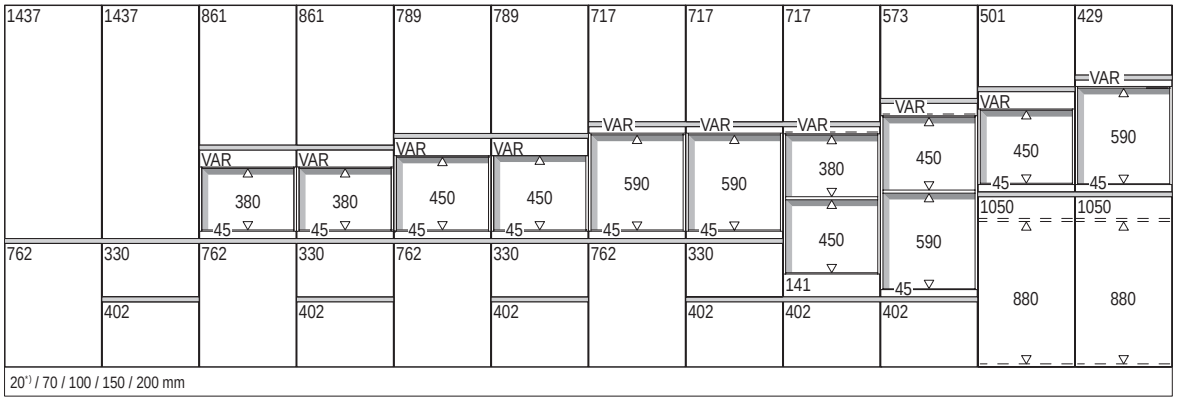

20*) / 70 / 100 / 150 / 200 mm

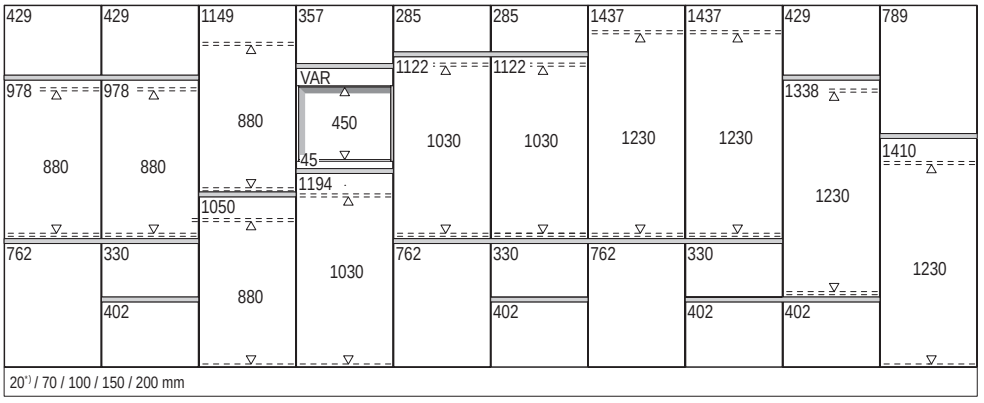


20*) / 70 / 100 / 150 / 200 mm

*) For ergonomic reasons, the 20 mm plinth height must not be used in the active areas of the kitchen (cooking, washing, refrigeration).


LINE N

Front views of standard doors

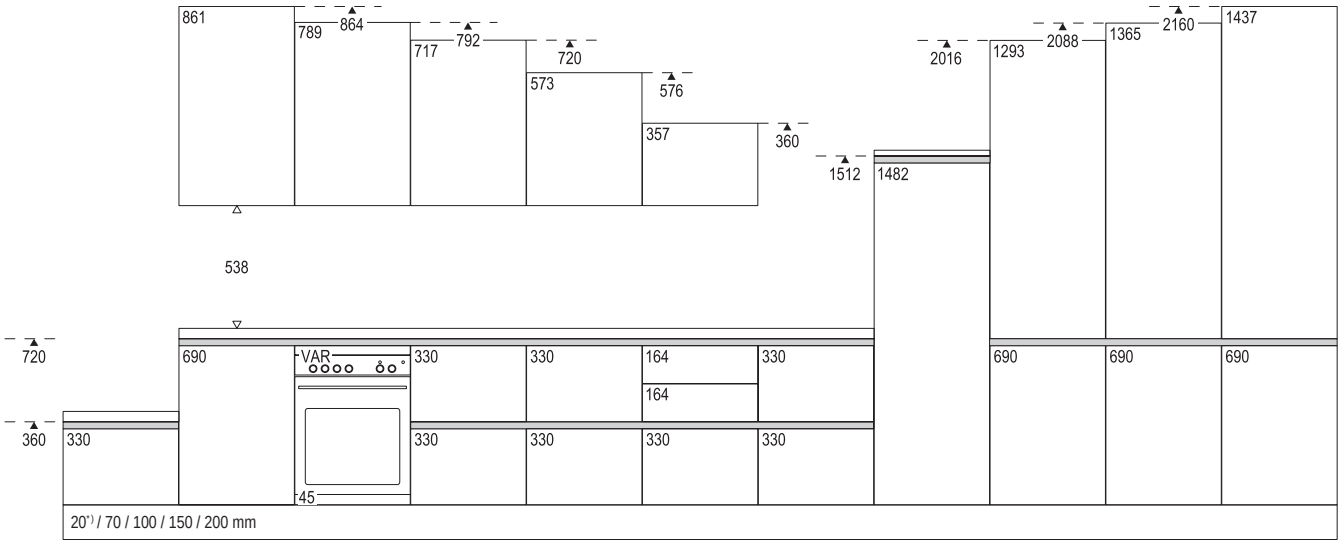

LINE N


Front views of standard doors XL

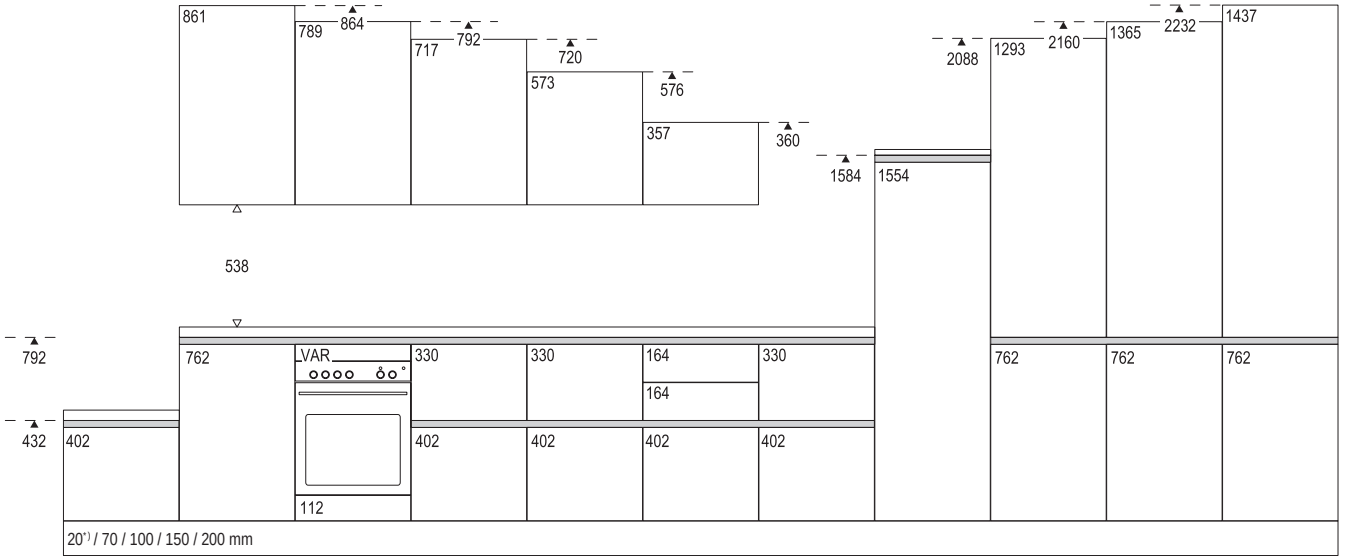

*) For ergonomic reasons, the 20 mm plinth height must not be used in the active areas of the kitchen (cooking, washing, refrigeration).


LINE N one

Front views of standard doors

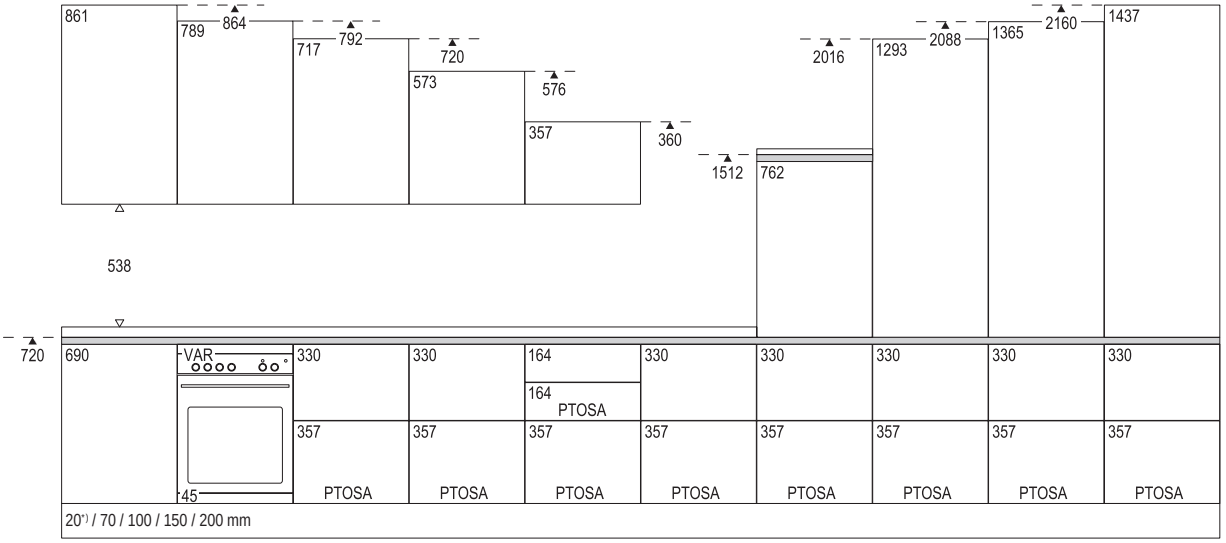

LINE N one

Front views of standard doors XL

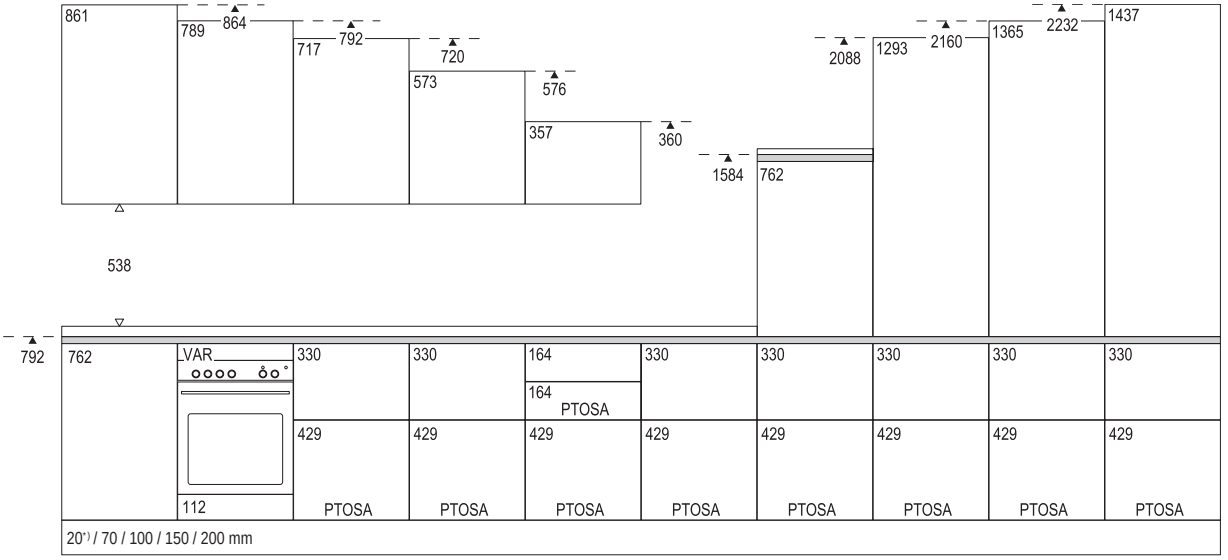

*) For ergonomic reasons, the 20 mm plinth height must not be used in the active areas of the kitchen (cooking, washing, refrigeration).

Front panels
without drillings, without handle




Front panels, continuous

Front panel (1 piece) continuous



Abbreviation	Height	Width	Order No.	Points 1	2	3	4	5	6	7	8	9	10	Can be used as
82 mm high	F	82	-594	60229	92	101	104	108	115	120	121	—	155	—	B
112 mm high	F	112	-594	60135	92	101	104	108	115	120	121	—	155	—	SK
141 mm high	F	141	-194	60003	86	88	92	101	104	105	108	—	145	—	SK
	F	141	-294	60004	88	92	96	105	107	108	111	—	146	—	SK
	F	141	-394	60005	92	96	101	108	111	117	120	—	149	—	SK
	F	141	-444	60006	96	101	104	111	117	120	121	—	152	—	SK
	F	141	-494	60007	101	102	105	120	121	123	124	—	153	—	SK
	F	141	-594	60008	102	105	107	121	123	124	126	—	158	—	SK
	F	141	-794	60009	111	123	124	126	145	149	158	—	184	—	SK
	F	141	-894	60011	120	124	126	137	147	153	168	—	197	—	SK
	F	141	-994	60136	126	143	145	146	155	169	178	—	207	—	SK
	F	141	-1194	60221	145	155	158	164	175	190	201	—	237	—	SK
154 mm high	F	154	-594	60327	108	117	120	137	146	152	158	—	185	—	SK
157 mm high	F	157	-594	60144	108	117	120	137	146	152	158	—	185	—	SK
171 mm high	F	171	-594	60328	120	123	124	146	158	174	180	—	215	—	SK
175 mm high	F	175	-594	60271	120	123	124	146	158	174	180	—	215	—	SK
177 mm high	F	177	-494	60112	107	111	121	139	152	158	169	—	201	—	SK
	F	177	-594	60113	120	123	124	146	158	174	180	—	215	—	SK
	F	177	-794	60114	133	139	145	149	174	196	209	—	257	—	SK
	F	177	-894	60115	143	146	147	152	177	200	229	—	276	—	SK
	F	177	-994	60137	149	153	155	164	188	210	248	—	299	—	SK
	F	177	-1194	60222	164	168	169	172	204	235	266	—	323	—	SK
187 mm high	F	187	-594	60230	120	121	123	147	165	178	196	—	229	—	SK




Front panels
without drillings, without handle

		Abbreviation	Height	Width	Order No.	Points Price groups 1	2	3	4	5	6	7	8	9	10	Can be used as
Front panel continuous 	213 - 262 mm high	F	213	-594	60474	120	121	123	147	168	183	199	—	237	—	K
		F	234	-594	60013	120	121	123	149	169	185	201	—	242	—	K A
		F	250	-594	60014	123	137	139	158	184	206	225	—	258	—	K A
		F	262	-594	60116	126	147	149	174	196	231	248	—	279	—	K A
	285 mm high	F	285	-294	60015	108	120	121	139	153	169	178	—	204	—	K A
		F	285	-394	60016	111	121	124	147	164	180	197	—	229	—	K A
		F	285	-444	60017	120	123	126	152	169	185	201	—	242	—	K A
		F	285	-494	60018	121	124	139	153	177	197	207	—	251	—	K A FL
		F	285	-594	60019	137	145	147	158	197	209	238	—	280	—	K A FL
		F	285	-794	60020	139	149	152	168	200	250	270	—	324	—	A FL
		F	285	-894	60022	146	153	158	175	206	254	288	—	355	—	A FL
		F	285	-994	60138	153	169	175	185	229	276	312	—	380	—	A FL
		F	285	-1194	60223	174	185	200	207	254	304	355	—	412	—	A FL
	301 mm high	F	301	-594	60117	139	146	149	177	200	210	242	—	288	—	K L
Front panel (1 piece) continuous 	345 mm high	F	345	-594	60027	145	147	152	178	204	215	248	—	289	—	K
	357 mm high	F	357	-294	60232	108	120	127	147	168	183	199	—	228	—	A
		F	357	-394	60234	117	123	136	164	177	200	219	—	237	—	A
		F	357	-444	60118	123	126	145	155	175	199	209	—	258	—	K A T
		F	357	-494	60101	131	139	147	164	184	201	215	—	261	—	K A T FL
		F	357	-594	60102	146	149	153	180	206	229	250	—	299	—	K A T FL
		F	357	-794	60103	164	168	174	200	219	247	261	—	311	—	K A FL
		F	357	-894	60104	169	174	175	207	235	257	288	—	323	—	K A FL
		F	357	-994	60139	178	184	185	231	257	277	312	—	342	—	K A FL
		F	357	-1194	60225	197	200	206	257	296	329	364	—	426	—	K A FL
Front panel (1 piece) continuous 	429 mm high	F	429	-294	62423	108	120	133	152	172	190	204	—	242	—	K A T
		F	429	-394	62424	120	123	142	169	188	210	235	—	267	—	K A T
		F	429	-444	60272	139	146	149	177	201	210	247	—	288	—	K T L
		F	429	-494	62425	143	147	152	184	207	229	254	—	302	—	K A T FL
		F	429	-594	60236	149	153	156	197	218	248	276	—	331	—	K A T FL
		F	429	-794	62428	178	175	180	207	232	267	308	—	361	—	K FL
		F	429	-894	62429	188	184	185	218	247	289	330	—	380	—	K FL
		F	429	-994	62430	200	197	199	247	270	318	365	—	394	—	K FL
		F	429	-1194	62431	218	213	219	270	299	358	416	—	476	—	K FL

FL = Folding-lifting doors are only permissible for use with the following ranges: 115, 157, 187, 312, 317, 357, 371, 382, 566, 615, 648, 684, 808, 945

Front panels



without drillings, without handle

		Abbreviation	Height	Width	Order No.	Points 1	2	3	4	5	6	7	8	9	10	Can be used as
Front panel (1 piece) continuous 	501 mm high	F	501	-294	60148	110	120	137	156	175	199	207	—	251	—	T
		F	501	-394	60149	121	124	145	174	194	215	244	—	283	—	T
		F	501	-444	60325	137	145	152	188	206	231	261	—	315	—	T
		F	501	-494	60150	142	147	153	193	215	250	267	—	327	—	T
		F	501	-594	60273	152	155	164	207	242	273	310	—	374	—	T L
	573 mm high	F	573	-194	60032	108	111	126	158	177	185	197	—	210	—	T
		F	573	-294	60033	111	121	139	164	178	199	210	—	258	—	A T
		F	573	-344	60159	117	123	143	171	191	206	231	—	279	—	T
		F	573	-394	60034	123	126	147	178	200	215	251	—	304	—	A T
		F	573	-444	60035	126	139	152	188	207	235	261	—	324	—	A T
		F	573	-494	60036	139	146	155	200	225	250	280	—	355	—	A T
		F	573	-594	60037	153	158	168	209	250	276	318	—	385	—	A T L
Front panel (1 piece) continuous 	645 mm high	F	645	-194	60241	117	121	131	153	180	188	200	—	231	—	T
		F	645	-294	60242	121	126	145	175	197	215	235	—	279	—	A T
		F	645	-394	60243	124	145	155	199	210	239	266	—	329	—	A T
		F	645	-444	60244	137	147	158	206	235	263	291	—	361	—	A T
		F	645	-494	60245	145	149	164	209	247	273	304	—	380	—	A T
		F	645	-594	60246	153	156	168	225	254	289	324	—	402	—	A T
Front panel (1 piece) continuous 	709 mm high	F	709	-444	60274	155	168	184	235	261	296	329	—	385	—	T
		F	709	-594	60275	169	180	200	260	291	324	372	—	464	—	T
	717 mm high	F	717	-144	60051	121	126	139	175	180	188	200	—	229	—	A
		F	717	-194	60052	124	139	147	184	199	206	215	—	254	—	A T
		F	717	-244	60127	137	146	153	197	207	229	248	—	280	—	T
		F	717	-294	60053	145	149	158	201	225	248	261	—	315	—	A T
		F	717	-344	60329	146	152	168	206	238	257	279	—	331	—	T
		F	717	-394	60054	152	158	177	215	251	277	312	—	366	—	A T
		F	717	-444	60055	155	168	184	235	264	296	330	—	391	—	A T
		F	717	-494	60056	158	175	188	248	277	315	346	—	428	—	K A T
		F	717	-544	60129	168	178	199	254	288	321	364	—	450	—	T
		F	717	-594	60057	169	180	200	260	293	324	374	—	467	—	K A T
		F	717	-794	60125	238	242	260	339	380	437	488	—	622	—	K
		F	717	-894	60126	254	258	288	368	412	464	529	—	673	—	K

SK = drawer T = hinged door K = flap A = pull-out B = panel FL = folding/lifting L = lifting door

Front panels



without drillings, without handle

		Abbreviation			Order No.	Points Price groups 1	2	3	4	5	6	7	8	9	10	Can be used as
			Height	Width												
Front panel (1 piece) continuous 	781 mm high	F	781	-594	60276	172	180	199	273	299	336	377	—	480	—	T
	789 mm high	F	789	-144	60251	124	131	145	172	183	193	204	—	248	—	A
		F	789	-194	60252	127	136	152	178	201	209	219	—	273	—	A T
		F	789	-244	60377	139	146	158	197	216	235	253	—	305	—	T
		F	789	-294	60253	149	155	165	213	238	263	288	—	333	—	A T
		F	789	-344	60378	152	158	174	225	251	277	308	—	365	—	T
		F	789	-394	60254	153	164	184	235	261	296	327	—	393	—	A T
		F	789	-444	60255	158	168	185	250	291	326	362	—	426	—	A T
		F	789	-494	60256	168	177	197	257	296	330	366	—	453	—	A T
		F	789	-544	60379	171	180	199	267	299	334	374	—	467	—	T
		F	789	-594	60257	174	184	200	276	301	340	380	—	482	—	A T
Front panel (1 piece) continuous 	861 mm high	F	861	-144	60330	124	133	153	178	190	206	219	—	270	—	A
		F	861	-194	60331	127	143	161	188	206	222	237	—	296	—	A T
		F	861	-244	60332	139	147	168	200	219	248	266	—	321	—	T
		F	861	-294	60333	146	152	169	204	239	258	288	—	346	—	A T
		F	861	-344	60334	149	155	177	215	257	289	329	—	397	—	T
		F	861	-394	60335	153	164	180	238	266	299	334	—	412	—	A T
		F	861	-444	60336	158	168	185	257	292	315	362	—	458	—	A T
		F	861	-494	60337	168	177	199	270	298	323	381	—	502	—	A T
		F	861	-544	60338	174	180	201	280	314	342	404	—	521	—	T
		F	861	-594	60147	178	185	206	299	331	365	428	—	542	—	A T

SK = drawer T = hinged door K = flap A = pull-out B = panel FL = folding/lifting L = lifting door

Front panels


without drillings, without handle

		Abbreviation	Height	Width	Order No.	Points 1	2	3	4	5	6	7	8	9	10	Can be used as
Front panel (1 piece) continuous 	933 mm high	F	933	-294	60277	147	153	172	206	241	260	289	—	352	—	A T
		F	933	-394	60278	155	165	184	239	270	301	339	—	415	—	A T
		F	933	-444	60279	161	169	188	258	293	318	364	—	460	—	T
		F	933	-494	60280	169	178	200	272	299	324	383	—	505	—	T
	933 mm high	F	933	-594	60281	180	188	207	301	339	366	429	—	543	—	T
	1005 mm high	F	1005	-444	60160	194	188	201	267	314	358	384	—	549	—	T
	1005 mm high	F	1005	-594	60282	199	206	229	331	381	425	470	—	612	—	T
	1077 mm high	F	1077	-444	60340	201	204	218	296	330	374	416	—	568	—	T
	1077 mm high	F	1077	-594	60341	207	222	248	362	397	439	501	—	631	—	T
	1149 mm high	F	1149	-444	60344	213	225	251	334	362	406	450	—	587	—	T
	1149 mm high	F	1149	-594	60283	219	242	279	403	428	480	531	—	647	—	T
	1221 mm high	F	1221	-594	60345	242	260	324	448	469	511	581	—	688	—	T
	1293 mm high	F	1293	-294	60197	194	215	266	330	330	362	391	—	504	—	A T
		F	1293	-394	60198	207	229	298	374	380	423	466	—	606	—	A T
		F	1293	-494	60199	216	238	318	432	434	486	540	—	658	—	T
		F	1293	-594	60284	237	270	331	461	482	529	616	—	718	—	T
	1365 mm high	F	1365	-294	60892	225	231	272	340	352	377	404	—	526	—	A T
		F	1365	-394	60792	242	248	305	384	402	439	480	—	632	—	A T
		F	1365	-494	60592	253	257	327	445	458	510	558	—	688	—	T
		F	1365	-594	60492	272	292	342	476	510	572	634	—	752	—	T
	1437 mm high	F	1437	-294	60347	228	235	277	346	358	377	416	—	540	—	A T
		F	1437	-394	60348	242	251	311	393	412	439	491	—	641	—	A T
		F	1437	-494	60349	254	258	330	461	467	510	572	—	696	—	T
		F	1437	-594	60350	299	305	352	486	527	558	647	—	775	—	T
Front panel (1 piece) continuous 	1509 mm high	F	1509	-294	36700	248 [1]	256 [2]	302 [3]	377	413 [4]	448	—	—	—	—	A T
		F	1509	-394	36701	267 [1]	274 [2]	333 [3]	431	480 [4]	529	—	—	—	—	A T
		F	1509	-444	36702	272 [1]	279 [2]	349 [3]	458	508 [4]	558	—	—	—	—	T
		F	1509	-494	36703	274 [1]	283 [2]	362 [3]	483	534 [4]	584	—	—	—	—	T
		F	1509	-594	36704	305 [1]	308 [2]	383 [3]	527	580 [4]	632	—	—	—	—	T
	1581 mm high	F	1581	-294	36707	603 [1]	615 [2]	635 [3]	731	780 [4]	831	—	—	—	—	A T
		F	1581	-394	36711	612 [1]	632 [2]	672 [3]	774	828 [4]	896	—	—	—	—	A T
		F	1581	-444	36713	621 [1]	641 [2]	675 [3]	804	885 [4]	956	—	—	—	—	T
		F	1581	-494	36714	641 [1]	660 [2]	698 [3]	819	896 [4]	967	—	—	—	—	T
		F	1581	-594	36715	654 [1]	672 [2]	705 [3]	858	905 [4]	984	—	—	—	—	T

1) Except Laser, front 463 2) Only Riva, front 839, 842, 843 3) Except Structura, front 402, 405 4) Except Inline 526




Front panels

without drillings, without handle

		Abbreviation			Order No.	Points Price groups 1	2	3	4	5	6	7	8	9	10	Can be used as
			Height	Width												
Front panel (1 piece) continuous with tensioning fitting 	2013 mm high	F	2013	-294	36716	746 [1]	772 [2]	832 [3]	940	965 [4]	1.019	—	—	—	—	A T
		F	2013	-394	36717	768 [1]	796 [2]	883 [3]	997	1.040 [4]	1.110	—	—	—	—	A T
		F	2013	-494	36718	783 [1]	822 [2]	915 [3]	1.089	1.121 [4]	1.210	—	—	—	—	T
		F	2013	-594	36719	815 [1]	860 [2]	940 [3]	1.130	1.184 [4]	1.261	—	—	—	—	T
	2085 mm high	F	2085	-294	36720	752 [1]	778 [2]	840 [3]	952	977 [4]	1.034	—	—	—	—	A T
		F	2085	-394	36725	769 [1]	802 [2]	889 [3]	1.018	1.050 [4]	1.129	—	—	—	—	A T
		F	2085	-494	36726	793 [1]	823 [2]	924 [3]	1.098	1.139 [4]	1.226	—	—	—	—	T
		F	2085	-594	36728	819 [1]	863 [2]	940 [3]	1.146	1.191 [4]	1.278	—	—	—	—	T
	2157 mm high	F	2157	-294	36729	783 [1]	794 [2]	845 [3]	962	997 [4]	1.048	—	—	—	—	A T
		F	2157	-394	36730	804 [1]	821 [2]	896 [3]	1.028	1.072 [4]	1.145	—	—	—	—	A T
		F	2157	-494	36731	829 [1]	842 [2]	933 [3]	1.110	1.162 [4]	1.248	—	—	—	—	T
		F	2157	-594	36733	856 [1]	883 [2]	949 [3]	1.161	1.219 [4]	1.320	—	—	—	—	T
	2229 mm high	F	2229	-294	36734	785 [1]	797 [2]	851 [3]	968	1.003 [4]	1.048	—	—	—	—	A T
		F	2229	-394	36737	804 [1]	823 [2]	902 [3]	1.035	1.082 [4]	1.145	—	—	—	—	A T
		F	2229	-494	36740	831 [1]	844 [2]	936 [3]	1.127	1.172 [4]	1.248	—	—	—	—	T
		F	2229	-594	36741	882 [1]	896 [2]	961 [3]	1.172	1.237 [4]	1.305	—	—	—	—	T

1) Except Laser, front 463 2) Only Riva, front 839, 842, 843 3) Except Structura, front 402, 405 4) Except Inline 526

Front panels
without drillings, without handle


		Abbreviation	Height	Width	Order No.	Points 1	2	3	4	5	6	7	8	9	10	Can be used as
Front panels, pinned																
Front panel, pinned (2 pieces)  *In 194 mm width, all traditional-style and frame ranges only have profiled outer edges, no center panels!*	141 + 573 mm	FV	717	-194	60075	147	152	164	184	201 [1]	210	247	—	—	—	A T
		FV	717	-294	60076	152	158	175	206	229 [1]	250	277	—	—	—	A T
		FV	717	-394	60077	164	175	188	235	257 [1]	277	321	—	—	—	T
		FV	717	-444	60078	169	180	199	250	270 [1]	291	333	—	—	—	T
		FV	717	-494	60079	177	185	200	258	280 [1]	312	356	—	—	—	T
		FV	717	-594	60080	180	199	206	280	315 [1]	333	387	—	—	—	T
Front panel, pinned (2 pieces) 	141 + 645 mm	FV	789	-194	60262	152	158	177	206	218 [1]	232	248	—	—	—	A T
		FV	789	-294	60263	175	180	188	239	260 [1]	286	311	—	—	—	A T
		FV	789	-394	60264	178	199	210	257	291 [1]	323	356	—	—	—	T
		FV	789	-444	60265	188	201	215	273	314 [1]	350	383	—	—	—	T
		FV	789	-494	60266	197	206	218	280	323 [1]	356	387	—	—	—	T
		FV	789	-594	60267	200	209	225	304	321 [1]	362	403	—	—	—	T
Front panel, pinned (2 pieces) 	141 + 717 mm	FV	861	-194	60395	155	168	196	226	235 [1]	242	250	—	—	—	A T
		FV	861	-294	60396	201	206	201	276	292 [1]	318	342	—	—	—	A T
		FV	861	-394	60397	199	218	235	279	323 [1]	356	385	—	—	—	T
		FV	861	-444	60398	207	219	235	301	362 [1]	394	432	—	—	—	T
		FV	861	-494	60399	210	225	237	305	365 [1]	402	435	—	—	—	T
		FV	861	-594	60143	225	242	312	374	415 [1]	439	508	—	—	—	T

1) Except Inline 526

LINE N front panels
without drill holes



Only available for LINE N ranges.

LINE N front panels

		Abbreviation	Height	Width	Order No.	Points 1	2	3	4	5	6	7	8	9	10	Can be used as
Front panel (1 piece) continuous  *Only available for LINE N: Look 099, Laser 615, Riva 371, Structura 382, Touch 317, Senso 357, Flash 648, StoneArt 566, Easytouch 945, Natura 157, Inox 808, Focus 312, Softline 187, Novalux 115*	66 mm high	F	66	-594	60228	92	101	104	108	114	120	—	—	—	—	B
	106 mm high	F	106	-594	60291	92	101	104	108	114	120	—	—	—	—	SK
	130 mm high	F	130	-594	60301	101	104	105	120	121	123	—	—	—	—	SK
	163 mm high	F	163	-294	60151	102	104	107	117	128	142	—	—	—	—	SK
		F	163	-394	60152	104	105	108	121	134	145	—	—	—	—	SK
		F	163	-444	60153	105	107	111	123	136	146	—	—	—	—	SK
		F	163	-494	60154	104	108	120	126	139	149	—	—	—	—	SK
		F	163	-594	60155	117	120	126	139	150	162	—	—	—	—	SK
		F	163	-794	60156	131	137	143	146	164	180	—	—	—	—	SK
		F	163	-894	60157	140	143	145	147	168	188	—	—	—	—	SK
		F	163	-994	60158	146	149	152	155	177	199	—	—	—	—	SK
		F	163	-1194	60226	161	165	168	169	197	222	—	—	—	—	SK
	186 mm high	F	186	-594	60302	120	121	123	147	164	180	—	—	—	—	SK
	196 mm high	F	196	-594	60292	120	121	123	149	168	183	—	—	—	—	SK
Front panel (1 piece) continuous  *Only available for LINE N: Look 099, Laser 615, Riva 371, Structura 382, Touch 317, Senso 357, Flash 648, StoneArt 566, Easytouch 945, Natura 157, Inox 808, Focus 312, Softline 187, Novalux 115*	330 mm high	F	330	-294	60161	107	123	133	152	165	178	—	—	—	—	A
		F	330	-394	60162	115	124	137	153	171	190	—	—	—	—	A
		F	330	-444	60163	121	126	139	155	174	194	—	—	—	—	A
		F	330	-494	60164	128	137	146	158	178	199	—	—	—	—	A
		F	330	-594	60165	145	147	164	178	201	223	—	—	—	—	A
		F	330	-794	60166	153	158	174	196	216	238	—	—	—	—	A
		F	330	-894	60167	161	165	178	204	226	250	—	—	—	—	A
		F	330	-994	60168	168	172	185	210	235	257	—	—	—	—	A
		F	330	-1194	60227	177	180	204	238	260	280	—	—	—	—	A
	402 mm high	F	402	-294	60303	107	121	131	149	169	183	—	—	—	—	A
		F	402	-394	60304	118	124	137	165	185	203	—	—	—	—	A
		F	402	-444	60305	124	127	146	156	184	209	—	—	—	—	A
		F	402	-494	60306	139	143	149	165	191	215	—	—	—	—	A
		F	402	-594	60307	147	152	155	184	212	239	—	—	—	—	A
		F	402	-794	60308	172	169	175	201	228	256	—	—	—	—	A
		F	402	-894	60309	178	175	177	209	238	266	—	—	—	—	A
		F	402	-994	60310	190	185	188	235	261	289	—	—	—	—	A
		F	402	-1194	60311	206	201	207	258	298	334	—	—	—	—	A

LINE N front panels
without drill holes


Only available for LINE N ranges.

		Abbreviation	Height	Width	Order No.	Points 1	2	3	4	5	6	7	8	9	10	Can be used as
Front panel (1 piece) continuous  *Only available for LINE N: Look 099, Laser 615, Riva 371, Structura 382, Touch 317, Senso 357, Flash 648, StoneArt 566, Easytouch 945, Natura 157, Inox 808, Focus 312, Softline 187, Novalux 115*	690 mm high	F	690	-144	60099	120	124	137	174	178	183	—	—	—	—	A
		F	690	-294	60171	140	145	164	196	218	239	—	—	—	—	A T
		F	690	-394	60172	146	152	175	207	238	267	—	—	—	—	A T
		F	690	-444	60173	147	155	184	225	257	289	—	—	—	—	A T
		F	690	-494	60174	155	164	188	237	272	307	—	—	—	—	A T
		F	690	-594	60175	166	174	204	251	283	317	—	—	—	—	A T
Front panel (1 piece) continuous  *Only available for LINE N: Look 099, Laser 615, Riva 371, Structura 382, Touch 317, Senso 357, Flash 648, StoneArt 566, Easytouch 945, Natura 157, Inox 808, Focus 312, Softline 187, Novalux 115*	729 mm high	F	729	-594	60296	169	180	199	273	305	334	—	—	—	—	T
	762 mm high	F	762	-144	60312	121	127	143	174	180	185	—	—	—	—	A
		F	762	-294	60313	147	153	164	209	235	258	—	—	—	—	A T
		F	762	-394	60314	150	168	184	228	260	292	—	—	—	—	A T
		F	762	-444	60315	156	174	188	247	279	312	—	—	—	—	A T
		F	762	-494	60316	166	177	196	253	292	329	—	—	—	—	A T
		F	762	-594	60317	172	184	200	273	305	336	—	—	—	—	A T
	776 mm high	F	776	-594	60297	172	180	199	273	307	339	—	—	—	—	T
Front panel (1 piece) continuous  *Only available for LINE N: Look 099, Laser 615, Riva 371, Structura 382, Touch 317, Senso 357, Flash 648, StoneArt 566, Easytouch 945, Natura 157, Inox 808, Focus 312, Softline 187, Novalux 115*	906 mm high	F	906	-594	60189	178	185	206	299	333	366	—	—	—	—	T
	978 mm high	F	978	-594	60318	197	204	225	329	375	422	—	—	—	—	T
	1050 mm high	F	1050	-594	62411	200	213	239	346	393	437	—	—	—	—	T
	1122 mm high	F	1122	-594	60320	213	235	257	381	407	461	—	—	—	—	T
	1194 mm high	F	1194	-594	62412	231	251	302	425	467	508	—	—	—	—	T
	1338 mm high	F	1338	-594	60299	251	277	334	467	491	533	—	—	—	—	T
	1410 mm high	F	1410	-594	62414	292	302	345	482	518	555	—	—	—	—	T

LINE N front panels
without drill holes

Only available for LINE N ranges.

Front panel (1 piece) continuous



Only available for tall units with horizontal recessed handles.

Only available for LINE N: Look 099, Laser 615, Riva 371, Structura 382, Touch 317, Senso 357, Flash 648, StoneArt 566, Easytouch 945, Natura 157, Inox 808, Focus 312, Softline 187, Novalux 115

	Abbreviation	Height	Width	Order No.	Points Price groups 1	2	3	4	5	6	7	8	9	10	Can be used as
1482 mm high	F	1482	-294	60285	241	248	293	366	396	423	—	—	—	—	A T
	F	1482	-394	60286	258	266	326	418	458	499	—	—	—	—	A T
	F	1482	-494	60287	267	274	352	476	518	559	—	—	—	—	T
	F	1482	-594	60288	302	307	372	514	561	607	—	—	—	—	T
1554 mm high	F	1554	-294	60321	254	261	310	387	429	470	—	—	—	—	A T
	F	1554	-394	60322	274	282	342	445	502	559	—	—	—	—	A T
	F	1554	-494	60323	280	292	372	491	550	609	—	—	—	—	T
	F	1554	-594	60324	307	310	394	540	600	657	—	—	—	—	T

Glass doors
incl. drillings, incl. handle

Points

Price groups

Framed glass doors

		Width in cm	Order No.	1	2	3	4	5	6	7	8	9	10
Framed glass flap, 357 mm high, for WKG*-36	36325	50	35937	296	301	304	312	318	339	365	—	375	—
	36326	60	35938	318	323	329	330	333	365	397	—	412	—
	36328	80	35939	356	362	364	366	374	428	461	—	479	—
	36329	90	35940	375	380	381	385	391	448	502	—	521	—
	36330	100	35941	397	403	406	412	415	467	526	—	558	—
	36332	120	35942	445	450	453	457	502	546	587	—	635	—
Framed glass door, 717 mm high, for WG*-1	30104/32109	45	27930	479	488	508	520	540	564	591	—	621	—
	30105/32110	50	27931	486	508	521	533	558	591	622	—	642	—
	30106	60	27932	521	533	553	568	615	642	679	—	702	—
Framed glass door, 789 mm high, for WG*-2	41104/42109	45	60686	505	515	530	555	581	612	642	—	673	—
	41105/42110	50	60586	517	530	558	575	603	635	670	—	702	—
	41106	60	60486	559	571	590	618	656	692	730	—	762	—
Framed glass door, 861 mm high, for WG*-3	51104/51109	45	60381	531	540	558	590	623	656	692	—	724	—
	51105/51110	50	60382	543	558	591	618	645	688	717	—	761	—
	51106	60	60383	594	606	631	669	698	742	781	—	823	—
Framed glass door, partially glazed, 717 mm high, for WGGT*-1	30103/30113	45	60238	—	—	—	561 [1]	—	—	—	—	—	—
	30107/30115	50	60239	—	—	—	578 [1]	—	—	—	—	—	—
	30108	60	60240	—	—	—	610 [1]	—	—	—	—	—	—
								1) Only Frame 419					
Framed glass door, partially glazed, 789 mm high, for WGGT*-2	41103/41113	45	60293	—	—	—	588 [1]	—	—	—	—	—	—
	41107/41115	50	60294	—	—	—	609 [1]	—	—	—	—	—	—
	41108	60	60295	—	—	—	645 [1]	—	—	—	—	—	—
								1) Only Frame 419					
Framed glass door, partially glazed, 861 mm high, for WGGT*-3	51103/51113	45	60360	—	—	—	629 [1]	—	—	—	—	—	—
	51107/51115	50	60361	—	—	—	658 [1]	—	—	—	—	—	—
	51108	60	60362	—	—	—	707 [1]	—	—	—	—	—	—
								1) Only Frame 419					
Framed glass folding/lifting door, 357 mm high, for WFLG*-1 / WFLGG*-1	top 32371	50	35902	288	291	296	299	304 [1]	329	356	—	—	—
	bottom 32371/32355	50	35903	308	311	312	318	323 [1]	345	368	—	—	—
	top 32372	60	35904	310	312	315	318	323 [1]	353	381	—	—	—
	bottom 32372/32356	60	35905	324	329	331	333	339 [1]	371	403	—	—	—
	top 32373	80	35906	346	355	356	361	364 [1]	407	450	—	—	—
	bottom 32373/32358	80	35907	362	365	366	374	380 [1]	423	466	—	—	—
	top 32374	90	35908	365	368	374	375	381 [1]	431	482	—	—	—
	bottom 32374/32359	90	35909	380	383	385	391	402 [1]	456	508	—	—	—
	top 32375	100	35910	383	385	397	402	406 [1]	463	520	—	—	—
	bottom 32375/32360	100	35911	403	407	412	415	419 [1]	473	529	—	—	—
	top 32376	120	35912	434	437	438	439	475 [1]	510	571	—	—	—
	bottom 32376/32362	120	35913	450	456	457	458	491 [1]	524	590	—	—	—
								1) Except Inline 526					
Framed glass folding/lifting door, 429 mm high, for WFLG*-2 / WFLGG*-2	top 45355/43411	50	28428	299	302	307	310	321 [1]	333	366	—	—	—
	top 45356/43412	60	28429	323	326	329	331	347 [1]	362	396	—	—	—
	top 45358/43413	80	28430	364	369	371	375	397 [1]	416	466	—	—	—
	top 45359/43414	90	28431	381	384	391	393	418 [1]	444	499	—	—	—
	top 45360/43415	100	28432	404	407	419	422	448 [1]	472	540	—	—	—
	top 45362/43416	120	28433	457	460	461	463	498 [1]	530	591	—	—	—
								1) Except Inline 526					

Glass doors
incl. drillings, incl. handle

		Width in cm	Order No.	Points Price groups 1	2	3	4	5	6	7	8	9	10
Segmented glass doors / front panels for wall units Boulevard													
Segmented glass door 717 mm high, for wall units WGLS*-1 and wall units Boulevard WGB*-1	31434/34440/35437	45	28784	200	201	206	247	266 [1]	305	—	—	—	—
	31435/34441/35438	50	28785	201	204	207	253	276 [1]	312	—	—	—	—
	31436/35439	60	28786	204	206	209	260	289 [1]	327	—	—	—	—
								1) Except Inline 526					
Segmented glass door, 789 mm high, for wall units WGLS*-2 and wall units Boulevard WGB*-2	41434/41440/45437	45	60687	201	204	207	248	270 [1]	308	—	—	—	—
	41435/41441/45438	50	60587	204	206	209	254	277 [1]	314	—	—	—	—
	41436/45439	60	60487	206	207	213	263	292 [1]	329	—	—	—	—
								1) Except Inline 526					
Segmented glass door 861 mm high, for wall units WGLS*-3 and wall units Boulevard WGB*-3	51431/51440/52437	45	60688	204	206	209	250	273 [1]	310	—	—	—	—
	51432/51441/52438	50	60588	206	207	210	257	279 [1]	315	—	—	—	—
	51433/52439	60	60488	207	209	215	266	296 [1]	330	—	—	—	—
								1) Except Inline 526					
Segmented glass door 1293 mm high, for wall units WGLS*-130 and wall units Boulevard WGB*-130	25551/25794	45	60694	245	248	345	435	464 [1]	493	—	—	—	—
	25552/25795	50	60695	251	254	361	456	486 [1]	517	—	—	—	—
	25553/25796	60	60696	260	261	375	491	531 [1]	571	—	—	—	—
								1) Except Inline 526					
Segmented glass fronts for wall units with swivel flap doors													
Segmented glass front 717 mm high, for wall units WKSGLS*-1	32405	50	60493	201	204	207	253	276 [1]	315	—	—	—	—
	32406	60	60494	204	206	209	260	289 [1]	329	—	—	—	—
	32408	80	60495	216	225	242	301	327 [1]	383	—	—	—	—
	32409	90	60496	226	237	257	329	356 [1]	413	—	—	—	—
								1) Except Inline 526					
Front panels for wall units with bar flap													
Bar flap, 357 mm high, for WKB*-36	34334	45	35334	137	143	156	172	196	210	225	—	276	—
	34335	50	35335	146	153	164	177	199	215	231	—	279	—
	34336	60	35336	158	165	169	200	219	247	261	—	311	—
	34338	80	35338	177	180	188	213	237	258	279	—	324	—
	34339	90	35339	184	188	196	222	250	273	304	—	334	—
Front panels for wall units Square													
Available colours for glass fronts Square: No. 321 Aluminium framed front in stainless steel appearance with 02 Matt glass No. 308 Aluminium framed front in stainless steel appearance with 035 Grey glass No. 329 Aluminium framed front in Black with 39 Black glass													
Glass flap door Square, 357 mm high for WKSQ*-36 refer to colour chart above	37515	50	39035	456	456	456	456	456	456	456	456	456	456
	37516	60	39036	479	479	479	479	479	479	479	479	479	479
	37518	80	39038	552	552	552	552	552	552	552	552	552	552
	37519	90	39039	578	578	578	578	578	578	578	578	578	578
	37520	100	39040	604	604	604	604	604	604	604	604	604	604
	37522	120	39042	647	647	647	647	647	647	647	647	647	647
Glass door Square, 717 mm high for WSQ*-1 refer to colour chart above	37524/37529	45	39031	542	542	542	542	542	542	542	542	542	542
	37525/37531	50	39032	559	559	559	559	559	559	559	559	559	559
	37526	60	39033	594	594	594	594	594	594	594	594	594	594
Glass door Square, 789 mm high for WSQ*-2 refer to colour chart above	41524/41529	45	60690	569	569	569	569	569	569	569	569	569	569
	41525/41531	50	60590	588	588	588	588	588	588	588	588	588	588
	41526	60	60490	626	626	626	626	626	626	626	626	626	626
Glass door Square, 861 mm high for WSQ*-3 refer to colour chart above	51524/51529	45	60367	593	593	593	593	593	593	593	593	593	593
	51525/51531	50	60368	618	618	618	618	618	618	618	618	618	618
	51526	60	60369	656	656	656	656	656	656	656	656	656	656

Glass doors
incl. drillings, incl. handle


		Width in cm	Order No.	Points Price groups 1	2	3	4	5	6	7	8	9	10
Folding/lifting door Square, 357 mm high for WFLSQ*-1 refer to colour chart above	bottom 31575	50	39045	529	529	529	529	529	529	529	529	529	529
	bottom 31576	60	39046	555	555	555	555	555	555	555	555	555	555
	bottom 31578	80	39048	606	606	606	606	606	606	606	606	606	606
	bottom 31579	90	39049	631	631	631	631	631	631	631	631	631	631
	bottom 31580	100	39050	654	654	654	654	654	654	654	654	654	654
	bottom 31582	120	39052	705	705	705	705	705	705	705	705	705	705
Swivel flap door Square, 717 mm high for WKSSQ*-1 refer to colour chart above	31595	50	39055	618	618	618	618	618	618	618	618	618	618
	31596	60	39056	654	654	654	654	654	654	654	654	654	654
	31598	80	39058	717	717	717	717	717	717	717	717	717	717
	31599	90	39059	758	758	758	758	758	758	758	758	758	758

Front panels for wall units Flat


Available colours for glass fronts Flat:
No. 431 Aluminium framed front in Alpine white with 02 Matt glass
No. 434 Aluminium framed front in Slate grey with 035 Grey glass
No. 438 Aluminium framed front in Black with 39 Black glass
No. 440 Aluminium framed front in Black with 48 Black glass matt

Glass door Flat, 717 mm high for WF*-1 refer to colour chart above	32483	30	60371	518	518	518	518	518	518	518	518	518	518
	32484/32489	45	28464	584	584	584	584	584	584	584	584	584	584
	32485/32490	50	28465	609	609	609	609	609	609	609	609	609	609
	32486	60	28466	647	647	647	647	647	647	647	647	647	647
Glass door Flat, 789 mm high for WF*-2 refer to colour chart above	43483	30	60891	553	553	553	553	553	553	553	553	553	553
	43484/43489	45	60691	612	612	612	612	612	612	612	612	612	612
	43485/43490	50	60591	637	637	637	637	637	637	637	637	637	637
	43486	60	60491	682	682	682	682	682	682	682	682	682	682
Glass door Flat, 861 mm high for WF*-3 refer to colour chart above	50483	30	60373	588	588	588	588	588	588	588	588	588	588
	50484/50489	45	60374	637	637	637	637	637	637	637	637	637	637
	50485/50490	50	60375	669	669	669	669	669	669	669	669	669	669
	50486	60	60376	712	712	712	712	712	712	712	712	712	712
Glass door Flat, 1293 mm high for WF*-130 refer to colour chart above	26493	30	60390	771	771	771	771	771	771	771	771	771	771
	26494	45	60391	861	861	861	861	861	861	861	861	861	861
	26495	50	60392	896	896	896	896	896	896	896	896	896	896
	26496	60	60393	965	965	965	965	965	965	965	965	965	965


Accessories for base units

			Abbreviation	Order No.	Dimensions Height in cm	Dimensions Width in cm	Points
	Shelves for base units white, edging material all-round, 16 mm thick, 474 mm deep, including shelf supports Available colours: 036 Interior white 194 Slate grey *If no colour is specified in the order, the version 036 Interior white appearance will automatically be supplied.*		EB20	9014		20	58
			EB30	9015		30	60
			EB40	9016		40	61
			EB45	7234		45	64
			EB50	9017		50	66
			EB60	9018		60	69
			EB80	9021		80	70
			EB90	9047		90	72
			EB100	9019		100	73
			EB120	9020		120	79
	Fastening fitting for sink front panels, incl. dowels			2604			13,9
	Heat protection shield Side profile as heat protection for cooker housings and appliance housings for raised ovens, 2 pieces (LH/RH)		HSS	4501			42
	1 set of Vario clips for rear panel fastening, incl. 8 clips and 16 screws			2695			16,8
	Cover for syphon recess 1-part system for covering the syphon recess made of plastic, slate grey outer dimensions (H x W x D): 58 x 227 x 260 mm for syphon recess W x D: 210 x 250mm, for use in sink pull-out and vanity base units, suitable for width of 450 mm or more. *MP-PTOSA (7962) with syphon recess can only be used for units with a width of 500 mm or more.*			3332			44
	Waste system, separate,for model SPU(D)A* / UASA* / U(D)AASA*	21039		10478		30	477
		21041		10479		45	526
		23214		10480		60	499
		23254 / 21208		10475		45	390
		23255 / 21209		10476		50	399
		23256 / 21210		10477		60	403
	Waste system, separate, for model SPU(D)A-AF*	21277 / 20274		10472		45	518
		21278 / 20275		10473		50	526
		21279 / 20276		10474		60	537
	Waste system, separate, for ref. SPU(D)A-A*	22294 / 22284		10489		45	320
		22295 / 22285		10490		50	326
		22296 / 22286		10491		60	346
	Waste system single Flex 21 for types UDAASA*, (N)SPU(D)2A-AF*, GUWST Plannable for units with a width of 600 mm or more.			10470			520
	as above, but for pull-outs with 400 mm depth.			10471			496
	Fitting kit for oven housing HU	22315		2641			10,1
	Sealing profile for oven housing	22315, 309, 31311, 33309, 37311, 41311		2677		60	13,9
	Metal post for oven housings	22315, 309, 31311, 33309, 37311, 41311		2678		60	16,8




Individual components

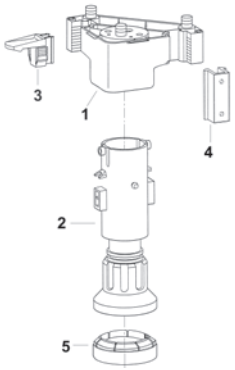			Abbreviation	Order No.	Dimensions		Points
					Height in cm	Width in cm	
	Fig. 1: Glide adapter for Vario plinth system, for dowelling and bolting to the base panel	1 piece		4225	5		9,2
	Fig. 2: Plug-in sleeve, to plug into glide adapter, matching the plinth height	1 piece		4236	7		9,2
		1 piece		4206	10		9,6
		1 piece		4207	15		10,1
		1 piece		4208	20		10,5
	Fig. 2: Plug-in sleeve, matching oven housing HU, ref. 315	4 pieces		4227	10		16,4
		4 pieces		4228	15		16,5
		4 pieces		4229	20		17,2
	Fig. 2: Plug-in sleeve, matching carousel and chamfered carousel corner units (base plate fitted lower)	6 pieces		4230	10		19,7
		6 pieces		4231	15		19,9
		6 pieces		4232	20		20,4
	Fig. 3: Engagement element, for plinth panel, to clip into glide adapter	1 piece		4209			9,2
	Fig. 4: Clips, for fastening the lateral plinth panel (return with adhesive tape)	1 piece		4210			9,2
	Fig. 5: Plinth foot adapter, as height compensation for intermediate heights	1 piece	SOFA1	4188	1		9,2
		1 piece	SOFA2	4189	2		9,6
	not illustrated: Plinth foot adapter for plug-in sleeve, 70 mm high	1 piece	SOFAK	4199	2		9,6
	Surcharge for plinth foot Height 20 mm, black plastic, height adjustment: -2 / + 8 mm, packing unit: 5 pieces, incl. 5 piece adapter, 5 mm high, for floor-standing planning in living spaces with bathroom units, sideboards and base units	4 pieces	SFB20-4	4247			47
		5 pieces	SFB20-5	4248			51
	not illustrated: 90° plinth corner profile pouch consisting of: 3 plinth corner profiles, 2 plinth connecting profiles, screws			4864			9,8
	not illustrated: 135° plinth corner profile pouch consisting of: 2 plinth interior corner profiles, 2 plinth exterior corner profiles, screws			4866			16,4
	Safety bracket for wall mounting incl. screws and dowels			2639			10,1
	Safety bracket for wall mounting incl. screws and dowels 2 safety brackets, fastening materials and installation instructions			3507			13,1
	Fittings bag for downdraft extractor fan required for plinth heights < 120 mm, when the cable routing duct is planned beneath the units		BB-ML	99147			7,9







Accessories for highboards / tall units

			Abbreviation	Order No.	Dimensions Height in cm	Dimensions Width in cm	Points
	Additional shelf for highboards / tall units white, edging material all-round, 16 mm thick, 474 mm deep including shelf supports		EB30	9015		30	60
			EB40	9016		40	61
			EB50	9017		50	66
			EB60	9018		60	69
	as above, however for corner highboard HE100*		EBHE	9048		100	73
	Safety bracket for wall mounting incl. screws and dowels			2639			10,1
	Safety bracket for wall mounting incl. screws and dowels 2 safety brackets, fastening materials and installation instructions			3507			13,1
	Drip cup for dishwasher housing (silver-coloured)	47511, 45511, 47512, 45512		4852		45	61
		34785, 30785, 47510, 45510		4858		60	66
	Front connecting link for tall units *Please specify with your order if planned for use with Inline 526, Pura 917 or fronts with bar handle.*			4841			8,8



Accessories for wall units

			Abbreviation	Order No.	Dimensions Height in cm	Dimensions Width in cm	Points
	Additional shelf for wall units white, edging material all-round, 16 mm thick, 305 mm deep, including shelf supports, for side depth 350 mm		EB-W15	29005		15	54
			EB-W20	29010		20	54
			EB-W25	29012		25	55
			EB-W30	29030		30	55
			EB-W35	29013		35	58
			EB-W40	29031		40	60
			EB-W45	29032		45	60
			EB-W50	29033		50	60
			EB-W55	29034		55	61
			EB-W60	29035		60	61
			EB-W80	29036		80	66
			EB-W90	29037		90	66
			EB-W100	29038		100	69
			EB-W120	29039		120	72
	Additional shelf for wall units in repro décor carcase-coloured, edging material all-round, 16 mm thick, 305 mm deep, including shelf supports, for side depth 350 mm		EB-WG50	29095		50	74
			EB-WG60	29096		60	79
	Additional shelf for wall units hinged in parallel, folding/lifting doors and swivel flap doors white, edging material all-round, 16 mm thick, 278 mm deep, including shelf supports for side depth 350 mm		EB-WFLS15	29040		15	54
			EB-WFLS50	29045		50	60
			EB-WFLS60	29046		60	61
			EB-WFLSP80	29048		80	64
			EB-WFLSP90	29049		90	66
			EB-WFLP100	29050		100	66
			EB-WFLP120	29051		120	70

Individual components

			Abbreviation	Order No.	Dimensions		Points
					Height in cm	Width in cm	
	Additional shelf for corner wall units white, edging material all-round, 16 mm thick, including shelf supports for side depth 350 mm	32160/52160	EB-WE60	29052		60	107
		32165/52165	EB-WE65	29053		65	108
		32168/52168	EB-WE80	29055		80	164
		32687/51687	EB-WEK80	29054		80	64
		32169/52169	EB-WE90	29056		90	177
		32697/51697	EB-WEK90	29057		90	66
		31150/52150	EB-WED60	29058		60	123
		32677/51677	EB-WEV60	29059		60	61
	Glass shelves, for wall units with glass doors, 5 mm thick, 305 mm deep, for side depth 350 mm *Price for 2 pieces.*		EBG-W30	29060		30	79
			EBG-W40	29129		40	83
			EBG-W45	29061		45	86
			EBG-W50	29062		50	96
			EBG-W60	29063		60	105
			EBG-W90	29064		90	139
			EBG-W100	29065		100	153
			EBG-W120	29066		120	180
	Glass shelf for wall units with folding/lifting doors or swivel flap doors 6 mm thick, 278 mm deep, for side depth 350 mm *Price for 2 pieces.*		EBG-WFLS50	29165		50	101
			EBG-WFLS60	29166		60	108
			EBG-WFLS80	29168		80	126
			EBG-WFLS90	29169		90	143
			EBG-WFL100	29170		100	156
			EBG-WFL120	29172		120	185
	Glass shelf for dresser units with plastic roll-up front 6 mm thick *Price for 1 piece.*	for utilisable depth 284 mm	EBG-AJ50	29024		50	74
		for utilisable depth 284 mm	EBG-AJ60	29025		60	83
		for utilisable depth 284 mm	EBG-AJ90	29026		90	105
		for utilisable depth 343 mm	EBG-AJT50	29640		50	96
		for utilisable depth 343 mm	EBG-AJT60	29641		60	105
		for utilisable depth 343 mm	EBG-AJT90	29642		90	139
		for utilisable depth 495 mm	EBG-AJTT50	29190		50	105
		for utilisable depth 495 mm	EBG-AJTT60	29192		60	115
		for utilisable depth 495 mm	EBG-AJTT90	29194		90	149
	Glass construction shelf for dresser units with plastic roll-up front 6 mm thick *Price for 1 piece.*	for utilisable depth 284 mm	KBG-AJ50	29027		50	74
		for utilisable depth 284 mm	KBG-AJ60	29028		60	83
		for utilisable depth 284 mm	KBG-AJ90	29029		90	105
		for utilisable depth 343 mm	KBG-AJT50	29645		50	96
		for utilisable depth 343 mm	KBG-AJT60	29646		60	105
		for utilisable depth 343 mm	KBG-AJT90	29647		90	139
		for utilisable depth 495 mm	KBG-AJTT50	29191		50	105
		for utilisable depth 495 mm	KBG-AJTT60	29193		60	115
		for utilisable depth 495 mm	KBG-AJTT90	29195		90	149
	Glass shelf for dresser units with glass roll-up front 6 mm thick *Price for 1 piece.*	for utilisable depth 268 mm	EBG-AJG50	29069		50	74
		for utilisable depth 268 mm	EBG-AJG60	29070		60	83
		for utilisable depth 330 mm	EBG-AJGT50	7295		50	86
		for utilisable depth 330 mm	EBG-AJGT60	3849		60	104
		for utilisable depth 450 mm	EBG-AJGTT50	29186		50	102
		for utilisable depth 450 mm	EBG-AJGTT60	29188		60	111

Individual components

			Abbreviation	Order No.	Dimensions		Points
					Height in cm	Width in cm	
	Glass construction shelf **for dresser units with glass roll-up front** 6 mm thick *Price for 1 piece.*	for utilisable depth 268 mm	KBG-AJG50	29067		50	74
		for utilisable depth 268 mm	KBG-AJG60	29068		60	83
		for utilisable depth 330 mm	KBG-AJGT50	9153		50	86
		for utilisable depth 330 mm	KBG-AJGT60	9155		60	104
		for utilisable depth 450 mm	KBG-AJGTT50	29187		50	102
		for utilisable depth 450 mm	KBG-AJGTT60	29189		60	111
	Glass shelf **for Climber** 8 mm thick *Price for 1 piece.*	311 mm deep	EBG-WC50	29080		50	74
		311 mm deep	EBG-WC60	29081		60	83
		311 mm deep	EBG-WC80	29082		80	96
		311 mm deep	EBG-WC90	29083		90	105
		311 mm deep	EBG-WC100	29084		100	111
	Safety bracket for wall mounting incl. screws and dowels			2639			10,1
	Suspension fitting for open shelf end wall unit	31722, 41722, 51722		2602			10,1
	1 pair of wall unit suspension brackets (2020 Collection)			2692			16,8
	1 pair of cover caps for wall unit suspension brackets, silver-coloured (2020 Collection)			3892			8,6
	Pair of cover caps for concealed shelf suspension fittings (2020 Collection)			4802			8,6
	1 pair of cover caps for concealed wall unit / shelf suspension fittings (from 2021 collection) **Available in:** 106 White, 014 Stainless steel appearance *Please include the desired design in the order.*			2929			3,8
	Metal rail for wall unit suspension	for compensation and corner units		9613		5,8	8,8
		for 150 mm wide wall units		9583		10	8,8
		for 300 mm wide wall units		9698		25	8,8
		for 350 mm wide wall units		9587		30	8,8
		for 400 mm wide wall units		9699		35	8,8
		for 450 mm wide wall units		9700		40	8,8
		for 500 mm wide wall units		9644		45	12,1
		for 550 mm wide wall units		9615		50	12,1
		for 600 mm wide wall units		9645		55	12,1
		for 800 (785) mm wide corner units		9617		73,5	14,5
		for 800 (800) mm wide corner units		9588		75	14,7
		for 900 (885) wide corner units		9628		83,5	15,5
		for 800 mm wide wall units		9618		75	14,5
		for 900 mm wide wall units		9632		85	15,5
		for 1000 mm wide wall units		9646		95	15,5
		for 1200 mm wide wall units		9633		115	17,5
	Spacer plate as spacer behind metal runners, 20 pieces			2687			10,1
	1 set of fastening lugs for WZB, 4 pcs.			2603			10,1
	Cleaning set for glass roll-up front **on dresser units AJG** Special cleaning agent for the glass slats as replacement (included in delivery of dresser unit)		RS-AJG	3847			61

Individual components

			Abbreviation	Order No.	Dimensions		Points
					Height in cm	Width in cm	
Accessories for hinges							
	Quick-mount concealed hinge Sensys with integrated cushioning	Hinged door units 110° opening angle	TSD110	6320			21
		Hinged door units 95° opening angle	TSD95	6323			22
		Corner units opening angle 165°	TS165	7441			22,9
	Quick-mount concealed hinge Sensys without integrated cushioning	Fridge doors opening angle 110°	TS110	7431			15,5
	Mounting plate for quick-mount concealed hinge	Aventos for WU with folding/lifting doors	MPD0	6325			9,2
		Sensys D3 for hinged doors	MPD	7474			8,6
		Sensys D8 for corner unit 800 x 800 mm	MPD8	6331			15,5
	Plastic dowels for quick-mount concealed hinges Sensys		TSKD	6330			4,1
General accessories							
	Shelf supports, full metal	simple: 20 pcs.	FTB20	9524			16,8
		with safety bracket 20 pcs.	FTBK20	9527			16,8
	Door buffer (20 pcs.)			2682			10,1
	Child safety guard DUO for doors 10 pcs., including screws			3929			73
	Sealing profile for carcase fillers Fixed length: 2232 mm *Please specify carcase colour!*			2625			13,9
	Spacer profile for top shelf MP-LADB 0,5 mm thick, transparent fixed length: 5000 mm			3330			17,7
No image	Spacer profile for top shelves as base shelf 3 mm thick, transparent fixed length: 3420 mm		DP-ADB	9888			41
	Spacer profile for cornice shelf KB* 5 mm thick, transparent *Price per started 1000 mm*			2652			10,1
	Sealing tape for light pelmets / sound-absorbing tape for LINE N kitchens Fixed length: 3000 mm			2653			16,8
	Spacer for LINE N kitchens for handle-less base and tall units LINE N, 15 mm wide, 10 pieces per bag		NDH10	59017		1,5	9,2
	Worktop fitting incl. turnbuckle connector lamelos and glue			9424			22
	Worktop fitting incl. turnbuckle connector for Slim Line worktop lamelos and glue			9423			69
	Adhesive edging film 35 mm, for rear carcase edge *Price per started 1000 mm.* *Please specify carcase colour!*			4980			19,9

Individual components


PP edging

		Abbreviation	Order No.	Dimensions Height in cm	Dimensions Width in cm	Points
PP edging (thick edging without adhesive) for 25 mm thick top shelves and upright panels in worktop décor	1,5 / 28 mm		4930			16,8
for 25 mm thick top shelves or upright panels in high gloss or ultra high gloss	1,5 / 28 mm		4967			20
for 25 mm thick top shelves or upright panels in matt décors	1,5 / 28 mm		4977			16,8
for 50 mm thick top shelves or upright panels in matt décors	2,0 / 54 mm		4970			21,5
for 50 mm thick top shelves or upright panels in high gloss or ultra high gloss	2,0 / 54 mm		4992			25,7
for 16 mm thick niche cladding in worktop décor	1,2 / 19 mm		4976			15,3
for 16 mm thick carcase material and Color Concept colours	1,2 / 19 mm		9134			16,8
for 16 mm top shelves, upright panels, niche cladding and carcase material in matt décors	1,2 / 19 mm		4974			15,3
for 16 mm thick top shelves or upright panels in high gloss or ultra high gloss	1,2 / 19 mm		9119			17,5
for 19 mm carcase material in matt décors	1,2 / 23 mm		4975			13,9
for 100 mm thick top shelves and console panels APP	1,5 / 104 mm		9131			64,2
for 16 mm thick worktop Slim Line	1,5 / 21 mm	APSLDKA	9114			16,5
for 25 mm thick worktops	1,5 / 30 mm	APDKA25	9108			17,7
for 38 mm thick worktops *Price per started 1000 mm.*	1.5 / 38 mm	APDKA	9112			20

10

Planning information
Dimensional drawings
Installation information

Height grid for tall units

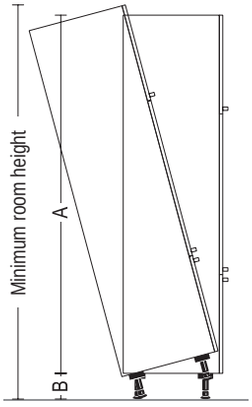


Minimum room heights


A* \ B*	70 mm	100 mm	150 mm	200 mm
2016 mm	2147 mm	2176 mm	2224 mm	2273 mm
2088 mm	2217 mm	2246 mm	2295 mm	2343 mm
2160 mm	2287 mm	2316 mm	2365 mm	2414 mm
2232 mm	2357 mm	2386 mm	2435 mm	2484 mm

A* = Tall unit height
B* = Plinth height


Height grid, carcase heights

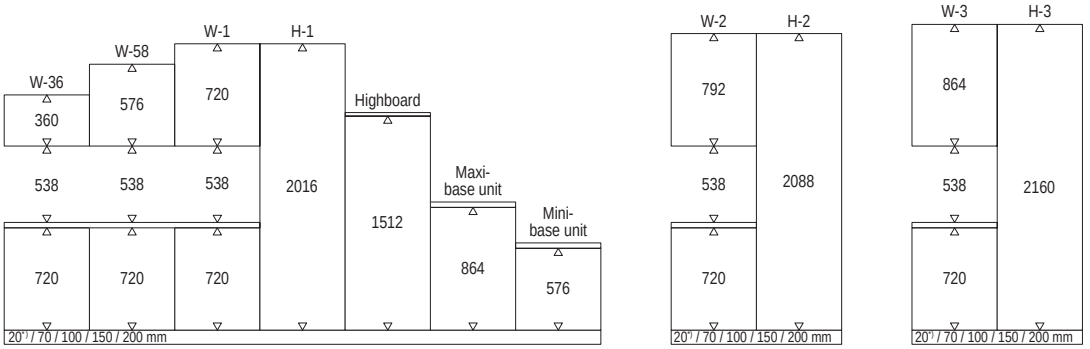



Height grid, XL carcase heights

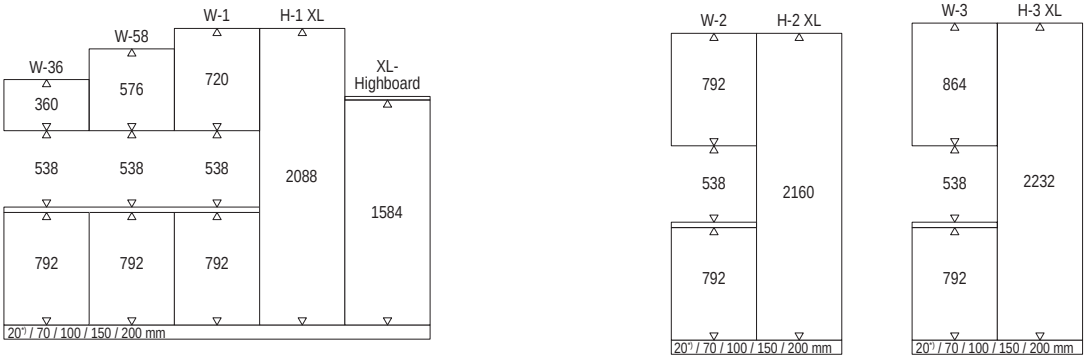

Height grid, standard and maxi door dimensions

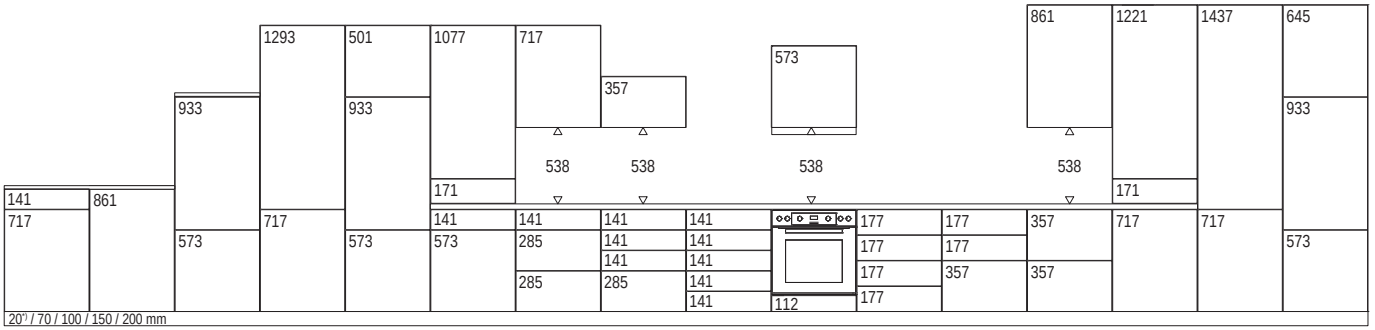


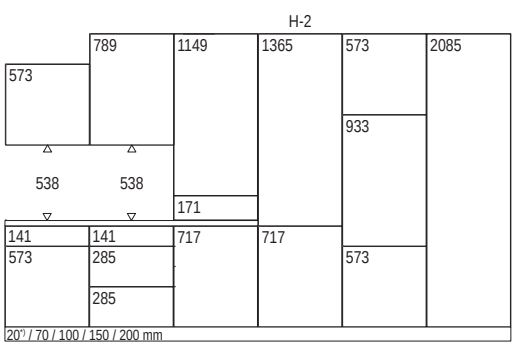

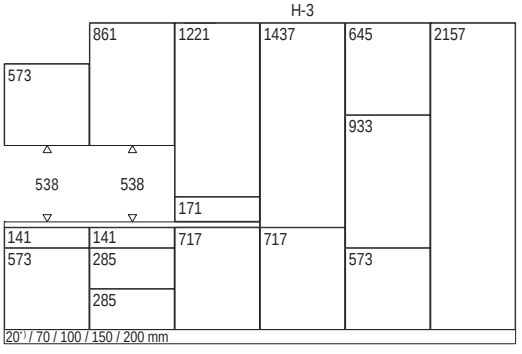


*) For ergonomic reasons, the 20 mm plinth height must not be used in the active areas of the kitchen (cooking, washing, refrigeration).


Height grid, XL door dimensions, Height 1

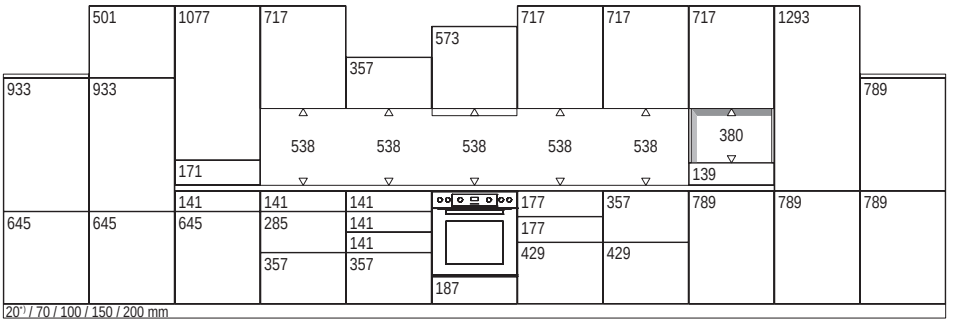

Height grid, XL door dimensions, Height 2

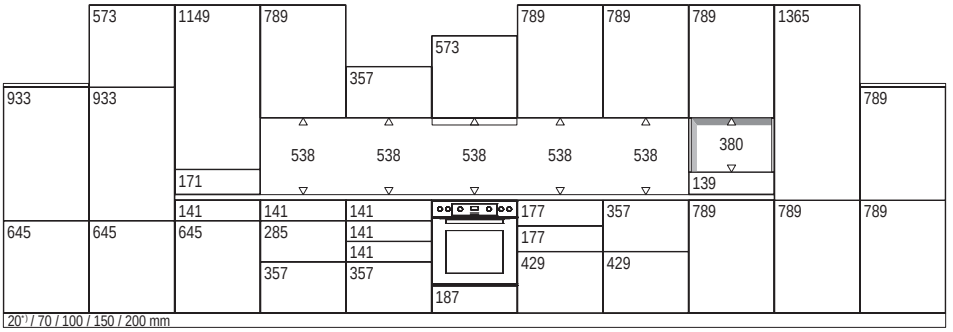


Height grid, XL door dimensions, Height 3

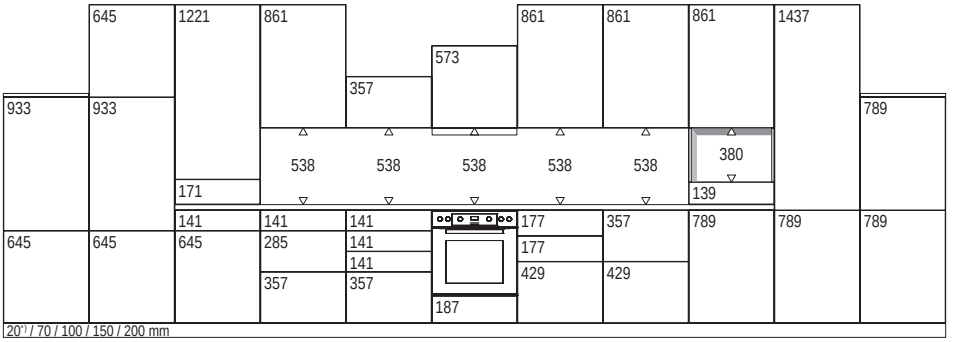

*) For ergonomic reasons, the 20 mm plinth height must not be used in the active areas of the kitchen (cooking, washing, refrigeration).


Base units
As end of run units - or breaking the line / Fillers

UDIAAD*15




Diagonal pull-out unit
- Can be planned as LH or RH version.
- When planned at the end of run, the short side = 421 mm carcase depth becomes the visible end side.
- Installation dimension = 150 mm, observe a possible worktop overhang at this point.
- Planning side = long side = 550 mm carcase depth (planning dimension: 561 mm).
- The delivery includes plinth.
- If this unit is used as a protruded solution, the protrusion must amount to 140 mm. Can be used, for instance, for protruding ovens.

UDIA(A)D*25




Diagonal pull-out unit
- Can be planned as LH or RH version.
- When planned at the end of run, the short side = 382 mm carcase depth becomes the visible end side.
- Installation dimension = 250 mm, observe a possible worktop overhang at this point.
- Planning side = long side = 550 mm carcase depth (planning dimension: 561 mm).
- The delivery includes plinth feet.
- If this unit is used as a protruded solution, the protrusion must amount to 179 mm. Can be used, for instance, for protruding ovens.

URA32(-X)




Open shelf end base unit, chamfered on one side
- Can be planned as LH or RH version.
- Side depth: 582 mm
- Width: 322 mm
- Planning side = long side = 582 mm carcase depth.
- Including the worktop overhang, the installation dimension amounts to 340 mm.
- The delivery includes plinth feet.

URA18(-X)





Diagonal base unit, Z-shaped chamfered on one side
- Can be planned as LH or RH version.
- Side depth: 582 mm
- Width: 182 mm
- Planning side = long side = 582 mm carcase depth.
- Including the worktop overhang, the installation dimension amounts to 200 mm.
- Delivery without plinth feet and plinth panels, the plinth return will be fixed to the adjacent base unit.
- Do not plan adjacent to built-under appliances.


UPE(-X/-M)



Base unit angle fillers
- The planning dimensions of the unused corners are 650 x 650 mm.
- The front filler (front angle filler) is 70 x 70 mm wide (ref. UPE-X/-M) or can be planned to have a length extension of 50 - 170 mm (ref. UPE-V-X/-M).
- Angle fillers are cut and bolted at the factory.
  The space requirement must be specified with the order. Adjustments on site are not possible.
- Planning dimension changes from minus 20 mm to plus 100 mm are possible at the factory.
- Angle changes above or below 90° are generally possible, see surcharge UPE-VAR / 175.
  Exceptions: Angle changes of 90 to 178° are possible for designs with a bar handle 240 / 430.
- A shortened carcase face for affixing to adjacent units is included with the units.
- When planning a dishwasher adjacent to the filler, consider the angle filler with a 561 mm deep side return (surcharge-No. MP-GS).
- The corner dimension 650 x 650 permits designs with drawers or front pull-outs next to the corner, no protruding handles form an obstacle. Please note the respective handle height when creating your plan. It can be found in chapter 2.








135° Angle filler


UPE135-2(-X/-M)



135° Angle filler set, moulded part

- Planning dimensions with base unit, 600 mm wide = 1050 x 1050 mm. The planning dimensions cannot be changed.
- Included in delivery = 2 pieces (left and right).
- Not available for Pura 917, Inline 526, Stone Art 566, Easytouch 945, bar handle 240 / 430 and planning dimensions larger than 1050 mm.
  In these cases, please use ref. UPE135-2-V(-X) / (332 / 37332 / 22332).
- Not possible with a worktop depth of 585 mm.
- Planning a dishwasher adjacent to an angle filler requires a corner angle filler with a side depth of 561mm (surcharge MP-GS).
- Angle changes are not possible.


UPE135-2-V(-X/-M)



135° Angle filler set, front material

- Double bracketed, mitre-glued front material
- Planning dimensions with base unit, 600 mm wide = 1050 to 1190 mm x 1050 to 1190 mm.
- Included in delivery = 2 pieces (left and right).
- Planning a dishwasher adjacent to an angle filler requires a corner angle filler with a side depth of 561 mm (surcharge MP-GS).
- Angle changes are possible.


UPE135(-X/-M)



135° Angle filler set, moulded part

- For design-dependent 135° corner solutions
- Planning dimensions = 259 x 259 mm. The planning dimensions cannot be changed.
- Not available for Pura 917, Inline 526, Stone Art 566, Easytouch 945, bar handle 240 / 430 and planning dimensions larger than 259 mm.
  In these cases, please use ref. UPE135-V(-X/-M) / (331 / 37331 / 21331).
- Not possible with a worktop depth of 585 mm.
- Planning a dishwasher adjacent to an angle filler requires a corner angle filler with a side depth of 561 mm (surcharge MP-GS).
- Angle changes are not possible.

UPE135-V(-X/-M)
HPE135-V*(-X*)




135° Angle filler set, front material


- For design-dependent 135° corner solutions
- Double bracketed, mitre-glued front material
- Planning dimensions = 259 to 400 mm.
- Planning a dishwasher adjacent to an angle filler requires a corner angle filler with a side depth of 561 mm (surcharge MP-GS).
- Angle changes are possible.

Base units | Corner solutions

UE(D) 80 / 90 (-X)
UE(D)T 80 / 90 (-X/-M)



UE(D) 80 / 90 (-X)




Diagonal corner unit with hinged door

- Required floor space / Planning dimensions = 800 x 800 mm / 900 x 900 mm
- Door width: 300 mm / 450 mm
- Side depth: 561 mm
- The corner base unit can be taken apart on site.
- Changing and adding shelves at a later point is not possible.

Note:

- Do not plan ovens with protruding handles next to the corner base unit.
- Do not plan sink units and hobs adjacent to the corner base unit due to the cut-outs next to the tongue and groove joint.
- Do not plan lower fitted worktops adjacent to higher ones.
- Not possible with the following handles using drill pattern 18: 370, 620, 650, 890.




U(D)TE 80 / 90 (-X/-M)

Corner base unit


- Required floor space / Planning dimensions = 800 x 800 mm / 900 x 900 mm
- Side depth: 561 mm
- The corner base unit can be taken apart on site.
- If planned as peninsular, carcase material for the rear panels is available. Order full height dimensions, considering the plinth height, down to the floor. Back panel cladding in front designs, refer to RFD80-72 and RFD90-72.
- A support panel or upright is recommended at the end of a run.
- Changing and adding shelves at a later point is not possible Type U(D)TE80/90(-X/-M).
- Island designs of type UE(D)K(-X/-M) require a continuous base unit back panel (RKS*).


Note:

- Do not plan protruding solutions adjacent to the corner unit U(D)TE80/90(-X/-M) and UE(D)TK80/90(-X). It would not be possible to open the door.
- Do not plan a lower unit height adjacent to the corner unit U(D)TE80/90(-X/-M) and UE(D)TK80/90(-X). It would not be possible to open the door.
- If type UE(D)K(-X/-M) is planned at end of run, an upright at end of run is required.




UE(D)K 80 / 90 (-X/-M)






UE(D)TK 80 / 90 (-X)

Planning possibilities for 800 x 800 mm corner solutions




Planning possibilities for 900 x 900 mm corner solutions




Special corner solutions for LINE N kitchen s. chapter 8


Base units | Corner solutions



UE...(-X/-M)



UEBD...(-X/-M)




UESA...(-X/-M)


Half corner cabinets (also XL height, maxi-height and highboards)

- Island designs of type UE(D)K(-X/-M) require a continuous base unit back panel (RKS*). The planning dimensions must be specified with the order. Adjustments on site are not possible.
- Angle changes above or below 90° are generally possible, see surcharge UPE-VAR / 175.
  Exceptions: Angle changes of 90 to 178° are possible for designs with a bar handle 240 / 430.
- Planning dimension changes from minus 20 mm to plus 100 mm are possible at the factory.
- A shortened carcase face for affixing to adjacent units is included in the scope of delivery.
- Door hinge side is also the face side.
- Specify right or left, to ensure that the corner base unit is delivered with the correct hinge side.
- Planning a dishwasher adjacent to a corner unit requires an angle filler with a side depth of 561 mm (surcharge MP-GS).


Dimension table for half corner cabients in mm:

Planning dimensions	= 650 x	1050	1100	1150	1250
Carcase width	=	900	900	1000	1000
Door width	=	394	444	494	594
Variable (planning dimensions)	= 630 - 750 x	1030 - 1150	1080 - 1200	1130 - 1250	1230 - 1350
Not usable	=	150	200	150	250
Required floor space for corner wall unit	=	650 x 650	650 x 650	650 x 650	650 x 650
Additional wall unit width	=	400	450	500	600

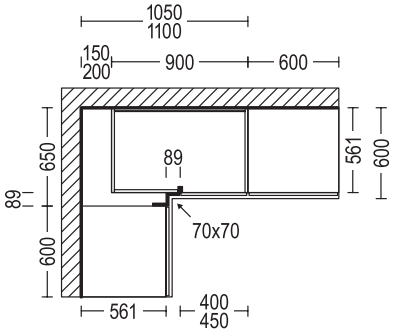

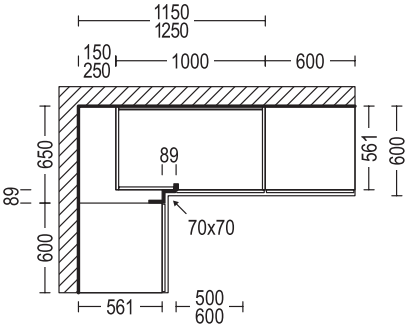

Planning information for corner units with swivel pull-out



Note:

- The tablars swivel out ranging from 280 mm to 350 mm to the right / left and from 620 mm to 720 mm toward the front upon opening, respective of unit size.
- Units with a swivel pull-out (UESA(-X/-M) / HESA(-X)) are not available adjacent to units of a greater depth or stand-alone refrigerators with a depth of more than 585 mm!
- The hinged door must be opened at least 85° so that it is possible to swivel out the tablars.
  Please check for handle depth & handle collisions if the side dimension of the filler is less than 70 mm.

Unit width	Swivel depth	Swivel width
900 mm	620 mm	280 mm
1000 mm	720 mm	350 mm

Special corner solutions for LINE N kitchen s. chapter 8


Wall units | Corner solutions

Planning possibilities for corner wall units
- All corner base units can be variably matched with corner wall units in both wall unit heights (576 / 720 / 792 / 864 mm).
- The vertical line should always be continued in line with the base units or at least coincide again with the next unit.


Take note if protruding handles are planned:
- When the diagonal corner wall unit has a RH hinge, the wall unit must also be hinged on the right-hand side.
- When the diagonal corner wall unit has a LH hinge, the wall unit must also be hinged on the left-hand side.

Take note when placing cooker hoods or tall units next to the corner wall unit 650 x 650 / 800 x 800 / 900 x 900 mm:
- The first door that needs to be opened must not be directly next to the cooker hood or a tall unit, as it would not be possible to open this door due to the depth of the cooker hood or tall unit!


Corner solution
650 x 650 mm




Corner solution
650 x 650 mm




Corner solution
650 x 650 mm




Corner solution
1150 x 650 mm




Corner solution
800 x 800 mm




Corner solution
900 x 900 mm



Corner solution
900 x 900 mm




Corner solution
900 x 900 mm




Planning possibilities for diagonal corner wall units
- The 900 x 900 mm planning dimension can be obtained for instance by a 650 x 650 mm diagonal corner wall unit (door width 394 mm) and two 250 mm wide wall units.
- To avoid two smaller doors for traditional style and framed door ranges, there is the alternative possibility of planning two 250 mm open shelf units.

Note:
- Not possible with the following handles using drill pattern 18: 370, 620, 650, 890.

Diagonal corner solution
900 x 900 mm



Diagonal corner solution
1050 x 1050 mm



The 1050 x 1050 mm planning dimension is obtained by a 650 x 650 mm diagonal wall unit (door width 394 mm) and two 400 mm wide wall units.

Special corner solutions for LINE N kitchen s. chapter 8

Corner solutions | Niche panelling

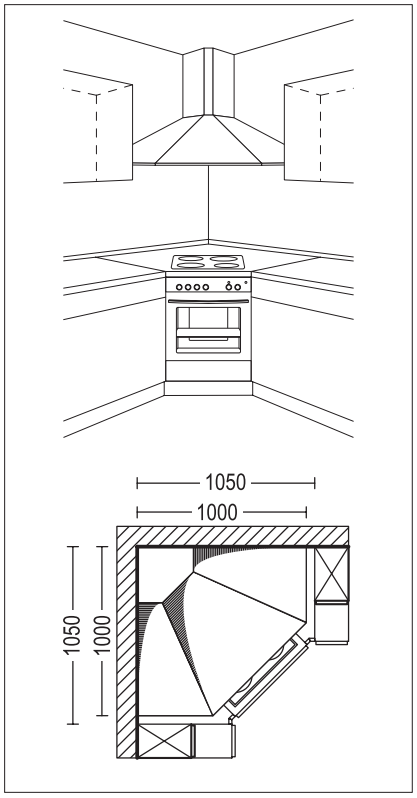


Fig. 1

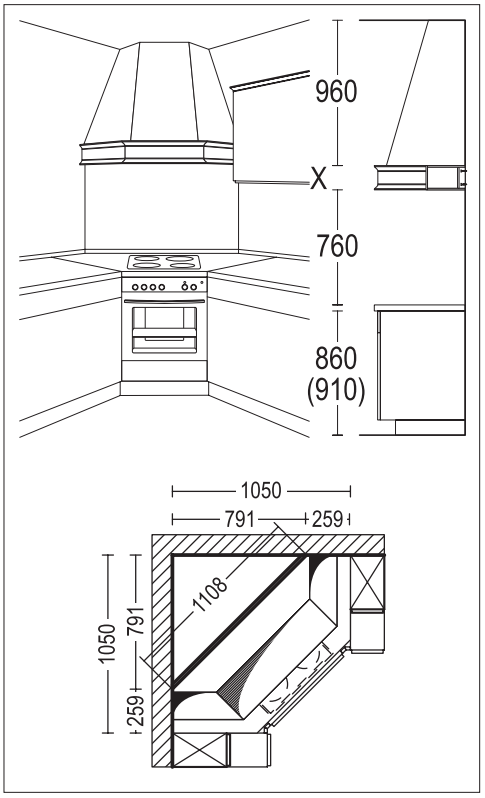


Fig. 2


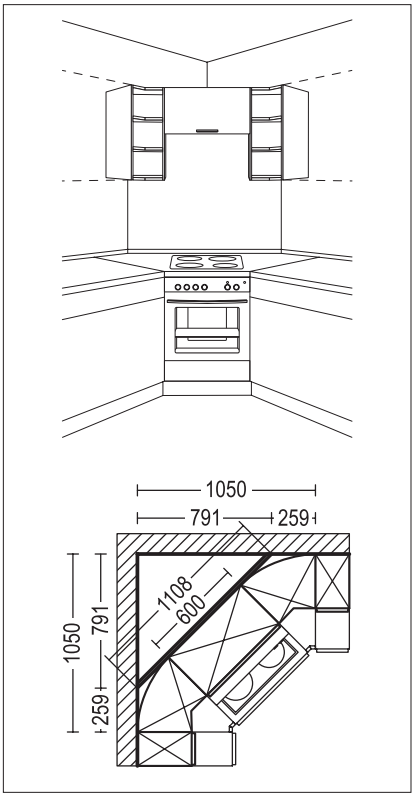


Fig. 3

Corner solutions for 600 mm wide appliances

- Required floor space: 1050 x 1050 mm
- The wall unit area allows three different corner versions, see Figs. 1 to 3 with the attendant floor plans.
- In the base unit area, the corners are formed by the angle fillers type UPE135-2 or UPE135-2-V, which are screw-fitted to the LH and RH cabinets.
- If a dishwasher is planned on the LH or RH side, the angle fillers are provided with a carcase side panel (MP-GS).

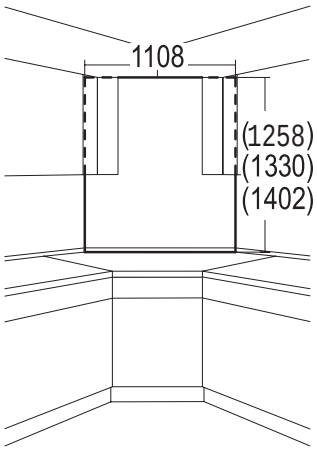



Niche rear panelling for 1050 x 1050 mm wide corner solutions


- Fig. 2 shows the corner canopy, consisting of the bottom section including the tiled cornice section (specify the laid tiling dimension) and the top section which has to be adapted on site.
- Fig. 2 and 3 require niche back panelling. The floor plan sketches show the dimensions for the niche cladding and corner wall units.
- The diagonal dimension of 1108 mm width accommodates two 135° corner open shelf units and one wall unit with a width of 600 mm.
- Niche panelling, 1258 mm high, with 720 mm wall unit height (W-1)
  Niche panelling, 1330 mm high, with 792 mm wall unit height (W-2)
  Niche panelling, 1402 mm high, with 864 mm wall unit height (W-3)
- The side edges are rounded.
- In the event of niche panelling made on site, the corner dimension up to the front edge of the laid tiling is 791 mm considering a 90° room angle.
- The niche panelling is suitable for tiling using a dispersion adhesive.

Planning information for independent hot plates

KKB / DBKI / NDBKI







LINEN

For operation of conventional or induction hot plates in 38 mm worktops directly above a drawer, pull-out or hinged door, a heat protection panel (KKB, DBKI, NDBKI) must be installed for safety reasons, in so far as the appliance does not have its own protection panel.

Please take the following points into consideration when planning your kitchen and include the respective information with your future orders.

As a rule when ordering:


- For reasons of safety and product liability we are obligated to confirm and deliver the respective heat protection panel (KKB, DBKI, NDBKI) with all orders that include the hot plate.
- For this reason, it is not possible to delete the heat protection panel!
- With LINEN kitchens, the recessed handle is provided with an additional milled opening for ventilation (MP-NAUSI). Milling is not necessary for appliances from the BSH and Electrolux group or for hot plates of the brands Miele, Bora and Elica.
- If the hot plate is not an integral component of the order, please inform us in writing, whether the required heat protection is also to be supplied by the third-party supplier / appliance manufacturer.
- If this information is missing from your order, we are obligated to confirm and deliver the respective heat protection panel.

Observe during kitchen planning:

- For planning hot plates across several base units, adjacent units with a width of 150 and 200 mm can be planned without a heat protection panel, as long as the central hot plate unit has a minimum width of 500 mm and is equipped with the respective heat protection panel.
- Planning induction hot plates above 2-door base units or half corner units is not permitted, since the protection shelves (DBKI) cannot be adapted at the factory nor on site. Plans for ceramic glass hot plates with thermal radiation above half corner units will be reviewed individually based upon the respective plan.
- Planning induction hot plates above 2-door base units or half corner units is not permitted, since the protection shelves (DBKI) cannot be adapted at the factory nor on site.
- For safety reasons it is not permissible to install hot plates above built-under appliances (dishwashers, fridges, etc.).

Angle changes for corner solutions


° VAR / UPE-VAR / 175



1), 2)

UPE.., HPE..., WPE...


° VAR / UPE-VAR / 175



1), 2)

UED..., UES..., UEV..., HE...,
WE60-20, WE80-35, WE90-45

Angle 88 - 92°
Surcharge MP-SONDER / 9312



3)

WE60, WE65

1) Pura & Inline angle fillers are available from 88 to 92°.
2) Surcharge for attached bar handle 240 / 430 (MP-GL / 7955) is available for an angle from 90 to 178°.
3) No light design and MP-WOG possible for wall units.

- The above-mentioned types require specification of a precise angle and leg value!
- For angles of less than 90°, do not plan pull-outs, dishwashers or built-in ovens in corners.
- Angle adaptations for Slim Line worktops and Line N are not available.

Hot plate units for downdraft extractor fan

KDMSA*(-X), KM2A*(-X), KMS2A*-M, KM2SA*(-X), KM2A*-M, KM3A*-M, NKMSA*(-X), NKM2A*(-X), LKMSA*(-X), LKM2A*(-X)

Plinth motor or compact appliance

When ordering the hot plate unit for downdraft extractor fans you no longer need to take into account whether you have a compact appliance with integrated motor or a hot plate extractor fan with plinth motor. You specify the planned appliance designation, the empty space* and the cable routing duct** and we generate the appropriate base unit for you. Important: Without this information the unit cannot be produced!

KDMP2A*(-X), KDMP2SA*(-X), KMPS2A*(-X) (-M), KMP3A*-M, KMP3SA*(-X), KMP2S2A*-M, NKMP2A*(-X), NKMP2SA*(-X), LKMP2SA*(-X), LKMP2A*(-X)


Panorama downdraft extractor fan with vertical motor

This type of appliance has the motor installed at the rear vertically or externally and is constructed at the front like a normal


hot plate. Depending on the worktop thickness, this allows for a drawer at the top. You provide us with the name of the planned appliance, the empty space* and the duct routing** and we will generate the right base unit for you.

Important: No unit can be generated without this information!


Side views

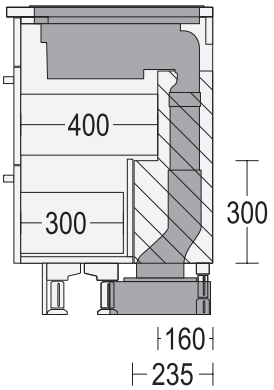

Downdraft extractor fan with plinth motor

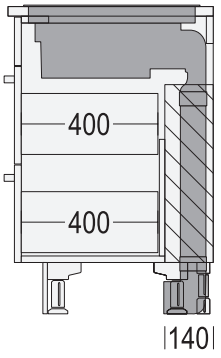


Downdraft extractor fan with integrated motor

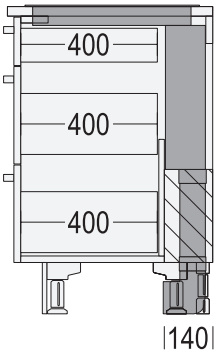

Panorama downdraft extractor fan with vertical motor

Unguided circulating air or duct-guided circulating air


Most appliances can often be installed in different ways. Duct-guided or unguided circulating air triggers completely different unit designs.

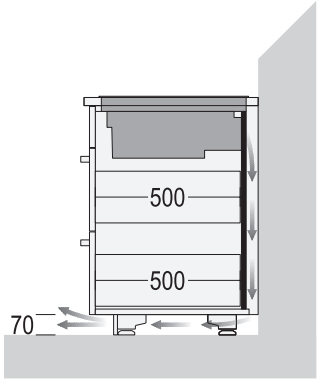

Downdraft extractor fan, circulating air, unguided (closed back panel)

Unguided circulating air

With unguided circulating air, the hot plate unit is supplied with a continuous back panel; the vapours are guided downwards behind the unit. **Important: A sufficiently large return flow opening must be ensured on site by cutting** down the plinth, plinth ventilation grille or louvre plinth.

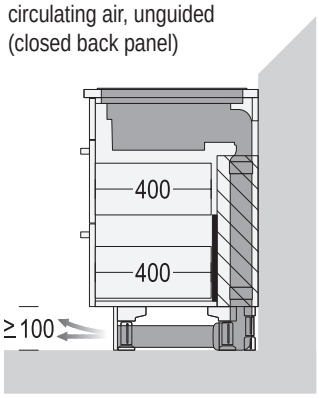


Downdraft extractor fan, circulating air, duct-guided (half-height back panel)

Duct-guided circulating air

With duct-guided circulating air, the hot plate unit is supplied with a half-height, reversible back panel. This enables easy installation and connection of the ducts. Please indicate the planned air duct when placing your order. Important: No unit can be generated without this information!

Hot plate units for downdraft extractor fan

Empty space* If, for example, an empty space of 100 mm is specified behind a hot plate unit for a downdraft extractor fan, we plan to position the vertical cable routing duct 100 mm further toward the rear (in so far as that is technically possible for the specified appliance) and automatically generate deeper pull-outs.

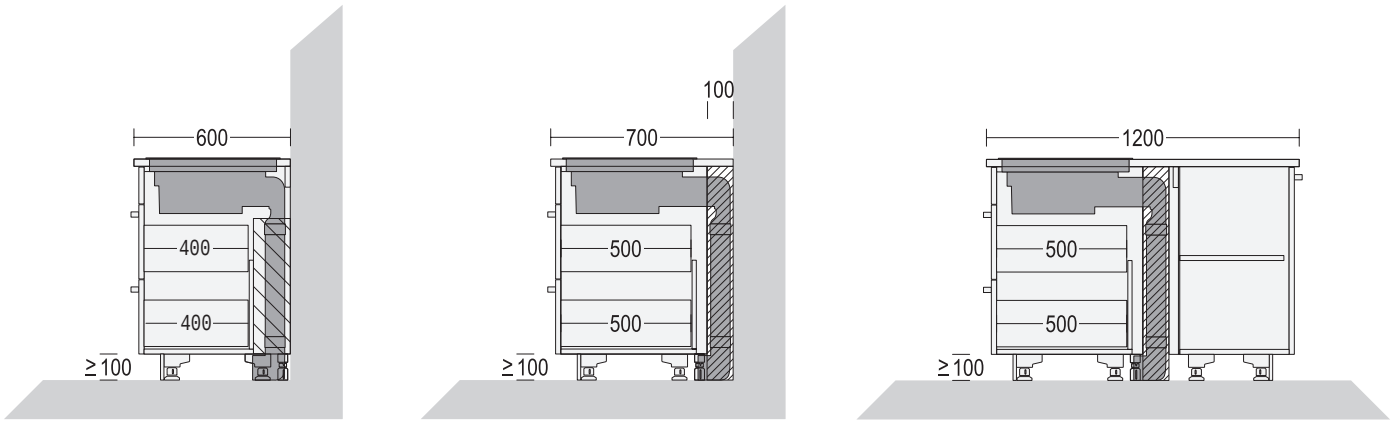


Available space in the unit due to shortened pull-outs

Available space behind the unit (empty space)


Different insertion depths or worktop thicknesses create different unit designs

Depending on the insertion depth of the downdraft extractor fan, it may collide with the pull-out below. If possible, we automatically change the pull-out to a drawer behind the pull-out panel.


The thickness of the worktop also has an influence on the unit design.

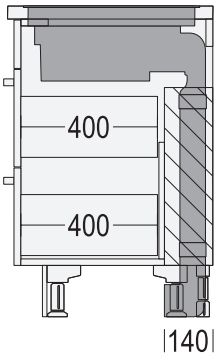


Hot plate unit for downdraft extractor fan with two pull-outs

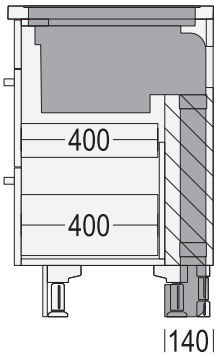

Downdraft extractor fan with large insertion depth creates a drawer at the top behind the pull-out panel

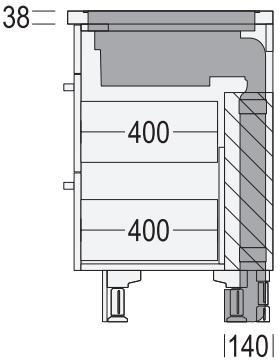

Downdraft extractor fan planned with 38 mm thick worktop

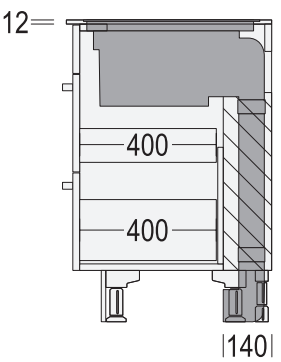

Downdraft extractor fan planned with 12 mm thick worktop creates a drawer behind the pull-out panel if required


When ordering, please provide us with the appliance designation, the planned worktop thickness, the empty space* and the duct routing** and we will generate the right base unit for you.
Important: No unit can be generated without this information!

Hot plate units for downdraft extractor fan


KDMSA*, KMSAA*(-X), KMS2A*(-M), KM2SA*(-X), KDM2A*(-M), KM3A*(-M), NKMSA*(-X), NKM2A*(-X)

Cable routing duct**


Planning the cable routing duct is a very important part of the kitchen order.
Dishwashers, plinth drawers, or refrigerators with plinth refrigeration units or similar cannot be planned atop the flooring in the cable routing duct area. Also, the cable routing duct cannot be planned beneath units with a plinth height of 70 mm.
Exception – cable routing duct in floor screed, on the basement ceiling or directly behind the appliance and vented to the outside.
Then the plinth height is not relevant.

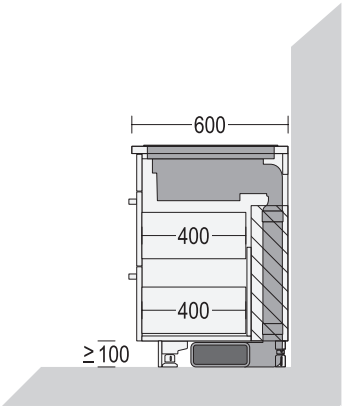


Cable routing duct atop flooring:
minimum plinth height 100 mm!

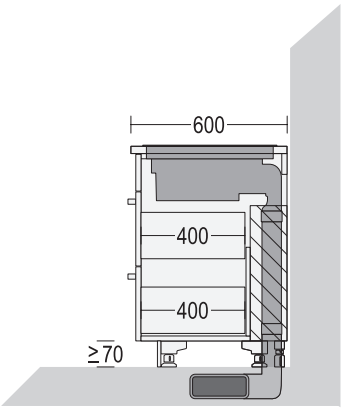

Cable routing duct in floor screed:
possible with plinth height 70 mm!

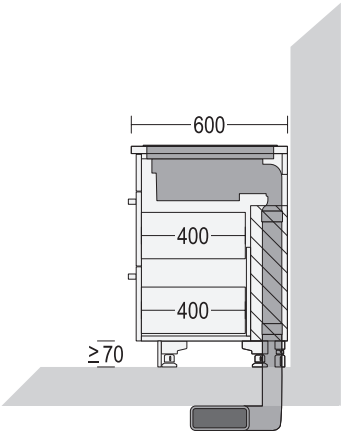



Cable routing duct on the basement ceiling:
possible with plinth height 70 mm!

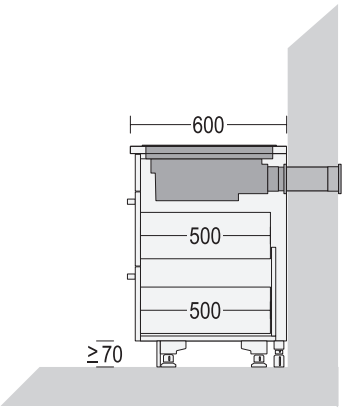


Cable routing duct directly behind the appliance and vented to the outside:
possible with plinth height 70 mm!

For plinth heights below 120 mm, the rear slide adapter must be offset toward the rear to allow for cable routing duct beneath adjacent units.
Screws and installation instructions (BB-ML 99147) are included in the delivery with the downdraft extractor fan unit.

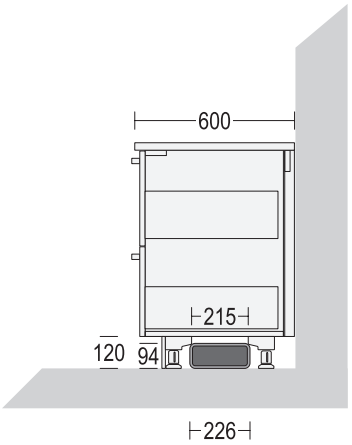

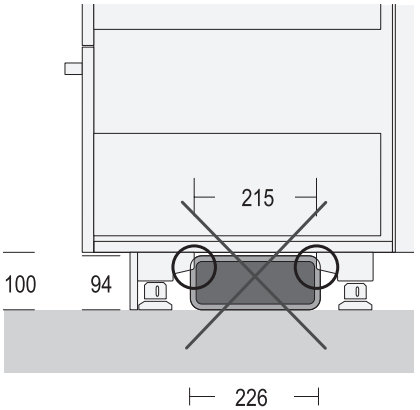

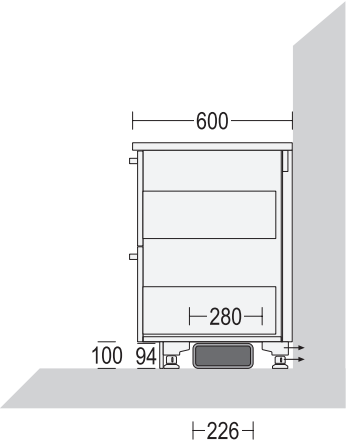

In recirculated air mode the steam must be extracted from the plinth area.

Tips for protruding designs with UFK units


1. The standard protrusion for UFK units is from 0 to 5 mm. UFK types with a width of 1000 to 1200 mm require a full-depth top shelf for stabilisation. ADB10* is only permitted up to a max. UFK width of 1000 mm.

2. If the wall gap for dresser units is 15 to 20 mm, the spacer plate bag 99190 is included and invoiced as a standard for each unit.


3. Furthermore, UFK units can be planned to protrude up to 50 mm.
   In this case, please observe the following information:
   a. The UFK unit must be planned between two posts that reach the floor. This could be tall units or end uprights that reach the floor and wall (min. 16 mm thick).
   b. A maximum of one UFK unit can be planned to protrude between two posts.
   c. A bracket set WINS (99139) is required for fastening. This comes standard as part of the delivery and is invoiced.
   d. For stabilisation of UFK units from 1000 to 1200 mm wide, an additional top shelf is required – which covers the total depth (unit depth + protrusion dimension).


4. If UFK units are stabilised with a top shelf, these can be planned to protrude up to a maximum of 150 mm. In this case, the same planning information applies as described under point 3. a - c.
   On UFK types up to and including 600 mm width, no top shelf is required.

5. By default an ADB planned underneath UFK types is a trigger for the spacer band 9888, which is invoiced.

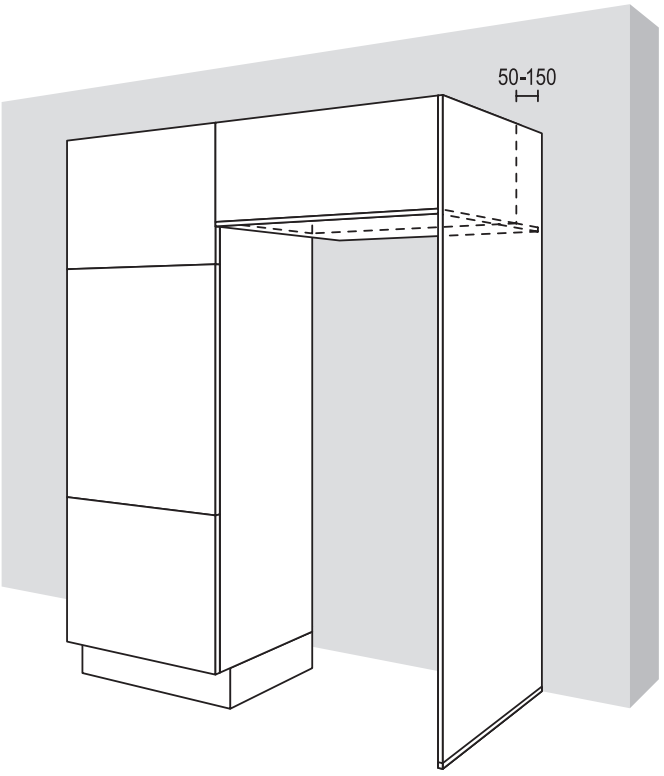

min. upright thickness 16 mm

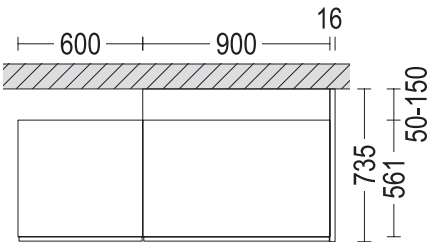

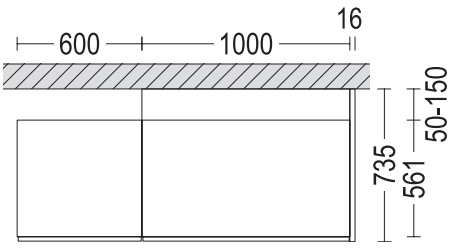

Planning information for top shelves as cornice shelves / accentuation of wall units using upright panel materials

For safety reasons, the following information must be observed when planning kitchens with top shelves as cornice shelves and / or as accentuation of wall units using upright panel materials:

- Planning of top shelves as cornice is permitted on all single door wall units as well as on all flap door, folding / lifting door, and swivel flap door units up to 1200 mm wide.
- Planning of 50 mm cover panels on 2-door wall units is not permitted.
- The total modification of **individually suspended 2-door wall units** is not permitted for structural reasons.
- The total modification of single door wall units, as well as flap door, folding/lifting door, and swivel flap door units is **only** permitted in conjunction with 10 mm, 16 mm and 25 mm thick top shelves / upright materials.
- The total modification of wall units with 50 mm thick materials is not permitted for structural reasons.

  Please note that a spacer tape (order no.: 9888) is required for the complete enclosure of wall units in order to prevent collisions between the front and horizontally mounted lower components.

  Please increase the height of side upright panels by 3 mm / 0.5 mm to accommodate the spacer tape.

Top shelf only on top

Shelf thickness	single door unit individually suspended	2-door unit individually suspended	multiple single door units combined	multiple units combined, also 2-door
10 mm	✓	✓	✓	✓
16 mm	✓	✓	✓	✓
25 mm	✓	✓	✓	✓
50 mm	✓	x	✓	x

Top shelf on top and bottom

Shelf thickness	single door unit individually suspended	2-door unit individually suspended	multiple single door units combined	multiple units combined, also 2-door
10 mm	✓	x	✓	✓
16 mm	✓	x	✓	✓
25 mm	✓	x	✓	✓
50 mm	x	x	x	x

Worktop overhangs on the side

Dimension table for worktop overhangs on the side

Worktop material	Max. free overhang on the side	Supporting elements that make a larger side overhang possible
APN / APD 38 mm APD 25 mm	Max. 400 mm [1.] (see fig. 1 and 2)	Support legs, upright panels, sled frame, support consoles, bathroom consoles, glass uprights
Slim Line 16 mm	Max. 300 mm [1.]	Permitted with glass upright and incl. support on one side wall = 600 mm [2.]
Quartz 12 mm	Max. 150 mm [1.]	Only permitted incl. support on one side wall = 300 mm [2.]
Quartz 38 mm	Max. 250 mm [1.]	Only permitted incl. support on one side wall = 600 mm [2.]
Xtra Ceramic 16 mm	Max. 300 mm [1.]	Only permitted incl. support on one side wall = 600 mm [2.]

[1.] No sink / hot plate cut-out must be located in a direct transition area (≤ 400 mm from outer carcase edge) ≤ 400 mm = Max. free overhang 100 mm (see fig. 2).

[2.] Side support on the wall using bracket, upright panel (see fig. 3)

Figure 1




Figure 2





Figure 3

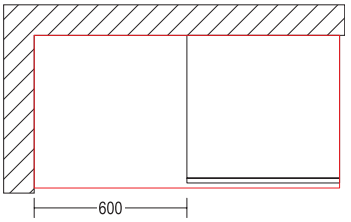


Max. 600 mm (Slim Line, quartz 38 mm, Xtra Ceramic)

Worktop overhangs with support legs, upright panels incl. upright panel corner connectors and table sled frames


- The max. permissible worktop overhang (APD / APN) with support legs, upright panels incl. upright panel corner connectors MP-WECK and table sled frame ATK* is max. 1400 mm.

Variant with support leg

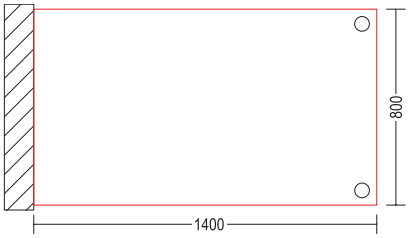


Worktop depth > 700 mm = 2 support legs
Please indicate any support legs available on site in the order!

Variant with upright panels incl. MP-WECK

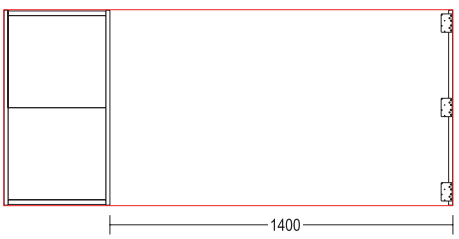

Variant with table sled frame ATK*

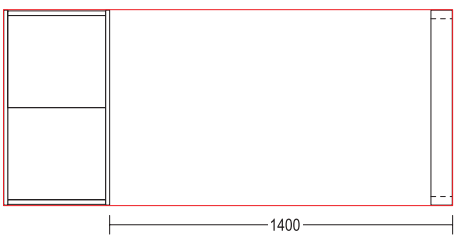

Worktop overhangs to the rear on single-line islands

Dimension table for worktop overhangs to the rear on single-line islands

Worktop material	Max. free overhang to the rear on single-line island
APN / APD 38 mm APD 25 mm	Max. 50% of the supported worktop depth may protrude freely toward the rear (see fig. 1). Example: 600 mm ÷ 2 = 300 mm overhang = 600 mm + 300 mm = 900 mm total worktop depth
Slim Line 16 mm	Max. 300 mm
Quartz 12 mm	Max. 150 mm [1.)]
Quartz 38 mm	Max. 250 mm [1.)]
Xtra Ceramic 16 mm	Max. 300 mm [1.)]

[1.)] The overhang cannot be increased by using supporting elements.

Figure 1


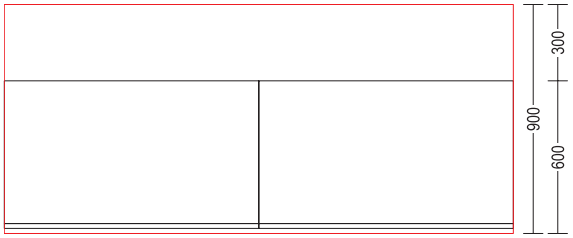


Figure 2

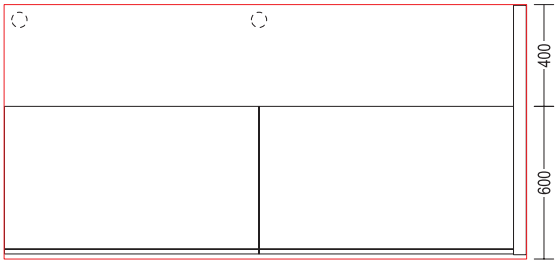

- If the APN / APD or Slim Line APL are planned with an overhang to the rear of >300 mm, a side or centre support is required!
- The support can be provided by floor-depth upright panels (16, 25, 50 mm) which must be planned along the entire worktop depth. As an alternative (except for Slim Line) support legs (1 centre support leg or 2 support legs on the outside) can be included in the plan (see fig. 2).
- The max. overhangs for quartz and Xtra Ceramic cannot be increased by supporting elements.

Installation aid

Explanation of Symbols

WW Hot water 1/2“ angle valve

KW Cold water 1/2“ angle valve with 3/4“ threaded dishwasher connection

A DN 50 drain

Earthed plug, 230 Volt

H Cooker connection N / 3 x 220 Volt (3 phase current)

AL Exhaust air duct depending upon appliance (Ø 125 mm / 150 mm)

G Gas connection (gas socket) do not plan behind the gas cooker

* Do not plan any installation behind a dishwasher or washing machine
Water connections must be planned so that they are accessible from the front!
The drain height for washing machines is measured from the bottom edge of the appliance and must be raised accordingly.
For the height, refer to the appliance operating manual!

A* For Beko-dishwasher: Drain hose must be positioned at a height of 500 mm away from the lowest edge of the appliance.

Dimensions: top edge of finished flooring in mm, all height dimensions are based on a 100 mm plinth height.

Note the connection and installation instructions of the applicance manufacturers for integrated electrical appliances.

