Worktops
Niche cladding
Quartz / Ceramic worktops and niche claddings

Key

Planning information, s. chapter 10.

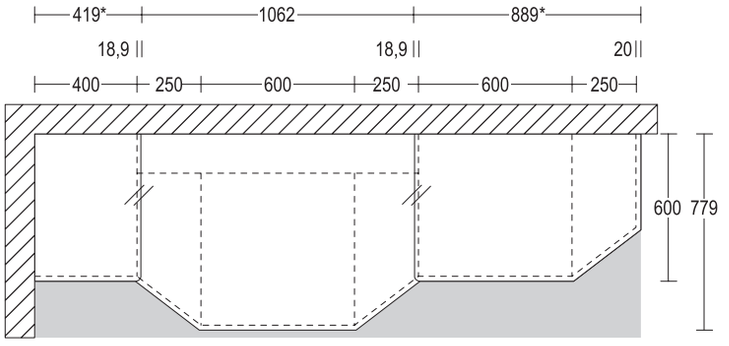
For available colours s. swatch, Design Overview page M 2.1.

Not available in: USA and Canada.

Order information for worktops, 38 mm high, 25 mm and 16 mm high

Sample design 1) for protruding diagonal units and diagonal end units
Ill. 1 shows a kitchen run (2370 mm long) with protruding diagonal units and accompanying worktops, which are delivered in three pieces.

*tongue + groove:
With APD the factory adds 5 mm, which will be invoiced.
With APN the factory adds 18.3 mm, which will be invoiced.




Ill. 1: Sample design of worktop in 3 pieces

Calculation example for worktop prices + surcharges:
For N edge:
APN60 = 500 x 600 mm
APN80 = 1100 x 800 mm
APN60 = 900 x 600 mm
2 x tongue + groove 9351 (AP-NF)
2 x 7727 (APN-A), 1 x 7831 (APN-ZS)

For worktops with N edge each type of processing will be individually invoiced!
For décor edge:
APD60 = 500 x 600 mm
APD80 = 1100 x 800 mm
APD60 = 900 x 600 mm
2 x tongue + groove 9351 (AP-NF)
1 x 7713 (APD-A)
1 x 7813 (APD-Z)

For worktops with décor edge, each type of processing will only be invoiced once per board!

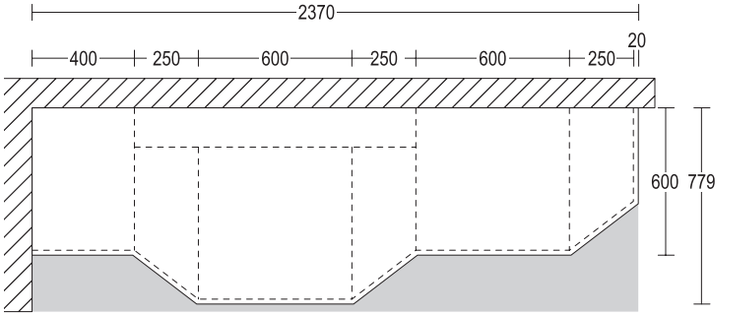
Sample design 2) for protruded diagonal units and diagonal end units
For straight décor edges the worktop can alternatively be supplied in a single piece up to a max. of 5100 mm (Xtra décor up to max. 4000 mm).
To calculate the price, the 800 mm depth is counted across the full width



Ill. 2: Sample design for worktop in a single piece

Calculation example for worktop prices + surcharges:
For décor edge:
APD80 = 2400 x 800 mm
1 x 7713 (APD-A)
1 x 7813 (APD-Z)
2 x 9191 (AP-A)

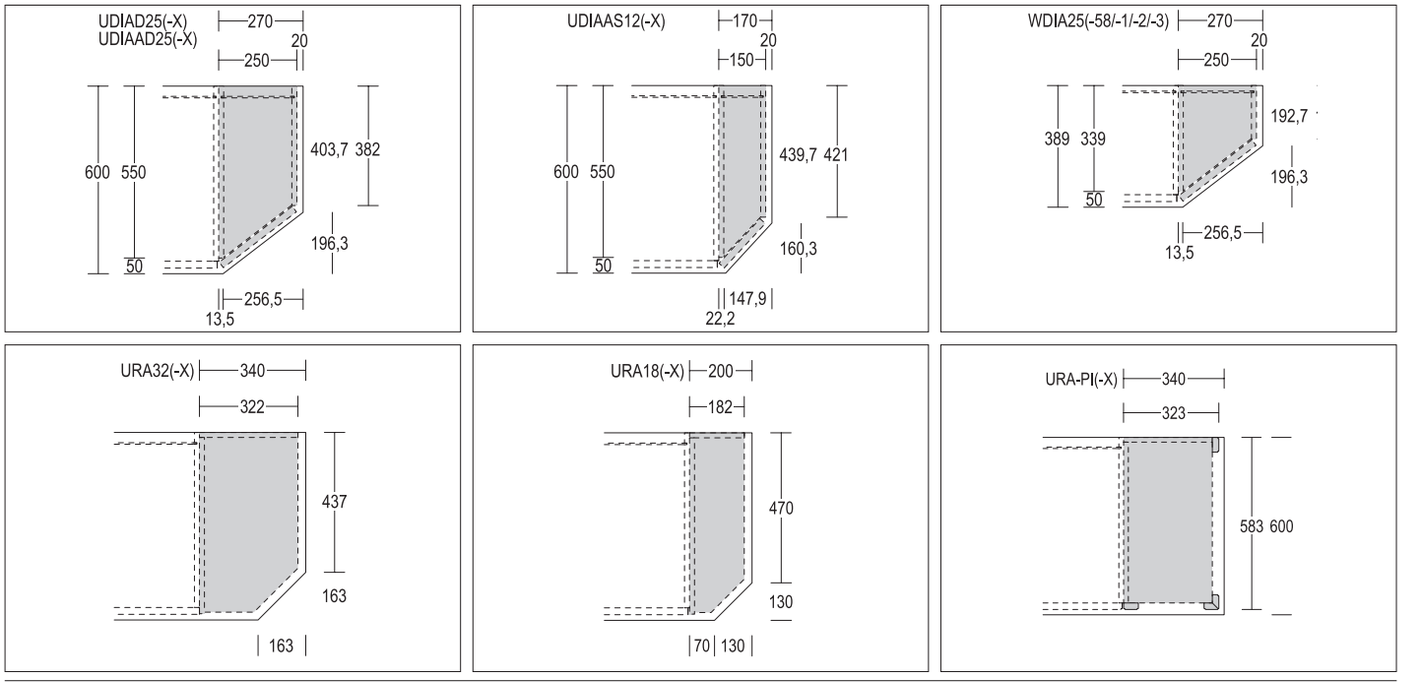Worktop dimensions for open shelf end units and end of run units




Worktop sealing for cut-outs
Sealing cut-outs absolutely must be performed on site. A worktop sealing strip and the respective instructions have automatically been supplied for sealing sink and hot plate cut-outs!

Worktops, 38 mm thick

Order information for worktops, 38 mm thick:
Price per running 100 mm, every 100 mm started will be invoiced.
Max. length:
Décor group 1: 5100 mm / Décor group 2 (Xtra décors): 4000 mm

Please quote the décor and edge colour number in your order.

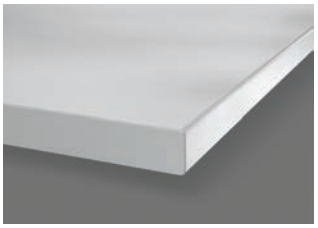
Worktops, 38 mm thick



Worktop APN with N edge
Rounded front edge,
sides sealed with straight décor edge.
Also available with inset N-edge for a surcharge.

Minimum dimensions:
With a minimum dimension of 70 mm, the maximum length of the worktop is 3000 mm (with rear edging 120 mm minimum depth).

	Width in mm	Abbreviation	Order-no.	Points Décor group 1	Points Décor group 2
up to 600 mm		APN60	7410	23,8	—
up to 700 mm		APN70	7668	32,4	—
up to 800 mm		APN80	7669	32,9	—
up to 900 mm		APN90	7412	33	—
up to 1000 mm		APN100	7670	40,6	—
up to 1100 mm		APN110	7671	41,2	—
up to 1200 mm		APN120	7413	41,5	—

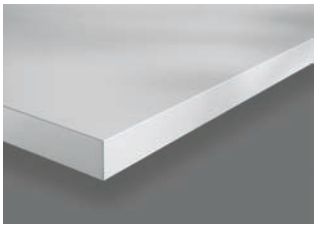

Worktop APD with décor edge
front and side edges coated with straight décor edging material, 1.5 mm thick

The delivery default for 90° outer corners is a square design. A rounded design with an outer radius of 20 mm is also optionally available at no surcharge. When the inner and outer corners are rounded, they are given an inner radius of 30 mm and an outer radius of 20 mm by default.
A square design of the inner corner is also available for surcharge AP-IEK / 9354.


Specify any deviation from standard design.
E = angled outer corners (= standard delivery)
R = rounded outer corners (= optional)

The décor edge is available in all worktop décors.

Minimum dimensions:
With a minimum dimension of 70 mm, the maximum length of the worktop is 3000 mm,
from a length of 3000 mm, the minimum depth is 120 mm.

	Width in mm	Abbreviation	Order-no.	Points Décor group 1	Points Décor group 2
up to 600 mm		APD60	7460	27,6	47,7
up to 700 mm		APD70	7701	36,5	75,8
up to 800 mm		APD80	7702	36,6	75,9
up to 900 mm		APD90	7462	43,8	81
up to 1000 mm		APD100	7703	44,4	81,5
up to 1100 mm		APD110	7704	44,5	81,8
up to 1170 mm		APD117	7463	44,8	81,9

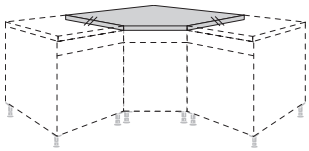Corner worktops, 38 mm thick



135° corner worktop,
for chamfered corner base units
in full depth made of one piece

Do not plan a corner sink in a 800 x 800 mm diagonal unit.
Tongue and groove connections are not included in the price.
Deviations from the standard version will be invoiced a surcharge of 20 % per modification.

	Width in mm	Abbreviation	Order-no.	Points Décor group 1	Points Décor group 2
N edge	800 x 800	APNE80	7418	466	—
N edge	900 x 900	APNE90	7415	520	—
N edge	1050 x 1050	APNE105	7419	587	—
D edge	800 x 800	APDE80	7468	540	924
D edge	900 x 900	APDE90	7465	588	1.022
D edge	1050 x 1050	APDE105	7549	660	1.172

	Width in mm	Abbreviation	Order-no.	Points	
				Décor group 1	Décor group 2

Console panel in worktop décor, 100 mm thick



Console panel in worktop décor
for screw mounting to the worktop,
laminate coated on both faces, 100 mm thick,
polymer edge all round,
max. 1200 mm deep, 1800 mm wide,
1. dimension is in the direction of the grain.
Minimum dimensions: 200 x 200 mm.
Invoiced per m².

Colour no. refer to chap. 2

At least 50 % of the console panel must rest on the support panel.
Built-in hot plates and sinks are not possible!

When planning a console panel, ensure a space of at least 150 mm from the rear edge of a gas hot plate or 50 mm from the rear edge of an electric hot plate on the worktop to the console panel.








Attention: Base units must be fastened.
Depending on the planning situation, the safety bracket KIPPS (see reverse page of chapter pages and Chap. 2 Equipment options) is required.

Quartz and Xtra Ceramic worktops require 4 drillings for fastening the console panel (NVQ(C)-BO35).

Width in mm	Abbreviation	Order-no.	Points Décor group 1	Points Décor group 2
	APP	7100	1.537	1.537



Worktop processing, 38 mm thick

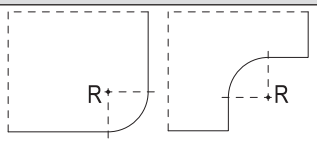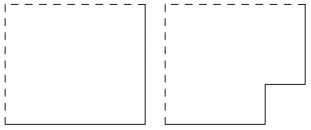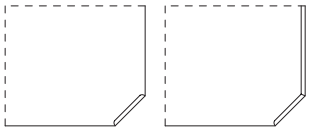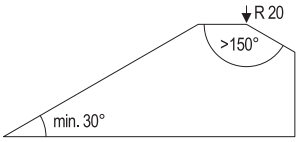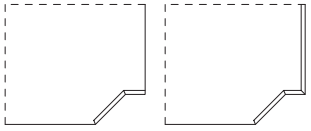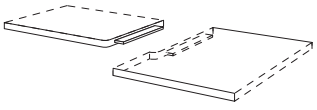The surcharge for roundings and chamfered cuts AP-R (No. 9308) and APD-A (No. 7713) on worktops with **decorative edging** is always invoiced **once per worktop**.All other surcharges for processing worktops having a decorative or a N edge are invoiced **per processing** step.

		Width in mm	Abbreviation	Order-no.	Points Décor group 1	Points Décor group 2
Worktop processing						
	**Surcharge for exterior and interior roundings deviating from the standard radii on worktops** on worktops and tables with décor edge. If the inner and outer corners are rounded, they will be provided as standard with a 30 mm inner radius and a 20 mm outer radius. For surcharge AP-IEK / 9354 inner corners are also available in square design. Specify any deviation from these standard radii. *Dimensions and sketches are required.*	Surcharge per worktop		AP-R	9308	149	149
	**Surcharge for inner corners in square design** on worktops and tables with décor edge			AP-IEK	9354	247	247
	**Surcharge for chamfered cuts** on worktops and tables, including edging *Dimensions and sketches are required.* *For chamfered cuts of up to 150°, the edging can be freely selected for each side.* *For chamfered cuts > 150° the edging must be uniform (APN or APD) and the radius must be at least 20 mm for APD.*	N edge on front Processing surcharge.		APN-A	7727	247	—
		N edge on front and sides Processing surcharge.		APN-AS	7631	288	—
		D edge on front and sides Surcharge per worktop.		APD-A	7713	149	149
							
	**Surcharge for chamfered cuts** on worktops for **diagonal z-shaped** units, including edging	N edge on front Processing surcharge.		APN-Z	7827	288	—
		N edge on front and sides Processing surcharge.		APN-ZS	7831	339	—
		D edge on front and sides Processing surcharge.		APD-Z	7813	149	149
	**Surcharge for additional edging on worktops and tables, in the rear** for APN-K the max. length is 2500 mm, the minimum width is 100 mm. **Price per 100 mm.** Invoiced per started 100 mm.	N edge		APN-K	7432	17,5	—
		D edge		APD-K	7493	2,5	2,5
	**Tongue and groove joint** for worktop corners or extensions, incl. screw fittings, tongues and water-resistant glue *Tongue and groove joints require a dimensional allowance which will be invoiced! Standard dimensional allowance for 90°-/135°corner joints: 5 mm. Dimensional allowance for deviating corner joints and for use with inset N edge: 18.9 mm.*			AP-NF	9351	64	64

Worktop processing, 38 mm thick

The surcharge for roundings and chamfered cuts AP-R (No. 9308) and APD-A (No. 7713) on worktops with **decorative edging** is always invoiced **once per worktop**.All other surcharges for processing worktops having a decorative or a N edge are invoiced **per processing** step.

		Width in mm	Abbreviation	Order-no.	Points Décor group 1	Points Décor group 2
	**Cut-outs for built in hobs, sinks, surface-mounted washbasins or ventilation grills or for tap hole 35 mm.** Please specify type of appliance or or cut-out dimensions. Cut-outs must be sealed on-site using sealing tape. *Not permitted for the installation of flush mounted hot plates or sinks.*		AP-AUS	9352	42	42
	**Notches with edging** Dimensions and or sketches are required. *For chamfered cuts of up to 150°, the edging can be freely selected for each side.* *For chamfered cuts > 150° the edging must be uniform (APN or APD) and the radius must be at least 20 mm for APD.* *The minimum width for U notches with inner rounding is 450 mm.*		AP-A	9191	83	83
No image	**Decorative edging for worktops** 1.5 mm thick, 38 mm high, Please specify the edge colour number, see chapter 2! Price per started 1000 mm.	1.5 / 38 mm	APDKA	9112	20	20

Cut-outs for flush mounting in Xtra worktops, 38 mm thick

Flush cut-outs can only be made for technically approved hot plates and sinks.
Flush mounting of hot plates and sinks is not possible in Slim Line worktops.



		Width in mm	Abbreviation	Order-no.	Points Décor group 1	Points Décor group 2
Cut-outs for flush mounting in Xtra worktops						
USA CAN						
	Tips for flush mounting sinks and hot plates in Xtra worktops, 38 mm high The functional layer of the 38 mm thick Xtra worktop – which is impervious to swelling – enables select hot plates and sinks to be flush mounted. The appropriate cut-outs for flush mounting will be made at the factory for a surcharge (refer to the following). You will find select hot plates and sinks approved for this in the respective chapters of the appliances and sinks list. They are identified with a symbol. *Moreover, additional technically approved hot plates and sinks outside of the nobilia product range can also be flush mounted. Our technically approved list for flush mounting can be found in the nobilia Extranet. This list is regularly updated on our website and in the kitchen planning systems of kitchen retailers.*					
E USA CAN			AP-FLBA	9360	—	207
	Cut-out for flush mounting of sinks and hot plates from the nobilia product range incl. sealing materials and mounting accessories *Flush cut-outs are only possible for respectively marked sinks and hot plates.* *Please look for the flush mounting symbol in the appliances and sinks list.* *Flush cut-outs are only possible in Xtra worktops 38 mm thick.* *For technically approved sinks and hot plates outside of the nobilia product range, please use cut-outs AP-FLBAS and AP-FLBAK.*					
E USA CAN			AP-FLBAS	9362	—	207
	Cut-out for flush mounting of third-party sinks (in accordance with the technically approved list) incl. sealing materials and mounting accessories					
	Cut-out for flush mounting of third-party hot plates (in accordance with the technically approved list) incl. sealing materials and mounting accessories *Flush cut-outs can only be made for technically approved hot plates and sinks.* *Our technically approved list for flush mounting can be found in the nobilia Extranet. This list is regularly updated on our website and in the kitchen planning systems of kitchen retailers.* *Flush cut-outs are only possible in Xtra worktops 38 mm thick.*		AP-FLBAK	9363	—	207

Table top in boat and kidney shape

Our table tops in a boat or kidney shape add a special touch to any space. Together with our matching table frame Centro, they are not just functional pieces of furniture but give any home a unique look and are a true eye-catcher. The table tops are available in fixed dimensions.





Table tops in
boat shape APDTB*
in 5 fixed dimensions with décor edge



APDTB160-95, APDTB180-95
APDTB200-105, APDTB220-105
APDTB240-105


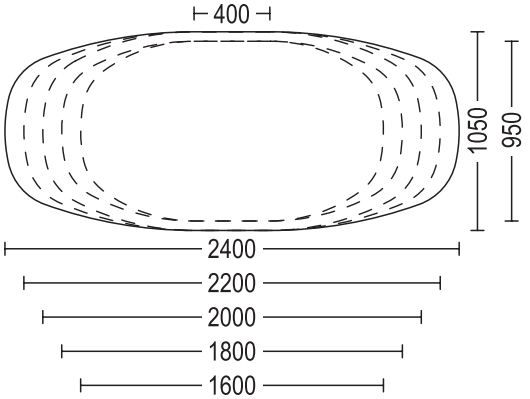


Table tops in
kidney shape APDTNR* / APDTNL*
in 2 fixed dimensions with décor edge

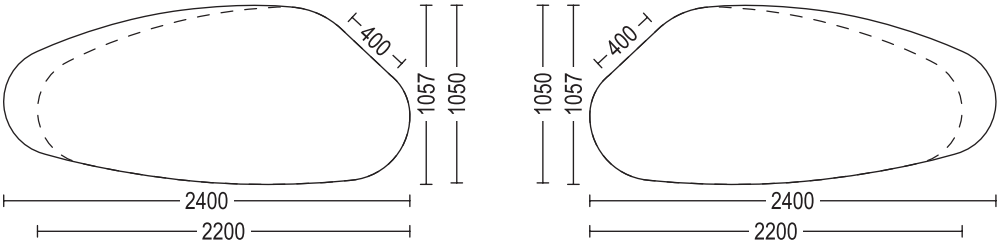



APDTN*220-105, APDTN*240-105-105



Matching table frame
Centro ATGC*
for worktops,
black,
720 mm high,
powdered steel incl. gliders

- ATGC 130: 725 mm deep, 1300 mm long
  worktop depth of 800 - 950 mm,
  worktop width of 1400 - 1900 mm
- ATGC 175: 812 mm deep, 1750 mm long
  worktop depth of 850 - 1050 mm,
  worktop width of 1900 - 2400 mm
- Not suitable for combination with quartz and Xtra Ceramic worktops.



You can find the matching table frame in the accessories list, chap. 2 Worktop accessories.






Table tops in boat and kidney shape

Order numbers apply to table tops of fixed dimensions as described below,
the edge design of the tables is décor edge.
Available in all worktop and Xtra décors.

		Abbreviation	Width in cm		Order No.	Points Décor group 1	Points Décor group 2
Table tops in boat shape							
	Table top in boat shape in fixed dimensions with décor edge, 38 mm	APDTB	160	-95	7122	858	1.451
		APDTB	180	-95	7123	946	1.615
		APDTB	200	-105	7124	1.038	1.783
	The frame is not included in the scope of delivery.	APDTB	220	-105	7126	1.127	1.948
	Matching table frame Centro ATGC, see accessories list, chap. 2 Worktop accessories.*	APDTB	240	-105	7127	1.215	2.111
Table tops in kidney shape							
NEW	Table top in kidney shape, right-hand side in fixed dimensions with décor edge, 38 mm	APDTNR	220	-105	7128	1.127	1.948
		APDTNR	240	-105	7129	1.215	2.111
	as above, however Table top in kidney shape, left-hand side	APDTNL	220	-105	7143	1.127	1.948
		APDTNL	240	-105	7144	1.215	2.111
	The frame is not included in the scope of delivery.						
	Matching table frame Centro ATGC, see accessories list, chap. 2 Worktop accessories.*						


Worktop tables and breakfast bars

The order numbers only apply to breakfast bars of fixed dimensions, as described below.
The table edges are banded with the **decor edging**. For other dimensions and edge versions, the calculation examples referring to the table shape can be taken as a basis. Individual table forms are available at any time; a dimensioned sketch, information on the edge version and the decor No. are required.

		Width in mm	Abbreviation	Order-no.	Points Décor group 1	Points Décor group 2
Worktop tables and breakfast bars						
	Breakfast bar, planning example 1 The price includes: APD90: 1600 x 900 mm, 1 x APD-K: surcharge for rear edging 700 mm, 1 x AP-R: surcharge for rounding radius 450 mm, 1 x AP-A: surcharge for notches *Breakfast bars in different dimensions and edgings can be based on the above calculation example.*	1600 x 900	APDT1	7776	950	1.545
	Breakfast bar, planning example 2 to be laterally fitted to base unit or to back panelling The price includes: APD110: 1100 x 1100 mm, 1 x APD-K: surcharge for rear edging 550 mm, 1 x AP-R: surcharge for rounding, radius 550 mm *Breakfast bars in different dimensions and edgings can be based on the above calculation example.*	1100	APDT2	9256	654	1.064
	Breakfast bar, planning example 3 The price includes: APD80: 1400 x 800 mm, 1 x APD-K: surcharge for rear edging 550 mm, 1 x AP-R: surcharge for rounding radius 100 mm, 1 x AP-A: surcharge for notches *Breakfast bars in different dimensions and edgings can be based on the above calculation example.*	1400 x 800	APDT5	7773	761	1.308
	Breakfast bar, planning example 4 Sample calculation: APD80: 1500 x 800 mm, 1 x APD-K: surcharge for rear edging 1660 mm, 1 x APD-A: surcharge for chamfered cuts, 1 x AP-A: surcharge for notching, 1 x AP-IEK: surcharge for inner corners, square design *Breakfast bars in different dimensions and edgings can be based on the above calculation example.*	1500 x 800	APDT6	7774	825	1.412
	Breakfast bar, planning example 5 The price includes: APD90: 1600 x 900 mm, 1 x APD-K: surcharge for rear edging 700 mm, 1 x AP-R: surcharge for rounding radius 450 mm, 1 x AP-A: surcharge for notches *Breakfast bars in different dimensions and edgings can be based on the above calculation example.*	1600 x 900	APDT7	7775	950	1.545

Worktop décors 25 mm & Order Information


198 Sierra oak reproduction


214 Black marble reproduction NEW


237 Jura greige marble reproduction NEW


243 Honey oak reproduction NEW


354 Concrete Slate Grey reproduction

Information related to plans that include hot plates

- Planning of built-in cooker ranges or ovens beneath hot plates is only possible with oven housing units HUB-SL(-X) / HUS-SL60-M and HUS90(-X).
- Drawers can only be planned beneath hot plates when used with hot plate units KS*(-X/-M), K2SA*, KS2A*(-X/-M), K2S2A*-M, SKU* in conjunction with the lowered frame MP-NIEZA.
- During installation, please note the installation instructions and installation depths given by the individual manufacturer.
- Flush mounted hot plates are not possible.

Information related to plans that include built-in sinks

- It is not possible to sink drainers above dishwashers, built-under fridges, dryers, washing machines and drawers.
- Flush mounted sinks are not possible.

Planning of the following units is not possible

- Dresser units adjacent to tall units or wall units having an identical upper edge line
- Glass panels, niche cladding in fixed sizes (except for cooker hoods), recessed shelves beneath wall units adjacent to tall units

Planning with the following workt op accessories is not possible

- Child safety guard




Worktops, 25 mm thick

Order information for worktops, 25 mm thick:
Price per running 100 mm, every 100 mm started will be invoiced.
Max. length:
3400 mm

Please quote the décor and edge colour number in your order.

Worktops 25 mm



Worktop APD with décor edge
front and side edges coated with straight décor edging material, 1.5 mm thick

Standard delivery for 90° outer corners is a square design. A rounded design with an outer radius of 20 mm is also optionally available at no surcharge. If the inner and outer corners are rounded, they will be provided as standard with a 30 mm inner radius and a 20 mm outer radius.

For surcharge AP-IEK / 9354 inner corners are also available in square design.
Flush mounting of hot plates and sinks is not possible.


Specify any deviation from standard design.
E = angled outer corners (= standard delivery)
R = rounded outer corners (= optional)

Minimum dimensions:
250 x 200 mm. Maximum 3,400 mm long.

Available décors:
198 Sierra oak reproduction, 214 Black marble reproduction, 237 Jura greige marble reproduction, 243 Honey oak reproduction, 354 Slate grey concrete reproduction

Abbreviation	Width in cm	Order No.	Points Décor group 1	Points Décor group 2
APD25	60	7386	27,6	—
APD25	70	7387	36,5	—
APD25	80	7388	36,6	—
APD25	90	7389	43,8	—
APD25	100	7390	44,4	—
APD25	110	7391	44,5	—
APD25	117	7392	44,8	—

Corner worktops, 25 mm thick



135° corner worktop,
for chamfered corner base units
in full depth made of one piece








Do not plan a corner sink in a 800 x 800 mm diagonal unit.
Tongue and groove connections are not included in the price.
Deviations from the standard version will be invoiced a surcharge of 20 % per modification.

Available décors:
198 Sierra oak reproduction, 214 Black marble reproduction, 237 Jura greige marble reproduction, 243 Honey oak reproduction, 354 Slate grey concrete reproduction

Abbreviation	Width in cm	Order No.	Points Décor group 1	Points Décor group 2
APDE25	80	7393	540	—
APDE25	90	7394	588	—
APDE25	105	7395	660	—



Worktop processing, 25 mm thick

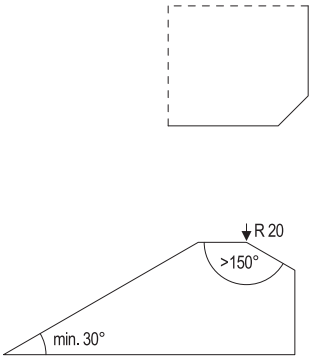The surcharge for roundings and chamfered cuts AP-R (No. 9308) and APD-A (No. 7713) on worktops with **decorative edging** is always invoiced **once per worktop**.

			Width in mm	Abbreviation	Order-no.	Points Décor group 1	Points Décor group 2
Worktop processing on 25 mm worktable							
	Surcharge for exterior and interior roundings deviating from the standard radii on worktops on worktops and tables with décor edge. If the inner and outer corners are rounded, they will be provided as standard with a 30 mm inner radius and a 20 mm outer radius. For surcharge AP-IEK / 9354 inner corners are also available in square design. Specify any deviation from these standard radii. *Dimensions and sketches are required.*	Surcharge per worktop		AP-R	9308	149	149
	Surcharge for inner corners in square design on worktops and tables with décor edge			AP-IEK	9354	247	247
	Surcharge for chamfered cuts on worktops and tables, including edging *Dimensions and sketches are required.* *For chamfered cuts of up to 150°, the edging can be freely selected for each side.* *For chamfered cuts > 150° the edging must be uniform (APN or APD) and the radius must be at least 20 mm for APD.*	D edge on front and sides Surcharge per worktop.		APD-A	7713	149	149
	Surcharge for chamfered cuts on worktops for **diagonal z-shaped** units, including edging	D edge on front and sides Processing surcharge.		APD-Z	7813	149	149
	Surcharge for additional edging on worktops and tables, in the rear Price per 100 mm. Invoiced per started 100 mm.	D edge		APD-K	7493	2,5	2,5
	Tongue and groove joint for worktop corners or extensions, incl. screw fittings, tongues and water-resistant glue *The tongue and groove joint requires a dimensional allowance, which will be invoiced!* *Standard dimensional allowance for 90°/135°corner joints:* *5 mm. Dimensional allowance for differing corner joints: 18.9 mm.*			AP-NF	9351	64	64
	Cut-outs for built in hobs, sinks, surface-mounted washbasins or ventilation grills or for tap hole 35 mm. Please specify type of appliance or or cut-out dimensions. Cut-outs must be sealed on-site using sealing tape. *Not permitted for the installation of flush mounted hot plates or sinks.*			AP-AUS	9352	42	42

Worktop processing, 25 mm thick

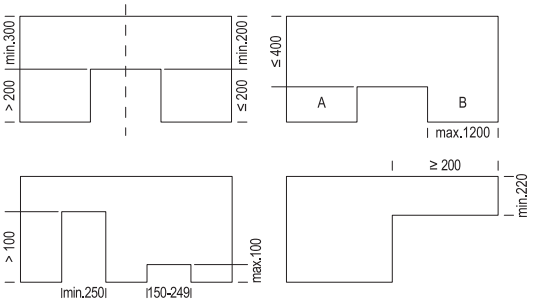The surcharge for roundings and chamfered cuts AP-R (No. 9308) and APD-A (No. 7713) on worktops with **decorative edging** is always invoiced **once per worktop**.

			Width in mm	Abbreviation	Order-no.	Points	
						Décor group 1	Décor group 2
	 	Notches with edging Dimensions and or sketches are required. *For chamfered cuts > 150° the radius must be at least 20 mm.* *The minimum width for U notches with inner rounding is 450 mm.*		AP-A	9191	83	83
NEW	**No image**	Decorative edging for worktops 25 mm 1.5 mm thick, 30 mm high Please indicate the décor no., see design overviews, worktop décors, chapter 2! Price per 1000 mm or part thereof.	1,5 / 30 mm	APDKA25	9108	17,7	—


Slim Line worktop décors & Order Information


198 Sierra oak reproduction


201 Concrete Sand reproduction


235 Venato Bianco marble reproduction


245 Sand textured NEW


320 Venato Nero marble reproduction


322 White Terrazzo reproduction


324 Carrara bronze marble reprocution


330 Concrete grey reproduction



344 Black granite décor


349 Sand grey travertine reproduktion

353 White Concrete reproduction


354 Concrete Slate Grey reproduction


362 Como oak reproduction NEW


366 Black textured

Xtra décors, Décor group 2


364 Taupe grey basalt reproduction


373 Grey slate reproduction

381 Honed alpine white Xtra NEW


389 Honed macchiato Xtra NEW

General information

- Tables and breakfast bars are not possible.

Information related to plans that include hot plates

- Hobs with cut-out dimensions from 560 mm width are suitable for use with cooker housing units HUB-SL(-X) / HUS-SL60-M and HUS90(-X) and for all hot plate units upwards of 600 mm width. The Slim Line built-in set APSL-SETK60 is required for cooker housing units and hot plate units in 600 mm widths.
- Planning of built-in cooker ranges or ovens beneath hot plates is only possible with oven housing units HUB-SL(-X) / HUS-SL60-M and HUS90(-X).
- Hobs with cut-out dimensions of 750 - 780 mm wide are only permitted for use with oven housing unit HUS90(-X) and for hot plate units upwards of 900 mm width. For hot plate units upwards of 800 mm width the Slim Line installation set APSL-SET is required.
- Drawers can only be planned beneath hot plates when used with hot plate units KS*(-X/-M), K2SA*, KS2A*(-X/-M), K2S2A*-M, SKU* in conjunction with the lowered frame MP-NIEZA.
- The Slim Line installation set NSL-SET60 is required for handle-less LINEN hot plate units NK* as well as cooker housing units NHU(-X) / NHUS(-X) / NHUM(-X) in 600 mm width.
- The installation set NSL-SET80 must be included in the order for handle-less LINEN sink and hot plate units upwards of 800 mm width.
- During installation, please note the installation instructions and installation depths given by the individual manufacturer.
- Flush mounted hot plates are not possible.

Information related to plans that include built-in sinks

- It is not possible to sink drainers above dishwashers, built-under fridges, dryers, washing machines and drawers.
- Matching sinks are identified by the SL symbol.
- Required sink unit width: Sink cut-out + 75 mm.
- The Slim Line installation set APSL-SET or NSL-SET80 is required for installation.
- Flush mounted sinks are not possible.

Planning of the following units is not possible

- Dresser units adjacent to tall units or wall units having an identical upper edge line
- Glass panels, niche cladding in fixed sizes (except for cooker hoods), recessed shelves beneath wall units adjacent to tall units
- Diagonal types, end of run diagonal shelf units
- Sink units SPUST60, SPUST90, SPUS90...120

Planning with the following worktop accessories is not possible

- Child safety guard
- Support legs
- Support consoles

Slim Line worktop, 16 mm thick

Price per running 100 mm, every 100 mm started will be invoiced.
Maximum length 3400 mm, 16 mm thick.
Please quote the décor and edge colour number in your order.

Slim Line worktop, 16 mm thick



Slim Line Worktop APSLN, 16 mm thick
both sides laminated in the same colour,
with 1.2 mm thick décor edge all around.
Minimum dimensions: 250 x 200 mm,
maximum 3400 mm long.

Price per started 100 mm.

The delivery default for 90° outer corners is a square design. A rounded design with an outer radius of 20 mm is also optionally available at no surcharge.
When the inner and outer corners are rounded, they are given an inner radius of 30 mm and an outer radius of 20 mm by default.
A square design of the inner corner is also available for surcharge AP-IEK / 9354.

Flush mounting of hot plates and sinks is not possible in Slim Line worktops.

Specify any deviation from standard design.
E = angled outer corners (= standard delivery)
R = rounded outer corners (= optional)

The décor edge delivered matches the worktop décor.

Please note the special information for planning Slim Line worktops on page M 4.13.

	Width in mm	Abbreviation	Order-no.	Points Décor group 1	Points Décor group 2
up to 600 mm		APSLN60	7881	34,2	43,9
up to 700 mm		APSLN70	7882	38,1	49,1
up to 800 mm		APSLN80	7883	42,9	55,3
up to 900 mm		APSLN90	7884	46	60,4
up to 1000 mm		APSLN100	7885	50,8	66,3
up to 1100 mm		APSLN110	7886	54	71,4
up to 1170 mm		APSLN117	7887	56,5	75,8

Slim Line worktop, matching Sakura design line

NEW



Slim Line Worktop APSLN, 16 mm thick
both sides laminated in the same colour,
with 1.2 mm thick décor edge all around.
Minimum dimensions: 250 x 200 mm,
maximum 3400 mm long.

Price per started 100 mm.

The delivery default for 90° outer corners is a square design. A rounded design with an outer radius of 20 mm is also optionally available at no surcharge.
When the inner and outer corners are rounded, they are given an inner radius of 30 mm and an outer radius of 20 mm by default.
A square design of the inner corner is also available for surcharge AP-IEK / 9354.

Flush mounting of hot plates and sinks is not possible in Slim Line worktops.

Specify any deviation from standard design.
E = angled outer corners (= standard delivery)
R = rounded outer corners (= optional)

The décor edge delivered matches the worktop décor.

The following décors cannot be used for the Sakura design line: 198 Sierra oak reproduction 367 Artisan oak reproduction


Please note the special information for planning Slim Line worktops on page M 4.13.

	Width in mm	Abbreviation	Order-no.	Points Décor group 1	Points Décor group 2
up to 605 mm		APSLNS61	7898	34,5	44,5

Corner worktops, 16 mm thick








Price per running 100 mm, every 100 mm started will be invoiced.
Maximum length 3400 mm, 16 mm thick.
Please quote the décor and edge colour number in your order.

Corner worktops, 16 mm thick

		Width in mm	Abbreviation	Order-no.	Points: Décor group 1	Points: Décor group 2
NEW	 Worktop APSLN Slim Line, 135° corner, for diagonal base units in APSLN design, full depth made of one piece *Do not plan a corner sink in a 800 x 800 mm diagonal unit.* *Tongue and groove connections are not included in the price.* *Deviations from the standard version will be invoiced a surcharge of 20 % per modification.*	800 x 800	APSLNE80	7888	677	908
		900 x 900	APSLNE90	7889	734	984
		1050 x 1050	APSLNE105	7890	847	1.136




Worktop processing, 16 mm thick

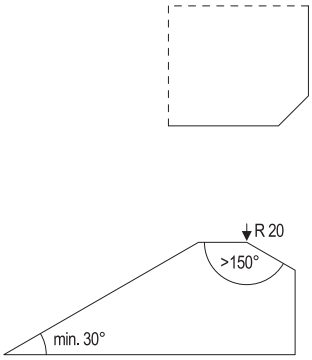The surcharge for roundings and chamfered cuts AP-R (No. 9308) and APD-A (No. 7713) on worktops with **decorative edging** is always invoiced **once per worktop**.

		Width in mm	Abbreviation	Order-no.	Points Décor group 1	Points Décor group 2
Worktop processing on 16 mm worktable						
	**Surcharge for exterior and interior roundings deviating from the standard radii on worktops** on worktops and tables with décor edge. If the inner and outer corners are rounded, they will be provided as standard with a 30 mm inner radius and a 20 mm outer radius. For surcharge AP-IEK / 9354 inner corners are also available in square design. Specify any deviation from these standard radii. *Dimensions and sketches are required.* Surcharge per worktop		AP-R	9308	149	149
	**Surcharge for inner corners in square design** on worktops and tables with décor edge		AP-IEK	9354	247	247
	**Surcharge for chamfered cuts** on worktops and tables, including edging *Dimensions and sketches are required.* *For chamfered cuts of up to 150°, the edging can be freely selected for each side.* *For chamfered cuts > 150° the edging must be uniform (APN or APD) and the radius must be at least 20 mm for APD.* D edge on front and sides Surcharge per worktop.		APD-A	7713	149	149
	**Surcharge for chamfered cuts** on worktops for **diagonal z-shaped** units, including edging D edge on front and sides Processing surcharge.		APD-Z	7813	149	149
	**Surcharge for additional edging on worktops and tables, in the rear** Price per 100 mm. Invoiced per started 100 mm. D edge		APD-K	7493	2,5	2,5
	**Tongue and groove joint** for Slim Line worktop corners and top shelves, 16 mm thick, incl. screw fittings, tongues and water-resistant glue *Tongue and groove joints require a dimensional allowance which will be invoiced! Standard dimensional allowance for 90° corner joints: 5 mm.*		APSL-NF	9353	82	82
	**Cut-outs for built in hobs, sinks, surface-mounted washbasins or ventilation grills or for tap hole 35 mm.** Please specify type of appliance or or cut-out dimensions. Cut-outs must be sealed on-site using sealing tape. *Not permitted for the installation of flush mounted hot plates or sinks.*		AP-AUS	9352	42	42

Worktop processing, 16 mm thick

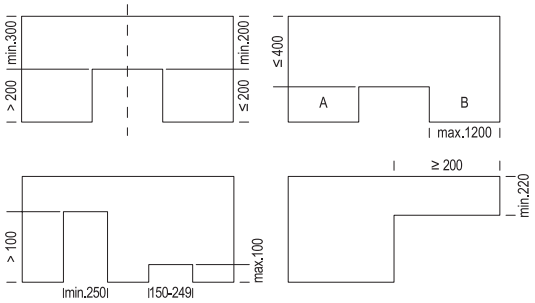The surcharge for roundings and chamfered cuts AP-R (No. 9308) and APD-A (No. 7713) on worktops with **decorative edging** is always invoiced **once per worktop**.

		Width in mm	Abbreviation	Order-no.	Points Décor group 1	Points Décor group 2
	  		AP-A	9191	83	83
	No image		APSL-SETK60	9356	204	204
			APSL-SET	9358	331	331
	No image	60	NSL-SET60	59356	199	199
		80	NSL-SET80	59358	276	276
NEW	**No image**		APSLDKA	9114	16,5	16,5

Notches
with edging
Dimensions and or sketches are required.

For chamfered cuts > 150° the radius must be at least 20 mm.

The minimum width for U notches with inner rounding is 450 mm.

Slim Line installation set
for hot plate units, 600 mm wide
as well as cooker housing units HUB-SL(-X) and HUS-SL60-M
comprised of:
1 fastening set, 1 set of installation instructions

as above, however
for sink units in all widths as well as hot plate units and cooker housing units upwards of 800 mm width


Slim Line installation set
for handle-less LINE N hot plate units NK*(-X)
600 mm wide, as well as cooker housing units NHU60(-X), NHUS60(-X) and NHUM60(-X)
comprised of:
1 fastening set, 1 set of installation instructions

as above, however
for handleless LINE N sink units in all widths as well as hot plate units upwards of 800 mm width

Décor edging for Slim Line worktop 1,5 / 21 mm
1.5 mm thick, 21 mm high,
Please indicate the décor no., s. overview of Slim Line décors.
Price per 1000 mm or part thereof.

Niche cladding

Planning gas hot plates in conjunction with recess panels requires a minimum spacing of 100 mm from the rear edge of the gas hot plate and the panel.

		Abbreviation	Width in cm		Order No.	Points Mat	High gloss	Stainless steel appearance/Yellow gold coloured/Bronze metallic	Xtra décors
Niche cladding									
	Niche cladding in carcase and worktop décors coated on both faces, 16 mm thick, horizontal structure, with edging on all sides, width: 250 - 2580 mm heights: NV54 for recess beneath wall units NV70 for recess beneath cooker hoods Colour no. see chap. 2 Price per started 100 mm.	NV54 NV70			9174 9176	19,9 25,3	48,2 62,1	46,4 59,4	52 66,4
	Niche cladding as above, but with deviating dimensions acc. to sketch max. 2580 mm wide, 2030 mm high*, 1. dimension in direction of grain, coated edge all round. Minimum price is 0.5 m², minimum dimensions: 250 x 200 mm. Invoiced per m². ** The following décors are only available to a maximum height of 1200 mm:* *- Xtra décors* *- All high gloss décors* *- 014 Décor in Stainless steel appearance, 211 Bronze coloured and 296 Yellow gold coloured* *- 366 Black textured* *Planning in combination with the NPUK or NKPU profile or WAPN (r. accessories list, chap. 2) is recommended for all niche claddings!*	NV203			9177	402	987	943	1.059
	Niche Cladding in carcase and worktop décors for 135° corners Niche cladding is required for all corner canopy hoods. All 600 mm wide cooker hoods can be mounted to the cladding, in conjunction with corner shelf units. Tiling is possible with neoprene glue. Vertical structure. Colour no. see chap. 2. Heights: NVKE*-126 for recess at wall unit height 1 NVKE*-133 for recess at wall unit height 2 NVKE*-140 for recess at wall unit height 3 *Available in all carcase colours, worktop and Xtra décors.* *The following décors are only available to a maximum height of 1200 mm:* *- Xtra décors* *- 366 Black textured* *Chamfered 45° at the rear of the right and left edge, to enable wall adjustment.*	NVKE NVKE NVKE	105 105 105	-126 -133 -140	9179 9184 9170	296 305 318	— — —	— — —	810 841 885

Recessed shelves

Planning gas hot plates in conjunction with niche panels requires a minimum spacing of 100 mm from the rear edge of the gas hot plate and the panel.

Recessed shelves

		Abbreviation	Width in cm		Order No.	Points
	Recessed shelf side depth: 125 mm, height: 257 mm *Available in all carcase colours.*	NRH	50		1325	374
		NRH	60		1326	385
		NRH	80		1328	477
		NRH	90		1329	491
	Recessed shelf Height: 537 mm for recess beneath wall units *Available in all carcase colours.*	NR	50	-54	31331	660
		NR	60	-54	31332	710
		NR	80	-54	31333	758
		NR	90	-54	31334	802
	Recessed shelf with flap for kitchen appliances 1 flap, 1 cable lead through front thickness: 16 mm, total depth: 125 mm, utilisable depth: 86 mm Height: 537 mm for recess beneath wall units *Available in all carcase colours.* *Kitchen appliances not included in scope of delivery.* *Designs with light pelmets are not possible.*	NRKG	60	-54	31336	1.031
		NRKG	90	-54	31339	1.132
	Recessed shelf with flap, magnetic strip and cutting board 1 flap, 1 magnetic strip for knives, in 900 mm width incl. 1 cutting board front thickness: 16 mm, total depth: 125 mm, utilisable depth: 86 mm Height: 537 mm for recess beneath wall units *Available in all carcase colours.* *Kitchen appliances not included in scope of delivery.* *Designs with light pelmets are not possible.*	NRKS	60	-54	31341	1.393
		NRKS	90	-54	31343	1.756

Niche cladding

Planning gas hot plates in conjunction with recess panels requires a minimum spacing of 100 mm from the rear edge of the gas hot plate and the panel.

		Abbreviation	Width in cm	Order No.	Points Décor group 1	Points Décor group 2
Niche cladding with motifs						
	 **Niche cladding with motif** coated on both faces, front face imprinted with motif, 16 mm thick, edging on all sides, width: 250 - 2800 mm heights: NVM54 for recess beneath wall units NVM70 for recess beneath cooker hoods Price per started 100 mm. You can find a motif overview on the following pages. Décor group 1 with motif in digital print: 291, 292, 293, 432, 435, 442, 448, 517, 518, 521, 522, 523, 529, 536, 548, 558, 559, 569, 576, 580, 581 For the motif 435 the base colour can be adapted to the carcase colours 193 Alpine white, 106 White, 120 Ivory, 070 Satin grey and 089 Stone grey. In this case, the lightest colour in the motif will be adapted. Please indicate the desired carcase colour in addition to the motif number when placing your order. Décor group 2 with motif in 3D digital print: 555, 556, 557, 570, 577, 579, 584, 586, 592, 598, 599 *The contact side of the motif is left, it is measured from the left.* *it is cut from the right.* *Planning in combination with the NPUK or NKPU profile or WAPN* *(r. accessories list, chap. 2) is recommended for all niche claddings!*	NVM54 NVM70		9159 9162	43,8 55,8	52,7 68,3
	Niche cladding as above, but with deviating dimensions acc. to sketch max. 2800 mm wide, 1200 mm high, Minimum price: 0.5 m², minimum dimensions: 250 x 200 mm. Invoiced per m². Décor group 1 with motif in digital print: 291, 292, 293, 432, 435, 442, 448, 517, 518, 521, 522, 523, 529, 536, 548, 558, 559, 569, 576, 580, 581 Décor group 2 with motif in 3D digital print: 555, 556, 557, 570, 577, 579, 584, 586, 592, 598, 599 *The contact side of the motif is left, it is measured from the left,* *it is cut from the right.* *Planning in combination with the NPUK or NKPU profile or WAPN* *(r. accessories list, chap. 2) is recommended for all niche claddings!*	NVM120		9163	911	1.086


Niche cladding

Planning gas hot plates in conjunction with recess panels requires a minimum spacing of 100 mm from the rear edge of the gas hot plate and the panel.


	Abbreviation	Width in cm	Order No.	Points Décor group 1	Points Décor group 2
 Niche cladding with motif in 3D texture for niche under wall units and cooker hoods, coated on both sides, front with tactile texture, texture direction vertical, edge coating on all sides. Width: 250 - 2040 mm heights: • NVMDS54 for niche beneath wall units • NVMDS70 for niche beneath cooker hoods Price per started 100 mm. An overview of motifs can be found on the following pages. *Planning in combination with the NPUK or NKPU profile or WAPN (r. accessories list, chap. 2) is recommended for all niche claddings!*	NVMDS54 NVMDS70		9124 9125	— —	22,8 29,8
Niche wall cladding as above, but with differing dimensions according to sketch coated on both sides, front with tactile texture, texture direction vertical, edge coating on all sides. max. 2040 mm wide, 2770 mm high, minimum price: 0.5 m², minimum dimensions: 250 x 200 mm, invoiced per m². Only available for the following motifs: 255 décor stripewood light, 283 décor stripewood slate grey, 284 décor stripewood taupe, 339 décor stripewood dark *Planning in combination with the NPUK or NKPU profile or WAPN (r. accessories list, chap. 2) is recommended for all niche claddings!*	NVMDS277		9126	—	472

Niche cladding with motif in digital print

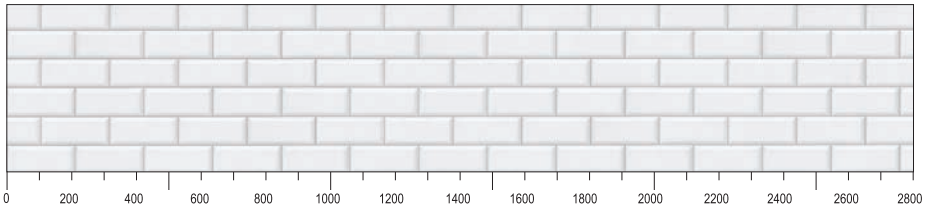
Note:
The contact side of the motif is left, it is measured from the left, and is cut from the right. Minimum order dimensions: 250 mm.
The following motifs cannot have their basic colour changed.



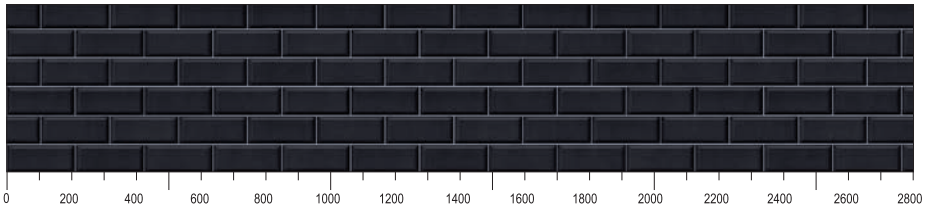
291 Décor Metro White
Edge colour: White 106



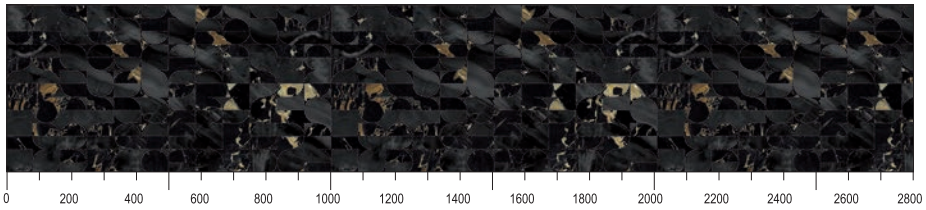
292 Décor Metro Black
Edge colour: Black 127



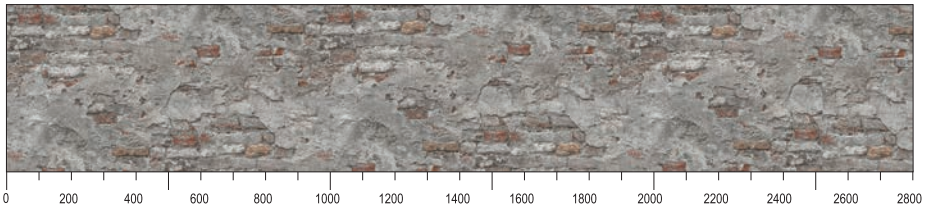
293 Décor Golden Art
Edge colour: Black 127



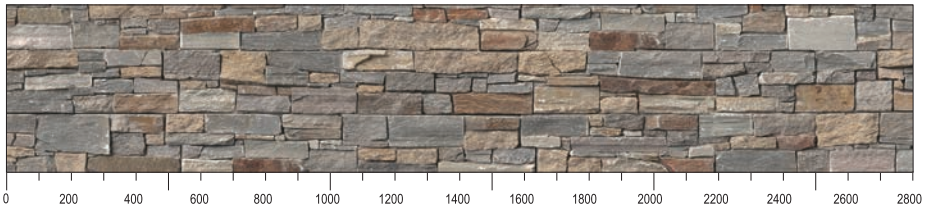
432 Décor loft design
Edge colour: Silver 046



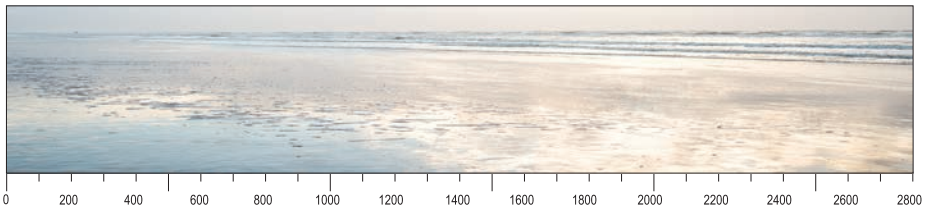442 Décor Stone wall
Edge colour: Silver 046




448 Décor Beach
Edge colour: Silver 046

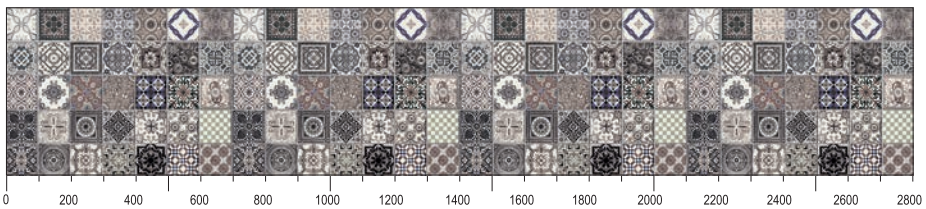


517 Décor ceramic tiles
Edge colour: Silver 046

Niche cladding with motif in digital print

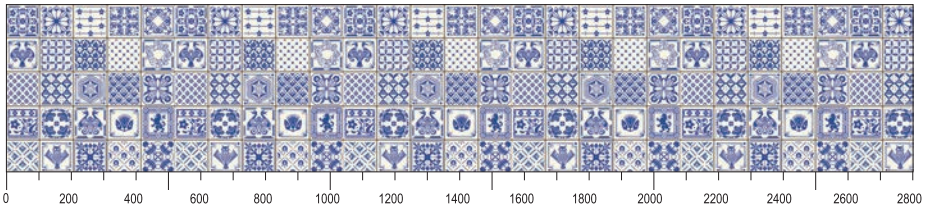
Note:
The contact side of the motif is left, it is measured from the left, and is cut from the right. Minimum order dimensions: 250 mm.
The following motifs cannot have their basic colour changed.



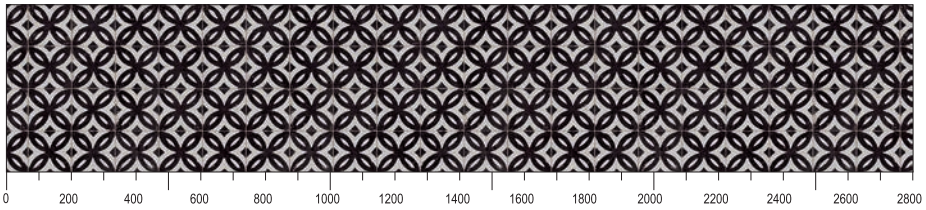
518 Décor indigo blue
Edge colour: Silver 046




521 Décor Retro
Edge colour: Silver 046

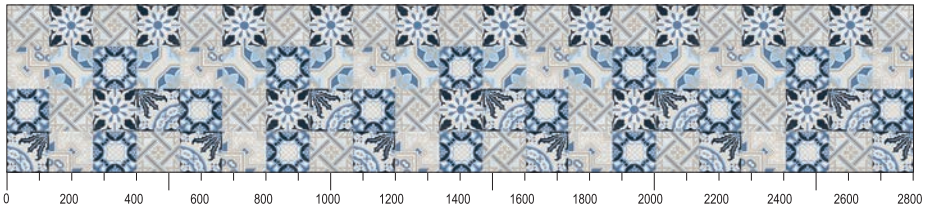

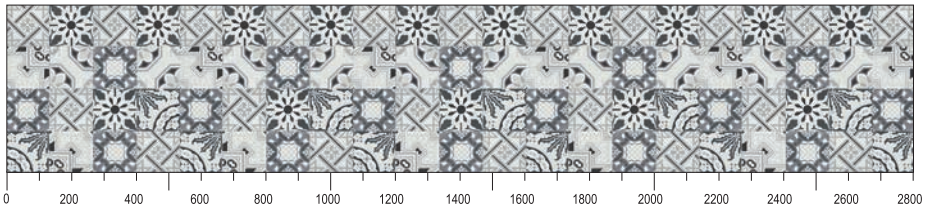
522 Décor Floral Blue
Edge colour: Silver 046



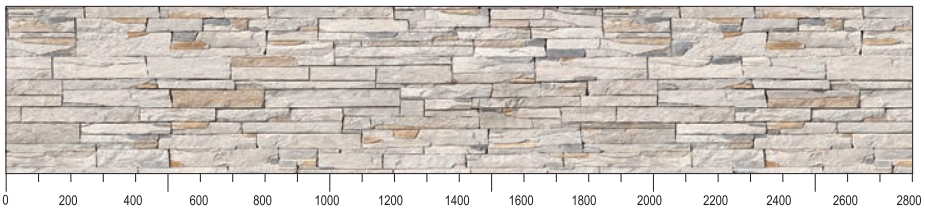
523 Décor Floral Grey
Edge colour: Silver 046



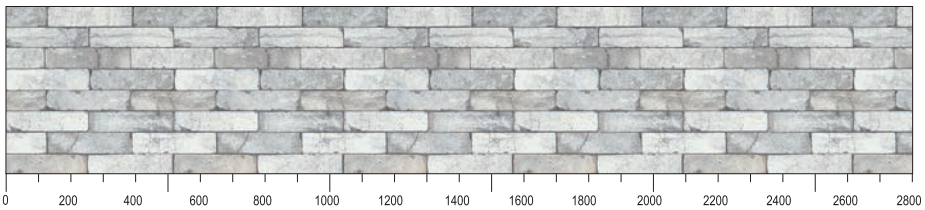529 Décor Dry Stone Wall
Edge colour: Silver 046



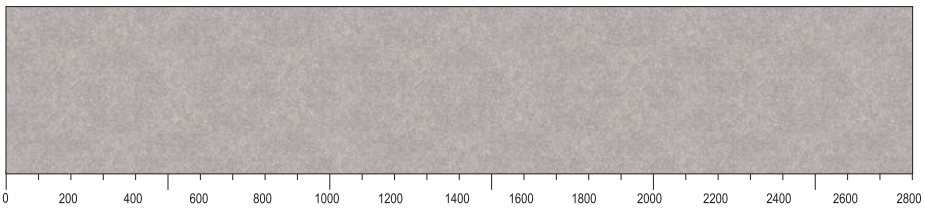
536 Décor brick, light
Edge colour: Silver 046




548 Décor ornamental taupe
Edge colour: Silver 046

Niche cladding with motif in digital print

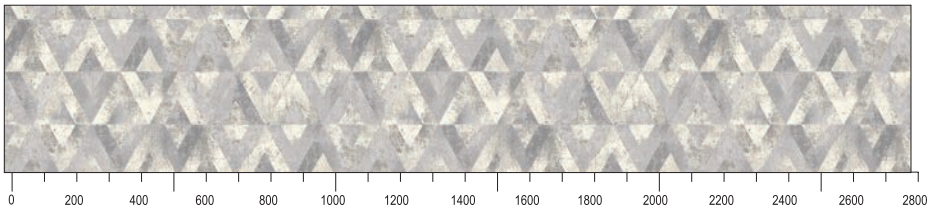
Note:
The contact side of the motif is left, it is measured from the left, and is cut from the right. Minimum order dimensions: 250 mm.
The following motifs cannot have their basic colour changed.



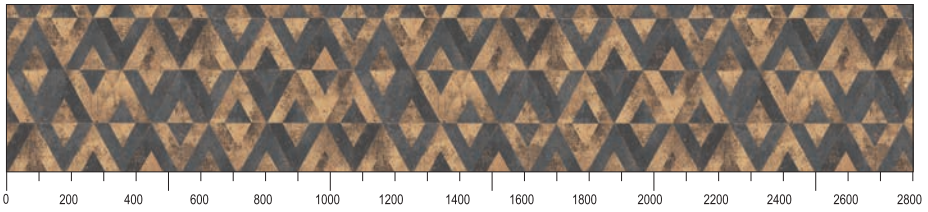
558 Décor rhombus grey
Edge colour: Silver 046



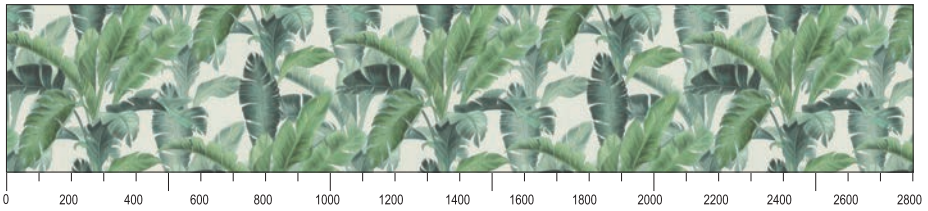
559 Décor rhombus gold
Edge colour: Silver 046



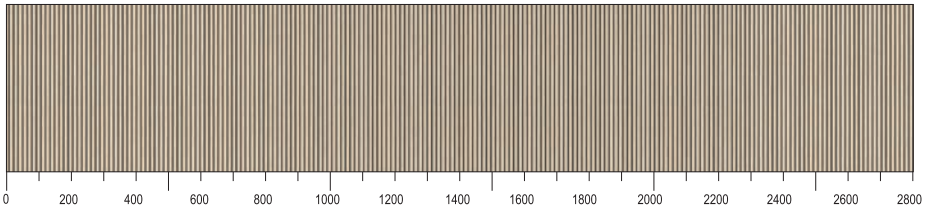569 Décor urban jungle
Edge colour: Silver 046



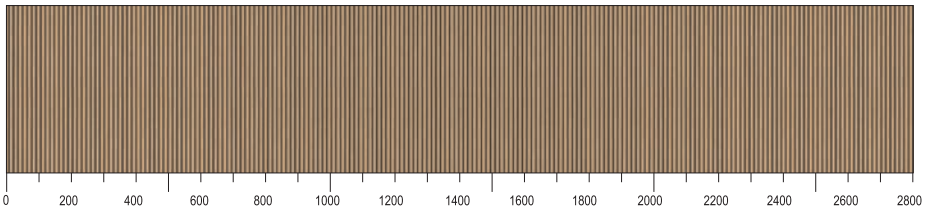576 Décor Oak Line light
Edge colour: Black 127



580 Décor Oak Line natural
Edge colour: Black 127



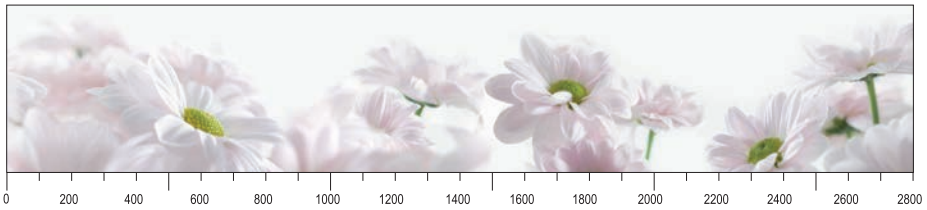
581 Decor Iconic Flowers
Edge colour: Black 127

NVM* Motif Overview, Décor group 2

Niche cladding with motif in digital print

Note:
Niche cladding NVM* in the following motifs can have their basic colour matched to the carcase colours 193 Alpine white, 106 White, 120 Ivory, 070 Satin grey and 089 Stone grey. In doing so, it will be matched to the lightest shade in the motif.
Please also add the desired carcase colour to the motif number when ordering.

The contact side of the motif is left, it is measured from the left, and is cut from the right. Minimum order dimensions: 250 mm.




435 Décor flower design

NVM* Motif Overview, Décor group 2


Niche cladding with motif in 3D digital print

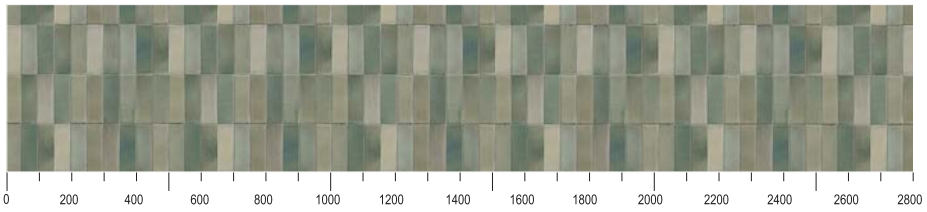Note:
The contact side of the motif is left, it is measured from the left, and is cut from the right. Minimum order dimensions: 250 mm.
The following motifs cannot have their basic colour changed.




555 Décor, vintage tile, green
Edge colour: Black 127

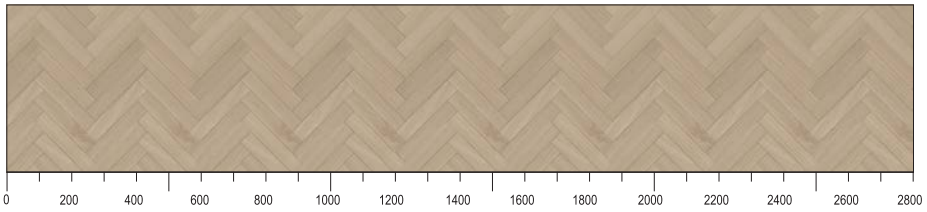NEW




556 Décor, herringbone, Como oak
Edge colour: Black 127

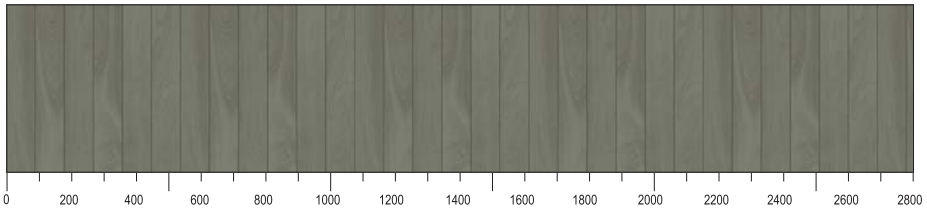NEW



557 Décor, wall panel, olive wood texture
Edge colour: Black 127

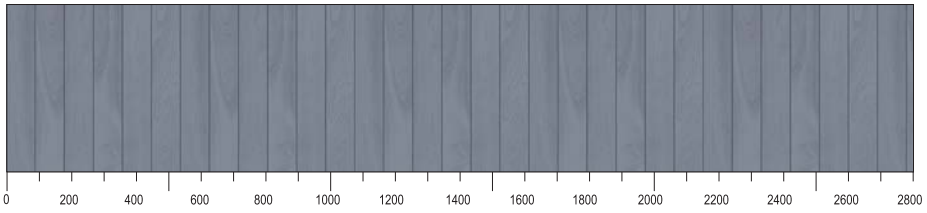NEW




570 Décor, wall panel, stone blue wood texture
Edge colour: Black 127


NEW

Niche cladding with motif in 3D digital print

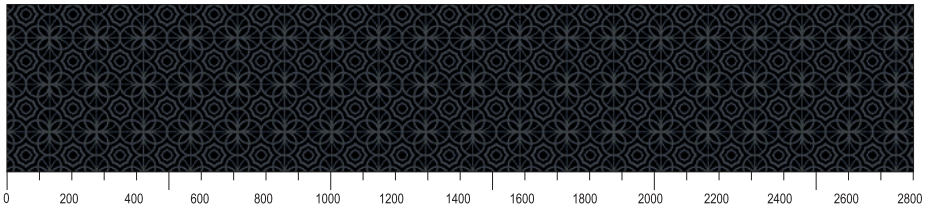
Note:
The contact side of the motif is left, it is measured from the left, and is cut from the right. Minimum order dimensions: 250 mm.
The following motifs cannot have their basic colour changed.



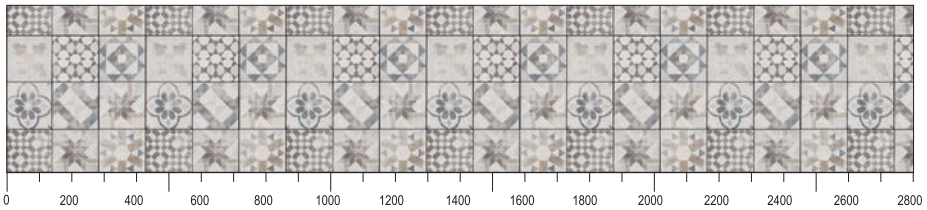
577 Décor kaleidoscope black
Edge colour: Black 127



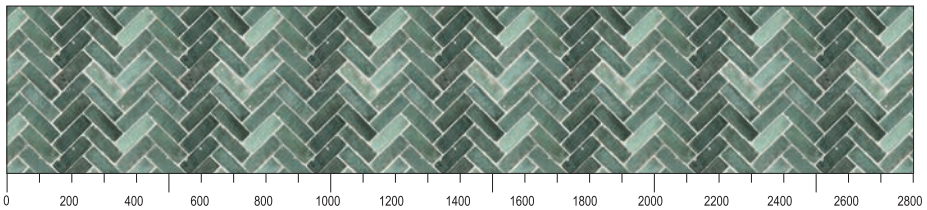579 Décor mosaic tile faro, warm grey
Edge colour: White 106



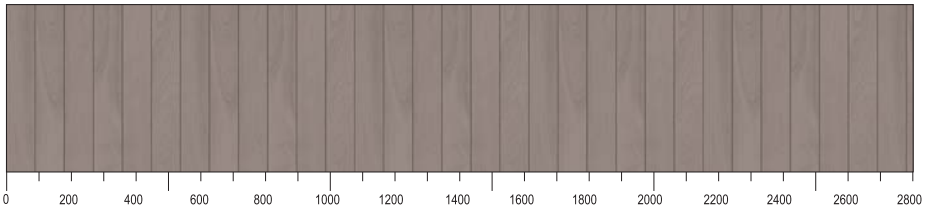584 Décor diagonal tile, green
Edge colour: White 106




586 Décor, wall panel, macchiato wood texture
Edge colour: Black 127

NEW




592 Décor, wall panel, Sierra oak
Edge colour: Black 127

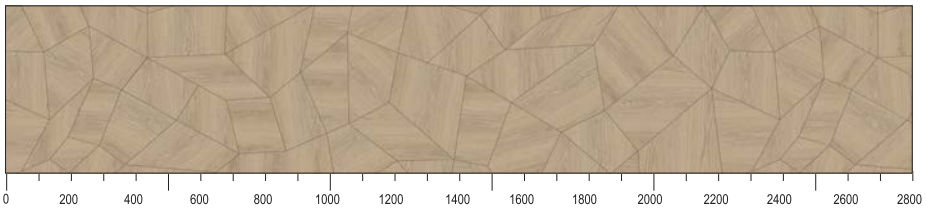NEW



598 Décor, Wood-Art, Como oak
Edge colour: Black 127

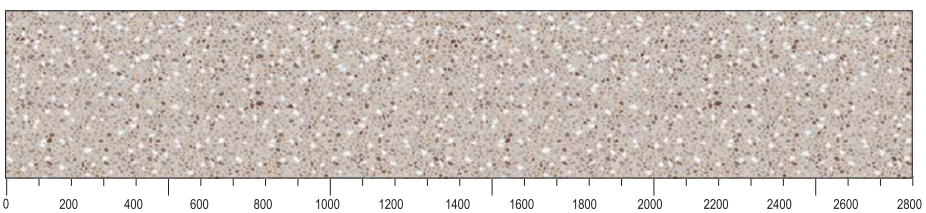NEW




599 Décor, natural Terrazzo
Edge colour: Satin grey 070

NEW

Niche cladding with motif in 3D texture

with vertical texture direction max. 2040 mm wide, 2770 mm high

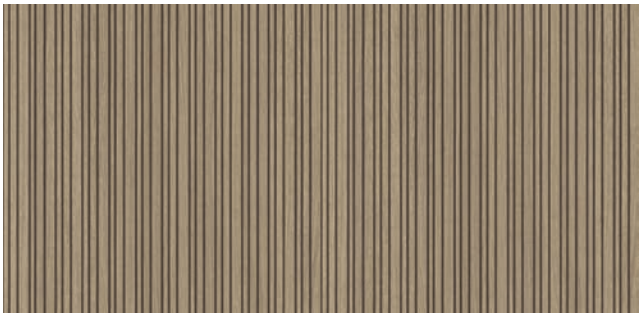
Please note:
Minimum ordering dimensions: 250 mm x 200 mm. The following motifs cannot have their basic colour changed.




255 Décor stripewood light
Edge colour: stripewood light 255



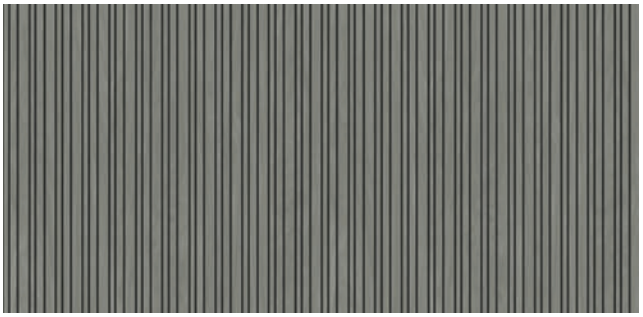283 Décor stripewood slate grey
Edge colour: graphite black ultra matt 961



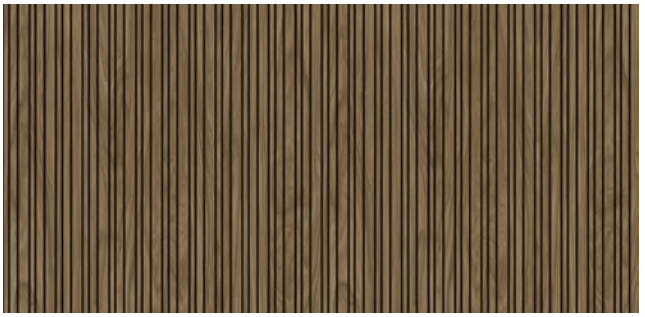284 Décor stripewood taupe
Edge colour: graphite black ultra matt 961



339 Décor stripewood dark
Edge colour: graphite black ultra matt 961



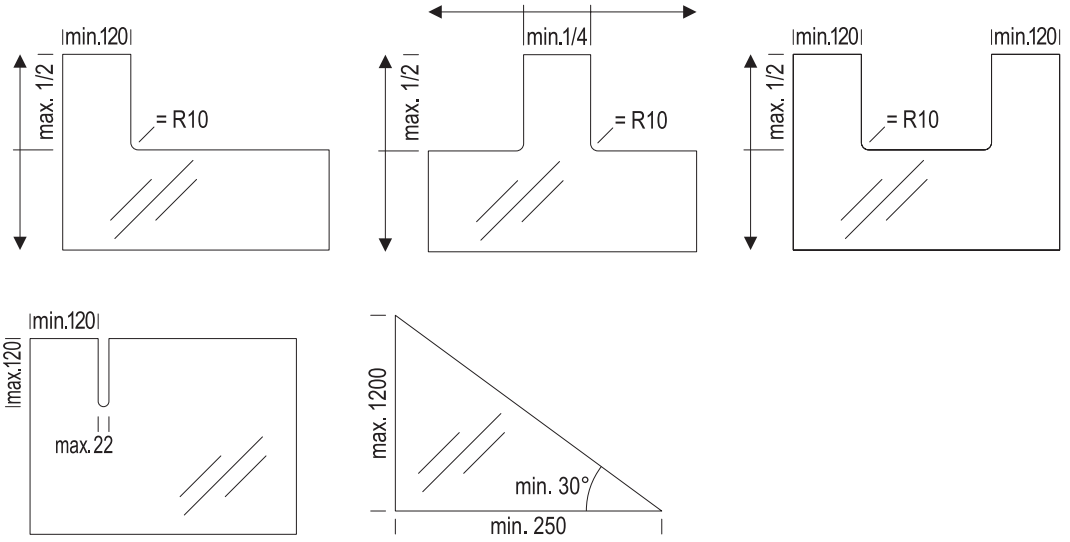
Planning information for glass and mirror niche cladding NVG120

General Information

- Maximum dimensions: height from 250 to 1200, width from 250 to 2500 mm.
- Minimum dimensions for NVG with processing: 250 x 250 mm.
- Minimum dimensions for NVG without processing
  45 to 90 mm height x 200 to 1500 mm width
  91 to 150 mm height x 150 to 2000 mm width
  151 to 1250 mm height x 150 to 2500 mm width
- Binding sketches with specific dimensions are required for order clearance.
- A written confirmation of the manufacturer's sketch is required from the customer for production clearance.
- Subsequent processing on site is not possible.
- With elaborately planned glass niche cladding it has proven successful on the market - for reasons of fitting accuracy - to allow a subsequent order after the completed kitchen installation. In this exceptional case it is permitted - with provision of the first OC - to invoice an additional kitchen block.

Notching or Chamfering
NVG-A

- The minimum distance between notches and the outer edge is 120 mm.
- The notch height must not exceed half of the glass height and must be a maximum of 200 mm deep.
- The standard inner radius is 10 mm, the edge is unpolished.
- Larger radii up to 600 mm are possible and must be specified with the order.
- The edge will be supplied polished for an inner radius upwards of 60 mm.
- For sharply angled corners, the minimum angle must not be smaller than 30°.




Rounding
NVG-R

- There is no minimum distance to the outer edge.
- The standard edge version is polished.
- Please specify the radius in your order.


Drill holes for electrical sockets
NVG-SD*

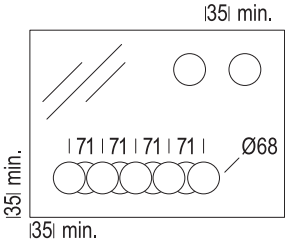- The diameter of the drill hole is 68 mm.
- The minimum distance to the outer edge, to other finishing details or the next free drill hole is 35 mm.
- The only exceptions are with double, triple, quadruple or quintuple drill holes for electrical sockets. The space from centre to centre is 71 mm. The centre partition is drilled.




Drill holes
NVG-BO*

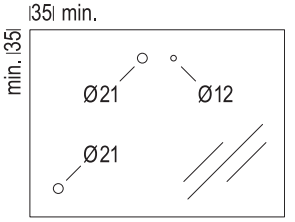- Drill holes with a diameter of less than 21 mm are only available in the fixed dimensions 5 / 6 / 7 / 8 / 10 / 12 and 21 mm.
- The minimum distance to the outer edge is 35 mm.
- Drill holes must be measured from the hole edge and spaced apart a minimum of 1x the diameter of the largest hole.



Slotted drill holes
NVG-BOL*

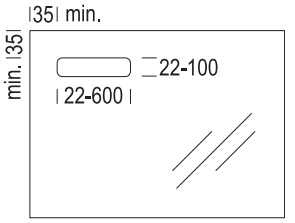- Maximum dimensions: width from 22 to 600 mm. Height from 22 to 100 mm
- The minimum distance to the outer edge is 35 mm.



Glass and mirror niche cladding

When using gas hot plates, ensure a minimum distance of 100 mm from the rear edge of the hot plate to the niche cladding.
Binding sketches with specific dimensions are required for order clearance on plans with NVG120.
Subsequent processing on site is not possible.

Glass and mirror niche cladding in fixed dimensions



	Abbreviation	Width in cm		Order No.	Points Décor group 1	Points Décor group 2
Glass and mirror niche cladding with lacquered rear face, 695 mm high, for niche height underneath cooker hoods 16 mm thick, 12 mm thick substrate board with 4 mm glass coating and PP edging on all sides, silver colour	NVG	60	-70	3979	251	437
	NVG	90	-70	3980	333	599
	NVG	100	-70	3900	374	639
as above, but **437 mm high** to supplement niche cladding in carcase colours or worktop décor in 256 mm height	NVG	60	-44	2916	209	304
	NVG	90	-44	2919	257	426
	NVG	100	-44	2920	280	457
as above, but for **recess height beneath wall units**	NVG	45	-54	3354	199	296
	NVG	50	-54	3355	204	310
	NVG	60	-54	3356	235	361
	NVG	80	-54	3358	260	439
	NVG	90	-54	3359	261	466
	NVG	100	-54	3360	291	515
	NVG	105	-54	3361	304	531
	NVG	110	-54	3362	315	572
	NVG	120	-54	3363	333	606
	NVG	150	-54	3365	403	712
as above, but **256 mm high** to supplement niche cladding in carcase colours or worktop décor in 275 mm height	NVG	45	-26	2904	178	225
	NVG	50	-26	2905	185	237
	NVG	60	-26	2906	204	250
	NVG	80	-26	2908	206	277
	NVG	90	-26	2909	239	301
	NVG	100	-26	2910	250	312
	NVG	105	-26	2907	270	321
	NVG	110	-26	2911	276	330
	NVG	120	-26	2912	301	385
	NVG	150	-26	2915	311	444

Available in décor group 1:

046 Silver
052 White high gloss
053 Black high gloss
082 Satin grey high gloss
085 Alpine white high gloss
129 Stone grey high gloss
131 Slate grey high gloss
162 Glass appearance
176 Ivory high gloss
177 Sand high gloss

Available in décor group 2:

050 Mirror, bronze colour
051 Mirror, slate grey
057 Masterflow black matt
092 Relief glass, black (1st dimension is grain direction)


When planning individual NVG elements adjacent to one another, there is no continuous pattern repeat with these décors.

To supplement with NV the connecting profile NPG must be included in the order!

Planning in combination with the NPUK or NKPU profile or WAPN (r. accessories list, chap. 2) is recommended for all niche claddings!






Glass and mirror niche cladding


When using gas hot plates, ensure a minimum distance of 100 mm from the rear edge of the hot plate to the niche cladding.
Binding sketches with specific dimensions are required for order clearance on plans with NVG120.
Subsequent processing on site is not possible.

		Abbreviation	Order No.	Points	
		Width in cm		Décor group 1	Décor group 2
Glass and mirror niche cladding for customised designs					
	For custom designed glass niche cladding NVG120 or designs with subsequent processing please observe the following information: *Binding sketches with specific dimensions are required for order clearance.* *A written confirmation of the manufacturer's sketch is required from the customer for production clearance.* *Subsequent processing on site is not possible.*				
	Glass and mirror niche cladding with lacquered rear face, for custom designs according to sketch 16 mm thick, 12 mm thick substrate board with 4 mm glass coating and PP edging on all sides, silver colour Dimensions for NVG120 with processing: height: 250 to 1200 mm, width: 250 to 2500 mm Dimensions for NVG120 without processing: 45 to 90 mm height x 200 to 1500 mm width 91 to 150 mm height x 150 to 2000 mm width 151 to 1250 mm height x 150 to 2500 mm width Minimum price: 0.5 m², minimum dimensions: 250 x 250 mm. Invoiced per m². Available colours , s. above. *To supplement with NV the connecting profile NPG must be included in the order!* *Planning in combination with the NPUK or NKPU profile or WAPN (r. accessories list, chap. 2) is recommended for all niche claddings!*	NVG120	23987	1.057	1.244


Glass and mirror niche cladding

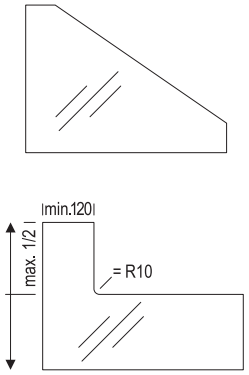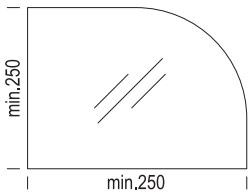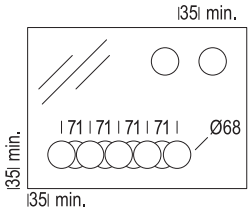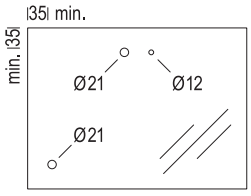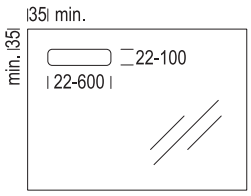When using gas hot plates, ensure a minimum distance of 100 mm from the rear edge of the hot plate to the niche cladding.
Binding sketches with specific dimensions are required for order clearance on plans with NVG120.
Subsequent processing on site is not possible.

		Abbreviation	Width in cm	Order No.	Points
Processing on glass and mirror niche cladding NVG120					
	Surcharge for notching or chamfering on NVG120 Inner radius for notches: at least 10 mm, Edge design: sanded, unpolished. Larger radii up to 10 mm are possible and must be specified with the order. The edge will be supplied polished for an inner radius upwards of 60 mm.	NVG-A		33901	180
	Surcharge for rounding on NVG120 Edge design: sanded and polished *Please indicate radius in your order.*	NVG-R		33902	180
	Surcharge for drill holes on NVG120 for electrical sockets Diameter: 68 mm *Minimum distance to outer edge, other finishing details or the next free drill hole: 35 mm*	1 socket	NVG-SD1	33911	85
		2 sockets	NVG-SD2	33912	123
		3 sockets	NVG-SD3	33913	155
		4 sockets	NVG-SD4	33914	180
		5 sockets	NVG-SD5	33915	207
	Surcharge for drill holes on NVG120 Diameter: variable *Minimum distance to outer edge: 35 mm*	Diameter 5/6/7/8/10/12/21 mm	NVG-BO	33904	85
		Diameter 22 - 50 mm	NVG-BO50	33905	123
		Diameter 51 - 150	NVG-BO150	33906	155
	Surcharge for slotted drill holes on NVG120 Diameter: variable NVG-BOL300: 22 to 300 mm wide, 22 to 50 mm high NVG-BOL600: 301 to 600 mm wide, 51 to 100 mm high *Minimum distance to outer edge: 35 mm*		NVG-BOL300	33908	155
			NVG-BOL600	33909	180

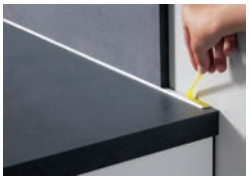		Abbreviation	Width in cm	Order No.	Points
Accessories for niche cladding					
	Plastic cover profile in translucent appearance for niche or back panel cladding, 16 mm thick, self-adhesive, 5000 mm long *The profile NPUK adds 1.6 mm.*	NPUK	500	4052	64
	Connecting profile in stainless steel appearance for niche cladding made of plastic in 437 mm / 256 mm height in order to reach niche height beneath cooker hoods and wall units. *The profile NPG* adds 2 mm.* *Necessary for NVG in conjunction with NV!*	NPG NPG NPG	200 400 500	9101 9102 9103	111 201 361
	Surcharge for niche cladding with LED lighted designs Profile strip with integrated LED light strip for mounting on the niche cladding, Energy efficiency rating: A - A++, with Emotion technology, 12 watt per running metre, Profile length: 100 to 4000 mm, incl. 2000 mm connection cable to starter set, Upwards of 3000 mm profile lengths will be supplied with 2 connection cables and 2000 mm extension cable. Available in: 010 Black 014 Stainless steel appearance Price per started 100 mm. Permitted for the following niche claddings: NV*, NVH*, NVM*, NVG120 Permitted for plans with WAPN, NPUK, NKPU *The lighted design MP-NVLA can also be ordered for individual niche claddings.* *Connected claddings are provided with a continuous profile.* *Cannot be planned with slimline cooker hoods.* *Attention: The recess must be divided.* *LED starter sets LSET-SMART36/60(-FB) are not included in the scope of delivery, see accessories list, chapter Lighting.*	MP-NVLA		7985	59,4
Carcase material					
No image	Carcase material both sides laminated in the same colour, incl. edging all around, please note surcharges for cut-outs and notches. 16 mm thick, max. 2580 mm wide, 2030 mm high, 1. dimension is in the direction of the grain. Minimum dimension: 250 x 250 mm Available in all carcase colours. Minimum price: 0.5 m². Invoiced per m².	KAM		7507	292
No image	Melamine edging for carcase material 0.5 mm thick, 23 mm wide (thin edging with glue) Available in all carcase colours. Price per started 1000 mm.	MKKA		9158	20
No image	Surcharge for notches and chamfered cuts in niche cladding or carcase materials	NVAUS (without edging)		4049	161
		NVAUSK (with edge coating)		4050	225

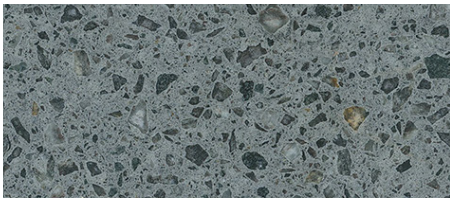Quartz décors & order information



802 Epic Raw

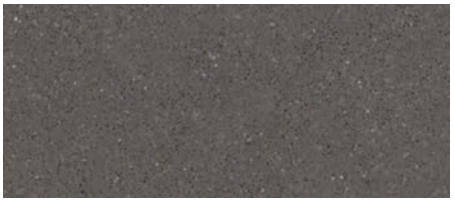


804 Epic Black

806 Epic White



807 Epic Easy Clay



809 Epic Ash Grain

Planning information for quartz worktops

General information

- Tables, breakfast bars and worktop extensions are not possible.
- Fastening support consoles is not possible.
- No connection with structure for window reveal!
- Worktop joints must be on the carcase side or are supported by supplied mounting plates.
- 1 mm air gap between worktop joints is automatically generated.
- All connections to the wall and adjacent units must be sealed. For this purpose, the quartz mounting set APQ-MSET is automatically confirmed, supplied and invoiced for each consignment.
- 1 mm inward offset for each side for double-sided connections to wall and / or adjacent units is generated automatically.
- 2 mm worktop overhang per unconnected visible side is generated automatically.
- Cut-outs for sinks and hot plates cannot be made on site.
- Corner connections with angular deviations cannot be adapted on site using extra-depth. Angle modifications are available at a surcharge UPE-VAR and APQ-PSTD.
- For complicated quartz designs, a subsequent order after the completed kitchen installation is possible. In this exceptional case it is permitted - if indicated in the first OC - to perform an additional block pricing.

Designs with the following units / the following worktop accessories are not possible

- As top shelf for highboards
- Support legs
- Support consoles
- Ventilation grille
- Glass upright UWG*

Special considerations for designing quartz worktops with a thickness of 12 mm

General information

- Maximum worktop overhang 150 mm.
- Visible edges will be invoiced a surcharge for additional edge processing APQ-K12.

Information for designs with hot plates

- Hobs with a cut-out dimension of 560 mm width are permissible for the cooker housing units HUB-SL(-X), HUS-SL60-M, HUS90(-X), NHU60(-X) and NHUM60(-X) and for all hot plate units 600 mm width or more.
- Cooker housing units and hot plate units of 600 mm width require the quartz installation set APQ-SET60.
- Hobs with the cut-out dimensions 750 - 780 mm in width are only permissible for the cooker housing unit HUS90(-X) and for hot plate units of 900 mm width or more. Hot plate units and cooker housing units of 800 mm width or more require the quartz installation set APQ-SET80.
- Designs of built-in cookers or ovens under hot plates are only possible using cooker housing types HUB-SL(-X) / HUS-SL60-M and HUS90(-X).
- Drawers under hot plates are only possible for designs involving hot plate units KS*(-X), K2SA*, KS2A*(-X), SKU* in combination with the low frame MP-NIEZA.
- During installation, please adhere to the installation information and installation depths provided by the corresponding manufacturers.
- Cut-outs for hot plates cannot be made on site.

Information for designs of built-in sinks

- It is not possible to sink drainers above dishwashers, built-under fridges, dryers, washing machines or drawers.
- Suitable sinks are labelled with the symbol SL and permit flush-mounted installation, if they are also labelled with the symbol for flush-mounted installation.
- Required sink base unit width: Sink cut-out + 75 mm.
- The quartz installation set APQ-SET80 is required for installation.
- Cut-outs for sinks cannot be made on site.
- Cut-outs for built-under sinks are not possible.

Designs with the following units / the following worktop accessories are not possible

- Glass panels, niche cladding made of wood in fixed dimensions (except for cooker hoods), recessed shelves underneath wall units with connection to tall units
- Sink base units SPUST90(X/M), SPUS90...120
- Child safety guard

Special considerations for designing quartz worktops with a thickness of 38 mm

General information

- Rounding is not possible.
- Maximum worktop overhang 250 mm.
- Visible edges will be invoiced a surcharge for additional edge processing APQ-K38.
- Cut-outs for sinks and hot plates cannot be made on site.

Information on subsequent processing of quartz

General information

- Subsequent processing of quartz on site is only possible with suitable tools.
- Minimum requirements:
  - Drill: Diamond drill bit for tiles, granite, stoneware, ceramics
  - Saw: Flex hand-held angle grinder; saw blades: Diamond cutting wheels (dry) for tiles, granite, stoneware, ceramics
  - Polishing machine: Hand-held sanding pads/polishing pads, galvanised diamond for stone, glass, ceramics
  - Personal protective equipment is required for subsequent processing of quartz on site.
- Minimum requirements:
  - Dust mask, protection rating FFP2

Special considerations for designing quartz niches and upstands

General information

- All connections to the wall and adjacent units must be sealed. For this purpose, the quartz mounting set APQ-MSET is automatically confirmed, supplied and invoiced for each consignment.
- A 1 mm gap from adjacent structures and for butt joints must be included in the calculation.
- A +2 mm overhang must be included for each visible side.

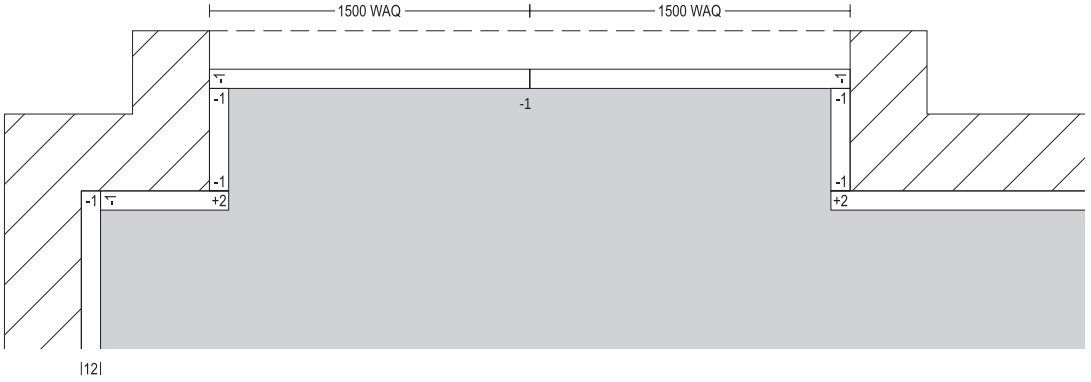


Fig. 1: Design example for use of niche and upstand with window reveal

Quartz worktops, 12 / 38 mm thick

Binding sketches with specific dimensions are required for order clearance.
A written confirmation of the manufacturer's sketch is required from the customer for production clearance.








Price per 100 mm, every 100 mm started will be invoiced. Width: 250 - 3000 mm.

		Abbreviation	Order No.	Points
		Width in cm		
Quartz worktops, 12 / 38 mm thick				
	Worktop APQS quartz, 12 mm thick Surface polished, front edge polished with double chamfer. At a surcharge APQ-K12, the side and rear edges are also available with a polished double chamfer. *Binding sketches with specific dimensions are required for order clearance on plans with quartz worktops. Subsequent processing on site is only possible with suitable tools for quartz and personal protective equipment.*	APQS60 APQS70 APQS80 APQS90 APQS100 APQS110 APQS120	7106 7107 7108 7109 7110 7111 7112	88,5 112,3 126,6 145,4 158,3 175,8 194,5
	Worktop APQ quartz, 38 mm thick Surface polished, front edge mitred with chamfer. At a surcharge APQ-K38, the side and rear edges are also available mitred with a chamfer. *Binding sketches with specific dimensions are required for order clearance on plans with quartz worktops. Subsequent processing on site is only possible with suitable tools for quartz and personal protective equipment.*	APQ60 APQ70 APQ80 APQ90 APQ100 APQ110 APQ120	7136 7137 7138 7139 7140 7141 7142	109,5 133,3 147,8 166,7 179,4 197 216,1
No image	Quartz installation set for hot plate units and cooker housing units HUB-SL(-X), HUS-SL60-M, NHU60-X and NHUM60-X, 600 mm wide	APQ-SET60	7166	137
	Quartz installation set for sink units in all widths as well as hot plate units and cooker housing units of 800 mm width or more *Only required for quartz worktops of 12 mm thickness.*	APQ-SET80	7168	207
No image	Quartz mounting set consisting of: • Sealing material • Mounting accessories *The quartz mounting set is automatically confirmed, supplied and invoiced for each consignment.*	APQ-MSET	7165	215

Processing on quartz worktops

Binding sketches with specific dimensions are required for order clearance.




A written confirmation of the manufacturer's sketch by the customer is required for production clearance.

		Abbreviation	Width in cm	Order No.	Points
Processing on quartz worktops					
	Surcharge for outer edge rounding on 12 mm quartz worktops without edge processing *Dimensions and sketches are required.* *Please indicate the radius.* *At a surcharge, round outer edges are also available with edge processing.*	outer edge rounding up to 22.5 mm	APQ-R	7149	213
		outer edge rounding > 22.5 mm	APQ-RX	7169	580
	Surcharge for notches on quartz worktops and niche cladding without edge processing *Dimensions and sketches are required.* *At a surcharge (APQ-K12/APQ-K38) notches are also available with edge processing.*		APQ-AK	7152	288
	Surcharge for U-shaped notches on quartz worktops and niche cladding without edge processing *Dimensions and sketches are required.* *At a surcharge (APQ-K12/APQ-K38) notches are also available with edge processing.*		APQ-AKU	7156	418
	Surcharge for chamfered cuts on quartz worktops and niche cladding without edge processing *Dimensions and sketches are required.* *At a surcharge (APQ-K12/APQ-K38) chamfered cuts are also available with edge processing.*		APQ-A	7151	253
	Surcharge for chamfered cuts, z-shaped on quartz worktops without edge processing *At a surcharge (APQ-K12/APQ-K38) z-shaped chamfered cuts are also available with edge processing.*		APQ-Z	7159	429
No image	Surcharge for additional edge processing for 12 mm quartz: Polished with double chamfer Price per started 100 mm.	Thickness 12 mm	APQ-K12	7157	18,5
No image	Surcharge for additional edge processing for 38 mm quartz: Mitred with chamfer Price per started 100 mm.	Thickness 38 mm	APQ-K38	7158	40,2
	Surcharge for drill holes on quartz worktops and niche cladding *Dimensions and sketch required.* *Minimum distance from outer edge: 35 mm.* *For sinks without tap fittings, eccentric equipment, surface-mounted hand basins and soap dispensers, please order the surcharge for drillings NVQ-BO35.*	Diameter 5 - 35 mm	NVQ-BO35	7153	85
		Diameter 36 - 72 mm	NVQ-BO72	7154	200
		Diameter 73 - 150 mm	NVQ-BO150	7155	315
	Surcharge for butt joint on quartz worktop corners or extensions Edges are chamfered.		APQ-PST	7150	178

Processing on quartz worktops



Binding sketches with specific dimensions are required for order clearance.

A written confirmation of the manufacturer's sketch by the customer is required for production clearance.

				Abbreviation Width in cm	Order No.	Points
		Surcharge for diagonal butt joint on quartz worktop corners or extensions Edges are chamfered.		APQ-PSTD	7164	416
E		Surcharge for cut-outs for sockets, surface-mounted washbasins, sinks and overlay hot plates on quartz worktops Not possible for built-under sinks. Please specify type of appliance or or cut-out dimensions.	up to 250 mm	APQ-AUS25	7125	356
			up to 600 mm	APQ-AUS60	7160	495
			up to 1500 mm	APQ-AUS150	7161	616
E		Cut-out for flush mounting of sinks and hot plates incl. sealing materials and mounting accessories *Cut-outs for flush mounting can only be made for technically approved hot plates and sinks. Please look for the flush-mounting symbol in the appliances and sinks list.* *Our technically approved list for flush mounting can be found in the nobilia Extranet. This list is regularly updated in our Extranet and in the kitchen planning systems of kitchen retailers.*	up to 600 mm	APQ-FL60	7162	968
			up to 1500 mm	APQ-FL150	7163	1.094




Quartz niche cladding, 12 mm thick

When using gas hot plates, ensure a minimum distance of 100 mm from the rear edge of the hot plate to the niche cladding.
Binding sketches with specific dimensions are required for order clearance.
A written confirmation of the manufacturer's sketch is required from the customer for production clearance.

			Abbreviation	Width in cm		Order No.	Points
Quartz niche cladding							
	Quartz niche cladding Surface polished, edges polished and chamfered on 3 sides. Price per started 100 mm. *Variable heights:* *NVQ54 301 - 563 mm*	250 - 3000 mm	NVQ54			7174	96,9
	Quartz niche cladding Height: 300 mm. Surface polished, edges polished and chamfered on 3 sides. Price per started 100 mm. *Factory-made height changes not possible!*	250 - 3000 mm	NVQ		-30	7170	66,3
	Quartz niche cladding for use beneath cooker hoods Height: 700 mm. Surface polished, edges polished and doubly chamfered on 3 sides. *Factory-made height and width changes not possible!*		NVQ NVQ NVQ	60 90 100	-70 -70 -70	7176 7179 7181	777 1.150 1.254
	Quartz upstand Height: 50 mm. Surface polished, edges polished and chamfered on 3 sides. Price per started 100 mm. *Please indicate dimensions and position.* *Factory-made height changes not possible!*	100 - 1500 mm	WAQ			7182	25,4
	Surcharge for chamfered cuts on quartz worktops and niche cladding without edge processing *Dimensions and sketches are required.* *At a surcharge (APQ-K12/APQ-K38) chamfered cuts are also available with edge processing.*		APQ-A			7151	253
	Surcharge for notches on quartz worktops and niche cladding without edge processing *Dimensions and sketches are required.* *At a surcharge (APQ-K12/APQ-K38) notches are also available with edge processing.*		APQ-AK			7152	288

Quartz niche cladding, 12 mm thick


When using gas hot plates, ensure a minimum distance of 100 mm from the rear edge of the hot plate to the niche cladding.
Binding sketches with specific dimensions are required for order clearance.
A written confirmation of the manufacturer's sketch is required from the customer for production clearance.

			Abbreviation	Width in cm	Order No.	Points
	Surcharge for U-shaped notches on quartz worktops and niche cladding without edge processing *Dimensions and sketches are required.* *At a surcharge (APQ-K12/APQ-K38) notches are also available with edge processing.*		APQ-AKU		7156	418
No image	Surcharge for additional edge processing for 12 mm quartz: Polished with double chamfer Price per started 100 mm.	Thickness 12 mm	APQ-K12		7157	18,5
	Surcharge for drill holes on quartz worktops and niche cladding *Dimensions and sketch required.* *Minimum distance from outer edge: 35 mm.* *For sinks without tap fittings, eccentric equipment, surface-mounted hand basins and soap dispensers, please order the surcharge for drillings NVQ-BO35.*	Diameter 5 - 35 mm	NVQ-BO35		7153	85
		Diameter 36 - 72 mm	NVQ-BO72		7154	200
		Diameter 73 - 150 mm	NVQ-BO150		7155	315
	Surcharge for socket drill holes on quartz niche cladding *Dimensions and sketch required.* *Minimum distance from outer edge: 35 mm.*	1 socket	NVQ-SD1		7191	188
		2 sockets	NVQ-SD2		7192	250
		3 sockets	NVQ-SD3		7193	310
		4 sockets	NVQ-SD4		7194	366
		5 sockets	NVQ-SD5		7195	428

Xtra Ceramic decórs & ordering information



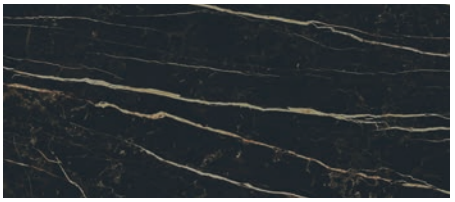781 Venato Bianco reproduction



783 Venato Nero reproduction



784 Fossil grey



785 Metal oxide



787 Stone Oak reproduction



790 Plain Black



792 Belgian Blue Stone reproduction

794 Concrete Satin grey reproduction

796 Concrete White reproduction



798 Concrete Sand reproduction

XTRA CERAMIC

Planning information for Xtra Ceramic worktops

General information

- Tables, breakfast bars and worktop extensions are not possible.
- Fastening support consoles is not possible.
- Maximum worktop overhang 300 mm.
- No connection with structure for window reveal!
- Worktop joints must be on the carcase side or are supported by supplied mounting plates.
- 1 mm air gap between worktop joints is automatically generated.
- All connections to the wall and adjacent units must be sealed. For this purpose, the Xtra Ceramic mounting set APC-MSET is automatically confirmed, supplied and invoiced for each consignment.
- 1 mm inward offset for each side for double-sided connections to wall and / or adjacent units is generated automatically.
- 2 mm worktop overhang per unconnected visible side is generated automatically.
- Corner connections with angular deviations cannot be adapted on site using an extra-deep worktop. Angle modifications possible for surcharge UPE-VAR, APC-PST and APC-A with min. 67.5°.
- Visible sides will be invoiced a surcharge for additional edging APC-K16.
- Notches are not possible with additional edging APC-K16.
- Cut-outs for sockets cannot be made on site.
- Rounding is not permitted.
- For complicated Xtra Ceramic designs, a subsequent order after the completed kitchen installation is possible. In this exceptional case it is permitted - if indicated in the first OC - to perform an additional block pricing.

Information for designs with hot plates

- Hobs with a cut-out dimension of 560 mm width are permissible for the cooker housing units HUB-SL(-X), HUS-SL60-M, HUS90(-X), NHU60(-X) and NHUM60(-X) and for all hot plate units 600 mm width or more.
- Cooker housing units and hot plate units of 600 mm width require the Xtra Ceramic installation set APC-SET60.
- Hot plate units and cooker housing units of 800 mm width or more require the Xtra Ceramic installation set APC-SET80. Hobs with the cut-out dimensions 750 - 780 mm in width are only permissible for the cooker housing unit HUS90(-X) and for hot plate units of 900 mm width or more.
- Designs of built-in cookers or ovens under hot plates are only possible using cooker housing types HUB-SL(-X) / HUS-SL60-M and HUS90(-X).
- Drawers under hot plates are only possible for designs involving hot plate units KS*(-X), K2SA*, KS2A*(-X), SKU* in combination with the low frame MP-NIEZA.
- During installation, please adhere to the installation information and installation depths provided by the corresponding manufacturers.
- Cut-outs for hot plates cannot be made on site.

Information for designs of built-in sinks

- It is not possible to sink drainers above dishwashers, built-under fridges, dryers, washing machines or drawers.
- Suitable sinks are labelled with the symbol SL and permit flush-mounted installation, if they are also labelled with the symbol for flush-mounted installation.
- Required sink base unit width: Sink cut-out + 75 mm.
- The Xtra Ceramic installation set APC-SET80 is required for installation.
- Cut-outs for sinks cannot be made on site.
- Cut-outs for built-under sinks are not possible.

Designs with the following units are not possible

- Glass panels, niche cladding made of wood in fixed dimensions (except for cooker hoods), recessed shelves underneath wall units with connection to tall units
- End of run types (Z shape), diagonal types, end of run diagonal shelf unit
- Sink base units SPUST90(X/M), SPUS90...120
- As top shelf for highboards

Designs with the following worktop accessories are not possible

- Child safety guard
- Support legs
- Support consoles
- Ventilation grille
- Table frames and bench bases

Processing on Xtra Ceramic worktops and niche claddings

General information

- Binding sketches with specific dimensions are required for order clearance of plans with Xtra Ceramic worktops. Subsequent processing on site is only possible with suitable tools for ceramic material.

Information on subsequent processing of Xtra Ceramic

General information

- Subsequent processing of Xtra Ceramic on site is only possible with suitable tools.
- Minimum requirements:
  - Drill: Diamond drill bit for tiles, granite, stoneware, ceramics
  - Saw: Flex hand-held angle grinder; Saw blades: Diamond cutting wheels (dry) for tiles, granite, stoneware, ceramics
  - Polishing machine: Hand-held sanding pads/polishing pads, galvanised diamond for stone, glass, ceramics
  - Personal protective equipment is required for subsequent processing of quartz on site.
- Minimum requirements:
  - Dust mask, protection rating FFP2

Special considerations for designing Xtra Ceramic niches and upstands

General information

- All connections to the wall and adjacent units must be sealed. For this purpose, the Xtra Ceramic mounting set APC-MSET is automatically confirmed, supplied and invoiced for each consignment.
- A 1 mm gap from adjacent structures and for butt joints must be included in the calculation.
- A +2 mm overhang must be included for each visible side.

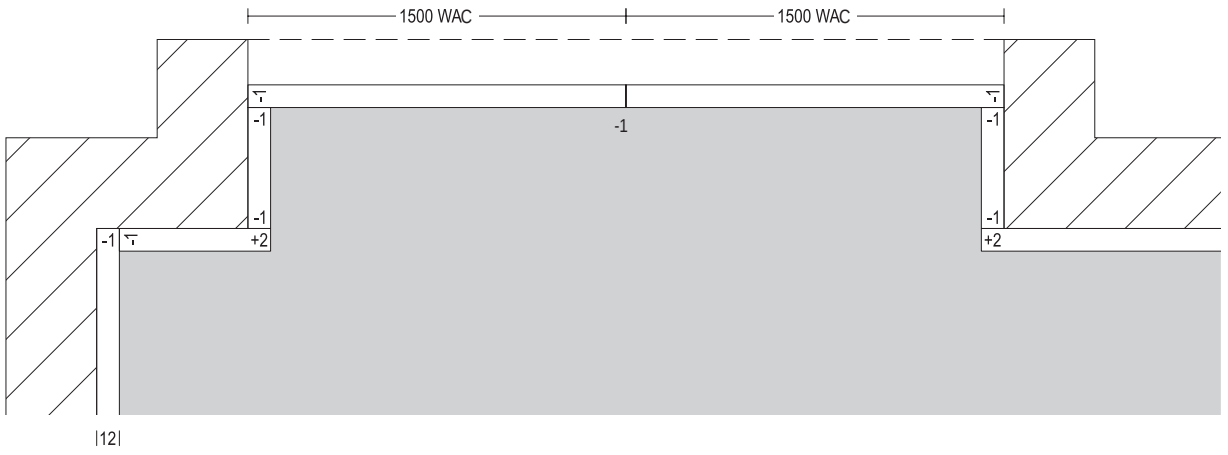






Fig. 1: Design example for use of niche and upstand with window reveal





Xtra Ceramic worktop, 16 mm thick

Binding sketches with specific dimensions are required for order clearance.
A written confirmation of the manufacturer's sketch by the customer is required for production clearance
Price per 100 mm, every 100 mm started will be invoiced. Width: 250 - 3100 mm.

		Abbreviation Width in cm	Order-no.	Points
Worktop Xtra Ceramic				
	Worktop APCS Xtra Ceramic, 16 mm thick Width: 250 - 3100 mm front and side with design edge, 1.2 mm thick *Binding sketches with specific dimensions are required for order clearance on plans with Xtra Ceramic worktops. Subsequent processing on site is only possible with suitable tools for ceramic and personal protective equipment.*	APCS60 APCS70 APCS80 APCS90 APCS100 APCS110 APCS120	7206 7207 7208 7209 7210 7211 7212	167,3 198,1 221,6 245,7 269,7 293,5 317,3
No image	Xtra Ceramic installation set for hot plate units and cooker housing units HUB-SL(-X), HUS-SL60-M, NHU60-X and NHUM60-X, 600 mm wide	APC-SET60	7260	137
No image	Xtra Ceramic installation set for sink units in all widths as well as hot plate units and cooker housing units of 800 mm width or more	APC-SET80	7261	207
No image	Xtra Ceramic mounting set consisting of: • superglue • adhesive tape • wiper • silicone • spacer plates • 4x mounting plate • installation instructions *The Xtra Ceramic mounting set is automatically confirmed, supplied and invoiced for each consignment.*	APC-MSET	7262	215
Processing on Xtra Ceramic worktops				
	Surcharge for notches on Xtra Ceramic worktops and niche cladding without edging Inner corners have an inner radius of 4 mm as a standard. *Dimensions and sketches are required.* *Deviations from the standard design are not possible.* *Notches with edging are not possible.*	APC-AK	7222	333
	Surcharge for U-shaped notches on Xtra Ceramic worktops and niche cladding without edging Inner corners have an inner radius of 4 mm as a standard. *Dimensions and sketches are required.* *Deviations from the standard design are not possible.* *U-shaped notches with edging are not possible.*	APC-AKU	7223	439
	Surcharge for full-depth chamfering on Xtra Ceramic worktops and niche cladding incl. edging *Dimensions and sketches are required.* *Angle: min. 67.5°*	APC-A	7227	301
No image	Surcharge for additional edging on Xtra Ceramic worktops and niche claddings Price per started 100 mm. *Not available for notches.*	APC-K16	7224	26,1

Processing on Xtra Ceramic worktops

Binding sketches with specific dimensions are required for order clearance.
A written confirmation of the manufacturer's sketch by the customer is required for production clearance.

			Abbreviation	Order-no.	Points
			Width in cm		
		**Surcharge for drill holes** on Xtra Ceramic worktops and niche claddings *Dimensions and sketch required.* *Minimum distance from outer edge: 35 mm.* *For sinks without tap fittings, eccentric equipment, surface-mounted hand basins and soap dispensers, please order the surcharge for drillings NVC-BO35.*	Diameter 5 - 35 mm Diameter 36 - 72 mm Diameter 73 - 150 mm	NVC-BO35 NVC-BO72 NVC-BO150	7235 7236 7237	112 261 416
		**Surcharge for socket drill holes** on Xtra Ceramic niche claddings *Dimensions and sketch required.* *Minimum distance from outer edge: 35 mm.*		NVC-SD1 NVC-SD2 NVC-SD3 NVC-SD4 NVC-SD5	7271 7272 7273 7274 7275	242 304 365 428 489
		**Surcharge for butt joint** on Xtra Ceramic worktop corners or extensions incl. Edging *Angle: min. 67.5°* *For each worktop joint a sealing set is automatically also confirmed.* *APC-PST: Deviating angles will bei invoiced against surcharge APC-A (7227).*		APC-PST APC-PSTD	7255 7257	48 599
E		**Surcharge for cut-outs for surface-mounted washbasins, sockets, sinks and overlay hot plates** on Xtra Ceramic worktops *The cut-outs are pre-milled at the factory.* *Not possible for built-under sinks.* *Please specify type of appliance or or cut-out dimensions.*	up to 250 mm up to 600 mm up to 1500 mm	APC-AUS25 APC-AUS60 APC-AUS150	7225 7246 7250	482 581 755
E		**Cut-out for flush mounting of sinks and hot plates** in Xtra Ceramic worktops incl. sealing materials and mounting accessories *Cut-outs for flush mounting can only be made for technically approved hot plates and sinks. Please look for the flush-mounting symbol in the appliances and sinks list.* *Our technically approved list for flush mounting can be found in the nobilia Extranet. This list is regularly updated in our Extranet and in the kitchen planning systems of kitchen retailers.*	up to 600 mm up to 1500 mm	APC-FL60 APC-FL150	7251 7253	1.098 1.421

Niche cladding Xtra Ceramic

Planning gas hot plates in conjunction with Xtra Ceramic recess panels and upstands requires a minimum spacing of 100 mm from the rear edge of the gas hot plate and the panel.

Niche cladding Xtra Ceramic, 16 mm thick

		Abbreviation	Width in cm		Order-no.	Points
	Xtra Ceramic niche cladding 3-sided with design edge, 1.2 mm thick Price per started 100 mm. *Variable heights:* *NVC56 301 - 559 mm* 250 - 3.100 mm	NVC		-56	7215	161,2
	Xtra Ceramic niche cladding Height: 300 mm. 3-sided with design edge, 1.2 mm thick Price per started 100 mm. *Factory-made height changes not possible!*	NVC		-30	7213	100,6
	Xtra Ceramic niche cladding for use beneath cooker hoods 3-sided with design edge, 1.2 mm thick *Factory-made width modifications not possible!*	NVC NVC NVC	60 90 100	-70 -70 -70	7216 7219 7220	1.209 1.797 1.993
	Xtra Ceramic upstand 3-sided with design edge, 1.2 mm thick Height: 75 mm. Price per started 100 mm. *Factory-made height changes not possible!* 100 - 1.500 mm	WAC			7221	52,7