5

Upright panels
Top shelves
Sakura design line
Pilasters
Wall shelves

Key

Item available in special sizes, s. chapter 2.

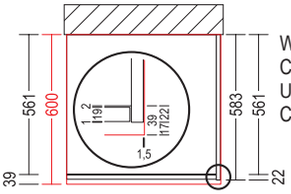
Planning information, s. chapter 10.

For available colours s. swatch, Design Overview page M 2.1.

Not available in: USA and Canada.

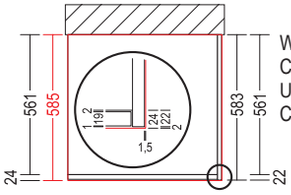
Worktop overhangs beyond carcase and upright panel edges

Planning on the wall



Worktop depth =
Carcase depth 561 mm + 39 mm = 600 mm
Upright panel depth =
Carcase depth 561 mm + 22 mm = 583 mm

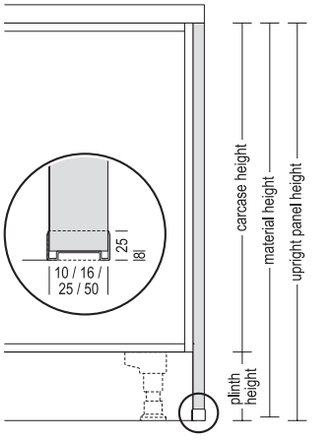
Worktop depth Line N, Pura, Inline, bar handle in drill pattern 19 and top shelf depth



Worktop / top shelf depth =
Carcase depth 561 mm + 24 mm = 585 mm
Upright panel depth =
Carcase depth 561 mm + 22 mm = 583 mm

Dimensional drawings for upright panels

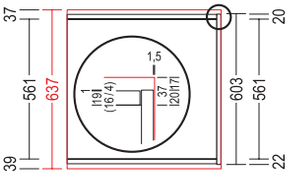
Uprights at end of run for base units, sideboards and tall units are supplied as standard with an upright panel shoe.
The upright panel shoe is included in the price of the upright panel and is available in: 014 Stainless steel appearance, 010 Black.
If no colour is specified in the order, the version 014 Stainless steel appearance will automatically be supplied.
The height of the upright panel is reduced by the interior height dimensions of the profile and thus calculated as follows:



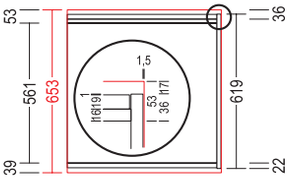
Carcase height
+ plinth height
- 8 mm interior chamfering of the floor profile
= material height

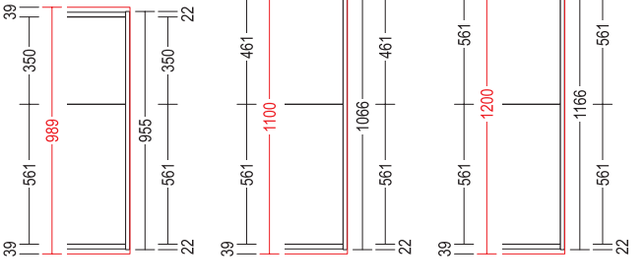
Island dimensions for worktop overhang + 39 mm

RK(S)* or RF(D)* without rear door buffer



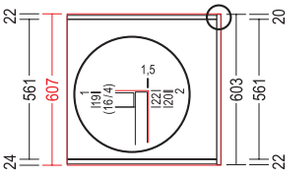
RK(S)* and RF(D)* without rear door buffer



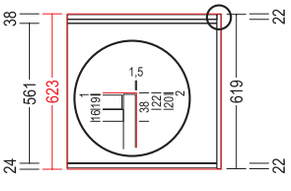


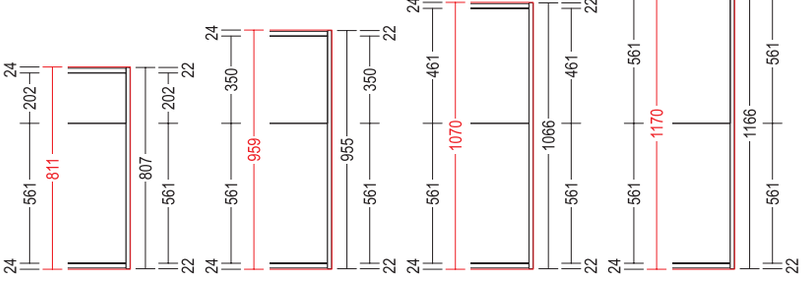
Island dimensions for worktop overhang + 24 mm (Line N, Pura, Inline, bar handle in drill pattern 19)

RK(S)* or RF(D)* without rear door buffer



RK(S)* and RF(D)* without rear door buffer

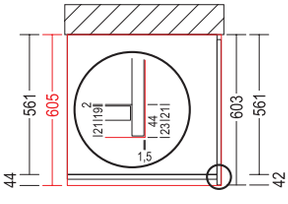




Line N front upright panel see page M 8.10

Sakura design line: Worktop overhangs beyond carcase and upright panel edges

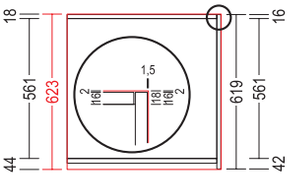
Planning on the wall



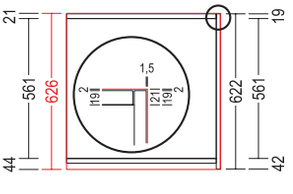
Worktop / top shelf depth = Carcase depth 561 mm + 44 mm = 605 mm
Upright panel depth = Carcase depth 561 mm + 42 mm = 603 mm

Island dimensions for worktop overhang + 44 mm

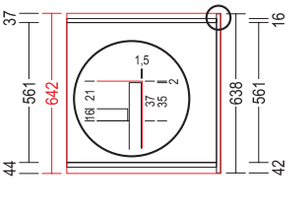
RK(S)*

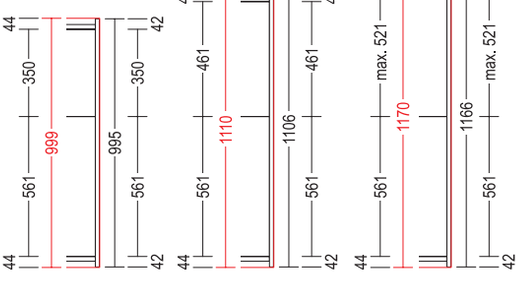


RF(D)* without door buffer and handle at rear



RK(S)* and RF(D)* without door buffer and handle at rear









Upright systems

Available upright floor seal colours:
014 Stainless steel appearance
010 Black



Please specify the upright floor seal colour in your order.
refer to colour chart in chapter 2

		Abbreviation	Width in mm	Order No.	Points							
					Mat	High gloss	Lacquered laminate/Lacquer, premium honed	Lacquer ultra high gloss	Lacquer mat	Lacquer, perfect honed	Lacquer high gloss	Xtra décors
Upright panel for base units												
S	 Intermediate upright depth: 372 mm, height: 720 mm Full size plinth panel.	UWZ	10	10801	146	—	251	—	391	—	425	254
		UWZ	16	16801	152	257	260	444	403	403	434	261
		UWZ	25	25801	161	273	—	—	—	—	—	276
		UWZ	50	50801	324	434	—	—	—	—	—	486
S	 Upright at end of run in carcase height depth: 583 mm, height: 720 mm Full size plinth panel.	UWK	10	10974	161	—	312	—	491	—	578	321
		UWK	16	16974	175	318	329	625	511	511	591	333
		UWK	25	25974	199	342	—	—	—	—	—	361
		UWK	50	50974	383	543	—	—	—	—	—	606
S	 Upright at end of run incl. floor seal, depth: 583 mm Plinth height 70 mm: 790 mm Plinth height 100 mm: 820 mm Plinth height 150 mm: 870 mm Plinth height 200 mm: 920 mm *When 10 mm uprights are planned next to dishwashers, the support angle WSTW is automatically also confirmed, invoiced and delivered.* *For uprights of any other thickness, the support angle is recommended and must be ordered separately.* *If no colour is specified in the order, the upright floor seal 014 Stainless steel appearance will automatically be supplied.*	UWA	10	10902	197	—	377	—	564	—	658	383
		UWA	16	16902	213	339	394	663	581	581	679	403
		UWA	25	25902	239	368	—	—	—	—	—	429
		UWA	50	50902	412	581	—	—	—	—	—	715
	as above, however for protruding solutions, depth: 683 mm *If no colour is specified in the order, the upright floor seal 014 Stainless steel appearance will automatically be supplied.*	UWAV	10	10904	197	—	381	—	572	—	692	415
		UWAV	16	16904	218	346	402	669	591	591	710	429
		UWAV	25	25904	253	374	—	—	—	—	—	437
		UWAV	50	50904	416	587	—	—	—	—	—	740
S	 Upright panel for room designs in carcase height depth: 250 - 1166 mm, height: 720 mm, edging on both sides	UWKR	10	10924	238	—	515	—	—	—	—	533
		UWKR	16	16924	272	432	542	914	—	—	—	558
		UWKR	25	25924	321	466	—	—	—	—	—	591
		UWKR	50	50924	467	736	—	—	—	—	—	1.015

Upright systems

Available upright floor seal colours:
014 Stainless steel appearance
010 Black

Please specify the upright floor seal colour in your order.
refer to colour chart in chapter 2

		Abbreviation	Width in mm		Order No.	Points							
						Mat	High gloss	Lacquered laminate/Lacquer, premium honed	Lacquer ultra high gloss	Lacquer mat	Lacquer, perfect honed	Lacquer high gloss	Xtra décors
S	 **Upright for room designs** depth: 250 - 1166 mm, edged on both sides, incl. floor seal Plinth height 70 mm: 790 mm Plinth height 100 mm: 820 mm Plinth height 150 mm: 870 mm Plinth height 200 mm: 920 mm *When 10 mm uprights are planned next to dishwashers, the support angle WSTW is automatically also confirmed, invoiced and delivered.* *For uprights of any other thickness, the support angle is recommended and must be ordered separately.* *If no colour is specified in the order, the upright floor seal 014 Stainless steel appearance will automatically be supplied.*	UWR	10		10903	276	—	622	—	—	—	—	644
		UWR	16		16903	311	520	656	1.099	—	—	—	676
		UWR	25		25903	365	565	—	—	—	—	—	717
		UWR	50		50903	548	863	—	—	—	—	—	1.172
S	 **Lacquered upright panel for room designs, in fixed depth dimensions and carcase height** front and rear edge lacquered height: 720 mm UWKRL*-62 = 619 mm deep for one-sided islands with units of 561 mm side depth UWKRL*-81 = 807 mm deep for two-sided islands with LINE N units of 561 mm and frame element of 202 mm side depth UWKRL*-96 = 955 mm deep for two-sided islands with units of 561 mm and 350 mm side depth UWKRL*-107 = 1066 mm deep for two-sided islands with units of 561 mm and 461 mm side depth UWKRL*-117 = 1166 mm deep for two-sided islands with units of 561 mm and 561 mm side depth *Depth reductions of lacquered upright panels are possible but the panel will be supplied with a polymer edge.*	UWKRL	10	-62	10723	—	—	—	—	549	—	675	—
		UWKRL	10	-81	10751	—	—	—	—	603	—	715	—
		UWKRL	10	-96	10727	—	—	—	—	708	—	848	—
		UWKRL	10	-107	10726	—	—	—	—	799	—	964	—
		UWKRL	10	-117	10728	—	—	—	—	807	—	971	—
						—	—	—	—	—	—	—	—
		UWKRL	16	-62	16723	—	—	—	—	581	581	696	—
		UWKRL	16	-81	16751	—	—	—	—	621	621	733	—
		UWKRL	16	-96	16727	—	—	—	—	736	736	875	—
		UWKRL	16	-107	16726	—	—	—	—	829	829	996	—
		UWKRL	16	-117	16728	—	—	—	—	861	861	1.029	—

Upright systems

Available upright floor seal colours:
014 Stainless steel appearance
010 Black



Please specify the upright floor seal colour in your order.
refer to colour chart in chapter 2

Abbreviation	Width in mm		Order No.	Points: Mat	High gloss	Lacquered laminate/Lacquer, premium honed	Lacquer ultra high gloss	Lacquer mat	Lacquer, perfect honed	Lacquer high gloss	Xtra décors
Lacquered upright for room designs, in fixed depth dimensions front and rear edge lacquered, incl. floor seal UWRL*-62 = 619 mm deep for one-sided islands with units of 561 mm side depth UWRL*-81 = 807 mm deep for two-sided islands with LINE N units of 561 mm and frame element of 202 mm side depth UWRL*-96 = 955 mm deep for two-sided islands with units of 561 mm and 350 mm side depth UWRL*-107 = 1066 mm deep for two-sided islands with units of 561 mm and 461 mm side depth UWRL*-117 = 1166 mm deep for two-sided islands with units of 561 mm and 561 mm side depth Plinth height 70 mm: 790 mm Plinth height 100 mm: 820 mm Plinth height 150 mm: 870 mm Plinth height 200 mm: 920 mm *Depth reductions of lacquered upright panels are possible but the panel will be supplied with a polymer edge.* *When 10 mm uprights are planned next to dishwashers, the support angle WSTW is automatically also confirmed, invoiced and delivered.* *For uprights of any other thickness, the support angle is recommended and must be ordered separately.* *If no colour is specified in the order, the upright floor seal 014 Stainless steel appearance will automatically be supplied.*	UWRL	10	-62	10733	—	—	—	—	572	—	694	—
	UWRL	10	-81	10753	—	—	—	—	621	—	733	—
	UWRL	10	-96	10739	—	—	—	—	731	—	866	—
	UWRL	10	-107	10735	—	—	—	—	819	—	981	—
	UWRL	10	-117	10740	—	—	—	—	823	—	990	—
					—	—	—	—	—	—	—	—
	UWRL	16	-62	16733	—	—	—	—	606	606	718	—
	UWRL	16	-81	16753	—	—	—	—	637	637	753	—
	UWRL	16	-96	16739	—	—	—	—	756	756	894	—
	UWRL	16	-107	16735	—	—	—	—	847	847	1.012	—
	UWRL	16	-117	16740	—	—	—	—	876	876	1.045	—
LINE N upright at end of run in carcase height depth: 598 mm, height: 720 mm, for plans with 600 mm worktop depth Full size plinth panel.	NUWK	10		50600	161	—	318	—	495	—	578	329
	NUWK	16		51900	175	318	333	625	511	511	591	342
	NUWK	25		52900	199	342	—	—	—	—	—	365
	NUWK	50		55900	383	543	—	—	—	—	—	632
LINE N upright at end of run incl. floor seal, depth: 598 mm, for plans with 600 mm worktop depth Plinth height 70 mm: 790 mm Plinth height 100 mm: 820 mm Plinth height 150 mm: 870 mm Plinth height 200 mm: 920 mm *When 10 mm uprights are planned next to dishwashers, the support angle WSTW is automatically also confirmed, invoiced and delivered.* *For uprights of any other thickness, the support angle is recommended and must be ordered separately.* *If no colour is specified in the order, the upright floor seal 014 Stainless steel appearance will automatically be supplied.*	NUWA	10		50602	197	—	383	—	564	—	658	387
	NUWA	16		51902	213	339	403	663	581	581	679	407
	NUWA	25		52902	239	368	—	—	—	—	—	437
	NUWA	50		55902	412	581	—	—	—	—	—	736

Upright systems

Available upright floor seal colours:
014 Stainless steel appearance
010 Black

Please specify the upright floor seal colour in your order.
refer to colour chart in chapter 2

		Abbreviation		Points							
		Width in mm	Order No.	Mat	High gloss	Lacquered laminate/Lacquer, premium honed	Lacquer ultra high gloss	Lacquer mat	Lacquer, perfect honed	Lacquer high gloss	Xtra décors
Accessories for base unit upright panels in all heights											
	 **Support angle** required for 10 mm thick uprights when planning dishwashers at the end of run. *For plans of 16 mm upright panels next to dishwashers, support bracket WSTW is recommended and must be ordered separately.*	WSTW	4029	314	314	314	314	314	314	314	314
	 **Surcharge for upright corner connection to corners for room designs** UWR25/50 (-X/M) and HWR25/50(X) as worktop end for island designs with max. 1400 mm worktop protrusion to a wall or a base unit. Also for connecting 100 mm console panels or 50 mm ADB incl. connecting plate and screws. *Not suitable for combination with Slim Line worktops, quartz worktops and Xtra Ceramic worktops. Attention: Not suitable for construction of a separate, free-standing table, breakfast bar or other similar element!*	MP-WECK	7995	72	72	72	72	72	72	72	72

Upright systems

Available upright floor seal colours:
014 Stainless steel appearance
010 Black




Please specify the upright floor seal colour in your order.
refer to colour chart in chapter 2

		Abbreviation	Width in mm		Order No.	Points							
						Mat	High gloss	Lacquered laminate/Lacquer, premium honed	Lacquer ultra high gloss	Lacquer mat	Lacquer, perfect honed	Lacquer high gloss	Xtra décors
Upright panels for base units in XL height													
	XL Intermediate upright depth: 372 mm, height: 792 mm Full size plinth panel.	UWZ	10	-X	10702	147	—	260	—	412	—	444	266
		UWZ	16	-X	16702	153	261	273	466	425	425	456	276
		UWZ	25	-X	25702	169	279	—	—	—	—	—	289
		UWZ	50	-X	50702	329	439	—	—	—	—	—	510
	XL Upright at end of run in carcase height depth: 583 mm, height: 792 mm Full size plinth panel.	UWK	10	-X	10703	164	—	329	—	530	—	619	339
		UWK	16	-X	16703	178	321	346	632	548	548	635	356
		UWK	25	-X	25703	206	353	—	—	—	—	—	375
		UWK	50	-X	50703	385	553	—	—	—	—	—	641
	XL Upright at end of run incl. floor seal, depth: 583 mm Plinth height 70 mm: 862 mm Plinth height 100 mm: 892 mm Plinth height 150 mm: 942 mm Plinth height 200 mm: 992 mm *When 10 mm uprights are planned next to dishwashers, the support angle WSTW is automatically also confirmed, invoiced and delivered.* *For uprights of any other thickness, the support angle is recommended and must be ordered separately.* *If no colour is specified in the order, the upright floor seal 014 Stainless steel appearance will automatically be supplied.*	UWA	10	-X	10704	199	—	393	—	571	—	677	385
		UWA	16	-X	16704	215	355	412	695	590	590	695	406
		UWA	25	-X	25704	248	383	—	—	—	—	—	434
		UWA	50	-X	50704	435	618	—	—	—	—	—	726
	as above, however for protruding solutions, depth: 683 mm *If no colour is specified in the order, the upright floor seal 014 Stainless steel appearance will automatically be supplied.*	UWAV	10	-X	10707	200	—	412	—	664	—	799	418
		UWAV	16	-X	16707	222	362	434	698	686	686	821	434
		UWAV	25	-X	25707	257	387	—	—	—	—	—	457
		UWAV	50	-X	50707	438	622	—	—	—	—	—	791
	XL Upright for room designs in carcase height depth: 250 - 1166 mm, height: 792 mm, edging on both sides	UWKR	10	-X	10708	250	—	552	—	—	—	—	543
		UWKR	16	-X	16708	282	448	584	994	—	—	—	578
		UWKR	25	-X	25708	333	501	—	—	—	—	—	623
		UWKR	50	-X	50708	511	778	—	—	—	—	—	1.045
	XL Upright for room designs depth: 250 - 1166 mm, edged on both sides, incl. floor seal Plinth height 70 mm: 862 mm Plinth height 100 mm: 892 mm Plinth height 150 mm: 942 mm Plinth height 200 mm: 992 mm *When 10 mm uprights are planned next to dishwashers, the support angle WSTW is automatically also confirmed, invoiced and delivered.* *For uprights of any other thickness, the support angle is recommended and must be ordered separately.* *If no colour is specified in the order, the upright floor seal 014 Stainless steel appearance will automatically be supplied.*	UWR	10	-X	10710	280	—	656	—	—	—	—	656
		UWR	16	-X	16710	321	530	689	1.175	—	—	—	685
		UWR	25	-X	25710	380	581	—	—	—	—	—	726
		UWR	50	-X	50710	587	908	—	—	—	—	—	1.212

Upright systems

Available upright floor seal colours:
014 Stainless steel appearance
010 Black


Please specify the upright floor seal colour in your order.
refer to colour chart in chapter 2

		Abbreviation	Width in mm		Order No.	Points							
						Mat	High gloss	Lacquered laminate/Lacquer, premium honed	Lacquer ultra high gloss	Lacquer mat	Lacquer, perfect honed	Lacquer high gloss	Xtra décors
S	 XL lacquered upright for room designs, in fixed depth dimensions and carcase height front and rear edge lacquered, height: 792 mm UWKRL*-62-X = 619 mm deep for one-sided islands with units of 561 mm side depth UWKRL*-81-X = 807 mm deep for two-sided islands with LINE N units of 561 mm and frame element of 202 mm side depth UWKRL*-96-X = 955 mm deep for two-sided islands with units of 561 mm and 350 mm side depth UWKRL*-107-X = 1066 mm deep for two-sided islands with units of 561 mm and 461 mm side depth UWKRL*-117-X = 1166 mm deep for two-sided islands with units of 561 mm and 561 mm side depth *Depth reductions of lacquered upright panels are possible but the panel will be supplied with a polymer edge.*	UWKRL	10-62	-X	10756	—	—	—	—	553	—	677	—
		UWKRL	10-81	-X	10851	—	—	—	—	639	—	769	—
		UWKRL	10-96	-X	10758	—	—	—	—	714	—	857	—
		UWKRL	10-107	-X	10760	—	—	—	—	809	—	969	—
		UWKRL	10-117	-X	10721	—	—	—	—	815	—	977	—
						—	—	—	—	—	—	—	—
		UWKRL	16-62	-X	16756	—	—	—	—	584	584	702	—
		UWKRL	16-81	-X	16851	—	—	—	—	661	661	790	—
		UWKRL	16-96	-X	16758	—	—	—	—	740	740	883	—
		UWKRL	16-107	-X	16760	—	—	—	—	835	835	999	—
		UWKRL	16-117	-X	16721	—	—	—	—	869	869	1.035	—
S	 XL lacquered upright for room designs, in fixed depth dimensions front and rear edge lacquered, incl. floor seal UWRL*-62-X = 619 mm deep for one-sided islands with units of 561 mm side depth UWRL*-81-X = 807 mm deep for two-sided islands with LINE N units of 561 mm and frame element of 202 mm side depth UWRL*-96-X = 955 mm deep for two-sided islands with units of 561 mm and 350 mm side depth UWRL*-107-X = 1066 mm deep for two-sided islands with units of 561 mm and 461 mm side depth UWRL*-117-X = 1166 mm deep for two-sided islands with units of 561 mm and 561 mm side depth Plinth height 70 mm: 862 mm Plinth height 100 mm: 892 mm Plinth height 150 mm: 942 mm Plinth height 200 mm: 992 mm *Depth reductions of lacquered upright panels are possible but the panel will be supplied with a polymer edge.* *When 10 mm uprights are planned next to dishwashers, the support angle WSTW is automatically also confirmed, invoiced and delivered.* *For uprights of any other thickness, the support angle is recommended and must be ordered separately.* *If no colour is specified in the order, the upright floor seal 014 Stainless steel appearance will automatically be supplied.*	UWRL	10-62	-X	10743	—	—	—	—	580	—	696	—
		UWRL	10-81	-X	10853	—	—	—	—	664	—	790	—
		UWRL	10-96	-X	10749	—	—	—	—	737	—	873	—
		UWRL	10-107	-X	10746	—	—	—	—	828	—	990	—
		UWRL	10-117	-X	10722	—	—	—	—	832	—	997	—
						—	—	—	—	—	—	—	—
		UWRL	16-62	-X	16743	—	—	—	—	610	610	723	—
		UWRL	16-81	-X	16853	—	—	—	—	686	686	813	—
		UWRL	16-96	-X	16749	—	—	—	—	761	761	902	—
		UWRL	16-107	-X	16746	—	—	—	—	853	853	1.022	—
		UWRL	16-117	-X	16722	—	—	—	—	885	885	1.057	—
S	 XL LINE N upright at end of run in carcase height depth: 598 mm, height: 792 mm, for plans with 600 mm worktop depth Full size plinth panel.	NUWK	10	-X	10850	164	—	331	—	530	—	619	346
		NUWK	16	-X	16850	178	321	355	632	548	548	635	362
		NUWK	25	-X	25850	206	353	—	—	—	—	—	381
		NUWK	50	-X	50850	385	553	—	—	—	—	—	673




Upright systems

Available upright floor seal colours:
014 Stainless steel appearance
010 Black

Please specify the upright floor seal colour in your order.
refer to colour chart in chapter 2

		Abbreviation	Width in mm		Order No.	Points							
						Mat	High gloss	Lacquered laminate/Lacquer, premium honed	Lacquer ultra high gloss	Lacquer mat	Lacquer, perfect honed	Lacquer high gloss	Xtra décors
	XL LINE N upright at end of run incl. floor seal, depth: 598 mm, for plans with 600 mm worktop depth Plinth height 70 mm: 862 mm Plinth height 100 mm: 892 mm Plinth height 150 mm: 942 mm Plinth height 200 mm: 992 mm *When 10 mm uprights are planned next to dishwashers, the support angle WSTW is automatically also confirmed, invoiced and delivered.* *For uprights of any other thickness, the support angle is recommended and must be ordered separately.* *If no colour is specified in the order, the upright floor seal 014 Stainless steel appearance will automatically be supplied.*	NUWA	10	-X	10852	199	—	402	—	571	—	677	393
		NUWA	16	-X	16852	215	355	419	695	590	590	695	412
		NUWA	25	-X	25852	248	383	—	—	—	—	—	439
		NUWA	50	-X	50852	435	618	—	—	—	—	—	742




Upright panels for base units in Maxi height

	Maxi intermediate upright depth: 372 mm, height: 864 mm Full size plinth panel.	UWZ	10	-M	10805	149	—	272	—	415	—	447	276
		UWZ	16	-M	16805	155	270	280	491	426	426	460	288
		UWZ	25	-M	25805	175	289	—	—	—	—	—	302
		UWZ	50	-M	50805	330	450	—	—	—	—	—	526
	Maxi upright at end of run in carcase height depth: 583 mm, height: 864 mm Full size plinth panel.	UWK	10	-M	10984	165	—	346	—	565	—	657	358
		UWK	16	-M	16984	180	323	365	635	584	584	677	372
		UWK	25	-M	25984	210	355	—	—	—	—	—	391
		UWK	50	-M	50984	391	558	—	—	—	—	—	685
	Maxi upright at end of run incl. floor seal, depth: 583 mm plinth height 70 mm: 934 mm plinth height 100 mm: 964 mm plinth height 150 mm: 1014 mm plinth height 200 mm: 1064 mm *When 10 mm uprights are planned next to dishwashers, the support angle WSTW is automatically also confirmed, invoiced and delivered.* *For uprights of any other thickness, the support angle is recommended and must be ordered separately.* *If no colour is specified in the order, the upright floor seal 014 Stainless steel appearance will automatically be supplied.*	UWA	10	-M	10906	200	—	409	—	581	—	694	391
		UWA	16	-M	16906	218	364	432	724	603	603	712	407
		UWA	25	-M	25906	254	397	—	—	—	—	—	437
		UWA	50	-M	50906	453	647	—	—	—	—	—	737
	as above, however for protruding solutions, depth: 683 mm *If no colour is specified in the order, the upright floor seal 014 Stainless steel appearance will automatically be supplied.*	UWAV	10	-M	10908	204	—	444	—	758	—	910	425
		UWAV	16	-M	16908	225	368	460	736	778	778	931	467
		UWAV	25	-M	25908	260	406	—	—	—	—	—	502
		UWAV	50	-M	50908	457	656	—	—	—	—	—	819

Upright systems

Available upright floor seal colours:
014 Stainless steel appearance
010 Black

Please specify the upright floor seal colour in your order.
refer to colour chart in chapter 2

		Abbreviation	Width in mm		Order No.	Points							
						Mat	High gloss	Lacquered laminate/Lacquer, premium honed	Lacquer ultra high gloss	Lacquer mat	Lacquer, perfect honed	Lacquer high gloss	Xtra décors
S	 **Maxi upright for room designs in carcase height** depth: 250 - 1166 mm, height: 864 mm, edging on both sides	UWKR	10	-M	10928	258	—	588	—	—	—	—	555
		UWKR	16	-M	16928	292	464	623	1.072	—	—	—	591
		UWKR	25	-M	25928	353	526	—	—	—	—	—	654
		UWKR	50	-M	50928	543	828	—	—	—	—	—	1.076
S	 **Maxi upright for room designs** depth: 250 - 1166 mm, edged on both sides, incl. floor seal Plinth height 70 mm: 934 mm Plinth height 100 mm: 964 mm Plinth height 150 mm: 1014 mm Plinth height 200 mm: 1064 mm *When 10 mm uprights are planned next to dishwashers, the support angle WSTW is automatically also confirmed, invoiced and delivered.* *For uprights of any other thickness, the support angle is recommended and must be ordered separately.* *If no colour is specified in the order, the upright floor seal 014 Stainless steel appearance will automatically be supplied.*	UWR	10	-M	10907	289	—	688	—	—	—	—	663
		UWR	16	-M	16907	329	540	718	1.247	—	—	—	694
		UWR	25	-M	25907	393	590	—	—	—	—	—	745
		UWR	50	-M	50907	623	952	—	—	—	—	—	1.216
S	 **Maxi lacquered upright panel for room designs in fixed depths in carcase height** front and rear edge lacquered, height: 864 mm UWKRL*-62 = 619 mm deep for one-sided islands with units of 561 mm side depth UWKRL*-96 = 955 mm deep for two-sided islands with units of 561 mm and 350 mm side depth UWKRL*-107 = 1066 mm deep for two-sided islands with units of 561 mm and 461 mm side depth UWKRL*-117 = 1166 mm deep for two-sided islands with units of 561 mm and 561 mm side depth *Depth reductions of lacquered upright panels are possible but the panel will be supplied with a polymer edge.*	UWKRL	10-62	-M	10802	—	—	—	—	558	—	682	—
		UWKRL	10-96	-M	10803	—	—	—	—	718	—	861	—
		UWKRL	10-107	-M	10804	—	—	—	—	813	—	975	—
		UWKRL	10-117	-M	10817	—	—	—	—	821	—	984	—
						—	—	—	—	—	—	—	—
		UWKRL	16-62	-M	16802	—	—	—	—	588	588	705	—
		UWKRL	16-96	-M	16803	—	—	—	—	746	746	888	—
		UWKRL	16-107	-M	16804	—	—	—	—	841	841	1.004	—
		UWKRL	16-117	-M	16817	—	—	—	—	860	860	1.023	—

You will find an explanation of the symbols at the front of the chapter index

Upright systems

Available upright floor seal colours:
014 Stainless steel appearance
010 Black

Please specify the upright floor seal colour in your order.
refer to colour chart in chapter 2

Abbreviation	Width in mm	Order No.	Points							
			Mat	High gloss	Lacquered laminate/Lacquer, premium honed	Lacquer ultra high gloss	Lacquer mat	Lacquer, perfect honed	Lacquer high gloss	Xtra décors
Maxi lacquered upright panel for room designs in fixed depths front and rear edge lacquered, incl. floor seal UWRL*-62 = 619 mm deep for one-sided islands with units of 561 mm side depth UWRL*-96 = 955 mm deep for two-sided islands with units of 561 mm and 350 mm side depth UWRL*-107 = 1066 mm deep for two-sided islands with units of 561 mm and 461 mm side depth UWRL*-117 = 1166 mm deep for two-sided islands with units of 561 mm and 561 mm side depth *Depth reductions of lacquered upright panels are possible but the panel will be supplied with a polymer edge.* *When 10 mm uprights are planned next to dishwashers, the support angle WSTW is automatically also confirmed, invoiced and delivered.* *For uprights of any other thickness, the support angle is recommended and must be ordered separately.* *If no colour is specified in the order, the upright floor seal 014 Stainless steel appearance will automatically be supplied.*										
	UWRL 10-62 -M	10807	—	—	—	—	583	—	702	—
	UWRL 10-96 -M	10808	—	—	—	—	742	—	883	—
	UWRL 10-107 -M	10809	—	—	—	—	835	—	999	—
	UWRL 10-117 -M	10818	—	—	—	—	841	—	1.004	—
			—	—	—	—	—	—	—	—
	UWRL 16-62 -M	16807	—	—	—	—	615	615	726	—
	UWRL 16-96 -M	16808	—	—	—	—	767	767	910	—
	UWRL 16-107 -M	16809	—	—	—	—	864	864	1.028	—
	UWRL 16-117 -M	16818	—	—	—	—	873	873	1.041	—

Upright panels for sideboards

Upright at end of run incl. floor seal, depth: 372 mm Plinth height 70 mm: 934 mm Plinth height 100 mm: 964 mm Plinth height 150 mm: 1014 mm Plinth height 200 mm: 1064 mm *If no colour is specified in the order, the upright floor seal 014 Stainless steel appearance will automatically be supplied.*										
SW 10	10810	155	—	323	—	464	—	505	323
SW 16	16810	161	291	333	583	477	477	517	334
SW 25	25810	196	324	—	—	—	—	—	362
SW 50	50810	375	510	—	—	—	—	—	606





Upright panels for highboards

Intermediate upright depth: 372 mm, height: 1512 mm Full size plinth panel.										
HWZ 10	10515	169	—	365	—	623	—	695	377
HWZ 16	16515	184	365	383	710	644	644	715	391
HWZ 25	25515	213	403	—	—	—	—	—	422
HWZ 50	50515	406	574	—	—	—	—	—	683
Upright at end of run in carcase height depth: 583 mm, height: 1512 mm Full size plinth panel.										
HWK 10	10516	197	—	473	—	841	—	1.006	496
HWK 16	16516	222	438	502	955	872	872	1.044	517
HWK 25	25516	270	499	—	—	—	—	—	553
HWK 50	50516	530	791	—	—	—	—	—	902

Upright systems

Available upright floor seal colours:
014 Stainless steel appearance
010 Black


Please specify the upright floor seal colour in your order.
refer to colour chart in chapter 2

		Abbreviation	Width in mm	Order No.	Points: Mat	High gloss	Lacquered laminate/Lacquer, premium honed	Lacquer ultra high gloss	Lacquer mat	Lacquer, perfect honed	Lacquer high gloss	Xtra décors
	 **Upright at end of run** incl. floor seal, depth: 583 mm Plinth height 70 mm: 1582 mm Plinth height 100 mm: 1612 mm Plinth height 150 mm: 1662 mm Plinth height 200 mm: 1712 mm *If no colour is specified in the order, the upright floor seal 014 Stainless steel appearance will automatically be supplied.*	HWA	10	10517	225	—	548	—	875	—	1.063	559
		HWA	16	16517	260	486	581	1.063	911	911	1.095	587
		HWA	25	25517	314	543	—	—	—	—	—	626
		HWA	50	50517	587	889	—	—	—	—	—	1.028
	as above, however for protruding solutions, depth: 683 mm *If no colour is specified in the order, the upright floor seal 014 Stainless steel appearance will automatically be supplied.*	HWAV	10	10519	219	—	578	—	949	—	1.139	599
		HWAV	16	16519	261	499	634	1.064	983	983	1.180	631
		HWAV	25	25519	324	555	—	—	—	—	—	688
		HWAV	50	50519	590	857	—	—	—	—	—	1.110
	 **LINE N upright at end of run** **in carcase height** depth: 598 mm, height: 1512 mm, for designs with 600 mm top shelves or connecting designs with 600 mm worktop depth Full size plinth panel.	NHWK	10	10532	197	—	485	—	853	—	1.021	502
		NHWK	16	16532	222	453	518	1.000	883	883	1.048	526
		NHWK	25	25532	270	512	—	—	—	—	—	568
		NHWK	50	50532	537	813	—	—	—	—	—	924
	 **LINE N upright at end of run** incl. floor seal, depth: 598 mm, for planning 600 mm top shelves or 600 mm worktop depth at end of run Plinth height 70 mm: 1582 mm Plinth height 100 mm: 1612 mm Plinth height 150 mm: 1662 mm Plinth height 200 mm: 1712 mm *If no colour is specified in the order, the upright floor seal 014 Stainless steel appearance will automatically be supplied.*	NHWA	10	10533	225	—	549	—	875	—	1.063	558
		NHWA	16	16533	260	486	578	1.063	911	911	1.095	583
		NHWA	25	25533	314	543	—	—	—	—	—	645
		NHWA	50	50533	587	889	—	—	—	—	—	1.034
	 **Upright for room designs** **in carcase height** depth: 250 - 1166 mm, height: 1512 mm, edging on both sides Full size plinth panel.	HWKR	10	10524	282	—	685	—	—	—	—	688
		HWKR	16	16524	327	642	737	1.610	—	—	—	740
		HWKR	25	25524	391	737	—	—	—	—	—	821
		HWKR	50	50524	726	1.072	—	—	—	—	—	1.339
	as above, however for protruding solutions with lacquered upright panels in carcase height depth: 780 mm, height: 1512 mm, front and rear edge lacquered *Depth reductions of lacquered upright panels are possible but the panel will be supplied with a polymer edge.*	HWKVL	10	10525	—	—	—	—	1.222	—	1.504	—
		HWKVL	16	16525	—	—	—	—	1.267	1.267	1.556	—

Upright systems

Available upright floor seal colours:
014 Stainless steel appearance
010 Black






Please specify the upright floor seal colour in your order.
refer to colour chart in chapter 2

	Abbreviation	Width in mm	Order No.	Points							
				Mat	High gloss	Lacquered laminate/Lacquer, premium honed	Lacquer ultra high gloss	Lacquer mat	Lacquer, perfect honed	Lacquer high gloss	Xtra décors
 **Upright for room designs** incl. floor seal, depth: 250 - 1166 mm, edged on both sides Plinth height 70 mm: 1582 mm Plinth height 100 mm: 1612 mm Plinth height 150 mm: 1662 mm Plinth height 200 mm: 1712 mm *If no colour is specified in the order, the upright floor seal 014 Stainless steel appearance will automatically be supplied.*	HWR	10	10526	315	—	769	—	—	—	—	787
	HWR	16	16526	365	718	823	1.819	—	—	—	831
	HWR	25	25526	435	788	—	—	—	—	—	892
	HWR	50	50526	813	1.213	—	—	—	—	—	1.494
as above, however for protruding solutions with lacquered upright panels depth: 780 mm, front and rear edge lacquered Plinth height 70 mm: 1582 mm Plinth height 100 mm: 1612 mm Plinth height 150 mm: 1662 mm Plinth height 200 mm: 1712 mm *Depth reductions of lacquered upright panels are possible but the panel will be supplied with a polymer edge.* *If no colour is specified in the order, the upright floor seal 014 Stainless steel appearance will automatically be supplied.*	HWVL	10	10527	—	—	—	—	1.285	—	1.577	—
	HWVL	16	16527	—	—	—	—	1.330	1.330	1.626	—

Upright systems

Available upright floor seal colours:
014 Stainless steel appearance
010 Black



Please specify the upright floor seal colour in your order.
refer to colour chart in chapter 2

		Abbreviation	Width in mm		Order No.	Points							
						Mat	High gloss	Lacquered laminate/Lacquer, premium honed	Lacquer ultra high gloss	Lacquer mat	Lacquer, perfect honed	Lacquer high gloss	Xtra décors
Upright panels for highboards in XL height													
S	 XL Intermediate upright depth: 372 mm, height: 1584 mm Full size plinth panel.	HWZ	10	-X	10854	175	—	377	—	644	—	723	385
		HWZ	16	-X	16854	185	372	397	737	664	664	742	403
		HWZ	25	-X	25854	219	406	—	—	—	—	—	429
		HWZ	50	-X	50854	412	588	—	—	—	—	—	736
S	 XL Upright at end of run in carcase height depth: 583 mm, height: 1584 mm Full size plinth panel.	HWK	10	-X	10855	200	—	486	—	844	—	1.009	511
		HWK	16	-X	16855	229	456	520	999	875	875	1.045	533
		HWK	25	-X	25855	276	517	—	—	—	—	—	571
		HWK	50	-X	50855	537	802	—	—	—	—	—	969
S	 XL Upright at end of run incl. floor seal, depth: 583 mm Plinth height 70 mm: 1654 mm Plinth height 100 mm: 1684 mm Plinth height 150 mm: 1734 mm Plinth height 200 mm: 1784 mm *If no colour is specified in the order, the upright floor seal 014 Stainless steel appearance will automatically be supplied.*	HWA	10	-X	10856	228	—	552	—	880	—	1.066	562
		HWA	16	-X	16856	261	488	587	1.064	914	914	1.099	588
		HWA	25	-X	25856	321	549	—	—	—	—	—	628
		HWA	50	-X	50856	588	892	—	—	—	—	—	1.037
	as above, however for protruding solutions, depth: 683 mm *If no colour is specified in the order, the upright floor seal 014 Stainless steel appearance will automatically be supplied.*	HWAV	10	-X	10857	229	—	584	—	969	—	1.162	603
		HWAV	16	-X	16857	272	501	641	1.069	1.006	1.006	1.200	634
		HWAV	25	-X	25857	331	558	—	—	—	—	—	692
		HWAV	50	-X	50857	591	896	—	—	—	—	—	1.153
S	 XL LINE N upright at end of run in carcase height depth: 598 mm, height: 1584 mm, for designs with 600 mm top shelves or connecting designs with 600 mm worktop depth Full size plinth panel.	NHWK	10	-X	10858	200	—	495	—	864	—	1.028	515
		NHWK	16	-X	16858	229	458	529	1.018	895	895	1.059	540
		NHWK	25	-X	25858	276	520	—	—	—	—	—	581
		NHWK	50	-X	50858	543	821	—	—	—	—	—	987
S	 XL LINE N upright at end of run incl. floor seal, depth: 598 mm, for planning 600 mm top shelves or 600 mm worktop depth at end of run Plinth height 70 mm: 1654 mm Plinth height 100 mm: 1684 mm Plinth height 150 mm: 1734 mm Plinth height 200 mm: 1784 mm *If no colour is specified in the order, the upright floor seal 014 Stainless steel appearance will automatically be supplied.*	NHWA	10	-X	10859	228	—	552	—	880	—	1.066	562
		NHWA	16	-X	16859	261	488	587	1.064	914	914	1.099	588
		NHWA	25	-X	25859	321	549	—	—	—	—	—	631
		NHWA	50	-X	50859	588	892	—	—	—	—	—	1.038



Upright systems

Available upright floor seal colours:
014 Stainless steel appearance
010 Black

Please specify the upright floor seal colour in your order.
refer to colour chart in chapter 2

		Abbreviation	Width in mm		Order No.	Points: Mat	High gloss	Lacquered laminate/Lacquer, premium honed	Lacquer ultra high gloss	Lacquer mat	Lacquer, perfect honed	Lacquer high gloss	Xtra décors
S		XL Upright for room designs in carcase height depth: 250 - 1166 mm, height: 1584 mm, edging on both sides	HWKR	10	-X	10861	291	—	705	—	—	—	—	707
			HWKR	16	-X	16861	334	661	761	1.669	—	—	—	765
			HWKR	25	-X	25861	407	759	—	—	—	—	—	850
			HWKR	50	-X	50861	742	1.107	—	—	—	—	—	1.390
		as above, however for protruding solutions with lacquered upright panels in carcase height depth: 780 mm, height: 1584 mm, front and rear edge lacquered *Depth reductions of lacquered upright panels are possible but the panel will be supplied with a polymer edge.*	HWKVL	10	-X	10862	—	—	—	—	1.223	—	1.505	—
			HWKVL	16	-X	16862	—	—	—	—	1.272	1.272	1.558	—
S		XL Upright for room designs incl. floor seal, depth: 250 - 1166 mm, edged on both sides Plinth height 70 mm: 1654 mm Plinth height 100 mm: 1684 mm Plinth height 150 mm: 1734 mm Plinth height 200 mm: 1784 mm *If no colour is specified in the order, the upright floor seal 014 Stainless steel appearance will automatically be supplied.*	HWR	10	-X	10863	323	—	777	—	—	—	—	791
			HWR	16	-X	16863	375	724	834	1.828	—	—	—	835
			HWR	25	-X	25863	453	796	—	—	—	—	—	896
			HWR	50	-X	50863	818	1.222	—	—	—	—	—	1.523
		as above, however for protruding solutions with lacquered upright panels depth: 780 mm, front and rear edge lacquered *Depth reductions of lacquered upright panels are possible but the panel will be supplied with a polymer edge.* *If no colour is specified in the order, the upright floor seal 014 Stainless steel appearance will automatically be supplied.*	HWVL	10	-X	10864	—	—	—	—	1.291	—	1.587	—
			HWVL	16	-X	16864	—	—	—	—	1.339	1.339	1.637	—





Upright panel for tall units, height 1

S		Intermediate upright depth: 372 mm, height: 2016 mm Full size plinth panel.	HWZ	10	-1	10301	196	—	438	—	780	—	882	461
			HWZ	16	-1	16301	209	434	469	968	812	812	911	480
			HWZ	25	-1	25301	242	480	—	—	—	—	—	511
			HWZ	50	-1	50301	515	749	—	—	—	—	—	838
S		Upright at end of run in carcase height depth: 583 mm, height: 2016 mm Full size plinth panel.	HWK	10	-1	10302	229	—	593	—	1.088	—	1.324	623
			HWK	16	-1	16302	266	600	635	1.315	1.130	1.130	1.369	651
			HWK	25	-1	25302	327	664	—	—	—	—	—	707
			HWK	50	-1	50302	647	1.012	—	—	—	—	—	1.142

Upright systems

Available upright floor seal colours:
014 Stainless steel appearance
010 Black


Please specify the upright floor seal colour in your order.
refer to colour chart in chapter 2

		Abbreviation	Width in mm		Order No.	Points							
						Mat	High gloss	Lacquered laminate/Lacquer, premium honed	Lacquer ultra high gloss	Lacquer mat	Lacquer, perfect honed	Lacquer high gloss	Xtra décors
S	 **Upright at end of run** incl. floor seal, depth: 583 mm Plinth height 70 mm: 2086 mm Plinth height 100 mm: 2116 mm Plinth height 150 mm: 2166 mm Plinth height 200 mm: 2216 mm *If no colour is specified in the order, the upright floor seal 014 Stainless steel appearance will automatically be supplied.*	HWA	10	-1	10303	263	—	675	—	1.167	—	1.415	698
		HWA	16	-1	16303	311	663	724	1.391	1.213	1.213	1.460	755
		HWA	25	-1	25303	368	736	—	—	—	—	—	796
		HWA	50	-1	50303	688	1.098	—	—	—	—	—	1.254
		HWAV	10	-1	10304	273	—	724	—	1.150	—	1.407	758
	as above, however for protruding solutions, depth: 683 mm *If no colour is specified in the order, the upright floor seal 014 Stainless steel appearance will automatically be supplied.*	HWAV	16	-1	16304	315	670	777	1.396	1.193	1.193	1.461	796
		HWAV	25	-1	25304	383	745	—	—	—	—	—	857
		HWAV	50	-1	50304	694	1.069	—	—	—	—	—	1.380
S	 **LINE N upright at end of run** **in carcase height** depth: 598 mm, height: 2016 mm for designs with 600 mm top shelves or connecting designs with 600 mm worktop depth Full size plinth panel.	NHWK	10	-1	10309	229	—	615	—	1.102	—	1.337	642
		NHWK	16	-1	16309	266	618	657	1.399	1.139	1.139	1.377	670
		NHWK	25	-1	25309	327	683	—	—	—	—	—	724
		NHWK	50	-1	50309	653	1.018	—	—	—	—	—	1.172
S	 **LINE N upright at end of run** incl. floor seal, depth: 598 mm, for planning 600 mm top shelves or 600 mm worktop depth at end of run Plinth height 70 mm: 2086 mm Plinth height 100 mm: 2116 mm Plinth height 150 mm: 2166 mm Plinth height 200 mm: 2216 mm *If no colour is specified in the order, the upright floor seal 014 Stainless steel appearance will automatically be supplied.*	NHWA	10	-1	10310	263	—	688	—	1.167	—	1.415	710
		NHWA	16	-1	16310	311	663	730	1.391	1.213	1.213	1.460	761
		NHWA	25	-1	25310	368	736	—	—	—	—	—	831
		NHWA	50	-1	50310	688	1.098	—	—	—	—	—	1.349
S	 **Upright for room designs** **in carcase height** depth: 250 - 1166 mm, height: 2016 mm, edging on both sides Full size plinth panel.	HWKR	10	-1	10305	318	—	857	—	—	—	—	712
		HWKR	16	-1	16305	383	841	926	2.162	—	—	—	840
		HWKR	25	-1	25305	480	945	—	—	—	—	—	1.057
		HWKR	50	-1	50305	956	1.369	—	—	—	—	—	1.777
	as above, however for protruding solutions with lacquered upright panels in carcase height depth: 780 mm, height: 2016 mm, front and rear edge lacquered *Depth reductions of lacquered upright panels are possible but the panel will be supplied with a polymer edge.*	HWKVL	10	-1	10307	—	—	—	—	1.534	—	1.895	—
		HWKVL	16	-1	16307	—	—	—	—	1.596	1.596	1.961	—




Upright systems

Available upright floor seal colours:
014 Stainless steel appearance
010 Black

Please specify the upright floor seal colour in your order.
refer to colour chart in chapter 2

		Abbreviation	Width in mm		Order No.	Points							
						Mat	High gloss	Lacquered laminate/Lacquer, premium honed	Lacquer ultra high gloss	Lacquer mat	Lacquer, perfect honed	Lacquer high gloss	Xtra décors
S	 **Upright for room designs** incl. floor seal, depth: 250 - 1166 mm, edged on both sides Plinth height 70 mm: 2086 mm Plinth height 100 mm: 2116 mm Plinth height 150 mm: 2166 mm Plinth height 200 mm: 2216 mm *If no colour is specified in the order, the upright floor seal 014 Stainless steel appearance will automatically be supplied.*	HWR	10	-1	10306	356	—	962	—	—	—	—	809
		HWR	16	-1	16306	418	942	1.034	2.432	—	—	—	955
		HWR	25	-1	25306	521	1.037	—	—	—	—	—	1.172
		HWR	50	-1	50306	1.015	1.505	—	—	—	—	—	1.939
	as above, however for protruding solutions with lacquered upright panels front and rear edge lacquered, depth: 780 mm *Depth reductions of lacquered upright panels are possible but the panel will be supplied with a polymer edge.* *If no colour is specified in the order, the upright floor seal 014 Stainless steel appearance will automatically be supplied.*	HWVL	10	-1	10308	—	—	—	—	1.556	—	1.914	—
		HWVL	16	-1	16308	—	—	—	—	1.618	1.618	1.978	—





Upright panels for tall units in XL height 1

S	 **XL Intermediate upright** depth: 372 mm, height: 2088 mm Full size plinth panel.	HWZ	10	-1X	10321	200	—	453	—	802	—	905	470
		HWZ	16	-1X	16321	210	439	485	996	832	832	936	491
		HWZ	25	-1X	25321	250	485	—	—	—	—	—	520
		HWZ	50	-1X	50321	520	765	—	—	—	—	—	891
S	 **XL Upright at end of run in carcase height** depth: 583 mm, height: 2088 mm Full size plinth panel.	HWK	10	-1X	10322	235	—	609	—	1.091	—	1.327	637
		HWK	16	-1X	16322	272	616	653	1.356	1.133	1.133	1.371	670
		HWK	25	-1X	25322	331	683	—	—	—	—	—	724
		HWK	50	-1X	50322	656	1.021	—	—	—	—	—	1.209
S	 **XL Upright at end of run** incl. floor seal, depth: 583 mm Plinth height 70 mm: 2158 mm Plinth height 100 mm: 2188 mm Plinth height 150 mm: 2238 mm Plinth height 200 mm: 2288 mm *If no colour is specified in the order, the upright floor seal 014 Stainless steel appearance will automatically be supplied.*	HWA	10	-1X	10323	267	—	679	—	1.171	—	1.418	702
		HWA	16	-1X	16323	312	664	730	1.393	1.216	1.216	1.463	756
		HWA	25	-1X	25323	375	739	—	—	—	—	—	797
		HWA	50	-1X	50323	689	1.101	—	—	—	—	—	1.295
	as above, however for protruding solutions, depth: 683 mm *If no colour is specified in the order, the upright floor seal 014 Stainless steel appearance will automatically be supplied.*	HWAV	10	-1X	10324	282	—	731	—	1.171	—	1.434	761
		HWAV	16	-1X	16324	327	673	783	1.400	1.216	1.216	1.483	799
		HWAV	25	-1X	25324	391	746	—	—	—	—	—	861
		HWAV	50	-1X	50324	695	1.110	—	—	—	—	—	1.422

Upright systems

Available upright floor seal colours:
014 Stainless steel appearance
010 Black





Please specify the upright floor seal colour in your order.
refer to colour chart in chapter 2

		Abbreviation	Width in mm		Order No.	Points							
						Mat	High gloss	Lacquered laminate/Lacquer, premium honed	Lacquer ultra high gloss	Lacquer mat	Lacquer, perfect honed	Lacquer high gloss	Xtra décors
	 XL LINE N upright at end of run in carcase height depth: 598 mm, height: 2088 mm for designs with 600 mm top shelves or connecting designs with 600 mm worktop depth Full size plinth panel.	NHWK	10	-1X	10329	235	—	623	—	1.113	—	1.345	654
		NHWK	16	-1X	16329	272	623	670	1.415	1.152	1.152	1.387	685
		NHWK	25	-1X	25329	331	689	—	—	—	—	—	739
		NHWK	50	-1X	50329	657	1.025	—	—	—	—	—	1.234
	 XL LINE N upright at end of run incl. floor seal, depth: 598 mm, for planning 600 mm top shelves or 600 mm worktop depth at end of run Plinth height 70 mm: 2158 mm Plinth height 100 mm: 2188 mm Plinth height 150 mm: 2238 mm Plinth height 200 mm: 2288 mm *If no colour is specified in the order, the upright floor seal 014 Stainless steel appearance will automatically be supplied.*	NHWA	10	-1X	10330	267	—	692	—	1.171	—	1.418	714
		NHWA	16	-1X	16330	312	664	739	1.393	1.216	1.216	1.463	767
		NHWA	25	-1X	25330	375	739	—	—	—	—	—	813
		NHWA	50	-1X	50330	689	1.101	—	—	—	—	—	1.355
	 XL Upright for room designs in carcase height depth: 250 - 1166 mm, height: 2088 mm, edging on both sides Full size plinth panel.	HWKR	10	-1X	10325	323	—	876	—	—	—	—	715
		HWKR	16	-1X	16325	393	861	949	2.221	—	—	—	864
		HWKR	25	-1X	25325	498	967	—	—	—	—	—	1.086
		HWKR	50	-1X	50325	974	1.403	—	—	—	—	—	1.828
	as above, however for protruding solutions with XL lacquered upright panels in carcase height depth: 780 mm, height: 2088 mm, front and rear edge lacquered *Depth reductions of lacquered upright panels are possible but the panel will be supplied with a polymer edge.*	HWKVL	10	-1X	10327	—	—	—	—	1.536	—	1.897	—
		HWKVL	16	-1X	16327	—	—	—	—	1.599	1.599	1.961	—
	 XL Upright for room designs incl. floor seal, depth: 250 - 1166 mm, edged on both sides Plinth height 70 mm: 2158 mm Plinth height 100 mm: 2188 mm Plinth height 150 mm: 2238 mm Plinth height 200 mm: 2288 mm *If no colour is specified in the order, the upright floor seal 014 Stainless steel appearance will automatically be supplied.*	HWR	10	-1X	10326	364	—	967	—	—	—	—	813
		HWR	16	-1X	16326	428	945	1.042	2.443	—	—	—	962
		HWR	25	-1X	25326	537	1.042	—	—	—	—	—	1.178
		HWR	50	-1X	50326	1.018	1.513	—	—	—	—	—	1.970
	as above, however for protruding solutions with XL lacquered upright front and rear edge lacquered, depth: 780 mm *Depth reductions of lacquered upright panels are possible but the panel will be supplied with a polymer edge.* *If no colour is specified in the order, the upright floor seal 014 Stainless steel appearance will automatically be supplied.*	HWVL	10	-1X	10328	—	—	—	—	1.562	—	1.923	—
		HWVL	16	-1X	16328	—	—	—	—	1.628	1.628	1.987	—

Upright systems

Available upright floor seal colours:
014 Stainless steel appearance
010 Black



Please specify the upright floor seal colour in your order.
refer to colour chart in chapter 2

		Abbreviation	Width in mm		Order No.	Points							
						Mat	High gloss	Lacquered laminate/Lacquer, premium honed	Lacquer ultra high gloss	Lacquer mat	Lacquer, perfect honed	Lacquer high gloss	Xtra décors
Upright panel for tall units, height 2													
S	 Intermediate upright depth: 372 mm, height: 2088 mm Full size plinth panel.	HWZ	10	-2	10660	200	—	453	—	802	—	905	470
		HWZ	16	-2	16660	210	439	485	996	832	832	936	491
		HWZ	25	-2	25660	250	485	—	—	—	—	—	520
		HWZ	50	-2	50660	520	765	—	—	—	—	—	891
S	 Upright at end of run in carcase height depth: 583 mm, height: 2088 mm Full size plinth panel.	HWK	10	-2	10661	235	—	609	—	1.091	—	1.327	637
		HWK	16	-2	16661	272	616	653	1.356	1.133	1.133	1.371	670
		HWK	25	-2	25661	331	683	—	—	—	—	—	724
		HWK	50	-2	50661	656	1.021	—	—	—	—	—	1.209
S	 Upright at end of run incl. floor seal, depth: 583 mm Plinth height 70 mm: 2158 mm Plinth height 100 mm: 2188 mm Plinth height 150 mm: 2238 mm Plinth height 200 mm: 2288 mm *If no colour is specified in the order, the upright floor seal 014 Stainless steel appearance will automatically be supplied.*	HWA	10	-2	10662	267	—	679	—	1.171	—	1.418	702
		HWA	16	-2	16662	312	664	730	1.393	1.216	1.216	1.463	756
		HWA	25	-2	25662	375	739	—	—	—	—	—	797
		HWA	50	-2	50662	689	1.101	—	—	—	—	—	1.295
	as above, however for protruding solutions, depth: 683 mm *If no colour is specified in the order, the upright floor seal 014 Stainless steel appearance will automatically be supplied.*	HWAV	10	-2	10663	282	—	731	—	1.171	—	1.434	761
		HWAV	16	-2	16663	327	673	783	1.400	1.216	1.216	1.483	799
		HWAV	25	-2	25663	391	746	—	—	—	—	—	861
		HWAV	50	-2	50663	695	1.110	—	—	—	—	—	1.422
S	 LINE N upright at end of run in carcase height depth: 598 mm, height: 2088 mm for designs with 600 mm top shelves or connecting designs with 600 mm worktop depth Full size plinth panel.	NHWK	10	-2	10664	235	—	623	—	1.113	—	1.345	654
		NHWK	16	-2	16664	272	623	670	1.415	1.152	1.152	1.387	685
		NHWK	25	-2	25664	331	689	—	—	—	—	—	739
		NHWK	50	-2	50664	657	1.025	—	—	—	—	—	1.234
S	 LINE N upright at end of run incl. floor seal, depth: 598 mm, for planning 600 mm top shelves or 600 mm worktop depth at end of run Plinth height 70 mm: 2158 mm Plinth height 100 mm: 2188 mm Plinth height 150 mm: 2238 mm Plinth height 200 mm: 2288 mm *If no colour is specified in the order, the upright floor seal 014 Stainless steel appearance will automatically be supplied.*	NHWA	10	-2	10665	267	—	692	—	1.171	—	1.418	714
		NHWA	16	-2	16665	312	664	739	1.393	1.216	1.216	1.463	767
		NHWA	25	-2	25665	375	739	—	—	—	—	—	813
		NHWA	50	-2	50665	689	1.101	—	—	—	—	—	1.355



Upright systems

Available upright floor seal colours:
014 Stainless steel appearance
010 Black

Please specify the upright floor seal colour in your order.
refer to colour chart in chapter 2

		Abbreviation	Width in mm		Order No.	Points							
						Mat	High gloss	Lacquered laminate/Lacquer, premium honed	Lacquer ultra high gloss	Lacquer mat	Lacquer, perfect honed	Lacquer high gloss	Xtra décors
S	 Upright for room designs in carcase height depth: 250 - 1166 mm, height: 2088 mm, edging on both sides	HWKR	10	-2	10666	323	—	876	—	—	—	—	715
		HWKR	16	-2	16666	393	861	949	2.221	—	—	—	864
		HWKR	25	-2	25666	498	967	—	—	—	—	—	1.086
		HWKR	50	-2	50666	974	1.403	—	—	—	—	—	1.828
	as above, however for protruding solutions with lacquered upright panels in carcase height depth: 780 mm, height: 2088 mm, front and rear edge lacquered *Depth reductions of lacquered upright panels are possible but the panel will be supplied with a polymer edge.*	HWKVL	10	-2	10668	—	—	—	—	1.536	—	1.897	—
		HWKVL	16	-2	16668	—	—	—	—	1.599	1.599	1.961	—
S	 Upright for room designs incl. floor seal, depth: 250 - 1166 mm, edged on both sides Plinth height 70 mm: 2158 mm Plinth height 100 mm: 2188 mm Plinth height 150 mm: 2238 mm Plinth height 200 mm: 2288 mm *If no colour is specified in the order, the upright floor seal 014 Stainless steel appearance will automatically be supplied.*	HWR	10	-2	10667	364	—	967	—	—	—	—	813
		HWR	16	-2	16667	428	945	1.042	2.443	—	—	—	962
		HWR	25	-2	25667	537	1.042	—	—	—	—	—	1.178
		HWR	50	-2	50667	1.018	1.513	—	—	—	—	—	1.970
	as above, however for protruding solutions with lacquered upright panels front and rear edge lacquered, depth: 780 mm *Depth reductions of lacquered upright panels are possible but the panel will be supplied with a polymer edge.* *If no colour is specified in the order, the upright floor seal 014 Stainless steel appearance will automatically be supplied.*	HWVL	10	-2	10669	—	—	—	—	1.562	—	1.923	—
		HWVL	16	-2	16669	—	—	—	—	1.628	1.628	1.987	—





Upright panels for tall units in XL height 2

S	 XL Intermediate upright depth: 372 mm, height: 2160 mm Full size plinth panel.	HWZ	10	-2X	10670	204	—	464	—	823	—	931	482
		HWZ	16	-2X	16670	213	444	491	1.021	851	851	962	502
		HWZ	25	-2X	25670	254	488	—	—	—	—	—	530
		HWZ	50	-2X	50670	527	768	—	—	—	—	—	892
S	 XL Upright at end of run in carcase height depth: 583 mm, height: 2160 mm Full size plinth panel.	HWK	10	-2X	10671	238	—	622	—	1.095	—	1.329	654
		HWK	16	-2X	16671	277	622	669	1.400	1.139	1.139	1.374	688
		HWK	25	-2X	25671	333	686	—	—	—	—	—	740
		HWK	50	-2X	50671	660	1.028	—	—	—	—	—	1.232

Upright systems

Available upright floor seal colours:
014 Stainless steel appearance
010 Black


Please specify the upright floor seal colour in your order.
refer to colour chart in chapter 2

		Abbreviation	Width in mm		Order No.	Points							
						Mat	High gloss	Lacquered laminate/Lacquer, premium honed	Lacquer ultra high gloss	Lacquer mat	Lacquer, perfect honed	Lacquer high gloss	Xtra décors
S	 **XL Upright at end of run** incl. floor seal, depth: 583 mm Plinth height 70 mm: 2230 mm Plinth height 100 mm: 2260 mm Plinth height 150 mm: 2310 mm Plinth height 200 mm: 2360 mm *If no colour is specified in the order, the upright floor seal 014 Stainless steel appearance will automatically be supplied.*	HWA	10	-2X	10672	272	—	685	—	1.175	—	1.421	715
		HWA	16	-2X	16672	314	669	736	1.394	1.222	1.222	1.467	758
		HWA	25	-2X	25672	380	740	—	—	—	—	—	815
		HWA	50	-2X	50672	692	1.104	—	—	—	—	—	1.339
	as above, however for protruding solutions, depth: 683 mm *If no colour is specified in the order, the upright floor seal 014 Stainless steel appearance will automatically be supplied.*	HWAV	10	-2X	10673	288	—	737	—	1.183	—	1.456	765
		HWAV	16	-2X	16673	329	675	788	1.402	1.229	1.229	1.504	802
		HWAV	25	-2X	25673	394	748	—	—	—	—	—	864
		HWAV	50	-2X	50673	696	1.117	—	—	—	—	—	1.431
S	 **XL LINE N upright at end of run in carcase height** depth: 598 mm, height: 2160 mm for designs with 600 mm top shelves or connecting designs with 600 mm worktop depth Full size plinth panel.	NHWK	10	-2X	10674	238	—	634	—	1.123	—	1.352	663
		NHWK	16	-2X	16674	277	631	683	1.434	1.164	1.164	1.397	696
		NHWK	25	-2X	25674	333	695	—	—	—	—	—	752
		NHWK	50	-2X	50674	661	1.029	—	—	—	—	—	1.260
S	 **XL LINE N upright at end of run** incl. floor seal, depth: 598 mm, for planning 600 mm top shelves or 600 mm worktop depth at end of run Plinth height 70 mm: 2230 mm Plinth height 100 mm: 2260 mm Plinth height 150 mm: 2310 mm Plinth height 200 mm: 2360 mm *If no colour is specified in the order, the upright floor seal 014 Stainless steel appearance will automatically be supplied.*	NHWA	10	-2X	10676	272	—	731	—	1.175	—	1.421	726
		NHWA	16	-2X	16676	314	669	783	1.394	1.222	1.222	1.467	788
		NHWA	25	-2X	25676	380	740	—	—	—	—	—	828
		NHWA	50	-2X	50676	692	1.104	—	—	—	—	—	1.361
S	 **XL Upright for room designs in carcase height** depth: 250 - 1166 mm, height: 2160 mm, edging on both sides	HWKR	10	-2X	10677	329	—	896	—	—	—	—	737
		HWKR	16	-2X	16677	397	876	974	2.278	—	—	—	889
		HWKR	25	-2X	25677	501	990	—	—	—	—	—	1.117
		HWKR	50	-2X	50677	994	1.409	—	—	—	—	—	1.879
	as above, however for protruding solutions with lacquered upright panels in carcase height depth: 780 mm, height: 2160 mm, front and rear edge lacquered *Depth reductions of lacquered upright panels are possible but the panel will be supplied with a polymer edge.*	HWKVL	10	-2X	10679	—	—	—	—	1.537	—	1.899	—
		HWKVL	16	-2X	16679	—	—	—	—	1.600	1.600	1.962	—




Upright systems

Available upright floor seal colours:
014 Stainless steel appearance
010 Black

Please specify the upright floor seal colour in your order.
refer to colour chart in chapter 2

	Abbreviation	Width in mm		Order No.	Points							
					Mat	High gloss	Lacquered laminate/Lacquer, premium honed	Lacquer ultra high gloss	Lacquer mat	Lacquer, perfect honed	Lacquer high gloss	Xtra décors
 XL Upright for room designs incl. floor seal, depth: 250 - 1166 mm, edged on both sides Plinth height 70 mm: 2230 mm Plinth height 100 mm: 2260 mm Plinth height 150 mm: 2310 mm Plinth height 200 mm: 2360 mm *If no colour is specified in the order, the upright floor seal 014 Stainless steel appearance will automatically be supplied.*	HWR	10	-2X	10678	368	—	972	—	—	—	—	819
	HWR	16	-2X	16678	437	948	1.051	2.448	—	—	—	967
	HWR	25	-2X	25678	540	1.050	—	—	—	—	—	1.184
	HWR	50	-2X	50678	1.021	1.523	—	—	—	—	—	1.999
as above, however for protruding solutions with lacquered upright panels front and rear edge lacquered, depth: 780 mm *Depth reductions of lacquered upright panels are possible but the panel will be supplied with a polymer edge.* *If no colour is specified in the order, the upright floor seal 014 Stainless steel appearance will automatically be supplied.*	HWVL	10	-2X	10680	—	—	—	—	1.562	—	1.923	—
	HWVL	16	-2X	16680	—	—	—	—	1.628	1.628	1.987	—





Upright panels for tall units, height 3

 Intermediate upright depth: 372 mm, height: 2160 mm Full size plinth panel.	HWZ	10	-3	10825	204	—	464	—	823	—	931	482
	HWZ	16	-3	16825	213	444	491	1.021	851	851	962	502
	HWZ	25	-3	25825	254	488	—	—	—	—	—	530
	HWZ	50	-3	50825	527	768	—	—	—	—	—	892
 Upright at end of run in carcase height depth: 583 mm, height: 2160 mm Full size plinth panel.	HWK	10	-3	10813	238	—	622	—	1.095	—	1.329	654
	HWK	16	-3	16813	277	622	669	1.400	1.139	1.139	1.374	688
	HWK	25	-3	25813	333	686	—	—	—	—	—	740
	HWK	50	-3	50813	660	1.028	—	—	—	—	—	1.232
 Upright at end of run incl. floor seal, depth: 583 mm Plinth height 70 mm: 2230 mm Plinth height 100 mm: 2260 mm Plinth height 150 mm: 2310 mm Plinth height 200 mm: 2360 mm *If no colour is specified in the order, the upright floor seal 014 Stainless steel appearance will automatically be supplied.*	HWA	10	-3	10814	272	—	685	—	1.175	—	1.421	715
	HWA	16	-3	16814	314	669	736	1.394	1.222	1.222	1.467	758
	HWA	25	-3	25814	380	740	—	—	—	—	—	815
	HWA	50	-3	50814	692	1.104	—	—	—	—	—	1.339
as above, however for protruding solutions, depth: 683 mm *If no colour is specified in the order, the upright floor seal 014 Stainless steel appearance will automatically be supplied.*	HWAV	10	-3	10816	288	—	737	—	1.183	—	1.456	765
	HWAV	16	-3	16816	329	675	788	1.402	1.229	1.229	1.504	802
	HWAV	25	-3	25816	394	748	—	—	—	—	—	864
	HWAV	50	-3	50816	696	1.117	—	—	—	—	—	1.431

Upright systems

Available upright floor seal colours:
014 Stainless steel appearance
010 Black

Please specify the upright floor seal colour in your order.
refer to colour chart in chapter 2

		Abbreviation	Width in mm		Order No.	Points							
						Mat	High gloss	Lacquered laminate/Lacquer, premium honed	Lacquer ultra high gloss	Lacquer mat	Lacquer, perfect honed	Lacquer high gloss	Xtra décors
S	 LINE N	NHWK	10	-3	10821	238	—	634	—	1.123	—	1.352	663
	LINE N upright at end of run in carcase height depth: 598 mm, height: 2160 mm for designs with 600 mm top shelves or connecting designs with 600 mm worktop depth Full size plinth panel.	NHWK	16	-3	16821	277	631	683	1.434	1.164	1.164	1.397	696
		NHWK	25	-3	25821	333	695	—	—	—	—	—	752
		NHWK	50	-3	50821	661	1.029	—	—	—	—	—	1.260
S	 LINE N	NHWA	10	-3	10823	272	—	731	—	1.175	—	1.421	726
	LINE N upright at end of run incl. floor seal, depth: 598 mm, for planning 600 mm top shelves or 600 mm worktop depth at end of run Plinth height 70 mm: 2230 mm Plinth height 100 mm: 2260 mm Plinth height 150 mm: 2310 mm Plinth height 200 mm: 2360 mm *If no colour is specified in the order, the upright floor seal 014 Stainless steel appearance will automatically be supplied.*	NHWA	16	-3	16823	314	669	783	1.394	1.222	1.222	1.467	767
		NHWA	25	-3	25823	380	740	—	—	—	—	—	828
		NHWA	50	-3	50823	692	1.104	—	—	—	—	—	1.361
S		HWKR	10	-3	10824	329	—	896	—	—	—	—	737
	Upright for room designs in carcase height depth: 250 - 1166 mm, height: 2160 mm, edging on both sides	HWKR	16	-3	16824	397	876	974	2.278	—	—	—	889
		HWKR	25	-3	25824	501	990	—	—	—	—	—	1.117
		HWKR	50	-3	50824	994	1.409	—	—	—	—	—	1.879
	as above, however for protruding solutions with lacquered upright panels in carcase height depth: 780 mm, height: 2160 mm, front and rear edge lacquered *Depth reductions of lacquered upright panels are possible but the panel will be supplied with a polymer edge.*	HWKVL	10	-3	10767	—	—	—	—	1.537	—	1.899	—
		HWKVL	16	-3	16767	—	—	—	—	1.600	1.600	1.962	—
S		HWR	10	-3	10827	368	—	972	—	—	—	—	819
	Upright for room designs incl. floor seal, depth: 250 - 1166 mm, edged on both sides Plinth height 70 mm: 2230 mm Plinth height 100 mm: 2260 mm Plinth height 150 mm: 2310 mm Plinth height 200 mm: 2360 mm *If no colour is specified in the order, the upright floor seal 014 Stainless steel appearance will automatically be supplied.*	HWR	16	-3	16827	437	948	1.051	2.448	—	—	—	967
		HWR	25	-3	25827	540	1.050	—	—	—	—	—	1.184
		HWR	50	-3	50827	1.021	1.523	—	—	—	—	—	1.999
	as above, however for protruding solutions with lacquered upright panels front and rear edge lacquered, depth: 780 mm *Depth reductions of lacquered upright panels are possible but the panel will be supplied with a polymer edge.* *If no colour is specified in the order, the upright floor seal 014 Stainless steel appearance will automatically be supplied.*	HWVL	10	-3	10768	—	—	—	—	1.562	—	1.923	—
		HWVL	16	-3	16768	—	—	—	—	1.628	1.628	1.987	—

Upright systems

Available upright floor seal colours:
014 Stainless steel appearance
010 Black

Please specify the upright floor seal colour in your order.
refer to colour chart in chapter 2



Upright panels for tall units in XL height 3

	Abbreviation	Width in mm		Order No.	Points: Mat	High gloss	Lacquered laminate/Lacquer, premium honed	Lacquer ultra high gloss	Lacquer mat	Lacquer, perfect honed	Lacquer high gloss	Xtra décors
XL Intermediate upright depth: 372 mm, height: 2232 mm Full size plinth panel.	HWZ	10	-3X	10331	207	—	476	—	847	—	959	495
	HWZ	16	-3X	16331	215	445	499	1.048	873	873	988	515
	HWZ	25	-3X	25331	260	491	—	—	—	—	—	542
	HWZ	50	-3X	50331	533	771	—	—	—	—	—	894
XL Upright at end of run in carcase height depth: 583 mm, height: 2232 mm Full size plinth panel.	HWK	10	-3X	10332	242	—	634	—	1.099	—	1.330	673
	HWK	16	-3X	16332	282	626	683	1.444	1.143	1.143	1.375	707
	HWK	25	-3X	25332	334	689	—	—	—	—	—	758
	HWK	50	-3X	50332	663	1.035	—	—	—	—	—	1.256
XL Upright at end of run incl. floor seal, depth: 583 mm Plinth height 70 mm: 2302 mm Plinth height 100 mm: 2332 mm Plinth height 150 mm: 2382 mm Plinth height 200 mm: 2432 mm *If no colour is specified in the order, the upright floor seal 014 Stainless steel appearance will automatically be supplied.*	HWA	10	-3X	10333	277	—	689	—	1.178	—	1.424	731
	HWA	16	-3X	16333	315	670	740	1.396	1.225	1.225	1.470	759
	HWA	25	-3X	25333	383	742	—	—	—	—	—	834
	HWA	50	-3X	50333	694	1.110	—	—	—	—	—	1.383
as above, however for protruding solutions, depth: 683 mm *If no colour is specified in the order, the upright floor seal 014 Stainless steel appearance will automatically be supplied.*	HWAV	10	-3X	10334	289	—	742	—	1.193	—	1.482	768
	HWAV	16	-3X	16334	330	676	796	1.403	1.244	1.244	1.527	807
	HWAV	25	-3X	25334	397	749	—	—	—	—	—	869
	HWAV	50	-3X	50334	698	1.124	—	—	—	—	—	1.435
XL LINE N upright at end of run in carcase height depth: 598 mm, height: 2232 mm for designs with 600 mm top shelves or connecting designs with 600 mm worktop depth Full size plinth panel.	NHWK	10	-3X	10339	242	—	644	—	1.132	—	1.362	675
	NHWK	16	-3X	16339	282	637	695	1.450	1.178	1.178	1.409	710
	NHWK	25	-3X	25339	334	702	—	—	—	—	—	765
	NHWK	50	-3X	50339	664	1.035	—	—	—	—	—	1.286
XL LINE N upright at end of run incl. floor seal, depth: 598 mm, for planning 600 mm top shelves or 600 mm worktop depth at end of run Plinth height 70 mm: 2302 mm Plinth height 100 mm: 2332 mm Plinth height 150 mm: 2382 mm Plinth height 200 mm: 2432 mm *If no colour is specified in the order, the upright floor seal 014 Stainless steel appearance will automatically be supplied.*	NHWA	10	-3X	10340	277	—	769	—	1.178	—	1.424	737
	NHWA	16	-3X	16340	315	670	829	1.396	1.225	1.225	1.470	812
	NHWA	25	-3X	25340	383	742	—	—	—	—	—	840
	NHWA	50	-3X	50340	694	1.110	—	—	—	—	—	1.368



Upright systems

Available upright floor seal colours:
014 Stainless steel appearance
010 Black

Please specify the upright floor seal colour in your order.
refer to colour chart in chapter 2

		Abbreviation	Width in mm		Order No.	Points							
						Mat	High gloss	Lacquered laminate/Lacquer, premium honed	Lacquer ultra high gloss	Lacquer mat	Lacquer, perfect honed	Lacquer high gloss	Xtra décors
S	 XL Upright for room designs in carcase height depth: 250 - 1166 mm, height: 2232 mm, edging on both sides Full size plinth panel.	HWKR	10	-3X	10335	333	—	917	—	—	—	—	758
		HWKR	16	-3X	16335	404	894	999	2.336	—	—	—	913
		HWKR	25	-3X	25335	505	1.012	—	—	—	—	—	1.145
		HWKR	50	-3X	50335	1.012	1.415	—	—	—	—	—	1.929
	as above, however for protruding solutions with lacquered upright panels in carcase height depth: 780 mm, height: 2232 mm, front and rear edge lacquered *Depth reductions of lacquered upright panels are possible but the panel will be supplied with a polymer edge.*	HWKVL	10	-3X	10337	—	—	—	—	1.539	—	1.901	—
		HWKVL	16	-3X	16337	—	—	—	—	1.602	1.602	1.965	—
S	 XL Upright for room designs incl. floor seal, depth: 250 - 1166 mm, edged on both sides Plinth height 70 mm: 2302 mm Plinth height 100 mm: 2332 mm Plinth height 150 mm: 2382 mm Plinth height 200 mm: 2432 mm *If no colour is specified in the order, the upright floor seal 014 Stainless steel appearance will automatically be supplied.*	HWR	10	-3X	10336	374	—	977	—	—	—	—	823
		HWR	16	-3X	16336	447	952	1.059	2.453	—	—	—	972
		HWR	25	-3X	25336	542	1.056	—	—	—	—	—	1.188
		HWR	50	-3X	50336	1.025	1.532	—	—	—	—	—	2.028
	as above, however for protruding solutions with lacquered upright panels front and rear edge lacquered, depth: 780 mm *Depth reductions of lacquered upright panels are possible but the panel will be supplied with a polymer edge.* *If no colour is specified in the order, the upright floor seal 014 Stainless steel appearance will automatically be supplied.*	HWVL	10	-3X	10338	—	—	—	—	1.570	—	1.930	—
		HWVL	16	-3X	16338	—	—	—	—	1.635	1.635	1.996	—









Upright panels for dresser units

S	 Upright at end of run in carcase height depth: 583 mm, height: 2232 - 2580 mm for plannings with dresser units on tall units Full size plinth panel.	HWK	10	-258	10868	257	—	708	—	1.237	—	1.475	740
		HWK	16	-258	16868	305	679	769	1.591	1.288	1.288	1.532	783
		HWK	25	-258	25868	352	740	—	—	—	—	—	841
		HWK	50	-258	50868	685	1.069	—	—	—	—	—	1.442
S	 Upright at end of run incl. floor seal, depth: 583 mm, height: 2425 - 2580 mm for plannings with dresser units on tall units *If no colour is specified in the order, the upright floor seal 014 Stainless steel appearance will automatically be supplied.*	HWA	10	-258	10869	299	—	901	—	1.256	—	1.514	804
		HWA	16	-258	16869	327	705	969	1.407	1.307	1.307	1.561	917
		HWA	25	-258	25869	402	783	—	—	—	—	—	921
		HWA	50	-258	50869	705	1.167	—	—	—	—	—	1.494

Upright systems

Available upright floor seal colours:
014 Stainless steel appearance
010 Black

Please specify the upright floor seal colour in your order.
refer to colour chart in chapter 2







		Abbreviation	Width in mm		Order No.	Points							
						Mat	High gloss	Lacquered laminate/Lacquer, premium honed	Lacquer ultra high gloss	Lacquer mat	Lacquer, perfect honed	Lacquer high gloss	Xtra décors
Upright panels for plans with dresser units on tall units													
S	 LINE N	NHWK	10	-258	10349	257	—	708	—	1.237	—	1.475	740
	LINE N upright at end of run in carcase height depth: 598 mm, height: 2232 - 2580 mm for plans with dresser units on tall units with a vertical recessed handle Full size plinth panel.	NHWK	16	-258	16349	305	679	769	1.591	1.288	1.288	1.532	783
		NHWK	25	-258	25349	352	740	—	—	—	—	—	841
		NHWK	50	-258	50349	685	1.069	—	—	—	—	—	1.442
S	 LINE N	NHWA	10	-258	10350	299	—	901	—	1.256	—	1.514	804
	LINE N upright at end of run incl. floor seal, depth: 598 mm, height: 2425 - 2580 mm for plans with dresser units on tall units with a vertical recessed handle *If no colour is specified in the order, the upright floor seal 014 Stainless steel appearance will automatically be supplied.*	NHWA	16	-258	16350	327	705	969	1.407	1.307	1.307	1.561	917
		NHWA	25	-258	25350	402	783	—	—	—	—	—	921
		NHWA	50	-258	50350	705	1.167	—	—	—	—	—	1.494
Upright panels for wall units													
S		WW	10	-36	10836	133	—	177	—	258	—	274	169
	Upright at end of run / intermediate upright for wall units, height 360 mm depth: 372 mm, height: 360 mm	WW	16	-36	16836	139	190	180	324	261	261	280	178
		WW	25	-36	25836	147	197	—	—	—	—	—	184
		WW	50	-36	50836	235	301	—	—	—	—	—	324
S		WW	10	-58	10806	140	—	200	—	315	—	375	199
	Upright at end of run / intermediate upright for wall units, height 576 mm depth: 372 mm, height: 576 mm	WW	16	-58	16806	146	209	206	384	321	321	383	206
		WW	25	-58	25806	153	216	—	—	—	—	—	212
		WW	50	-58	50806	250	350	—	—	—	—	—	371
S		WW	10	-1	10832	146	—	222	—	372	—	412	226
	Upright at end of run / intermediate upright for wall units, height 1 depth: 372 mm, height: 720 mm	WW	16	-1	16832	152	228	229	444	381	381	420	231
		WW	25	-1	25832	161	237	—	—	—	—	—	239
		WW	50	-1	50832	263	397	—	—	—	—	—	419
	as above, however for wall units WSTK* with sliding door depth: 380 mm, height: 720 mm	WWST	10	-1	10834	147	—	226	—	377	—	418	229
		WWST	16	-1	16834	153	231	235	453	387	387	428	237
		WWST	25	-1	25834	164	239	—	—	—	—	—	247
		WWST	50	-1	50834	270	403	—	—	—	—	—	426
S		WW	10	-2	10835	149	—	251	—	384	—	429	258
	Upright at end of run / intermediate upright for wall units, height 2 depth: 372 mm, height: 792 mm	WW	16	-2	16835	155	257	260	469	394	394	439	263
		WW	25	-2	25835	169	270	—	—	—	—	—	272
		WW	50	-2	50835	301	432	—	—	—	—	—	470
S		WW	10	-3	10833	153	—	277	—	402	—	448	289
	Upright at end of run / intermediate upright for wall units, height 3 depth: 372 mm, height: 864 mm	WW	16	-3	16833	158	280	291	496	409	409	463	296
		WW	25	-3	25833	177	304	—	—	—	—	—	305
		WW	50	-3	50833	331	464	—	—	—	—	—	521
S		WW	10	-130	10837	164	—	333	—	527	—	585	346
	Upright at end of run / intermediate upright for wall units, height 1296 mm depth: 372 mm, height: 1296 mm	WW	16	-130	16837	177	353	368	675	552	552	625	375
		WW	25	-130	25837	201	368	—	—	—	—	—	380
		WW	50	-130	50837	380	565	—	—	—	—	—	644

Upright systems

Available upright floor seal colours:
014 Stainless steel appearance
010 Black

Please specify the upright floor seal colour in your order.
refer to colour chart in chapter 2


Upright panels for dresser units and bridge units

		Abbreviation	Width in mm		Order No.	Points							
						Mat	High gloss	Lacquered laminate/Lacquer, premium honed	Lacquer ultra high gloss	Lacquer mat	Lacquer, perfect honed	Lacquer high gloss	Xtra décors
S	 Upright at end of run / intermediate upright for dresser units, Highboard height depth: 372 mm, height: 754 mm	AW	10	-75	10844	146	—	226	—	381	—	422	229
		AW	16	-75	16844	155	231	235	445	391	391	431	237
		AW	25	-75	25844	172	248	—	—	—	—	—	247
		AW	50	-75	50844	273	406	—	—	—	—	—	426
	as above, however depth: 583 mm	AWT	10	-75	10876	164	—	301	—	444	—	501	310
		AWT	16	-75	16876	178	299	312	670	458	458	515	318
		AWT	25	-75	25876	206	315	—	—	—	—	—	333
		AWT	50	-75	50876	323	508	—	—	—	—	—	578
S	 Upright at end of run / intermediate upright for dresser units, height 1 depth: 372 mm, height: 1258 mm	AW	10	-1	10840	161	—	327	—	521	—	583	334
		AW	16	-1	16840	175	323	342	645	537	537	600	353
		AW	25	-1	25840	200	362	—	—	—	—	—	368
		AW	50	-1	50840	374	555	—	—	—	—	—	631
	as above, however depth: 583 mm	AWT	10	-1	10870	197	—	409	—	688	—	794	434
		AWT	16	-1	16870	218	393	435	1.016	712	712	818	453
		AWT	25	-1	25870	253	439	—	—	—	—	—	480
		AWT	50	-1	50870	407	670	—	—	—	—	—	802
S	 Upright at end of run / intermediate upright for dresser units, height 2 depth: 372 mm, height: 1330 mm	AW	10	-2	10845	164	—	342	—	558	—	625	353
		AW	16	-2	16845	177	330	361	695	575	575	639	365
		AW	25	-2	25845	206	368	—	—	—	—	—	384
		AW	50	-2	50845	377	562	—	—	—	—	—	660
	as above, however depth: 583 mm	AWT	10	-2	10878	200	—	429	—	737	—	853	457
		AWT	16	-2	16878	222	407	458	1.079	765	765	882	476
		AWT	25	-2	25878	260	456	—	—	—	—	—	505
		AWT	50	-2	50878	418	682	—	—	—	—	—	847
S	 Upright at end of run / intermediate upright for dresser units, height 3 depth: 372 mm, height: 1402 mm	AW	10	-3	10843	165	—	358	—	590	—	663	365
		AW	16	-3	16843	178	339	375	745	610	610	682	380
		AW	25	-3	25843	209	375	—	—	—	—	—	402
		AW	50	-3	50843	381	565	—	—	—	—	—	688
	as above, however depth: 583 mm	AWT	10	-3	10874	204	—	450	—	785	—	913	477
		AWT	16	-3	16874	226	419	479	1.143	815	815	939	496
		AWT	25	-3	25874	266	464	—	—	—	—	—	529
		AWT	50	-3	50874	426	689	—	—	—	—	—	891
S	 Upright at end of run / intermediate upright for dresser units depth: 583 mm, height: 360 mm	UFKW	10	-36	10641	142	—	226	—	311	—	345	215
		UFKW	16	-36	16641	147	242	235	418	318	318	377	229
		UFKW	25	-36	25641	161	257	—	—	—	—	—	244
		UFKW	50	-36	50641	311	418	—	—	—	—	—	418
S	 Upright at end of run / intermediate upright for dresser units depth: 583 mm, height: 720 mm	UFKW	10	-72	10642	161	—	312	—	491	—	578	321
		UFKW	16	-72	16642	175	318	329	584	511	511	591	333
		UFKW	25	-72	25642	199	342	—	—	—	—	—	361
		UFKW	50	-72	50642	383	543	—	—	—	—	—	606

Top shelves

Top shelves are available in variable depth dimensions.
If nothing else is ordered, the standard delivery is
374 mm / 585 mm / 1170 mm depth.



Refer to colour chart in chapter 2

		Abbreviation	Width in mm		Order No.	Points							
						Mat	High gloss	Lacquered laminate/Lacquer, premium honed	Lacquer ultra high gloss	Lacquer mat	Lacquer, perfect honed	Lacquer high gloss	Xtra décors
Accessories for top shelves													
	 Plastic ventilation grid grey, for ventilation when electric appliances are installed in the highboard. L x W x H = 574 x 51 x 14,5 mm cut-out dimensions L x W: 568 x 44 mm	LGADB			9500	60	60	60	60	60	60	60	60
	 Cut-out for ventilation grid in 16 mm, 25 mm and 50 mm thick top shelves	AP-AUS			9352	42	42	42	42	42	42	42	42
Top shelves, 10 mm thick													
	 Top shelf, 10 mm thick, for side- or highboard coated on both faces, polymer edged on front and sides, length: 250 - 2580 mm Depth dimensions: ADB*38: 374 mm, variable from 250 - 389 mm ADB*59: 585 mm, variable from 501 - 600 mm ADB*117: 1170 mm, variable from 601 - 1170 mm *Price per 100 mm.*	ADB10		38	10838	14,3	—	27,3	—	—	—	—	36,6
		ADB10		59	10976	17,7	—	34,6	—	—	—	—	44,4
		ADB10		117	10979	21	—	56,8	—	—	—	—	79,9
	Top shelf in lacquer, 10 mm thick, for highboards in fixed widths both faces lacquered, front and side edge lacquered, 585 mm deep (variable from 250 mm to 600 mm depth) Widths: 924 mm / 1224 mm / 1524 mm / 1824 mm *Depth reductions of lacquered upright panels are possible but the panel will be supplied with a polymer edge.*	ADBML10		92	10709	—	—	—	—	480	—	540	—
		ADBML10		122	10712	—	—	—	—	584	—	663	—
		ADBML10		152	10715	—	—	—	—	696	—	797	—
		ADBML10		182	10718	—	—	—	—	799	—	924	—
	 Top shelf, 10 mm thick, for fixed dimension highboard coated on both faces, polymer edged on front and side, 585 mm deep (variable up to 600 mm depth) Widths: 470 mm for dishwasher housing (GGSP45*), 450 mm wide 600 mm for highboard, 600 mm wide 620 mm for dishwasher housing (GGSP60*/GOGSP60*), 600 mm wide	ADBM10		47	10975	88	—	174	—	—	—	—	222
		ADBM10		60	10977	107	—	207	—	—	—	—	263
		ADBM10		62	10978	124	—	242	—	—	—	—	311
	as above, however for designs with top shelf panels in lacquer both faces lacquered, front and side edge lacquered 585 mm deep (variable up to 600 mm depth), width: 624 mm *Depth reductions of lacquered upright panels are possible but the panel will be supplied with a polymer edge.*	ADBML10		62	10706	—	—	—	—	377	—	415	—


Top shelves

Top shelves are available in variable depth dimensions.
If nothing else is ordered, the standard delivery is
374 mm / 585 mm / 1170 mm depth.

Refer to colour chart in chapter 2

		Abbreviation	Width in mm	Order No.	Points: Mat	High gloss	Lacquered laminate/Lacquer, premium honed	Lacquer ultra high gloss	Lacquer mat	Lacquer, perfect honed	Lacquer high gloss	Xtra décors
		ADB-AS		7845	225	225	225	—	—	—	—	225
	Surcharge for chamfering / rounding on top shelves, 10 mm / 16 mm / 25 mm thick front edge with polymer edging *Standard for 90° outer corners is a square design. 90° inner corners and deviating angles are finished with an inner radius of 30 mm, unless specified otherwise.*											
		ADB-ZS		7849	292	292	292	—	—	—	—	292
	Surcharge for z-shaped chamfering or notching on 10 mm / 16 mm / 25 mm thick top shelves front edge with polymer edging *Please note lateral overhang of 1,5 mm! Standard for 90° outer corners is a square design. 90° inner corners and deviating angles are finished with an inner radius of 30 mm, unless specified otherwise.*											
	No image	ADB10-K		10980	4,2	—	4,2	—	—	—	—	4,2
	Surcharge for additional edge banding at the rear on 10 mm thick top shelves with polymer edging material *Price per 100 mm, minimum purchase quantity 600 mm!*											






Top shelves, 16 mm thick

		ADB16	38	16838	16,1	34,6	37,5	63,5	—	—	—	37,7
	Top shelf, 16 mm thick, for side- or highboard coated on both faces, polymer edged on front and sides, length: 250 - 2580 mm Depth dimensions: ADB*38: 374 mm, variable from 250 - 389 mm ADB*59: 585 mm, variable from 501 - 600 mm ADB*117: 1170 mm, variable from 601 - 1170 mm *Price per 100 mm.*	ADB16	59	16976	19,9	43,2	45,8	84,8	—	—	—	46,6
		ADB16	117	16979	25,1	67,5	82,3	152,7	—	—	—	83,8
	Top shelf in lacquer, 16 mm thick, for highboards in fixed widths both faces lacquered, front and side edge lacquered, 585 mm deep (variable from 250 mm to 600 mm depth) Widths: 936 mm / 1236 mm / 1536 mm / 1836 mm *Depth reductions of lacquered upright panels are possible but the panel will be supplied with a polymer edge.*	ADBML16	94	16709	—	—	—	—	501	501	559	—
		ADBML16	124	16712	—	—	—	—	609	609	688	—
		ADBML16	154	16715	—	—	—	—	724	724	828	—
		ADBML16	184	16718	—	—	—	—	832	832	959	—

Top shelves

Top shelves are available in variable depth dimensions.
If nothing else is ordered, the standard delivery is
374 mm / 585 mm / 1170 mm depth.






Refer to colour chart in chapter 2

		Abbreviation	Width in mm	Order No.	Points: Mat	High gloss	Lacquered laminate / Lacquer, premium honed	Lacquer ultra high gloss	Lacquer mat	Lacquer, perfect honed	Lacquer high gloss	Xtra décors
												
	Top shelf, 16 mm thick, **for fixed dimension highboard** coated on both faces, polymer edged on front and side 585 mm deep, (variable up to 600 mm depth) **Widths:** 482 mm for dishwasher housing (GGSP45*), 450 mm wide 600 mm for highboard, 600 mm wide 632 mm for dishwasher housing (GGSP60*/GOGSP60*), 600 mm wide	ADBM16	48	16975	98	213	231	429	—	—	—	237
		ADBM16	60	16977	120	257	277	512	—	—	—	279
		ADBM16	63	16978	137	302	321	594	—	—	—	327
	as above, however for designs with top shelf panels in lacquer both faces lacquered, front and side edge lacquered 585 mm deep (variable up to 600 mm depth), Width: 636 mm *Depth reductions of lacquered upright panels are possible but the panel will be supplied with a polymer edge.*	ADBML16	64	16706	—	—	—	—	391	391	426	—
												
	Top shelf, 16 mm thick, **for planning at end of run beneath glass uprights UWG* / UWGR*** coated on both faces, polymer edge all around, width: 300 - 652 mm **Depth dimensions:** ADB*59: 585 mm, for UWG*, ADB*62: 623 mm, for UWGR62*, ADB*81: 811 mm, for UWGR81*, ADB*96: 959 mm, for UWGR96*, ADB*107: 1070 mm, for UWGR107* *Price per 100 mm.* *width = direction of grain*	ADB16-WG	59	16646	19,9	43,2	45,8	84,8	—	—	—	46,6
		ADB16-WG	62	16647	20,4	45,8	51,7	89,4	—	—	—	52,1
		ADB16-WG	81	16652	22,6	56,2	64,1	120,5	—	—	—	64,4
		ADB16-WG	96	16649	23,8	61,8	79,9	150,7	—	—	—	79,9
		ADB16-WG	107	16650	24,7	64,4	81	151,4	—	—	—	82,2
												
	Surcharge for chamfering / rounding on top shelves, **10 mm / 16 mm / 25 mm thick** front edge with polymer edging *Standard for 90° outer corners is a square design.* *90° inner corners and deviating angles are finished with an inner radius of 30 mm, unless specified otherwise.*	ADB-AS		7845	225	225	225	—	—	—	—	225
												
	Surcharge for z-shaped chamfering or notching on 10 mm / 16 mm / 25 mm thick top shelves front edge with polymer edging *Please note lateral overhang of 1,5 mm!* *Standard for 90° outer corners is a square design.* *90° inner corners and deviating angles are finished with an inner radius of 30 mm, unless specified otherwise.*	ADB-ZS		7849	292	292	292	—	—	—	—	292
												
	Tongue and groove joint for Slim Line worktop corners and top shelves, 16 mm thick, incl. screw fittings, tongues and water-resistant glue *Tongue and groove joints require a dimensional allowance which will be invoiced! Standard dimensional allowance for 90° corner joints: 5 mm.*	APSL-NF		9353	82	82	82	82	—	—	—	82

Top shelves

Top shelves are available in variable depth dimensions.
If nothing else is ordered, the standard delivery is
374 mm / 585 mm / 1170 mm depth.

Refer to colour chart in chapter 2

		Abbreviation	Width in mm	Order No.	Points: Mat	High gloss	Lacquered laminate / Lacquer, premium honed	Lacquer ultra high gloss	Lacquer mat	Lacquer, perfect honed	Lacquer high gloss	Xtra décors
	No image Surcharge for additional edge banding at the rear on 16 mm thick top shelves with polymer edging material *Price per 100 mm, minimum purchase quantity 600 mm!*	ADB16-K		16980	4,8	4,8	4,8	4,8	—	—	—	4,8
	Top shelves, 25 mm thick											
	 Top shelf, 25 mm thick, for side- or highboard coated on both faces, polymer edged on front and sides, length: 250 - 2580 mm Depth dimensions: ADB*38: 374 mm, variable from 250 - 389 mm ADB*59: 585 mm, variable from 501 - 600 mm ADB*117: 1170 mm, variable from 601 - 1170 mm *Price per 100 mm.*	ADB25	38	25838	19,6	37,4	—	—	—	—	—	39,3
		ADB25	59	25976	22,5	46,6	—	—	—	—	—	50,2
		ADB25	117	25979	31,8	74,9	—	—	—	—	—	90,4
	 Top shelf, 25 mm thick, for fixed dimension highboard coated on both faces, polymer edged on front and side, 585 mm deep (variable up to 600 mm depth) Widths: 500 mm for dishwasher housing (GGSP45*), 450 mm wide 600 mm for highboard, 600 mm wide 650 mm for dishwasher housing (GGSP60*/GOGSP60*), 600 mm wide	ADBM25	50	25975	117	237	—	—	—	—	—	251
		ADBM25	60	25977	136	279	—	—	—	—	—	302
		ADBM25	65	25978	158	327	—	—	—	—	—	353
	 Surcharge for chamfering / rounding on top shelves, 10 mm / 16 mm / 25 mm thick front edge with polymer edging *Standard for 90° outer corners is a square design.* *90° inner corners and deviating angles are finished with an inner radius of 30 mm, unless specified otherwise.*	ADB-AS		7845	225	225	225	—	—	—	—	225
	 Surcharge for z-shaped chamfering or notching on 10 mm / 16 mm / 25 mm thick top shelves front edge with polymer edging *Please note lateral overhang of 1,5 mm!* *Standard for 90° outer corners is a square design.* *90° inner corners and deviating angles are finished with an inner radius of 30 mm, unless specified otherwise.*	ADB-ZS		7849	292	292	292	—	—	—	—	292
	 Tongue and groove joint for cover panels, 25 mm thick, incl. screw fittings, tongues and water-resistant glue *Tongue and groove joints require a 5 mm size allowance which will be charged!*	AP-NF		9351	64	64	—	—	—	—	—	64



Top shelves

Top shelves are available in variable depth dimensions.
If nothing else is ordered, the standard delivery is
374 mm / 585 mm / 1170 mm depth.

Refer to colour chart in chapter 2

		Abbreviation	Width in mm	Order No.	Points: Mat	High gloss	Lacquered laminate / Lacquer, premium honed	Lacquer ultra high gloss	Lacquer mat	Lacquer, perfect honed	Lacquer high gloss	Xtra décors
	No image Surcharge for additional edge banding in the rear on 25 mm thick top shelves with polymer edging material *Price per 100 mm, minimum purchase quantity 600 mm!*	ADB-K		7854	6	6	—	—	—	—	—	6

Top shelves, 50 mm thick

	Top shelf, 50 mm thick, for side- or highboard coated on both faces, front and sides with polymer edge, length: 250 - 2580 mm Depth dimensions: ADB*38: 374 mm, variable from 250 - 389 mm ADB*59: 585 mm, variable from 501 - 600 mm ADB*117: 1170 mm, variable from 601 - 1170 mm *Price per running 100 mm. Rounding, profiling, cut-outs and notching are not possible! Not suitable for planning as cornice shelf!* *You will find instructions for planning 50 mm top shelves as cornice or as accentuation for wall units in the Planning Information chapter.*	ADB50	38	50838	35,3	45,7	—	—	—	—	—	54,3
		ADB50	59	50976	45,7	62,5	—	—	—	—	—	76,2
		ADB50	117	50979	82,1	112,4	—	—	—	—	—	133,3
	Top shelf, 50 mm thick, for fixed dimension highboard coated on both faces, polymer edged on front and side, 585 mm deep (variable up to 600 mm depth) Widths: 550 mm for dishwasher housing (GGSP45*), 450 mm wide 600 mm for highboard, 600 mm wide 700 mm for dishwasher housing (GGSP60*/GOGSP60*), 600 mm wide	ADBM50	55	50975	273	375	—	—	—	—	—	457
		ADBM50	60	50977	273	375	—	—	—	—	—	457
		ADBM50	70	50978	321	438	—	—	—	—	—	531
	No image Surcharge for additional edge banding (at the rear) on 50 mm thick top shelf with polymer edging material *Price per 100 mm, minimum purchase quantity 600 mm!*	ADB-K	5	7554	8,6	8,6	—	—	—	—	—	8,6

Sakura design line

The combination of Japanese simplicity and Scandinavian warmth - that is the essence of the Japandi style. Our kitchen and bathroom furniture reinterprets this aesthetic and focuses on a design that conveys both calm and structure.
The deep Como oak upright panels are more than just a design detail: They frame the furniture as though it were a picture, giving it a striking visual presence in the room. The result is an organised, almost architectural expression reminiscent of the precise lines of traditional Japanese interiors.
This concept is complemented by the horizontal screw-on bar handles, which further emphasise the design. The wood-look frame look is the constant element of our Sakura design line and can be customised with fronts of your choice. The concept can be applied to all smooth, plain-coloured fronts and our wood decors and opens up a wide range of design options for you - for your personal interpretation of the Japanese-Scandinavian style of living.





General information

- The protruding 16 mm thick Sakura upright panels in Como oak reproduction achieve a modern, narrow frame look in combination with the 315 screw-on bar handle in Como oak. Can be designed using all smooth fronts.
- Not available for the following programs: Cascada 684, Frame 419, Inline 526, Nordic 782, Pura 917 and Sylt 706
- Upright panels with 42 mm carcase projection and top shelf with a projection of 44 mm
- UWZ16 / HWZ16 intermediate upright panels can be used from the standard register upright panels for the Sakura design line. The same also applies to UWR16 spatial design upright and UWAV16 uprights at end of run for advanced solutions if these are required in different depth dimensions.

Planning information

- The screw-on bar handle for panels / pull-outs / drawers / flaps is always supplied in the front width.
  Fixed panels and pinned fronts are also fitted with a screw-on bar handle.
  The screw-on bar handle moulding on hinged doors is indented by 50 mm on the stop side.
- The opening angle limiter must always be set to 85° OWB85 (6328) for hinged doors due to the protruding upright panel. This also applies to inbuilt refrigerator and freezer units with a tandem door fitting.
- For folding lift-door units, the opening angle limiter must always be designed at 83° OBK-HF (6336) due to the protruding KBWS16 top shelf cornice.

Notes on upright panels, top shelf and worktop depths

- The protruding upright panels in the Sakura design line result in different worktop and top shelf depths.
- Base unit / tall unit: Carcase depth 561 mm = 603 mm upright panel depth = for designs with 605 mm worktop depth
- Wall unit: Carcase depth 350 mm = 392 mm upright panel depth = for designs with 394 mm worktop depth
- Bathroom base unit: Carcase depth 461 mm = 503 mm upright panel depth = for designs with 505 mm worktop depth
- ADBS16 for sideboards and bathroom occasional furniture: Upright panel 392 mm = for designs with 394 mm top shelf depth
- ADBS16 for bathroom: Upright panel 503 mm = for designs with 505 mm top shelf depth
- ADBS16 for highboards and tall units: Upright panel 603 mm = for designs with 605 mm top shelf depth
- Cornice top shelf KBWS16 for wall units with a 394 mm depth and tall units with a 605 mm depth
- Designing with Slim Line worktops APSLNS61 (7898) is recommended.
  The APSLN can be used for differences in depth dimensions.

Designs with the following units are not possible

- Diagonal base units, highboards, tall units UDIAD25 / UDIAAD15/25 / HDIAD25 / HDIAF25
- Carousel corner unit UE(D)K
- Diagonal corner unit and corner sink base unit UE(D) / SPUE(D)
- Corner wall units WE60/65/80/90
- Diagonal corner wall unit WED65
- Wall unit with folding door with slide mechanism WFT
- Wall unit hinged in parallel W2TP
- Wall unit with swivel flap door WKSF / WKSFAG/ WKSG/ WKSGAG / WKSGLS / WKSSQ
- Highboards with lifting door at top for microwaves GLOSA / GLOA / G88L etc.

Special design features

- When designing islands, the number of upright panels (front and rear) should always be the same.
- Upright panels for UWR* room designs cannot be positioned back to back with 2 x 561 mm deep base units due to the larger overhang. Here we recommend using a depth-reduction base unit TK (9310), which carries a surcharge, and has a carcase depth of 521 mm (561 mm + max. 521 mm = upright panel depth 1166 mm).




Upright panels and top shelf for bathroom base units can be found in register 9 More than kitchen.

Sakura design line

Modern frame look with handle 315 and upright panels in decor 362 Como oak reproduction

Not permitted for the following programs:
Cascada 684, Frame 419, Inline 526, Nordic 782, Pura 917, Sylt 706

We recommend designing with Slim Line worktops (APSLNS61), see Chapter 4 Worktops.





		Abbreviation	Width in mm	Order-no.	Points
Handle for the Sakura design line					
NEW	 Surcharge for wooden screw-on bar handle Handle number 315, Como oak Drilling pattern: 01 hole spacing: 320 / 160 mm | H: 21 mm *Handle strips on panels / pull-outs / drawers / flaps are supplied in front width.* *Fixed panel and pinned fronts are also fitted with a bar handle.* *The bar handle on hinged doors is indented by 50 mm on the stop side.* *The pull-out for high GSP is supplied with a handle, but not pre-drilled.* *As this product is a natural product, variations in colour may occur.*			7941	62,5
Upright panels for base units for the Sakura design line					
NEW S	 Sakura upright at end of run is at carcase height depth: 603 mm, for designs using 605 mm worktop depth, height: 720 mm Full size plinth panel.	UWKS	16	16080	175
NEW S	 Sakura upright at end of run incl. floor seal, depth: 603 mm for designs using 605 mm worktop depth Plinth height 70 mm: 790 mm Plinth height 100 mm: 820 mm Plinth height 150 mm: 870 mm Plinth height 200 mm: 920 mm *If no colour is specified in the order, the upright floor seal 014 Stainless steel appearance will automatically be supplied.* *When designing next to dishwashers, the WSTW support bracket is recommended and must be ordered separately.*	UWAS	16	16081	213
NEW S	 Sakura upright-panel for room designs in fixed depth dimensions at carcase height edged on both sides, height: 720 mm UWRKS*-62 = 622 mm deep for single-sided islands with units at carcase depth 561 mm and base unit back panel in front design, for designs using 626 mm deep worktops UWRKS*-100 = 995 mm deep for double-sided islands with units at carcase depth 561 mm and 350 mm for designs using 999 mm deep worktops UWRKS*-111 = 1106 mm deep for double-sided islands with units at carcase depth 561 mm and 461 mm for designs using 1110 mm deep worktops *Depth reductions are not permitted.*	UWRKS UWRKS UWRKS	16-62 16-100 16-111	16135 16136 16137	178 225 238

Sakura design line

Modern frame look with handle 315 and upright panels in decor 362 Como oak reproduction

Not permitted for the following programs:
Cascada 684, Frame 419, Inline 526, Nordic 782, Pura 917, Sylt 706

We recommend designing with Slim Line worktops (APSLNS61), see Chapter 4 Worktops.





		Abbreviation	Width in mm		Order-no.	Points
NEW S	 Sakura upright panel for room design in fixed depth dimensions edged on both sides, incl. floor seal UWKS*-62 = 622 mm deep for single-sided islands with units at carcase depth 561 mm and base unit back panel in front design, for designs using 626 mm deep worktops UWRS*-100 = 995 mm deep for double-sided islands with units at carcase depth 561 mm and 350 mm for designs using 999 mm deep worktops UWRS*-96 = 1106 mm deep for double-sided islands with units at carcase depth 561 mm and 461 mm for designs using 1110 mm deep worktops Plinth height 70 mm: 790 mm (782 mm) Plinth height 100 mm: 820 mm (812 mm) Plinth height 150 mm: 870 mm (862 mm) Plinth height 200 mm: 920(912 mm) *Depth reductions are not permitted.* *When designing next to dishwashers, the WSTW support bracket is recommended and must be ordered separately.* *If no colour is specified in the order, the upright panel shoe 014 Stainless steel appearance will be supplied.*	UWRS UWRS UWRS	16-62 16-100 16-111		16145 16146 16147	216 264 276
NEW S	 XL Sakura upright at end of run is at carcase height depth: 603 mm, for designs using 605 mm worktop depth, height: 792 mm Full size plinth panel.	UWKS	16	-X	16082	178
NEW S	 XL Sakura upright at end of run incl. floor seal, depth: 603 mm for designs using 605 mm worktop depth Plinth height 70 mm: 862 mm Plinth height 100 mm: 892 mm Plinth height 150 mm: 942 mm Plinth height 200 mm: 992 mm *When designing next to dishwashers, the WSTW support bracket is recommended and must be ordered separately.* *If no colour is specified in the order, the upright floor seal 014 Stainless steel appearance will automatically be supplied.*	UWAS	16	-X	16083	215
NEW S	 XL Sakura upright panel for room designs in fixed depth dimensions at carcase height edged on both sides, height: 792 mm UWRKS*-62-X = 622 mm deep for single-sided islands with units at carcase depth 561 mm and base unit back panel in front design, for designs with 626 mm deep worktops UWRKS*-100-X = 995 mm deep for double-sided islands with units at carcase depth 561 mm and 350 mm for designs with 999 mm deep worktops UWRKS*-111-X = 1106 mm deep for double-sided islands with units at carcase depth 561 mm and 461 mm for designs with 1110 mm deep worktops *Depth reductions are not permitted.*	UWRKS UWRKS UWRKS	16-62 16-100 16-111	-X -X -X	16138 16139 16140	183 237 250

Sakura design line

Modern frame look with handle 315 and upright panels in decor 362 Como oak reproduction

Not permitted for the following programs:
Cascada 684, Frame 419, Inline 526, Nordic 782, Pura 917, Sylt 706

We recommend designing with Slim Line worktops (APSLNS61), see Chapter 4 Worktops.


		Abbreviation	Width in mm		Order-no.	Points
NEW S	 XL Sakura upright panel for room design in fixed depth dimensions edged on both sides, incl. floor seal UWRS*-62-X = 622 mm deep for single-sided islands with units at carcase depth 561 mm and base unit back panel in front design, for designs using 626 mm deep worktops UWRS*-100-X = 995 mm deep for double-sided islands with units at carcase depth 561 mm and 350 mm for designs using 999 mm deep worktops UWRS*-96-X = 1106 mm deep for double-sided islands with units at carcase depth 561 mm and 461 mm for designs using 1110 mm deep worktops Plinth height 70 mm: 862 mm (854 mm) Plinth height 100 mm: 892 mm (884 mm) Plinth height 150 mm: 942 mm (934 mm) Plinth height 200 mm: 992(984 mm) *Depth reductions are not permitted.* *When designing next to dishwashers, the WSTW support bracket is recommended and must be ordered separately.* *If no colour is specified in the order, the upright panel shoe 014 Stainless steel appearance will be supplied.*	UWRS UWRS UWRS	16-62 16-100 16-111	-X -X -X	16148 16149 16150	218 269 280
NEW S	 Sakura Maxi upright at end of run is at carcase height depth: 603 mm, for designs using 605 mm worktop depth, height: 864 mm Full size plinth panel.	UWKS	16	-M	16084	180
NEW S	 Sakura Maxi upright at end of run incl. floor seal, depth: 603 mm for designs using 605 mm worktop depth Plinth height 70 mm: 934 mm Plinth height 100 mm: 964 mm Plinth height 150 mm: 1014 mm Plinth height 200 mm: 1064 mm *When designing next to dishwashers, the WSTW support bracket is recommended and must be ordered separately.* *If no colour is specified in the order, the upright floor seal 014 Stainless steel appearance will automatically be supplied.*	UWAS	16	-M	16085	218
NEW S	 Sakura Maxi upright panel for room designs in fixed depth dimensions at carcase height edged on both sides, height: 864 mm UWRKS*-62 = 622 mm deep for single-sided islands with units at carcase depth 561 mm and base unit back panel in front design, for designs using 626 mm deep worktops UWRKS*-100-M = 995 mm deep for double-sided islands with units at carcase depth 561 mm and 350 mm for designs using 999 mm deep worktops UWRKS*-111 = 1106 mm deep for double-sided islands with units at carcase depth 561 mm and 461 mm for designs using 1110 mm deep worktops *Depth reductions are not permitted.*	UWRKS UWRKS UWRKS	16-62 16-100 16-111	-M -M -M	16141 16142 16143	185 244 258

Sakura design line


Modern frame look with handle 315 and upright panels in decor 362 Como oak reproduction

Not permitted for the following programs:
Cascada 684, Frame 419, Inline 526, Nordic 782, Pura 917, Sylt 706

We recommend designing with Slim Line worktops (APSLNS61), see Chapter 4 Worktops.

		Abbreviation	Width in mm		Order-no.	Points
NEW	 Sakura Maxi upright panel for room design in fixed depth dimensions edged on both sides, incl. floor seal UWRS*-62-M = 622 mm deep for single-sided islands with units at carcase depth 561 mm and base unit back panel in front design, for designs using 626 mm deep worktops UWRS*-100-M = 995 mm deep for double-sided islands with units at carcase depth 561 mm and 350 mm for designs using 999 mm deep worktops UWRS*-96-M = 1106 mm deep for double-sided islands with units at carcase depth 561 mm and 461 mm for designs using 1110 mm deep worktops Plinth height 70 mm: 934 mm (926 mm) Plinth height 100 mm: 964 mm (956 mm) Plinth height 150 mm: 1014 mm (1006 mm) Plinth height 200 mm: 1064(1056 mm) *Depth reductions are not permitted.* *When designing next to dishwashers, the WSTW support bracket is recommended and must be ordered separately.* *If no colour is specified in the order, the upright panel shoe 014 Stainless steel appearance will be supplied.*	UWRS	16-62	-M	16151	220
		UWRS	16-100	-M	16152	274
		UWRS	16-111	-M	16153	289

Upright panels for sideboards in the Sakura design line





NEW	 Sakura upright at end of run incl. floor seal, depth: 392 mm for designs using 394 mm top shelf Plinth height 70 mm: 934 mm Plinth height 100 mm: 964 mm Plinth height 150 mm: 1014 mm Plinth height 200 mm: 1064 mm *If no colour is specified in the order, the upright floor seal 014 Stainless steel appearance will automatically be supplied.*	SWS	16		16086	161

Sakura design line

Modern frame look with handle 315 and upright panels in decor 362 Como oak reproduction

Not permitted for the following programs:
Cascada 684, Frame 419, Inline 526, Nordic 782, Pura 917, Sylt 706

We recommend designing with Slim Line worktops (APSLNS61), see Chapter 4 Worktops.



		Abbreviation	Width in mm		Order-no.	Points
Upright panels for highboards and tall units in the Sakura design line						
NEW S	 Sakura upright at end of run in carcase height for highboards depth: 603 mm, for designs using 605 mm top shelf or worktop depth, height: 1512 mm Full size plinth panel.	HWKS	16		16087	222
NEW S	 Sakura upright at end of run for highboards incl. floor seal, depth: 603 mm for designs using 605 mm top shelf or worktop depth Plinth height 70 mm: 1582 mm Plinth height 100 mm: 1612 mm Plinth height 150 mm: 1662 mm Plinth height 200 mm: 1712 mm *If no colour is specified in the order, the upright floor seal 014 Stainless steel appearance will automatically be supplied.*	HWAS	16		16088	260
NEW S	 XL Sakura upright at end of run in carcase height for highboards in Height XL depth: 603 mm, for designs using 605 mm top shelf or worktop depth, height: 1584 mm Full size plinth panel.	HWKS	16	-X	16089	229
NEW S	 XL Sakura upright at end of run for highboards in Height XL incl. floor seal, depth: 603 mm, for designs using 605 mm top shelf or worktop depth Plinth height 70 mm: 1654 mm Plinth height 100 mm: 1684 mm Plinth height 150 mm: 1734 mm Plinth height 200 mm: 1784 mm *If no colour is specified in the order, the upright floor seal 014 Stainless steel appearance will automatically be supplied.*	HWAS	16	-X	16091	261
NEW S	 Sakura upright at end of run is at carcase height for tall units in Height 1 depth: 603 mm, for designs using 605 mm top shelf as cornice shelf or connecting designs using 605 mm depth worktops, height: 2016 mm Full size plinth panel.	HWKS	16	-1	16092	266
NEW S	 Sakura upright at end of run for tall units in Height 1 incl. floor seal, depth: 603 mm, for designs using 605 mm top shelf as cornice shelf or connecting designs using 605 mm depth worktops Plinth height 70 mm: 2086 mm Plinth height 100 mm: 2116 mm Plinth height 150 mm: 2166 mm Plinth height 200 mm: 2216 mm *If no colour is specified in the order, the upright floor seal 014 Stainless steel appearance will automatically be supplied.*	HWAS	16	-1	16093	311

Sakura design line

Modern frame look with handle 315 and upright panels in decor 362 Como oak reproduction

Not permitted for the following programs:
Cascada 684, Frame 419, Inline 526, Nordic 782, Pura 917, Sylt 706

We recommend designing with Slim Line worktops (APSLNS61), see Chapter 4 Worktops.



		Abbreviation	Width in mm		Order-no.	Points
NEW S	 XL Sakura upright at end of run is at carcase height for tall units in Height 1 XL depth: 603 mm, for designs using 605 mm top shelf as cornice shelf or connecting designs using 605 mm depth worktops, height: 2088 mm Full size plinth panel.	HWKS	16	-1X	16095	272
NEW S	 XL Sakura upright at end of run in Height 1 XL incl. floor seal, depth: 603 mm, for designs using 605 mm top shelf as cornice shelf or connecting designs using 605 mm depth worktops Plinth height 70 mm: 2158 mm Plinth height 100 mm: 2188 mm Plinth height 150 mm: 2238 mm Plinth height 200 mm: 2288 mm *If no colour is specified in the order, the upright floor seal 014 Stainless steel appearance will automatically be supplied.*	HWAS	16	-1X	16096	312
NEW S	 Sakura upright at end of run is at carcase height for tall units in Height 2 depth: 603 mm, for designs using 605 mm top shelf as cornice shelf or connecting designs using 605 mm depth worktops, height: 2088 mm Full size plinth panel.	HWKS	16	-2	16097	272
NEW S	 Sakura upright at end of run in Height 2 incl. floor seal, depth: 603 mm, for designs using 605 mm top shelf as cornice shelf or connecting designs using 605 mm depth worktops Plinth height 70 mm: 2158 mm Plinth height 100 mm: 2188 mm Plinth height 150 mm: 2238 mm Plinth height 200 mm: 2288 mm *If no colour is specified in the order, the upright floor seal 014 Stainless steel appearance will automatically be supplied.*	HWAS	16	-2	16098	312
NEW S	 XL Sakura upright at end of run is at carcase height for tall units in Height 2 XL depth: 603 mm, for designs using 605 mm top shelf as cornice shelf or connecting designs using 605 mm depth worktops, height: 2160 mm Full size plinth panel.	HWKS	16	-2X	16099	277
NEW S	 XL Sakura upright at end of run in Height 2 XL incl. floor seal, depth: 603 mm, for designs using 605 mm top shelf as cornice shelf or connecting designs using 605 mm depth worktops Plinth height 70 mm: 2230 mm Plinth height 100 mm: 2260 mm Plinth height 150 mm: 2310 mm Plinth height 200 mm: 2360 mm *If no colour is specified in the order, the upright floor seal 014 Stainless steel appearance will automatically be supplied.*	HWAS	16	-2X	16100	314

Sakura design line

Modern frame look with handle 315 and upright panels in decor 362 Como oak reproduction

Not permitted for the following programs:
Cascada 684, Frame 419, Inline 526, Nordic 782, Pura 917, Sylt 706

We recommend designing with Slim Line worktops (APSLNS61), see Chapter 4 Worktops.

		Abbreviation	Width in mm		Order-no.	Points
NEW S	 Sakura upright at end of run is at carcase height for tall units in Height 3 depth: 603 mm, for designs using 605 mm top shelf as cornice shelf or connecting designs using 605 mm depth worktops, height: 2160 mm Full size plinth panel.	HWKS	16	-3	16101	277
NEW S	 Sakura upright at end of run in Height 3 incl. floor seal, depth: 603 mm, for designs using 605 mm top shelf as cornice shelf or connecting designs using 605 mm depth worktops Plinth height 70 mm: 2230 mm Plinth height 100 mm: 2260 mm Plinth height 150 mm: 2310 mm Plinth height 200 mm: 2360 mm *If no colour is specified in the order, the upright floor seal 014 Stainless steel appearance will automatically be supplied.*	HWAS	16	-3	16102	314
NEW S	 XL Sakura upright at end of run is at carcase height for tall units in Height 3 XL depth: 603 mm, for designs using 605 mm top shelf as cornice shelf or connecting designs using 605 mm depth worktops, height: 2232 mm Full size plinth panel.	HWKS	16	-3X	16103	282
NEW S	 XL Sakura upright at end of run in Height 3 XL incl. floor seal, depth: 603 mm, for designs using 605 mm top shelf as cornice shelf or connecting designs using 605 mm depth worktops Plinth height 70 mm: 2302 mm Plinth height 100 mm: 2332 mm Plinth height 150 mm: 2382 mm Plinth height 200 mm: 2432 mm *If no colour is specified in the order, the upright floor seal 014 Stainless steel appearance will automatically be supplied.*	HWAS	16	-3X	16104	315

Upright panels for designs with bridge units for the Sakura design line









NEW S	 Sakura upright at end of run in carcase height depth: 603 mm, for designs using 605 mm top shelf as cornice shelf or connection designs using 605 mm deep worktops, height: 2233 - 2580 mm for designs using bridge units on tall units Full size plinth panel.	HWKS	16	-258	16106	305
NEW S	 Sakura upright at end of run incl. floor seal, depth: 603 mm, for designs using 605 mm top shelf as cornice shelf or connecting designs using 605 mm depth worktops, height: 2433 - 2588 mm for designs using bridge units on tall units *If no colour is specified in the order, the upright floor seal 014 Stainless steel appearance will automatically be supplied.*	HWAS	16	-258	16107	327

Sakura design line

Modern frame look with handle 315 and upright panels in decor 362 Como oak reproduction

Not permitted for the following programs:
Cascada 684, Frame 419, Inline 526, Nordic 782, Pura 917, Sylt 706

We recommend designing with Slim Line worktops (APSLNS61), see Chapter 4 Worktops.





		Abbreviation	Width in mm		Order-no.	Points
Upright panels for wall units for the Sakura design line						
NEW S	 Sakura upright / intermediate upright for wall units, Height 360 mm depth: 392 mm, height: 360 mm	WWS	16	-36	16108	139
NEW S	 Sakura upright / intermediate upright for wall units, Height 576 mm depth: 392 mm, height: 576 mm	WWS	16	-58	16109	146
NEW S	 Sakura upright / intermediate upright for wall units, Height 1 depth: 392 mm, height: 720 mm	WWS	16	-1	16110	152
NEW S	 Sakura upright / intermediate upright for wall units, Height 2 depth: 392 mm, height: 792 mm	WWS	16	-2	16112	155
NEW S	 Sakura upright / intermediate upright for wall units, Height 3 depth: 392 mm, height: 864 mm	WWS	16	-3	16113	158
NEW S	 Sakura upright / intermediate upright for wall units, Height 1296 mm depth: 392 mm, height: 1296 mm	WWS	16	-130	16114	177
Upright panels for dresser and bridge units for the Sakura design line						
NEW S	 Sakura upright / intermediate upright for dresser units, highboard height depth: 392 mm, height: 754 mm	AWS	16	-75	16115	155
	as above, however depth: 603 mm	AWST	16	-75	16116	178
NEW S	 Sakura upright / intermediate upright for dresser units, Height 1 depth: 392 mm, height: 1258 mm	AWS	16	-1	16117	175
	as above, however depth: 603 mm	AWST	16	-1	16118	218

Sakura design line


Modern frame look with handle 315 and upright panels in decor 362 Como oak reproduction

Not permitted for the following programs:
Cascada 684, Frame 419, Inline 526, Nordic 782, Pura 917, Sylt 706


We recommend designing with Slim Line worktops (APSLNS61), see Chapter 4 Worktops.

		Abbreviation	Width in mm		Order-no.	Points
NEW S	 Sakura upright / intermediate upright for dresser units, Height 2 depth: 392 mm, height: 1330 mm	AWS	16	-2	16119	177
	as above, however depth: 603 mm	AWST	16	-2	16120	222
NEW S	 Sakura upright / intermediate upright for dresser units, Height 3 depth: 392 mm, height: 1402 mm	AWS	16	-3	16121	178
	as above, however depth: 603 mm	AWST	16	-3	16122	226
NEW S	 Sakura upright / intermediate upright for bridge units depth: 603 mm, height: 360 mm	UFKWS	16	-36	16123	147
NEW S	 Sakura upright / intermediate upright for bridge units depth: 603 mm, height: 720 mm	UFKWS	16	-72	16124	175

Top shelf for the Sakura design line, 16 mm thick

NEW	 Top shelf Sakura, 16 mm thick, for side- or highboard coated on both faces, polymer edged on front and sides, length: 250 - 2580 mm Depth dimensions: ADBS16-40: 394 mm, variable from 200 - 394 mm ADBS16-51: 505 mm, variable from 395 - 505 mm ADBS16-61: 605 mm, variable from 506 - 605 mm *Price per 100 mm.*	ADBS16 ADBS16 ADBS16		40 51 61	16055 16056 16057	16,1 17,8 19,9







Top shelf as cornice shelf for the Sakura design line, 16 mm thick

NEW	 Top shelf Sakura, 16 mm thick coated on both sides, front and side with polymer edge, Length 250 - 2580 mm Depth dimensions: KBWS16-40: 394 mm, variable from 200 - 394 mm KBWS16-61: 605 mm, variable from 395 - 605 mm *Price per running 100 mm,* *every 100 mm started will be invoiced.* *Please indicate additional lengths in case of end of run units!* *A sketch is required!*	KBWS16 KBWS16	40 61		16610 16611	18,4 22,5

Pilasters

Only available for cottage style ranges:
Price group 7: Cascada 684, Nordic 497, Sylt 706





Pilaster colours and design depend on range, see front pages.

		Abbreviation	Width in cm		Order No.	Points
Pilaster for base units						
	Base unit pilaster front material, width: 50 mm, depth: 583.5 mm, except for Cascada 684 and Nordic 497, depth: 586 mm *Matches ranges Cascada 684, Nordic 497, Sylt 706.*	UPI			4490	415
	Intermediate base unit pilaster for installation between base units, front material, width: 50 mm, depth: 122.5 mm, except for Cascada 684 and Nordic 497, depth: 125 mm *Matches ranges Cascada 684, Nordic 497, Sylt 706.*	UPIZ			4177	277
	Base unit pilaster for room designs front material on both faces, width: 50 mm, depth: 250 - 1167 mm, except for Cascada 684 and Nordic 497, depth: 250 - 1172 mm *Matches ranges Cascada 684, Nordic 497, Sylt 706.*	UPIR	117		4164	488
Pilasters for base units in XL height						
	XL Base unit pilaster front material, width: 50 mm, depth: 583.5 mm, except for Cascada 684 and Nordic 497, depth: 586 mm *Matches ranges Cascada 684, Nordic 497, Sylt 706.*	UPI		-X	6431	425
	Intermediate XL base unit pilaster front material, width: 50 mm, depth: 122.5 mm, except for Cascada 684 and Nordic 497, depth: 125 mm *Matches ranges Cascada 684, Nordic 497, Sylt 706.*	UPIZ		-X	6432	282
	XL Base unit pilaster for room designs front material, width: 50 mm, depth: 250 - 1167 mm, except for Cascada 684 and Nordic 497, depth: 250 - 1172 mm *Matches ranges Cascada 684, Nordic 497, Sylt 706.*	UPIR117		-X	6433	491

Pilasters

Only available for cottage style ranges:
Price group 7: Cascada 684, Nordic 497, Sylt 706





Pilaster colours and design depend on range, see front pages.

		Abbreviation	Width in cm		Order No.	Points
Pilaster for highboards						
	 Highboard pilaster front material, width: 50 mm, depth: 583.5 mm, height: 1512 mm, except for Cascada 684 and Nordic 497, depth: 586 mm *Matches ranges Cascada 684, Nordic 497, Sylt 706.*	HPI			4481	610
	 Intermediate highboard pilaster for installation between highboards, front material, width: 50 mm, depth: 122.5 mm, height: 1512 mm, except for Cascada 684 and Nordic 497, depth: 125 mm *Matches ranges Cascada 684, Nordic 497, Sylt 706.*	HPIZ			4482	385
Pilaster for highboards in XL height						
	 XL Highboard pilaster front material, width: 50 mm, depth: 583.5 mm, height: 1584 mm, except for Cascada 684 and Nordic 497, depth: 586 mm *Matches ranges Cascada 684, Nordic 497, Sylt 706.*	HPI		-X	4506	654
	 Intermediate XL Highboard pilaster for installation between highboards, front material, width: 50 mm, depth: 122.5 mm, height: 1584 mm, except for Cascada 684 and Nordic 497, depth: 125 mm *Matches ranges Cascada 684, Nordic 497, Sylt 706.*	HPIZ		-X	4508	394

Pilasters

Only available for cottage style ranges:
Price group 7: Cascada 684, Nordic 497, Sylt 706





Pilaster colours and design depend on range, see front pages.

		Abbreviation	Width in cm	Order No.	Points
Pilaster for tall units, height 1					
	Tall unit pilaster, for tall units, height 1 front material, width: 50 mm, depth: 583.5 mm, height: 2016 mm, except for Cascada 684 and Nordic 497, depth: 586 mm *Matches ranges Cascada 684, Nordic 497, Sylt 706.*	HPI	-1	45761	745
	Tall unit pilaster as intermediate solution for tall units, height 1 for installation between tall units, front material, width: 50 mm, depth: 122.5 mm, height: 2016 mm, except for Cascada 684 and Nordic 497, depth: 125 mm *Matches ranges Cascada 684, Nordic 497, Sylt 706.*	HPIZ	-1	45762	457
Pilasters for tall units in XL height 1					
	XL Tall unit pilaster, for tall units, height 1X front material, width: 50 mm, depth: 583.5 mm, height: 2088 mm, except for Cascada 684 and Nordic 497, depth: 586 mm *Matches ranges Cascada 684, Nordic 497, Sylt 706.*	HPI	-1X	45765	752
	XL Tall unit pilaster as intermediate solution for tall units, height 1X for installation between XL tall units, front material, width: 50 mm, depth: 122.5 mm, height: 2088 mm, except for Cascada 684 and Nordic 497, depth: 125 mm *Matches ranges Cascada 684, Nordic 497, Sylt 706.*	HPIZ	-1X	45766	469

Pilasters

Only available for cottage style ranges:
Price group 7: Cascada 684, Nordic 497, Sylt 706





Pilaster colours and design depend on range, see front pages.

		Abbreviation	Width in cm	Order No.	Points
Pilaster for tall units, height 2					
	Tall unit pilaster, **for tall units, height 2** front material, width: 50 mm, depth: 583.5 mm, height: 2088 mm, except for Cascada 684 and Nordic 497, depth: 586 mm *Matches ranges Cascada 684, Nordic 497, Sylt 706.*	HPI	-2	45731	752
	Tall unit pilaster as intermediate solution **for tall units, height 2** for installation between tall units, front material, width: 50 mm, depth: 122.5 mm, height: 2088 mm, except for Cascada 684 and Nordic 497, depth: 125 mm *Matches ranges Cascada 684, Nordic 497, Sylt 706.*	HPIZ	-2	45732	469
Pilasters for tall units in XL height 2					
	XL Tall unit pilaster, **for tall units, height 2X** front material, width: 50 mm, depth: 583.5 mm deep, height: 2160 mm, except for Cascada 684 and Nordic 497, depth: 586 mm *Matches ranges Cascada 684, Nordic 497, Sylt 706.*	HPI	-2X	45734	759
	XL Tall unit pilaster as intermediate solution **for tall units, height 2X** for installation between XL tall units, front material, width: 50 mm, depth: 122.5 mm, height: 2160 mm, except for Cascada 684 and Nordic 497, depth: 125 mm *Matches ranges Cascada 684, Nordic 497, Sylt 706.*	HPIZ	-2X	45735	482

Pilasters

Only available for cottage style ranges:
Price group 7: Cascada 684, Nordic 497, Sylt 706







Pilaster colours and design depend on range, see front pages.

		Abbreviation	Width in cm	Order No.	Points
Pilaster for tall units, height 3					
	Tall unit pilaster, for tall units, height 3 front material, width: 50 mm, depth: 583.5 mm deep, height: 2160 mm, except for Cascada 684 and Nordic 497, depth: 586 mm *Matches ranges Cascada 684, Nordic 497, Sylt 706.*	HPI	-3	44711	759
	Tall unit pilaster as intermediate solution for tall units, height 3 for installation between tall units, front material, width: 50 mm, depth: 122.5 mm, height: 2160 mm, except for Cascada 684 and Nordic 497, depth 125 mm *Matches ranges Cascada 684, Nordic 497, Sylt 706.*	HPIZ	-3	44712	482
Pilasters for tall units in XL height 3					
	XL Tall unit pilaster, for tall units, height 3X front material, width: 50 mm, depth: 583.5 mm deep, height: 2232 mm, except for Cascada 684 and Nordic 497, depth: 586 mm *Matches ranges Cascada 684, Nordic 497, Sylt 706.*	HPI	-3X	44718	767
	XL Tall unit pilaster as intermediate solution for tall units, height 3X for installation between XL tall units, front material, width: 50 mm, depth: 122.5 mm, height: 2232 mm, except for Cascada 684 and Nordic 497, depth: 125 mm *Matches ranges Cascada 684, Nordic 497, Sylt 706.*	HPIZ	-3X	44720	496

Pilasters

Only available for cottage style ranges:
Price group 7: Cascada 684, Nordic 497, Sylt 706

Pilaster colours and design depend on range, see front pages.

		Abbreviation	Width in cm	Order No.	Points
Pilaster for wall units					
	Wall unit pilaster for wall units, height 1 front material, width: 50 mm, depth: 372.5 mm, height: 720 mm, except for Cascada 684 and Nordic 497, depth: 375 mm *Matches ranges Cascada 684, Nordic 497, Sylt 706.*	WPI	-1	44752	366
	Wall unit pilaster for wall units, height 2 front material, width: 50 mm, depth: 372.5 mm, height: 792 mm, except for Cascada 684 and Nordic 497, depth: 375 mm *Matches ranges Cascada 684, Nordic 497, Sylt 706.*	WPI	-2	45737	375
	Wall unit pilaster for wall units, height 3 front material, width: 50 mm, depth: 372.5 mm, height: 864 mm, except for Cascada 684 and Nordic 497, depth: 375 mm *Matches ranges Cascada 684, Nordic 497, Sylt 706.*	WPI	-3	44753	383
Pilaster for dresser units					
	Dresser unit pilaster for dresser units, height 1 front material, width: 50 mm, depth: 372.5 mm, height: 1258 mm, except for Cascada 684 and Nordic 497, depth: 375 mm *Matches ranges Cascada 684, Nordic 497, Sylt 706.*	API	-1	44747	453
	Dresser unit pilaster for dresser units, height 2 front material, width: 50 mm, depth: 372.5 mm, height: 1330 mm, except for Cascada 684 and Nordic 497, depth: 375 mm *Matches ranges Cascada 684, Nordic 497, Sylt 706.*	API	-2	45738	458
	Dresser unit pilaster for dresser units, height 3 front material, width: 50 mm, depth: 372.5 mm, height: 1402 mm, except for Cascada 684 and Nordic 497, depth: 375 mm *Matches ranges Cascada 684, Nordic 497, Sylt 706.*	API	-3	44759	466

Wall shelf units


Refer to colour chart in chapter 2

Wall shelving units

Abbreviation	Width in cm	Order-no.	Points: Mat	Points: High gloss	Points: Lacquered laminate / Lacquer, premium honed	Points: Xtra décors
Plug-in wall shelf, 16 mm thick carcase material, polymer edging all around, 150 mm deep, incl. metal plug fitting, 6 kg load per pair of supports *Dimensional changes can only be made on site!* *Width reductions only possible up to 25 mm on each side!* *Upwards of 800 mm widths will be supplied with 3 plug-in fittings.* *No lighting possible.* *Available in all carcase colours.*						
WB16	30	16010	273	—	—	—
WB16	40	16011	274	—	—	—
WB16	45	16012	276	—	—	—
WB16	50	16013	276	—	—	—
WB16	55	16014	277	—	—	—
WB16	60	16015	279	—	—	—
WB16	65	16016	279	—	—	—
WB16	70	16017	280	—	—	—
WB16	80	16018	439	—	—	—
WB16	90	16019	442	—	—	—
WB16	100	16020	445	—	—	—
WB16	110	16021	447	—	—	—
WB16	120	16022	448	—	—	—
Bevelled plug-in wall shelf, 16 mm thick 150 mm deep, polymer edging all round, bevelled at the front, incl. metal plug fitting, 6 kg load per pair of holders *Dimensional changes can only be made on site!* *Width reductions only possible up to 25 mm on each side!* *Upwards of 800 mm widths will be supplied with 3 plug-in fittings.* *No lighting possible.* *Available in all carcase colours (Mat) and all front colours from the Easytouch 945 range (Lacquered laminate).*						
WBF16	30	16030	288	—	304	—
WBF16	40	16031	291	—	311	—
WBF16	45	16032	292	—	314	—
WBF16	50	16033	292	—	317	—
WBF16	55	16034	295	—	321	—
WBF16	60	16035	296	—	324	—
WBF16	65	16036	298	—	327	—
WBF16	70	16037	299	—	331	—
WBF16	80	16038	464	—	504	—
WBF16	90	16039	466	—	511	—
WBF16	100	16040	469	—	518	—
WBF16	110	16041	472	—	526	—
WBF16	120	16042	473	—	531	—
Plug-in wall shelf, 25 mm thick carcase material, polymer edging all around, 255 mm deep, incl. metal plug fitting, 12 kg load per pair of supports *Dimensional changes can only be made on site!* *Width reductions only possible up to 25 mm on each side!* *Upwards of 800 mm widths will be supplied with 3 plug-in fittings.* *WB25* incl. MP-WBL (7963), MP-WBLP (7966) or MP-WBLL (7931) available.* *Available in all carcases, worktops and high-gloss colours, except 366 Black textured*						
WB25	30	25953	145	248	—	253
WB25	40	25954	146	254	—	266
WB25	45	25945	152	266	—	277
WB25	50	25955	153	279	—	299
WB25	55	25555	153	291	—	305
WB25	60	25956	156	301	—	312
WB25	65	25965	158	311	—	323
WB25	70	25567	165	318	—	339
WB25	80	25958	175	339	—	366
WB25	90	25959	178	355	—	377
WB25	100	25961	196	362	—	385
WB25	110	25581	197	375	—	409
WB25	120	25962	200	387	—	429


Wall shelf units

Refer to colour chart in chapter 2

			Abbreviation	Width in cm	Order-no.	Points Mat	High gloss	Lacquered laminate / Lacquer, premium honed	Xtra décors
2700K-6500K F		Surcharge for plug-in wall shelf WB25* with LED light design MANILA PLUS consisting of: plug-in wall shelf with integrated LED built-in light MANILA PLUS and 1700 mm connection cable to the starter set, 12 kg load per pair of supports With Emotion technology: infinitely adjustable colour temperature from warm white to cold white LED starter and follow-up sets LSET-SMART36/60(-FB) are not included in the scope of delivery, see accessories list, chapter Lighting. *Can only be planned in conjunction with niche cladding for the cable lead through and adjacent units for storing the transformers.*	MP-WBL		7963	299	299	—	299
		as above, however with LED plant grow light LED supply set ESS6-LED and switch NK/SEN220/FUNK are not included in the scope of delivery. *The plant lights must be grouped in a separate lighting group. After activation, the lamp automatically switches off after 8 hours.* *Not available in: USA, Canada.*	MP-WBLP		7966	305	305	—	305
NEW E		Surcharge for plug-in wall shelf WB25* with LED light design LUCIA consists of: built-in LED light integrated in the plug-in wall shelf LUCIA and 1700 mm connection cable to the starter set, black aluminium housing, 12 kg load per pair of beams With Emotion technology: infinitely variable adjustment of colour temperature from warm white to cold white, light colour: 2700 - 6000 K *Can only be planned in conjunction with niche cladding for the cable lead through and adjacent units for storing the transformers.*	MP-WBLL		7931	299	299	—	299
		Wall shelf unit with shelf holders, 16 mm thick 255 mm deep, with polymer edge on all sides, available from 200 mm to 1000 mm width, including 2 shelf holders VBH5, 16 kg load per pair of supports Available shelf holder colours: no. 010 Black no. 014 Stainless steel appearance *If no bracket colour is specified in the order, the version 014 Stainless steel appearance will automatically be supplied.* *Available in all carcase, worktop, lacquered laminate, premium honed and high-gloss colours.*	VB16	100	16910	323	434	391	380
		Wall shelf unit with shelf holders as above, however, available in widths from 1001 mm to 2580 mm, includes 4 shelf holders VBH5, 16 kg load per pair of supports, with 4 shelf holders 32 kg Available shelf holder colours: no. 010 Black no. 014 Stainless steel appearance *If no bracket colour is specified in the order, the version 014 Stainless steel appearance will automatically be supplied.* *Available in all carcases, worktops, lacquered laminate, premium honed and high-gloss colours.* *Not available in Xtra-honed finishes 381 Alpine white, 389 Macchiato and 366 Black textured.*	VB16	258	16920	542	645	664	715



Wall shelf units

Refer to colour chart in chapter 2

			Abbreviation	Width in cm	Order-no.	Points Mat	High gloss	Lacquered laminate / Lacquer, premium honed	Xtra décors
NEW		**Wall shelf with bracket support, 16 mm thick** 300 mm deep, all-round with polymer edge, **available from 200 mm to 1000 mm width,** including 2 VBK support brackets, 16 kg load per pair of beams **Available console support colours:** 010 Black *Available in all carcases, worktops, lacquered laminate, premium honed and high-gloss colours.* *Not available in Xtra-honed finishes 381 Alpine white, 389 Macchiato and 366 Black textured.*	VBK16	100	16003	407	518	476	464
		Wall shelf with console supports as before, **but available from 1001 mm to 2580 mm width,** including 4 VBK support brackets, 16 kg load per pair of beams, 32 kg with 4 floor brackets **Available console support colours:** 010 Black *Available in all carcases, worktops, lacquered laminate, premium honed and high-gloss colours.* *Not available in Xtra-honed finishes 381 Alpine white, 389 Macchiato and 366 Black textured.*	VBK16	258	16004	712	816	834	885
		**Bevelled shelf with shelf holders, 16 mm thick** 255 mm deep, polymer edging all round, bevelled at the front, **available in widths from 200 mm to 1000 mm,** includes 2 shelf holders VBH5, 16 kg load per pair of holders **Available shelf holder colours:** no. 010 Black no. 014 Stainless steel appearance *If no bracket colour is specified in the order, the version 014 Stainless steel appearance will automatically be supplied.* *Available in all carcase colours (Mat) and all front colours from the Easytouch 945 range (Lacquered laminate).*	VBF16	100	16812	381	—	450	—
		Bevelled wall shelf with shelf holders as before, **but available from 1001 mm to 2580 mm width,** including 4 shelf holders VBH5, 16 kg load per pair of supports, 32 kg for 4 shelf holders Available in all carcase colours (Mat) and all front colours from the Easytouch 945 range (Lacquered laminate). **Available shelf holder colours:** no. 010 Black no. 014 Stainless steel appearance *If no bracket colour is specified in the order, the version 014 Stainless steel appearance will automatically be supplied.* *Available in all carcase colours (Mat) and all front colours from the Easytouch 945 range (Lacquered laminate).*	VBF16	258	16819	558	—	679	—



Wall shelf units

Refer to colour chart in chapter 2

		Abbreviation	Width in cm	Order-no.	Points Mat	High gloss	Lacquered laminate / Lacquer, premium honed	Xtra décors
		**Wall shelf unit with shelf holders**, 25 mm thick 255 mm deep, polymer edging all around, **available in widths from 200 mm to 1000 mm,** includes 2 shelf holders VBH5, 16 kg load per pair of supports Available shelf holder colours: no. 010 Black no. 014 Stainless steel appearance *If no bracket colour is specified in the order, the version 014 Stainless steel appearance will automatically be supplied.* *Available in all shelf unit colours, worktop and high-gloss colours.* *Not available in Xtra-honed finishes 381 Alpine white, 389 Macchiato and 366 Black textured.*	VB25	100	25910	330	445	—	387
		Wall shelf unit with shelf holders as above, **however, available in widths from 1001 mm to 2580 mm,** includes 4 shelf holders VBH5, 16 kg load per pair of supports, with 4 shelf holders 32 kg Available shelf holder colours: no. 010 Black no. 014 Stainless steel appearance *If no bracket colour is specified in the order, the version 014 Stainless steel appearance will automatically be supplied.* *Available in all shelf unit colours, worktop and high-gloss colours.* *Not available in Xtra-honed finishes 381 Alpine white, 389 Macchiato and 366 Black textured.*	VB25	258	25920	593	707	—	749
NEW		**Wall shelf with bracket support**, 25 mm thick 300 mm deep, all-round with polymer edge, **available from 200 mm to 1000 mm width,** including 2 VBK support brackets, 16 kg load per pair of beams Available console support colours: 010 Black *Available in all shelf unit colours, worktop and high-gloss colours.* *Not available in Xtra-honed finishes 381 Alpine white, 389 Macchiato and 366 Black textured.*	VBK25	100	25003	415	530	—	473
		Wall shelf with console supports as before, **but available from 1001 mm to 2580 mm width,** including 4 VBK support brackets, 16 kg load per pair of beams, 32 kg with 4 floor brackets Available console support colours: 010 Black *Available in all shelf unit colours, worktop and high-gloss colours.* *Not available in Xtra-honed finishes 381 Alpine white, 389 Macchiato and 366 Black textured.*	VBK25	258	25004	764	876	—	920

Wall shelf units

Refer to colour chart in chapter 2

		Abbreviation	Width in cm	Order-no.	Points Mat	High gloss	Lacquered laminate / Lacquer, premium honed	Xtra décors
		VB50	100	50910	482	588	—	609
	Wall shelf unit with shelf holders, 50 mm thick 255 mm deep, polymer edging all around, **available in widths from 200 mm to 1000 mm,** includes 2 shelf holders VBH5, 16 kg load per pair of supports **Available shelf holder colours:** no. 010 Black no. 014 Stainless steel appearance *If no bracket colour is specified in the order, the version 014 Stainless steel appearance will automatically be supplied.* *Available in all shelf unit colours, worktop and high-gloss colours.* *Not available in Xtra-honed finishes 381 Alpine white, 389 Macchiato and 366 Black textured.*							
	Wall shelf unit with shelf holders as above, **however, available in widths from 1001 mm to 2580 mm,** includes 4 shelf holders VBH5, 16 kg load per pair of supports, with 4 shelf holders 32 kg **Available shelf holder colours:** no. 010 Black no. 014 Stainless steel appearance *If no bracket colour is specified in the order, the version 014 Stainless steel appearance will automatically be supplied.* *Available in all shelf unit colours, worktop and high-gloss colours.* *Not available in Xtra-honed finishes 381 Alpine white, 389 Macchiato and 366 Black textured.*	VB50	258	50920	712	895	—	1.117
		VBG-BH	30	6645	209	209	209	209
	Glass shelf with shelf supports 8 mm thick, 200 mm deep, edges sanded all round, includes 2 shelf holders VBH5, 16 kg load per pair of supports **Available shelf holder colours:** no. 010 Black no. 014 Stainless steel appearance *If no bracket colour is specified in the order, the version 014 Stainless steel appearance will automatically be supplied.*	VBG-BH	60	6646	225	225	225	225
		VBG-BH	90	6648	238	238	238	238