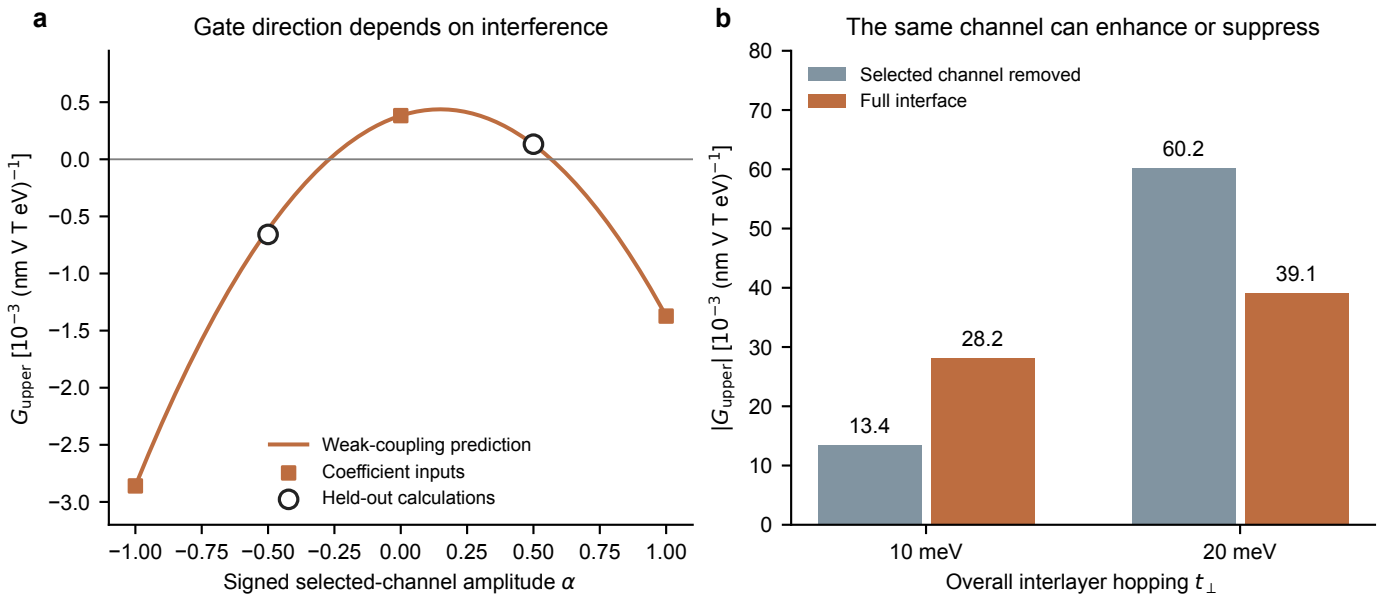
a
Gate direction depends on interference
G_{upper} [10^{-3} (nm V T eV)$^{-1}$]
0.5
0.0
−0.5
−1.0
−1.5
−2.0
−2.5
−3.0
Weak-coupling prediction
Coefficient inputs
Held-out calculations
−1.00 −0.75 −0.50 −0.25 0.00 0.25 0.50 0.75 1.00
Signed selected-channel amplitude α
b
The same channel can enhance or suppress
$|G_{upper}|$ [10^{-3} (nm V T eV)$^{-1}$]
80
70
60
50
40
30
20
10
0
Selected channel removed
Full interface
13.4
28.2
60.2
39.1
10 meV
20 meV
Overall interlayer hopping $t_\perp$